




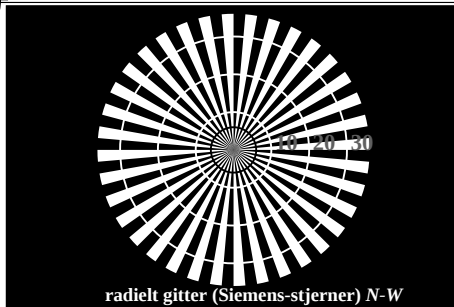


radielt gitter (Siemens-stjerner) N-W



radielt gitter (Siemens-stjerner) W-N

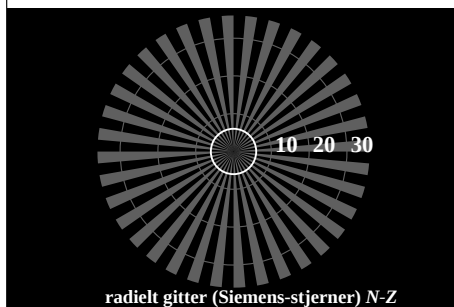

radielt gitter (Siemens-stjerner) N-Z



radielt gitter (Siemens-stjerner) W-Z

AN090-3, Figur A1Wdd: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: *rgb/cmy0/w/000n*

| $L^*/Y_{\text{intendert}}$<br>(absolutt)    | 18,0/2,5 | 37,3/9,7 | 56,7/24,6 | 76,0/49,8 | 95,4/88,5 | $N_0$ (min.) | $W_1$ (max.) |
|---------------------------------------------|----------|----------|-----------|-----------|-----------|--------------|--------------|
| $w^* = I^*_{\text{CIELAB}, r}$<br>(relativ) |          |          |           |           |           |              |              |
| $w^*_{\text{input}}$                        | 0,000    | 0,250    | 0,500     | 0,750     | 1,000     | $N_0$ (min.) | $W_1$ (max.) |

AN090-5, Figur A2Wdd: Element B: 5 visuelle ekvidistante  $L^*$ -gråtrinn +  $N_0$  +  $W_1$ ; PS operator: *rgb/cmy0/w/000n*

| $L^*/Y_{\text{intendert}}$<br>(absolutt)    | 18,0/2,5 | 23,1/3,8 | 28,3/5,5 | 33,4/7,7 | 38,6/10,4 | 43,8/13,7 | 48,9/17,5 | 54,1/22,0 | 59,2/27,3 | 64,4/33,3 | 69,6/40,1 | 74,7/47,8 | 79,9/56,5 | 85,0/66,1 | 90,2/76,8 | 95,4/88,5 |
|---------------------------------------------|----------|----------|----------|----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Nr. og<br>Hex-code                          | 00:F     | 01:E     | 02:D     | 03:C     | 04:B      | 05:A      | 06:9      | 07:8      | 08:7      | 09:6      | 10:5      | 11:4      | 12:3      | 13:2      | 14:1      | 15:0      |
| $w^* = I^*_{\text{CIELAB}, r}$<br>(relativ) |          |          |          |          |           |           |           |           |           |           |           |           |           |           |           |           |
| $w^*_{\text{input}}$                        | 0,000    | 0,067    | 0,133    | 0,200    | 0,267     | 0,333     | 0,400     | 0,467     | 0,533     | 0,600     | 0,667     | 0,733     | 0,800     | 0,867     | 0,933     | 1,000     |

AN090-7, Figur A3Wdd: Element C: 16 visuelle ekvidistante  $L^*$ -gråtrinn; PS operator: *rgb/cmy0/w/000n*



Prøveplansje AN09 infølge ISO 9241-306  
akromatisk prøveplansje N

| omfelt-trinn<br>Hex-code | 0   | 7   | E   | 2   | 8   | F   |
|--------------------------|-----|-----|-----|-----|-----|-----|
| ring-trinn<br>Hex-code   | 0-1 | 7-8 | E-F | 2-0 | 8-6 | F-D |

Landoltringer W-N

kode: omfelt - ring

AN091-1, Figur A4Wdd: Element D: Landoltringer W-N; PS operator: *rgb/cmy0/w/000n*

|             | 120 | 128 | 136 | 144 | 152 | 160 | 168 | 176 | 184 | 192 | 200 | 208 | 216 | 224 | 232 | 240 |     |
|-------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 120<br>(+8) |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     | 240 |
| 60<br>(+4)  |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     | 120 |
| 30<br>(+2)  |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     | 60  |
| 15<br>(+1)  |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     | 30  |
|             | 15  | 16  | 17  | 18  | 19  | 20  | 21  | 22  | 23  | 24  | 25  | 26  | 27  | 28  | 29  | 30  |     |

rasterbredde i lpi

AN091-3, Figur A5Wdd: Element E: Linjeraster med 45° (eller 135°); PS operator: *rgb/cmy0/w/000n*

|             | 120 | 128 | 136 | 144 | 152 | 160 | 168 | 176 | 184 | 192 | 200 | 208 | 216 | 224 | 232 | 240 |     |
|-------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 120<br>(+8) |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     | 240 |
| 60<br>(+4)  |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     | 120 |
| 30<br>(+2)  |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     | 60  |
| 15<br>(+1)  |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     | 30  |
|             | 15  | 16  | 17  | 18  | 19  | 20  | 21  | 22  | 23  | 24  | 25  | 26  | 27  | 28  | 29  | 30  |     |

rasterbredde i lpi

AN091-5, Figur A6Wdd: Element F: Linjeraster med 90° (eller 0°); PS operator: *rgb/cmy0/w/000n*

input: *rgb/cmy0/000n/w set...*  
output: *->rgb<sub>dd</sub> setrgbcolor*

