

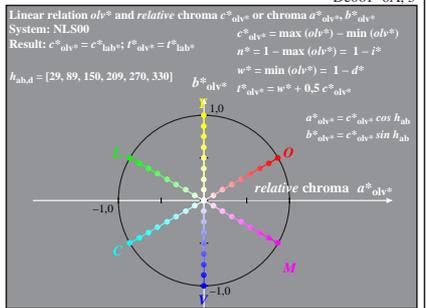
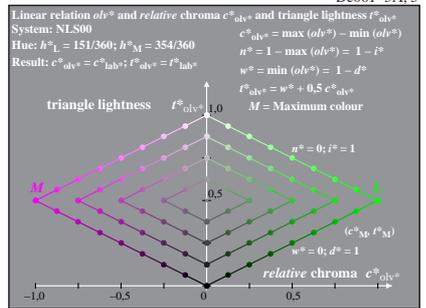
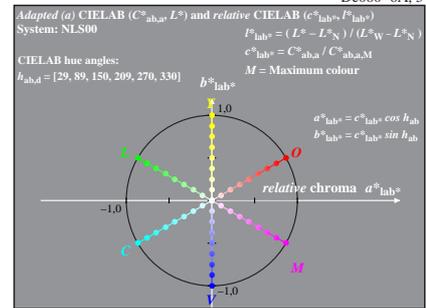
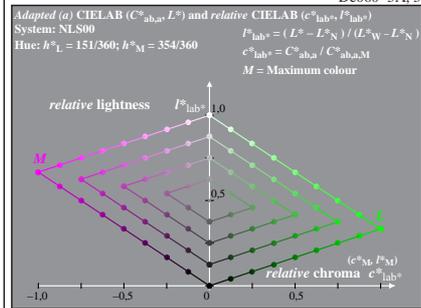
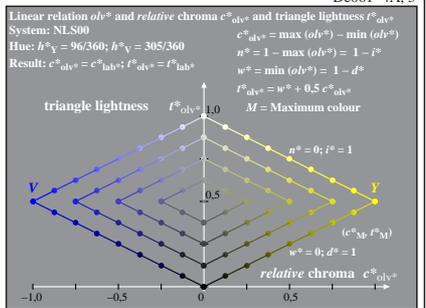
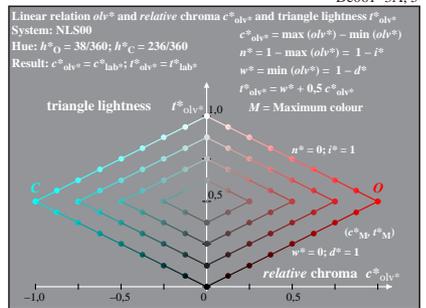
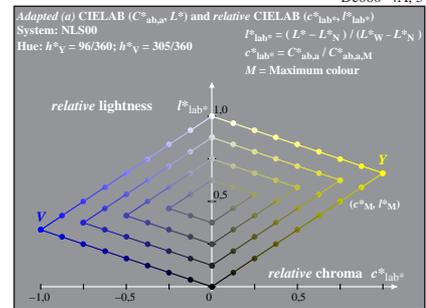
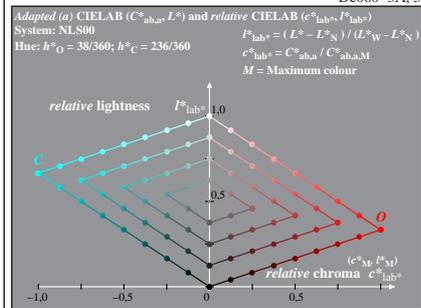
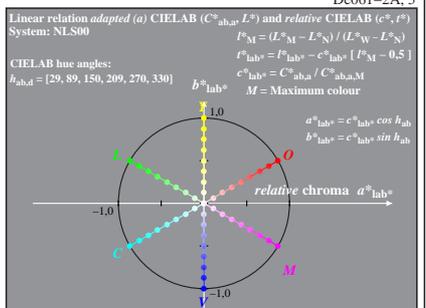
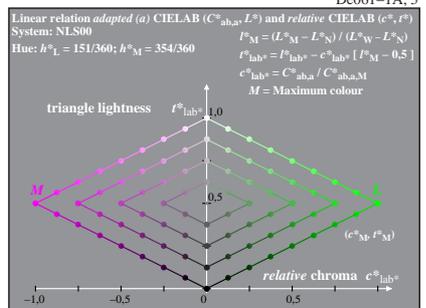
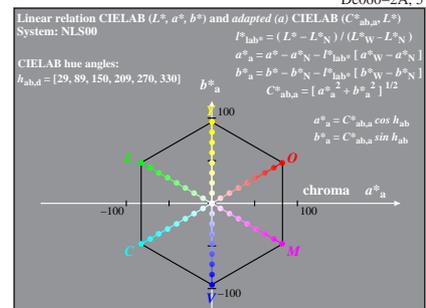
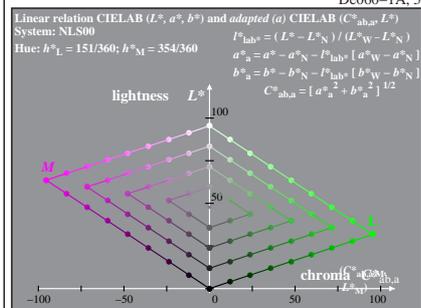
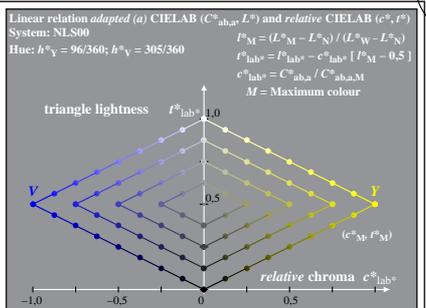
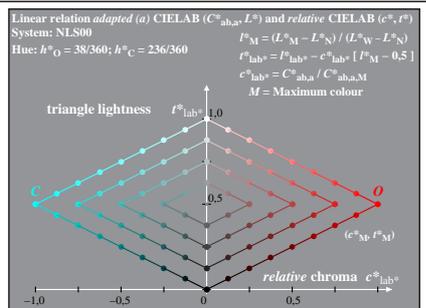


See for similar files: <http://www.ps.bam.de/De06/>; www.ps.bam.de/De-HTM
 Technical information: <http://www.ps.bam.de>
 Version 2.1, io=1,1

BAM registration: 20080201-De06/10L/L06e00NA.PS /.TXT BAM material: code=rhadt4
 application for evaluation and measurement of printer or monitor systems

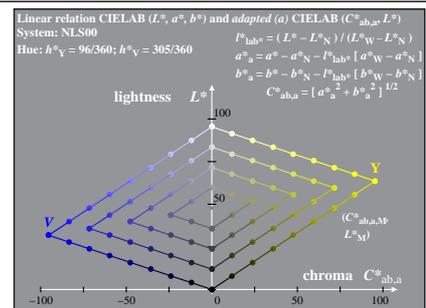

De060-7N: Measurement: 9 step equidistant colour series, Interpretation: rgb -> olv*, adapted, NLS00a LUT-data of De000-7 used

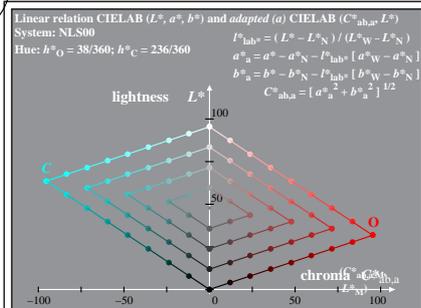

BAM-test chart De06; Colour device output: NLS00a
 9 step colour series; 1 standard device system, Page 1/1

input: $rgb \rightarrow olv^*$
 output: no change compared to input

