

















See for similar files: <http://www.ps.bam.de/De80/>; www.ps.bam.de/De80/10L/L80E00NP.PS/.PDF
Technical information: <http://www.ps.bam.de> Version 2.1, io=1,1, ColSpX=1









See for similar files: <http://www.ps.bam.de/De80/>; www.ps.bam.de/De80/De80.L80E00NP.PS/.PDF
Technical information: <http://www.ps.bam.de> Version 2.1, io=1,1, ColSpX=1

Input and output: Colorimetric Printer Reflective System ORS18.95aM for relative CIE L*a*b* hue $h^* = \text{lab}^*h^* = a_{90}/360 = 25/360 = 0.071$
Data for any colour:
lab^{*}h^{*} and lab^{*}u^{*}
elementary hue test:
 $u^* = r/50$
contrast reduction factor:
 $c_R = 1.0$
triangle lightness l^*

L*	a*	b*	C*	h*
49.0	18.8	18.8	26.8	45.0
50.0	19.0	19.0	27.0	45.0
51.0	19.2	19.2	27.2	45.0
52.0	19.4	19.4	27.4	45.0
53.0	19.6	19.6	27.6	45.0
54.0	19.8	19.8	27.8	45.0
55.0	20.0	20.0	28.0	45.0
56.0	20.2	20.2	28.2	45.0
57.0	20.4	20.4	28.4	45.0
58.0	20.6	20.6	28.6	45.0
59.0	20.8	20.8	28.8	45.0
60.0	21.0	21.0	29.0	45.0
61.0	21.2	21.2	29.2	45.0
62.0	21.4	21.4	29.4	45.0
63.0	21.6	21.6	29.6	45.0
64.0	21.8	21.8	29.8	45.0
65.0	22.0	22.0	30.0	45.0
66.0	22.2	22.2	30.2	45.0
67.0	22.4	22.4	30.4	45.0
68.0	22.6	22.6	30.6	45.0
69.0	22.8	22.8	30.8	45.0
70.0	23.0	23.0	31.0	45.0
71.0	23.2	23.2	31.2	45.0
72.0	23.4	23.4	31.4	45.0
73.0	23.6	23.6	31.6	45.0
74.0	23.8	23.8	31.8	45.0
75.0	24.0	24.0	32.0	45.0
76.0	24.2	24.2	32.2	45.0
77.0	24.4	24.4	32.4	45.0
78.0	24.6	24.6	32.6	45.0
79.0	24.8	24.8	32.8	45.0
80.0	25.0	25.0	33.0	45.0
81.0	25.2	25.2	33.2	45.0
82.0	25.4	25.4	33.4	45.0
83.0	25.6	25.6	33.6	45.0
84.0	25.8	25.8	33.8	45.0
85.0	26.0	26.0	34.0	45.0
86.0	26.2	26.2	34.2	45.0
87.0	26.4	26.4	34.4	45.0
88.0	26.6	26.6	34.6	45.0
89.0	26.8	26.8	34.8	45.0
90.0	27.0	27.0	35.0	45.0
91.0	27.2	27.2	35.2	45.0
92.0	27.4	27.4	35.4	45.0
93.0	27.6	27.6	35.6	45.0
94.0	27.8	27.8	35.8	45.0
95.0	28.0	28.0	36.0	45.0
96.0	28.2	28.2	36.2	45.0
97.0	28.4	28.4	36.4	45.0
98.0	28.6	28.6	36.6	45.0
99.0	28.8	28.8	36.8	45.0
100.0	29.0	29.0	37.0	45.0

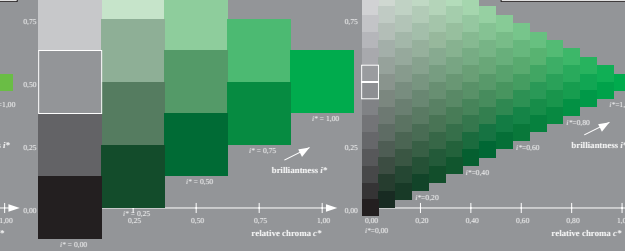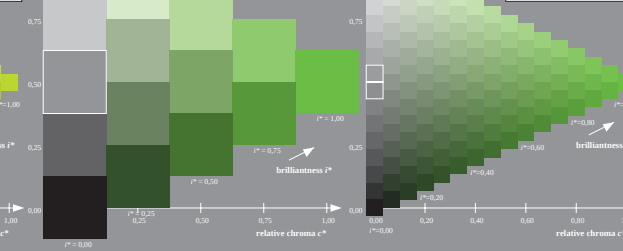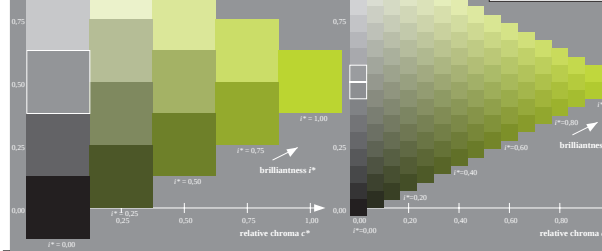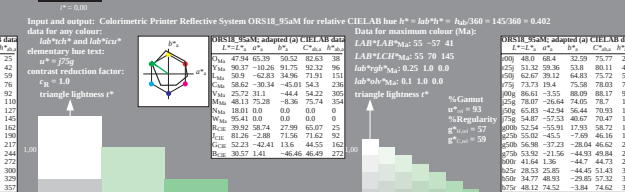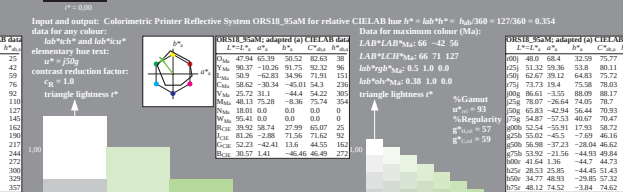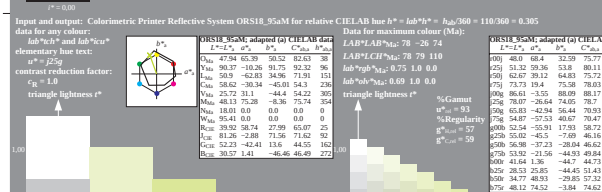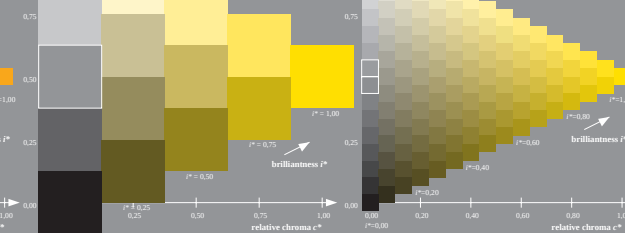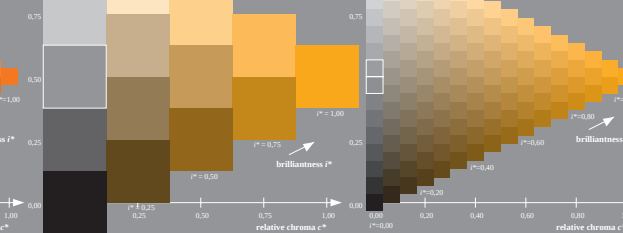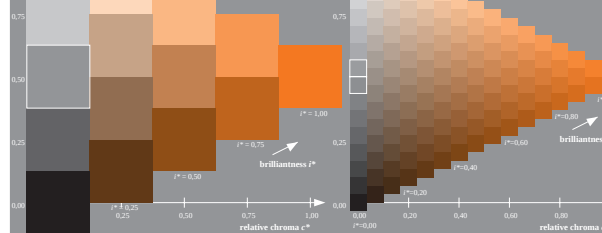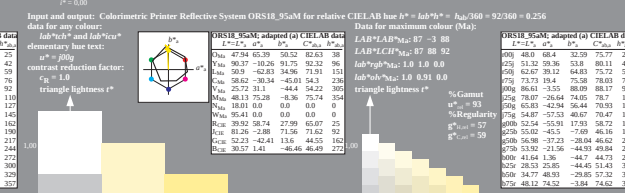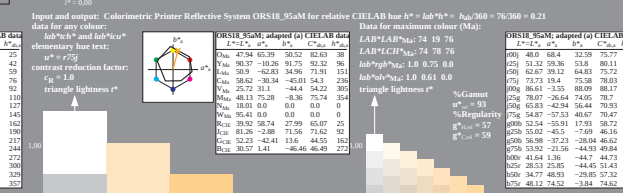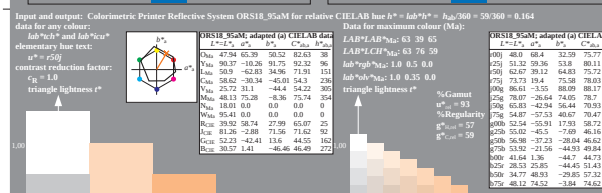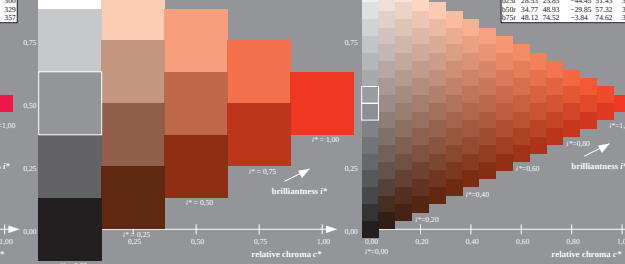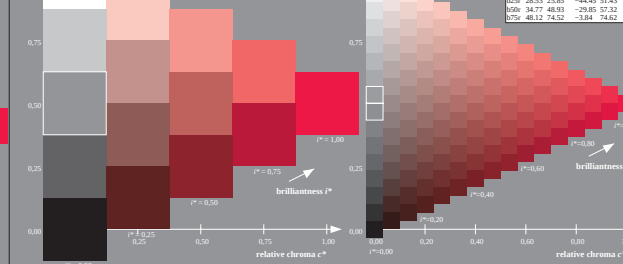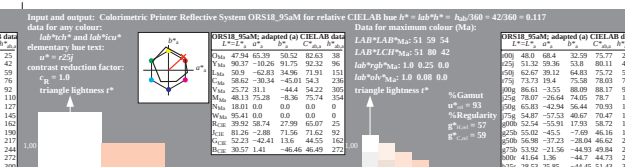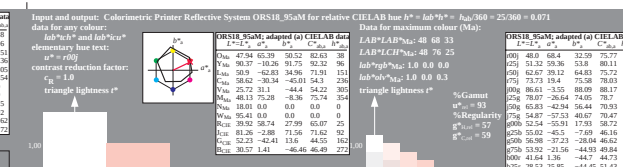

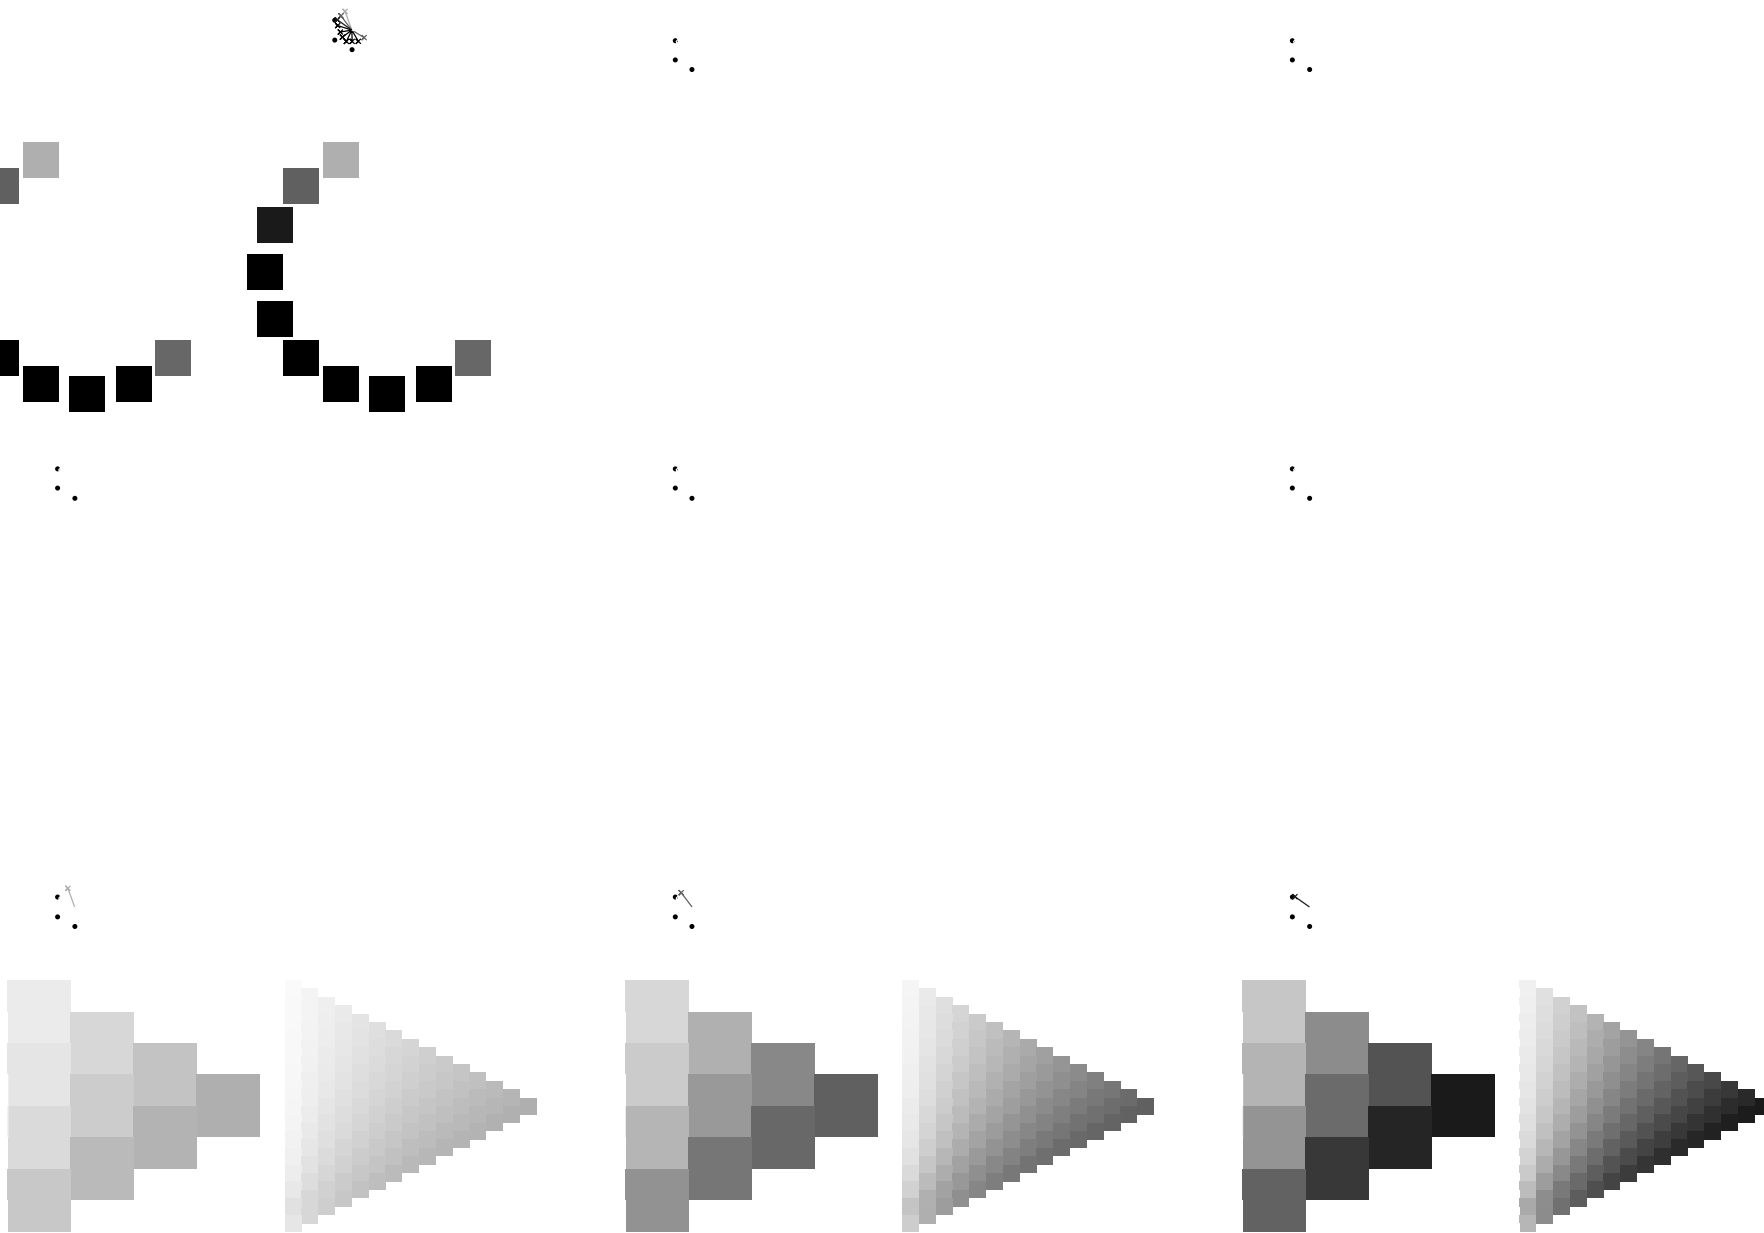

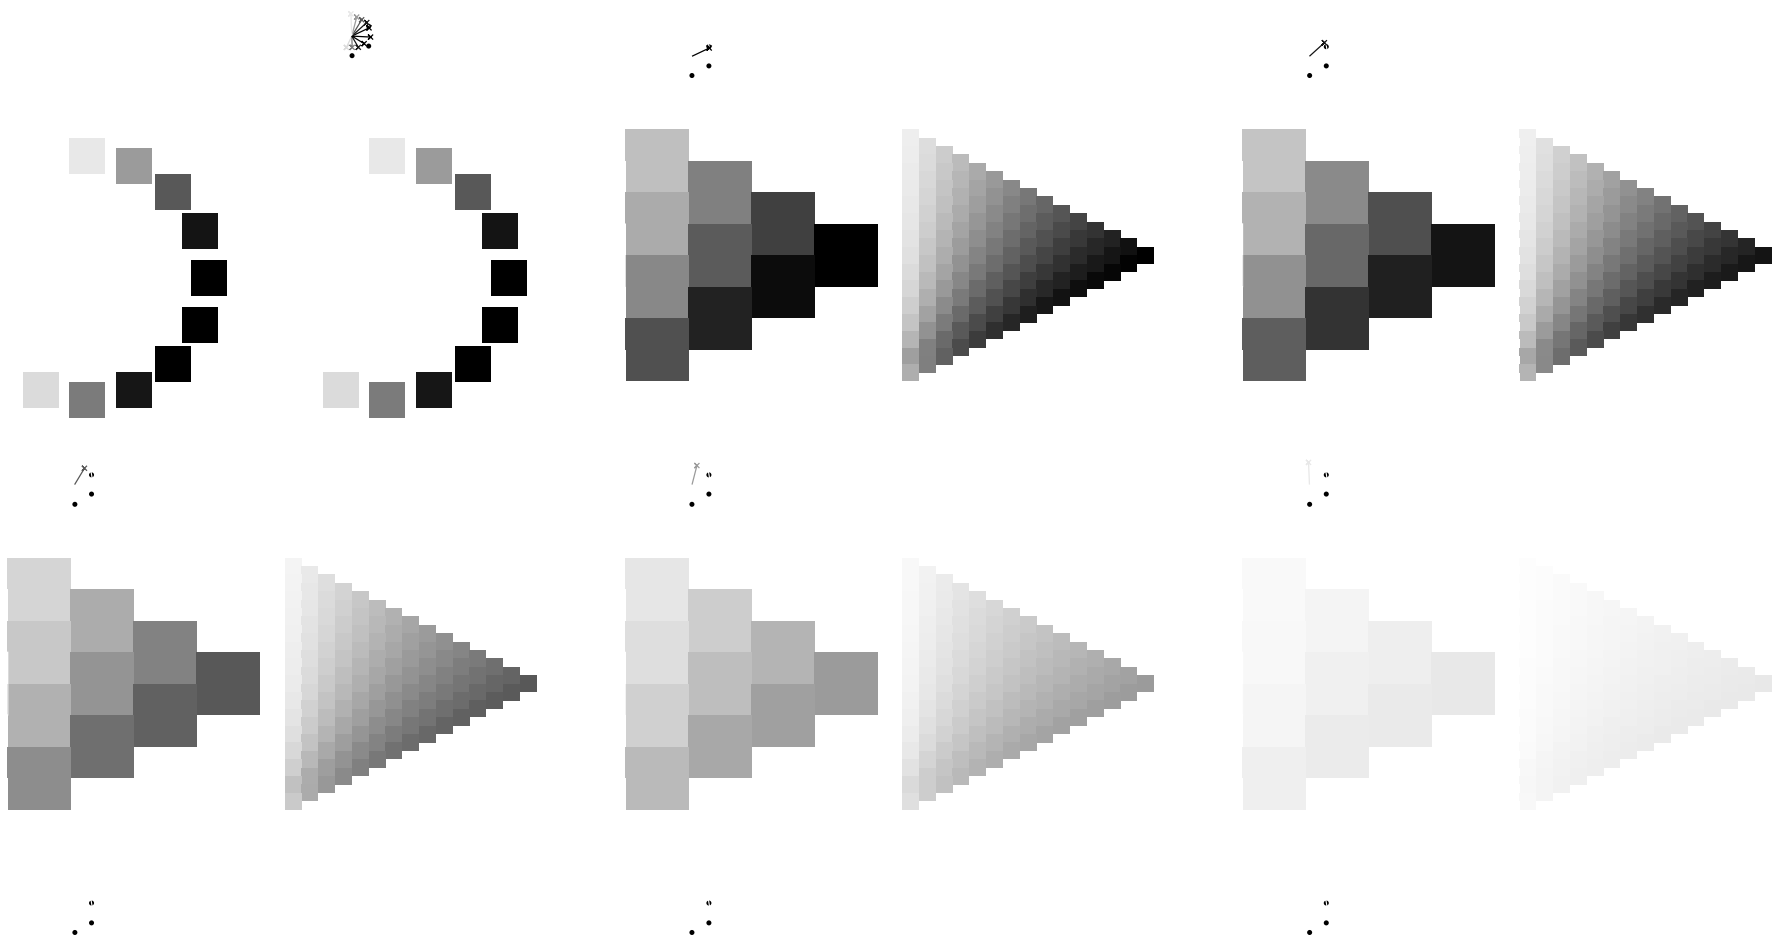

See for similar files: <http://www.ps.bam.de/De80/>; www.ps.bam.de/De.HTM
Technical information: <http://www.ps.bam.de> Version 2.1, io=1,1, ColSpx=1

See for similar files: <http://www.ps.bam.de/De80/>; www.ps.bam.de/De.HTM
Technical information: <http://www.ps.bam.de> Version 2.1, io=1,1, ColSpx=1

BAM registration: 20080701-De80/10L/L80E00NP.PS/ .PDF BAM material: code=rh4ta
application for evaluation and measurement of printer or monitor systems