



See for similar files: <http://www.ps.bam.de/Fe48/>; [www.ps.bam.de/Fe48/](http://www.ps.bam.de/Fe48/)  
Technical Information: <http://www.ps.bam.de>

Version 2.1, i=1,1, ColSpx=1

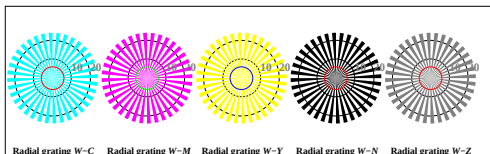


Fe481-5, Picture B2: Radial gratings W-C, W-M, W-Y, W-N, W-Z; PS operator *olv\* setrgbcolor*

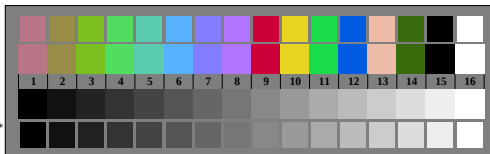


Fe480-7, Picture B3: 14 CIE-test colours and 2 + 16 grey steps; Use of PS operator *olv\* setrgbcolor*


Fe48-1; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705  
Fig. B1 to B7 similar ISO/IEC-Test chart 2, *olv\** interpretation

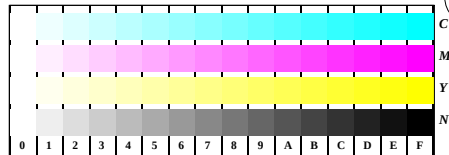


Fe481-1, Picture B4: 16 equidistant steps W-C, W-M, W-Y, W-N; PS operator *olv\* setrgbcolor*

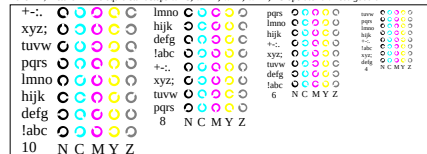

Fe481-3, Picture B5: Script and Landolt-rings N, C, M, Y, Z; PS operator *olv\* setrgbcolor*

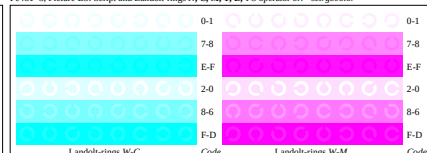

Fe481-5, Picture B6: Landolt-rings W-C, W-M; PS operator *olv\* setrgbcolor*

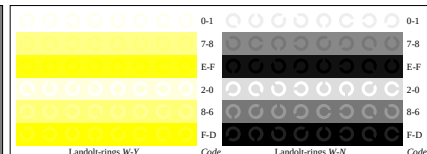

Fe481-7, Picture B7: Landolt-rings W-Y, W-N; PS operator *olv\* setrgbcolor*

input: *rgb->olv\* setrgbcolor*  
output: no change compared to input

BAM registration: 20081001-Fe48/10L/L48e00N1.PS/.TXT  
application for evaluation and measurement of printer or monitor systems  
BAM material: code=thada