
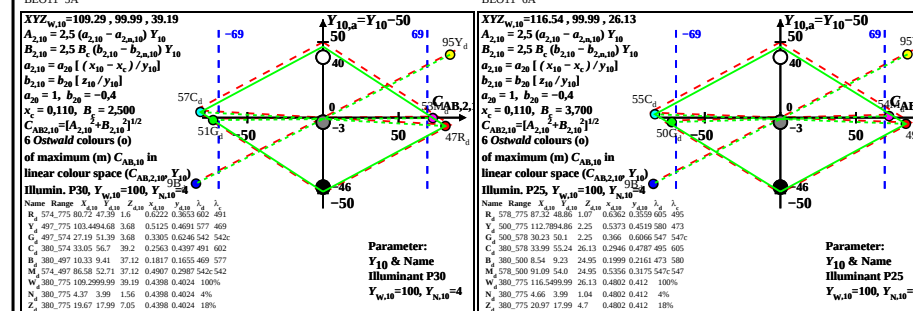
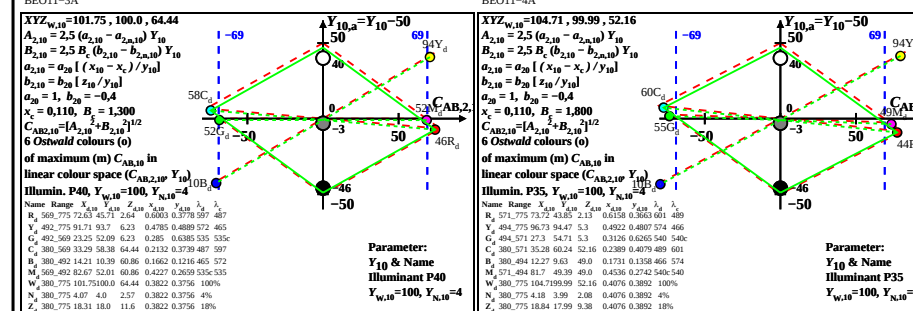
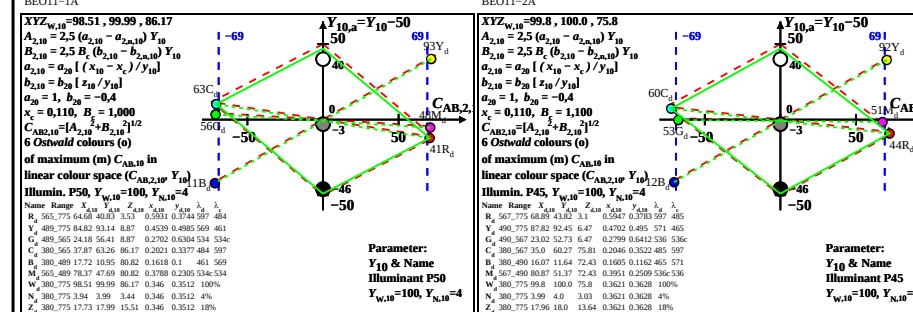
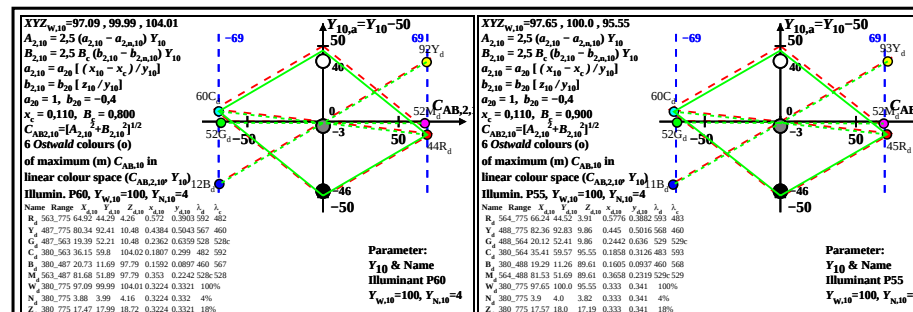
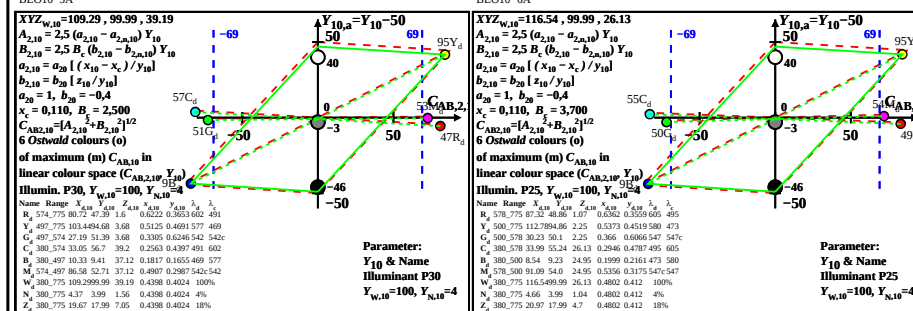
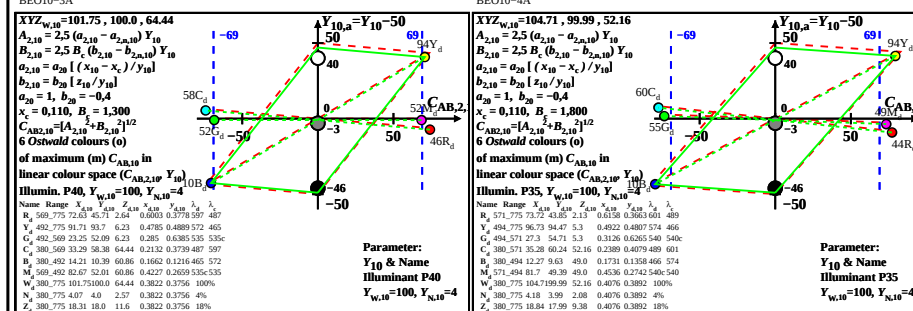
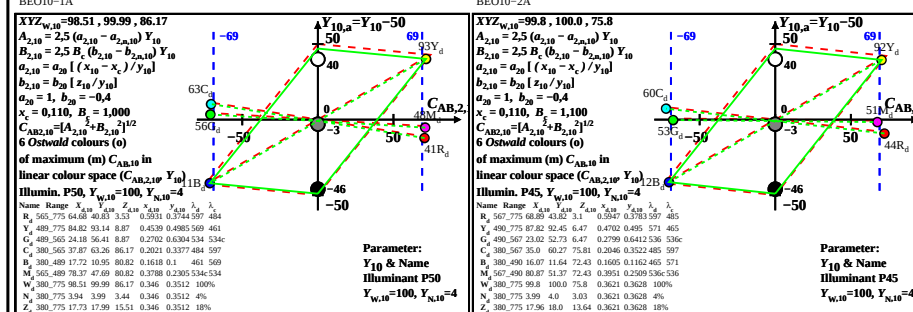


technical information: <http://fabbe.li.tu-berlin.de/> or <http://fabbe.li.tu-berlin.de/see-similar-files>: <http://fabbe.li.tu-berlin.de/BEOL/BEOL.H1M>

TUE registration: 20220301-BE01/BE01L0NA.TXT / PS application for evaluation and measurement of display or print output

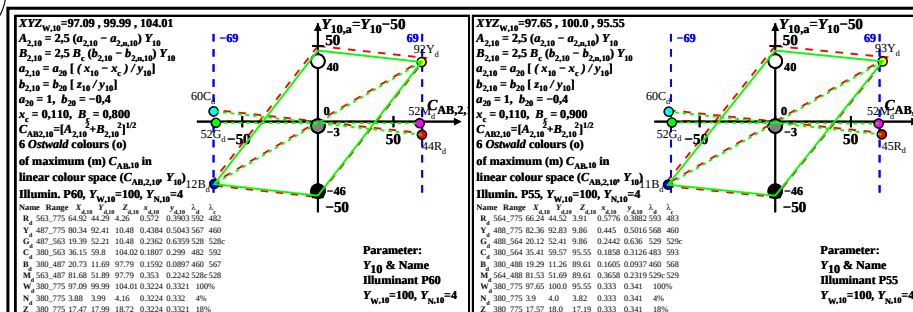

TUB-test chart BEO1; 6 *Ostwald* optimal colours for 8 illuminants Pxx, input: *rgb/cmy0/000k/n*
CIE-10. diagrams ($C_{AB} \geq 10, Y_{10}$). $C=25:1$, scale $Y_{10}=-50$ to 50, antagonistic reflection

4t2