









Ostwald-Optimalfarben (o) von maximalem (m) C_{AB} für D50, $Y_W=88,6$, $Y_m=520,770$

i_1, λ_1	i_2, λ_2	X	Y	Z	x	y	z	h_{xy}	i_d, λ_d	i_c, λ_c	Code
1 405	32 564	26.24	51.21	72.29	0.1752	0.3419	0.4827	185.5	17 486	38 592	Cm
7 435	33 565	23.33	51.54	56.25	0.1779	0.393	0.4289	168.3	18 490	46 634	
10 450	33 566	20.4	51.98	37.62	0.1854	0.4725	0.342	144.5	19 497	-1 497c	
12 460	33 567	19.02	52.53	25.04	0.1969	0.5437	0.2592	128.7	21 506	-1 506c	
13 465	33 568	18.88	53.11	19.63	0.206	0.5796	0.2143	122.2	22 511	-1 511c	
14 470	34 570	19.36	54.07	15.11	0.2187	0.6106	0.1706	116.7	23 519	-1 519c	
15 475	34 573	20.87	55.72	11.43	0.237	0.6329	0.1299	111.5	25 527	-1 527c	Gm
15 480	35 578	24.45	59.28	11.44	0.2569	0.6227	0.1202	108.5	26 531	-1 531c	
17 485	37 587	31.29	64.0	6.49	0.3074	0.6287	0.0637	98.0	28 544	-1 544c	
18 490	44 620	58.12	77.97	4.9	0.4122	0.5529	0.0348	71.0	32 561	-1 561c	max
19 495	-1 495c	73.62	82.96	3.66	0.4594	0.5177	0.0228	54.4	33 568	12 463	
20 500	-1 500c	73.61	81.49	2.68	0.4665	0.5164	0.0169	52.5	33 569	13 466	
22 510	-1 510c	73.51	77.37	1.37	0.4827	0.5081	0.009	47.4	34 571	14 471	
23 520	-1 519c	73.32	74.67	0.99	0.4921	0.5012	0.0066	44.2	34 572	14 473	Ym
25 530	-1 529c	72.37	68.03	0.49	0.5136	0.4828	0.0035	36.4	35 575	15 477	
27 540	-1 539c	70.43	60.24	0.23	0.538	0.4601	0.0018	27.8	35 579	16 480	
28 545	-1 544c	69.05	56.11	0.16	0.5509	0.4477	0.0013	23.4	36 581	16 481	
29 550	-1 549c	67.34	51.87	0.11	0.5643	0.4346	0.0009	19.1	36 583	16 483	
30 555	-1 554c	65.31	47.59	0.08	0.578	0.4211	0.0007	15.0	37 585	16 484	
32 560	-1 560c	60.3	39.22	0.05	0.6055	0.3938	0.0005	7.7	38 590	17 486	
32 564	1 405	70.17	48.78	10.19	0.5433	0.3776	0.0789	5.5	38 592	17 486	Rm
33 565	7 435	73.09	48.45	26.24	0.4945	0.3278	0.1775	348.3	46 634	18 490	
33 566	10 450	76.01	48.01	44.87	0.45	0.2842	0.2656	324.5	-1 497c	19 497	
33 567	12 460	77.39	47.46	57.44	0.4245	0.2603	0.3151	308.8	-1 506c	21 506	
33 568	13 465	77.53	46.88	62.85	0.414	0.2503	0.3356	302.3	-1 511c	22 511	
34 570	14 470	77.05	45.92	67.38	0.4047	0.2412	0.3539	296.7	-1 519c	23 519	
34 573	15 475	75.55	44.27	71.05	0.3957	0.2319	0.3722	291.6	-1 527c	25 527	Mm
35 578	15 480	71.96	40.71	71.05	0.3916	0.2216	0.3867	288.5	-1 531c	26 531	
37 587	17 485	65.12	35.99	76.0	0.3676	0.2032	0.429	278.0	-1 544c	28 544	
44 620	18 490	38.29	22.02	77.58	0.2777	0.1596	0.5626	251.1	-1 561c	32 561	min
-1 495c	19 495	22.79	17.03	78.83	0.192	0.1435	0.6643	234.4	12 463	33 568	
-1 500c	20 500	22.8	18.5	79.81	0.1882	0.1528	0.6589	232.5	13 466	33 569	
-1 510c	22 510	22.91	22.62	81.11	0.1808	0.1786	0.6404	227.5	14 471	34 571	
-1 519c	23 520	23.09	25.32	81.5	0.1777	0.1948	0.6273	224.2	14 473	34 572	Bm
-1 529c	25 530	24.04	31.96	81.99	0.1742	0.2315	0.5941	216.5	15 477	35 575	
-1 539c	27 540	25.98	39.75	82.25	0.1755	0.2686	0.5558	207.8	16 480	35 579	
-1 544c	28 545	27.37	43.88	82.33	0.1782	0.2857	0.536	203.5	16 481	36 581	
-1 549c	29 550	29.07	48.12	82.37	0.1821	0.3015	0.5162	199.2	16 483	36 583	
-1 554c	30 555	31.1	52.4	82.4	0.1874	0.3158	0.4966	195.0	16 484	37 585	
-1 560c	32 560	36.11	60.77	82.44	0.2013	0.3388	0.4597	187.7	17 486	38 590	
380	770	85.42	88.59	73.08	0.3457	0.3585	0.2957	0.0			

TUB-Prüfvorlage BG29; CIE (x, y) und Farbarten (a_i, b_i)

Ostwald-Optimalfarben für Lichtart D50; Diagramm für Lichtart D50, $Y_W=88,6$

Eingabe: w/rgb/cmyk -> rgb

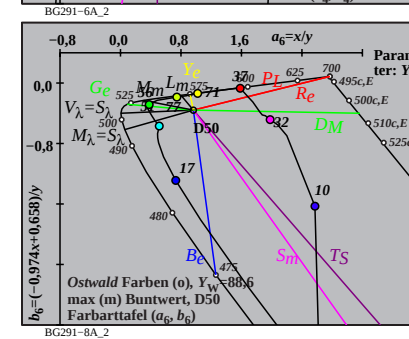
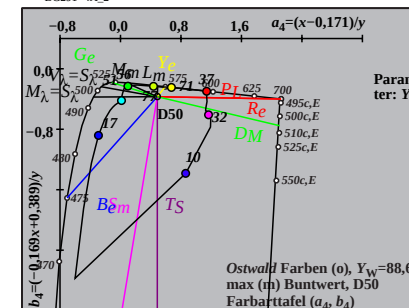
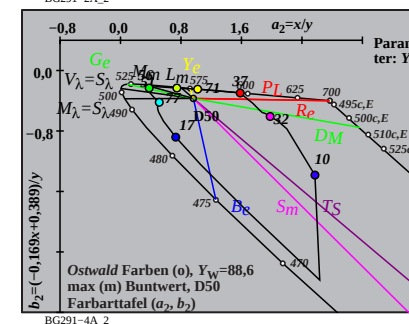
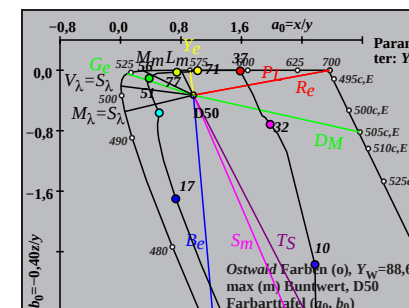
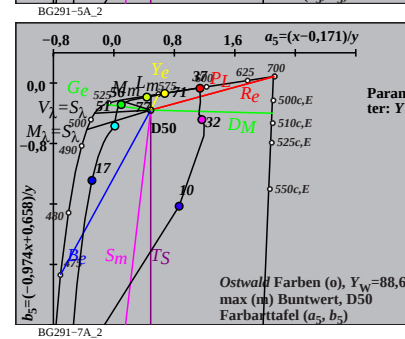
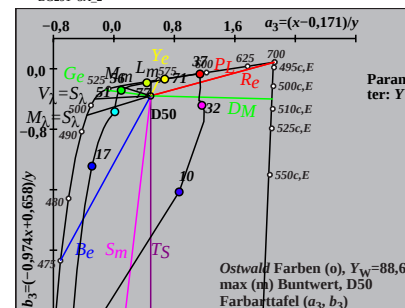
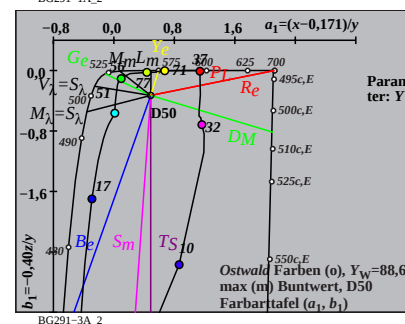
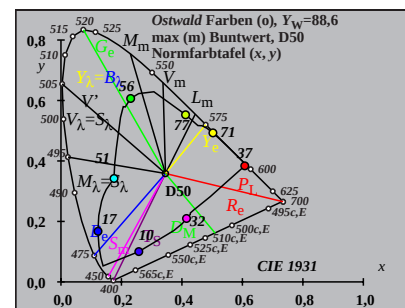


Ostwald-Optimalfarben (o) von maximalem (m) C_{AB} für P40, $Y_W=88,6$, $Y_m=520,770$

i_1, λ_1	i_2, λ_2	X	Y	Z	x	y	z	h_{xy}	i_d, λ_d	i_c, λ_c	Code
0	405	33	568	25.48	50.12	56.92	0.1922	0.3782	0.4295	179.4	17 488 38 594 Cm
7	435	33	568	22.92	50.37	42.95	0.1971	0.4333	0.3695	162.7	18 493 54 674
10	450	33	569	20.81	50.74	29.3	0.2063	0.5031	0.2905	143.8	19 499 -1 499c
12	460	34	570	19.89	51.2	20.08	0.2181	0.5615	0.2202	131.1	21 507 -1 507c
13	465	34	571	19.88	51.65	15.98	0.2271	0.5902	0.1825	125.5	22 512 -1 512c
14	470	34	572	20.36	52.42	12.49	0.2387	0.6147	0.1464	120.6	23 519 -1 519c
14	475	34	574	21.95	54.15	12.49	0.2477	0.6111	0.141	119.3	24 522 -1 522c Gm
15	480	35	578	24.49	56.54	9.64	0.2701	0.6234	0.1063	113.9	26 531 -1 531c
17	485	37	585	29.72	60.26	5.64	0.3108	0.6301	0.059	105.2	28 543 -1 543c
17	490	40	600	44.57	70.01	5.65	0.3707	0.5822	0.047	92.5	30 554 -1 554c max
19	495	-1	495c	80.24	84.05	3.24	0.4789	0.5016	0.0193	51.6	34 571 12 464
20	500	-1	500c	80.23	82.78	2.4	0.485	0.5004	0.0145	49.6	34 571 13 467
21	510	-1	509c	80.21	81.16	1.75	0.4916	0.4975	0.0107	47.2	34 572 13 469
24	520	-1	520c	79.64	73.89	0.66	0.5164	0.4792	0.0042	36.9	35 575 15 476 Ym
26	530	-1	530c	78.35	67.28	0.33	0.5368	0.4609	0.0022	28.2	35 578 16 480
27	540	-1	539c	77.33	63.58	0.23	0.5478	0.4504	0.0016	23.7	36 580 16 481
29	545	-1	545c	74.41	55.69	0.12	0.5714	0.4276	0.0009	14.9	36 584 16 484
29	550	-1	549c	74.41	55.69	0.12	0.5714	0.4276	0.0009	14.9	36 584 16 484
31	555	-1	555c	70.15	47.4	0.07	0.5963	0.403	0.0006	6.9	37 588 17 486
32	560	-1	560c	67.45	43.22	0.05	0.6091	0.3903	0.0005	3.4	38 591 17 487
33	568	0	405	75.45	49.87	7.76	0.5669	0.3747	0.0583	359.4	38 594 17 488 Rm
33	568	7	435	78.01	49.62	21.73	0.5222	0.3322	0.1454	342.7	54 674 18 493
33	569	10	450	80.12	49.25	35.38	0.4862	0.2989	0.2147	323.9	-1 499c 19 499
34	570	12	460	81.04	48.79	44.6	0.4645	0.2797	0.2557	311.1	-1 507c 21 507
34	571	13	465	81.04	48.34	48.7	0.455	0.2714	0.2734	305.5	-1 512c 22 512
34	572	14	470	80.56	47.57	52.19	0.4467	0.2638	0.2894	300.6	-1 519c 23 519
34	574	14	475	78.97	45.84	52.19	0.4461	0.259	0.2948	299.4	-1 522c 24 522 Mm
35	578	15	480	76.43	43.45	55.04	0.4369	0.2484	0.3146	294.0	-1 531c 26 531
37	585	17	485	71.2	39.73	59.04	0.4188	0.2337	0.3473	285.2	-1 543c 28 543
40	600	17	490	56.35	29.98	59.03	0.3876	0.2062	0.406	272.6	-1 554c 30 554 min
-1	495c	19	495	20.68	15.94	61.44	0.2109	0.1625	0.6264	231.6	12 464 34 571
-1	500c	20	500	20.69	17.21	62.28	0.2065	0.1718	0.6215	229.7	13 467 34 571
-1	509c	21	510	20.72	18.83	62.93	0.2021	0.1837	0.614	227.3	13 469 34 572
-1	520c	24	520	21.28	26.1	64.02	0.191	0.2342	0.5746	216.9	15 476 35 575 Bm
-1	530c	26	530	22.57	32.71	64.35	0.1886	0.2734	0.5378	208.3	16 480 35 578
-1	539c	27	540	23.59	36.41	64.45	0.1895	0.2925	0.5178	203.7	16 481 36 580
-1	545c	29	545	26.51	44.3	64.56	0.1958	0.3272	0.4769	194.9	16 484 36 584
-1	549c	29	550	26.51	44.3	64.56	0.1958	0.3272	0.4769	194.9	16 484 36 584
-1	555c	31	555	30.78	52.59	64.61	0.2079	0.3553	0.4366	186.9	17 486 37 588
-1	560c	32	560	33.47	56.77	64.63	0.2161	0.3665	0.4172	183.4	17 487 38 591
380	770	89.41	88.59	57.3	0.3799	0.3764	0.2435	0.0			

TUB-Prüfvorlage BG29; CIE (x, y) und Farbarten (a_i, b_i)

Ostwald-Optimalfarben für Lichtart P40; Diagramm für Lichtart P40, $Y_W=88,6$

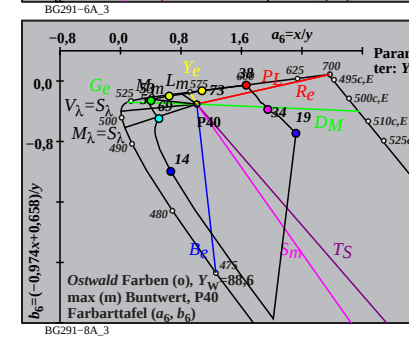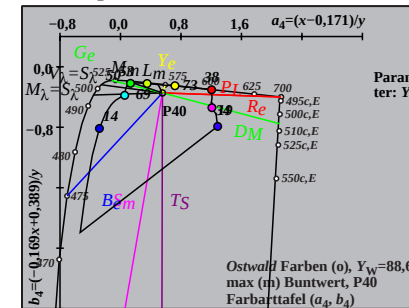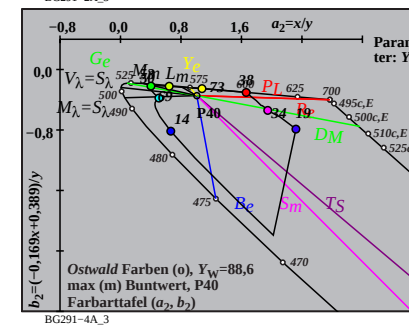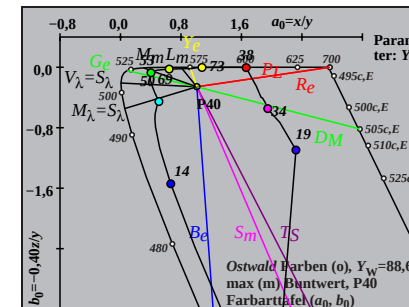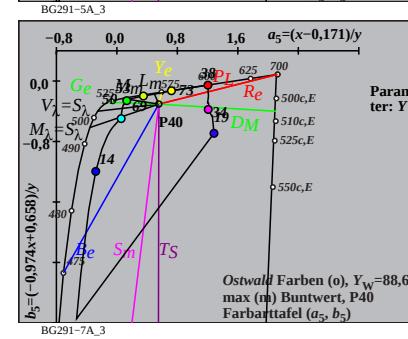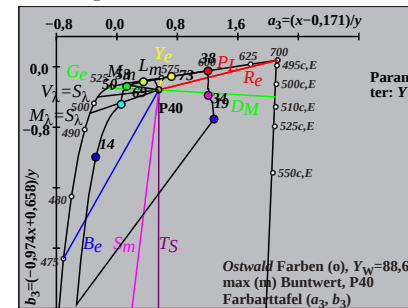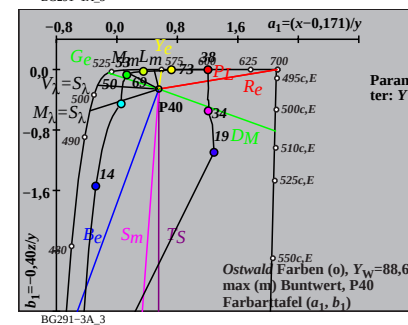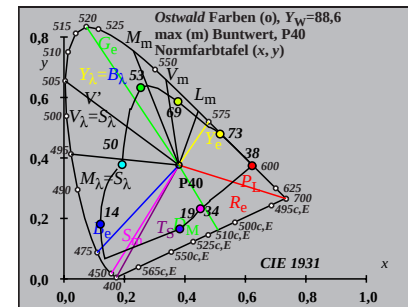

Eingabe: w/rgb/cmyk -> rgb









Ostwald-Optimalfarben (o) von maximalem (m) C_{AB} für A00, $Y_W=88,6$, $Y_m=520,770$

i_1, λ_1	i_2, λ_2	X	Y	Z	x	y	z	h_{xy}	i_d, λ_d	i_c, λ_c	Code	
1	405	34	574	24.45	48.43	31.25	0.2347	0.465	0.3001	164.8	18 494 39 599	Cm
6	435	34	574	23.77	48.59	27.06	0.239	0.4887	0.2722	158.6	19 496 42 611	
9	450	34	574	22.82	48.83	20.66	0.2472	0.5289	0.2238	148.7	20 501 -1 501c	
12	460	35	575	21.88	49.01	13.06	0.2606	0.5837	0.1556	136.6	21 508 -1 508c	
13	465	35	575	21.91	49.25	10.67	0.2677	0.6018	0.1303	132.7	22 512 -1 512c	
13	470	35	576	22.53	49.84	10.67	0.2712	0.6001	0.1285	132.4	22 513 -1 513c	
14	475	35	577	23.21	50.59	8.56	0.2817	0.6142	0.104	128.7	23 519 -1 519c	Gm
16	480	35	579	24.42	51.55	5.34	0.3003	0.6339	0.0656	123.0	26 532 -1 532c	
17	485	36	582	27.25	53.64	4.18	0.3202	0.6305	0.0491	119.6	28 540 -1 540c	
18	490	37	588	32.93	57.57	3.26	0.3512	0.6139	0.0348	114.9	29 548 -1 548c	max
19	495	40	601	47.38	65.98	2.53	0.4088	0.5693	0.0218	103.4	31 559 -1 559c	
20	500	-1	500c	92.54	84.75	1.93	0.5163	0.4728	0.0107	43.5	35 576 13 469	
21	510	-1	509c	92.53	83.55	1.44	0.5212	0.4706	0.0081	40.5	35 576 14 472	
24	520	-1	520c	92.07	77.79	0.58	0.5401	0.4563	0.0034	27.8	35 579 16 480	Ym
26	530	-1	530c	90.98	72.2	0.31	0.5564	0.4416	0.0019	17.4	36 582 16 484	
28	540	-1	540c	88.92	65.49	0.16	0.5752	0.4236	0.001	7.2	37 585 17 487	
28	545	-1	544c	88.92	65.49	0.16	0.5752	0.4236	0.001	7.2	37 585 17 487	
29	550	-1	549c	87.43	61.79	0.12	0.5854	0.4137	0.0008	2.6	37 586 17 489	
31	555	-1	555c	83.35	53.89	0.07	0.6069	0.3924	0.0005	354.6	38 590 18 491	
32	560	-1	560c	80.69	49.77	0.06	0.6182	0.3813	0.0004	351.3	38 593 18 492	
34	574	1	405	85.39	51.56	4.32	0.6044	0.3649	0.0306	344.8	39 599 18 494	Rm
34	574	6	435	86.07	51.4	8.51	0.5895	0.352	0.0583	338.7	42 611 19 496	
34	574	9	450	87.02	51.16	14.92	0.5683	0.3341	0.0974	328.7	-1 501c 20 501	
35	575	12	460	87.95	50.98	22.51	0.5447	0.3157	0.1394	316.7	-1 508c 21 508	
35	575	13	465	87.93	50.74	24.91	0.5375	0.3101	0.1522	312.7	-1 512c 22 512	
35	576	13	470	87.31	50.15	24.91	0.5377	0.3088	0.1534	312.4	-1 513c 22 513	
35	577	14	475	86.63	49.4	27.01	0.5313	0.3029	0.1656	308.7	-1 519c 23 519	Mm
35	579	16	480	85.41	48.44	30.24	0.5205	0.2951	0.1842	303.0	-1 532c 26 532	
36	582	17	485	82.59	46.35	31.39	0.5151	0.289	0.1958	299.7	-1 540c 28 540	
37	588	18	490	76.91	42.42	32.31	0.5071	0.2797	0.213	295.0	-1 548c 29 548	min
40	601	19	495	62.46	34.01	33.05	0.4822	0.2626	0.2551	283.4	-1 559c 31 559	
-1	500c	20	500	17.3	15.24	33.65	0.2613	0.2302	0.5083	223.5	13 469 35 576	
-1	509c	21	510	17.31	16.44	34.14	0.255	0.2422	0.5027	220.6	14 472 35 576	
-1	520c	24	520	17.77	22.2	34.99	0.237	0.2961	0.4667	207.8	16 480 35 579	Bm
-1	530c	26	530	18.86	27.79	35.27	0.2302	0.3392	0.4305	197.4	16 484 36 582	
-1	540c	28	540	20.92	34.5	35.41	0.2303	0.3797	0.3898	187.2	17 487 37 585	
-1	544c	28	545	20.92	34.5	35.41	0.2303	0.3797	0.3898	187.2	17 487 37 585	
-1	549c	29	550	22.41	38.2	35.45	0.2333	0.3976	0.369	182.6	17 489 37 586	
-1	555c	31	555	26.48	46.1	35.5	0.245	0.4264	0.3284	174.6	18 491 38 590	
-1	560c	32	560	29.15	50.22	35.52	0.2537	0.4371	0.3091	171.2	18 492 38 593	
380	770	97.31	88.58	31.52	0.4475	0.4074	0.1449	0.0				

TUB-Prüfvorlage BG29; CIE (x, y) und Farbarten (a_i, b_i)

Ostwald-Optimalfarben für Lichtart A00; Diagramm für Lichtart A00, $Y_W=88,6$

Eingabe: w/rgb/cmyk -> rgb

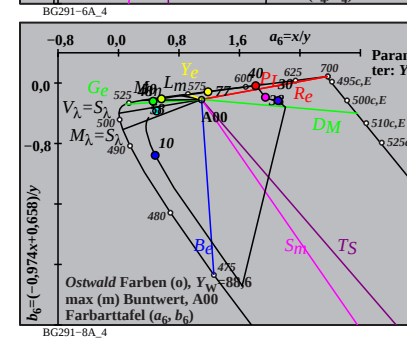
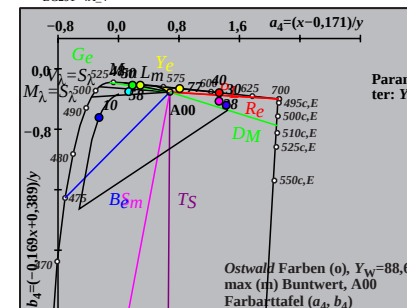
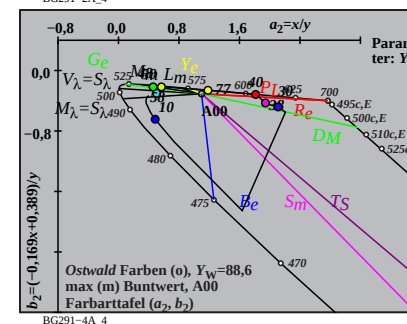
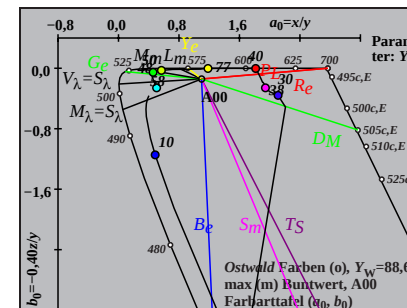
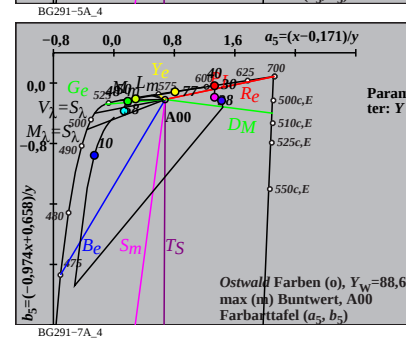
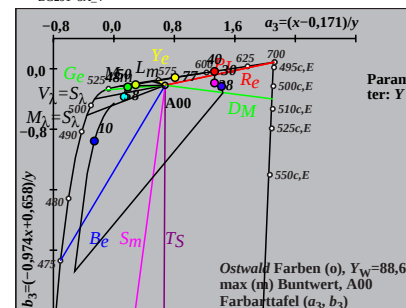
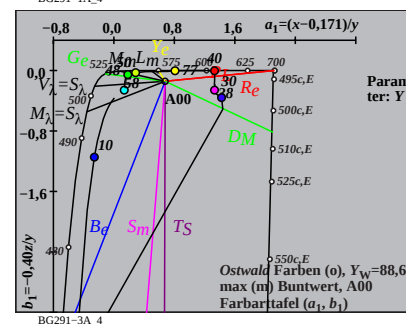
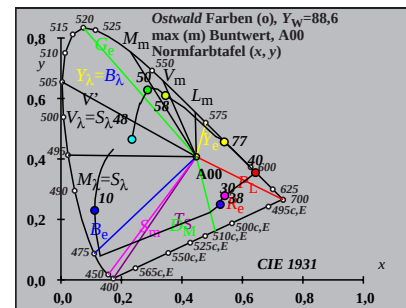


Ostwald-Optimalfarben (o) von maximalem (m) C_{AB} für E00, $Y_w=88,6$, $Y_m=520,770$

i_1, λ_1	i_2, λ_2	X	Y	Z	x	y	z	h_{xy}	i_d, λ_d	i_c, λ_c	Code
1 405	32 564	28.76	50.87	87.07	0.1725	0.3051	0.5222	189.9	16 484	38 592	Cm
6 435	33 565	25.48	51.3	69.01	0.1747	0.3518	0.4733	173.3	17 488	45 627	
10 450	33 566	20.65	51.78	40.05	0.1835	0.4603	0.3561	139.6	19 498	-1 498c	
12 460	33 568	19.25	52.51	26.36	0.1962	0.5351	0.2686	124.1	21 507	-1 507c	
13 465	33 569	19.21	53.28	20.52	0.2065	0.5727	0.2206	117.8	22 514	-1 514c	
14 470	34 571	20.0	54.5	15.7	0.2217	0.6041	0.174	112.3	24 522	-1 522c	
14 475	35 575	22.49	57.16	15.7	0.2358	0.5994	0.1646	110.0	25 525	-1 525c	Gm
16 480	36 581	26.5	60.43	8.9	0.2765	0.6305	0.0929	100.8	27 538	-1 538c	
17 485	39 595	37.68	67.95	6.68	0.3355	0.6049	0.0594	89.5	29 549	-1 549c	
18 490	-1 490c	73.83	83.75	4.99	0.4541	0.5151	0.0307	56.3	33 568	11 459	max
19 495	-1 495c	73.79	82.54	3.69	0.461	0.5157	0.0231	54.9	33 568	12 461	
19 500	-1 499c	73.79	82.54	3.69	0.461	0.5157	0.0231	54.9	33 568	12 461	
22 510	-1 510c	73.67	76.84	1.36	0.485	0.5059	0.0089	48.6	34 571	13 469	
24 520	-1 520c	73.12	70.99	0.69	0.5049	0.4902	0.0047	42.4	34 574	14 473	Ym
26 530	-1 530c	71.74	63.88	0.33	0.5276	0.4698	0.0024	35.0	35 577	15 477	
28 540	-1 540c	69.32	56.0	0.16	0.5524	0.4462	0.0012	27.2	36 581	15 479	
29 545	-1 545c	67.68	51.9	0.11	0.5654	0.4336	0.0009	23.3	36 583	16 480	
29 550	-1 549c	67.68	51.9	0.11	0.5654	0.4336	0.0009	23.3	36 583	16 480	
30 555	-1 554c	65.72	47.77	0.08	0.5786	0.4205	0.0007	19.5	37 585	16 482	
32 560	-1 560c	60.79	39.54	0.05	0.6055	0.3939	0.0005	12.5	38 590	16 483	
32 564	1 405	71.23	49.12	12.92	0.5344	0.3685	0.097	9.9	38 592	16 484	Rm
33 565	6 435	74.51	48.69	30.98	0.4832	0.3157	0.2009	353.3	45 627	17 488	
33 566	10 450	79.34	48.21	59.94	0.4231	0.2571	0.3196	319.7	-1 498c	19 498	
33 568	12 460	80.74	47.48	73.64	0.3999	0.2352	0.3648	304.2	-1 507c	21 507	
33 569	13 465	80.78	46.71	79.47	0.3903	0.2257	0.3839	297.9	-1 514c	22 514	
34 571	14 470	79.99	45.49	84.29	0.3813	0.2168	0.4018	292.4	-1 522c	24 522	
35 575	14 475	77.5	42.83	84.29	0.3787	0.2093	0.4119	290.1	-1 525c	25 525	Mm
36 581	16 480	73.49	39.56	91.09	0.36	0.1938	0.4461	280.8	-1 538c	27 538	
39 595	17 485	62.31	32.04	93.32	0.332	0.1707	0.4972	269.5	-1 549c	29 549	
-1 490c	18 490	26.16	16.24	95.0	0.1904	0.1182	0.6913	236.4	11 459	33 568	min
-1 495c	19 495	26.2	17.45	96.3	0.1872	0.1246	0.688	235.0	12 461	33 568	
-1 499c	19 500	26.2	17.45	96.3	0.1872	0.1246	0.688	235.0	12 461	33 568	
-1 510c	22 510	26.32	23.15	98.63	0.1777	0.1563	0.6659	228.6	13 469	34 571	
-1 520c	24 520	26.87	29.0	99.3	0.1731	0.1868	0.6399	222.4	14 473	34 574	Bm
-1 530c	26 530	28.25	36.11	99.66	0.1722	0.2201	0.6075	215.1	15 477	35 577	
-1 540c	28 540	30.67	43.99	99.83	0.1757	0.2521	0.5721	207.2	15 479	36 581	
-1 545c	29 545	32.31	48.09	99.88	0.1792	0.2667	0.554	203.3	16 480	36 583	
-1 549c	29 550	32.31	48.09	99.88	0.1792	0.2667	0.554	203.3	16 480	36 583	
-1 554c	30 555	34.27	52.22	99.91	0.1838	0.2801	0.5359	199.5	16 482	37 585	
-1 560c	32 560	39.2	60.45	99.94	0.1964	0.3028	0.5007	192.5	16 483	38 590	
380	770	88.59	88.59	88.59	0.3333	0.3333	0.3333	0.0			

TUB-Prüfvorlage BG29; CIE (x, y) und Farbarten (a_i, b_i)

Ostwald-Optimalfarben für Lichtart E00; Diagramm für Lichtart E00, $Y_w=88,6$

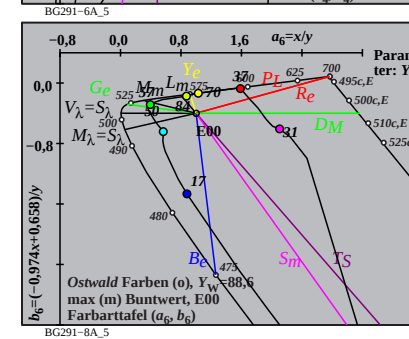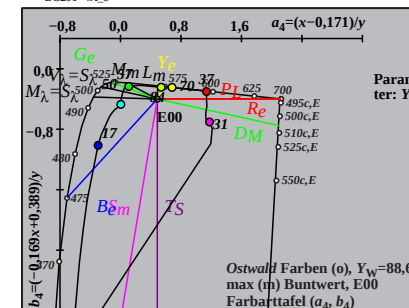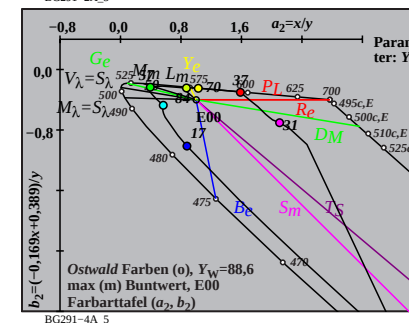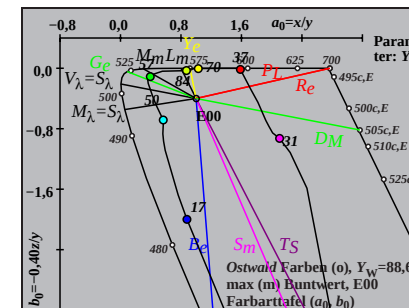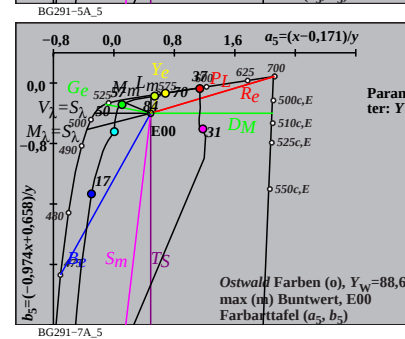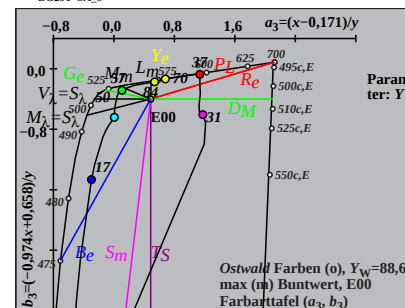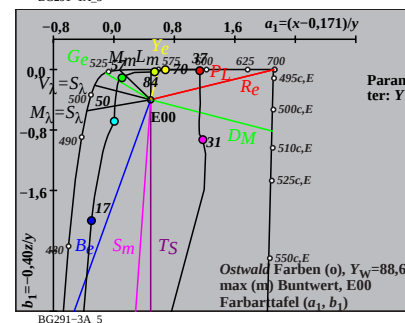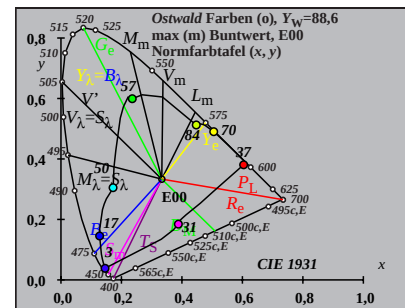

Eingabe: w/rgb/cmyk -> rgb


Ostwald-Optimalfarben (o) von maximalem (m) C_{AB} für C00, $Y_w=88,6$, $Y_m=520,770$

i_1, λ_1	i_2, λ_2	X	Y	Z	x	y	z	h_{xy}	i_d, λ_d	i_c, λ_c	Code
1 405	32 562	30.57	51.1	103.67	0.1649	0.2756	0.5593	195.5	16 482	37 589	Cm
6 435	32 563	27.1	51.69	84.28	0.1661	0.3169	0.5168	179.6	17 486	42 612	
10 450	32 564	21.08	52.35	48.7	0.1726	0.4286	0.3987	140.6	19 496	-1 496c	
11 460	33 566	20.72	53.63	39.94	0.1813	0.4691	0.3494	130.0	20 501	-1 501c	
13 465	33 568	19.28	54.22	24.52	0.1967	0.5531	0.2501	115.5	22 513	-1 513c	
14 470	34 570	20.14	55.77	18.52	0.2132	0.5906	0.1961	109.4	24 522	-1 522c	
15 475	35 575	22.55	58.4	13.74	0.2381	0.6167	0.1451	103.4	26 530	-1 530c	Gm
16 480	36 582	28.07	62.97	10.08	0.2775	0.6227	0.0996	96.0	28 540	-1 540c	
16 485	40 602	43.26	73.14	10.09	0.342	0.5781	0.0798	83.0	30 551	-1 551c	
18 490	-1 490c	69.45	82.68	5.32	0.441	0.525	0.0338	57.8	33 566	11 459	max
19 495	-1 495c	69.4	81.3	3.83	0.449	0.526	0.0248	56.4	33 567	12 462	
19 500	-1 499c	69.4	81.3	3.83	0.449	0.526	0.0248	56.4	33 567	12 462	
21 510	-1 509c	69.36	77.66	1.92	0.4656	0.5214	0.0128	52.8	33 568	13 466	
24 520	-1 520c	68.74	69.63	0.69	0.4943	0.5006	0.0049	45.0	34 572	14 472	Ym
26 530	-1 530c	67.38	62.62	0.34	0.5169	0.4804	0.0026	38.4	35 575	15 475	
28 540	-1 540c	64.9	54.54	0.16	0.5425	0.456	0.0013	31.0	35 579	15 478	
28 545	-1 544c	64.9	54.54	0.16	0.5425	0.456	0.0013	31.0	35 579	15 478	
29 550	-1 549c	63.17	50.25	0.11	0.5563	0.4425	0.001	27.1	36 581	15 479	
31 555	-1 555c	58.67	41.49	0.06	0.5853	0.4139	0.0006	19.5	37 586	16 481	
31 560	-1 559c	58.67	41.49	0.06	0.5853	0.4139	0.0006	19.5	37 586	16 481	
32 562	1 405	67.5	48.89	14.54	0.5154	0.3734	0.111	15.5	37 589	16 482	Rm
32 563	6 435	70.97	48.3	33.93	0.4632	0.3152	0.2215	359.6	42 612	17 486	
32 564	10 450	76.98	47.64	69.52	0.3965	0.2454	0.358	320.7	-1 496c	19 496	
33 566	11 460	77.34	46.36	78.27	0.3829	0.2295	0.3875	310.1	-1 501c	20 501	
33 568	13 465	78.78	45.77	93.7	0.3609	0.2097	0.4293	295.6	-1 513c	22 513	
34 570	14 470	77.92	44.22	99.7	0.3512	0.1993	0.4494	289.4	-1 522c	24 522	
35 575	15 475	75.51	41.59	104.48	0.3407	0.1876	0.4715	283.4	-1 530c	26 530	
36 582	16 480	70.0	37.02	108.14	0.3253	0.172	0.5025	276.0	-1 540c	28 540	
40 602	16 485	54.8	26.85	108.13	0.2887	0.1415	0.5697	263.0	-1 551c	30 551	
-1 490c	18 490	28.61	17.31	112.89	0.1801	0.109	0.7107	237.9	11 459	33 566	min
-1 495c	19 495	28.66	18.69	114.38	0.1772	0.1155	0.7071	236.5	12 462	33 567	
-1 499c	19 500	28.66	18.69	114.38	0.1772	0.1155	0.7071	236.5	12 462	33 567	
-1 509c	21 510	28.7	22.33	116.3	0.1715	0.1334	0.6949	232.8	13 466	33 568	
-1 520c	24 520	29.32	30.36	117.53	0.1654	0.1713	0.6632	225.0	14 472	34 572	Bm
-1 530c	26 530	30.68	37.37	117.88	0.165	0.201	0.6339	218.4	15 475	35 575	
-1 540c	28 540	33.16	45.45	118.05	0.1686	0.231	0.6002	211.0	15 478	35 579	
-1 544c	28 545	33.16	45.45	118.05	0.1686	0.231	0.6002	211.0	15 478	35 579	
-1 549c	29 550	34.89	49.74	118.1	0.1721	0.2453	0.5825	207.1	15 479	36 581	
-1 555c	31 555	39.39	58.5	118.15	0.1823	0.2707	0.5468	199.5	16 481	37 586	
-1 559c	31 560	39.39	58.5	118.15	0.1823	0.2707	0.5468	199.5	16 481	37 586	
380	770	86.88	88.59	104.73	0.31	0.3161	0.3737	0.0			

TUB-Prüfvorlage BG29; CIE (x, y) und Farbarten (a_i, b_i)

Ostwald-Optimalfarben für Lichtart C00; Diagramm für Lichtart C00, $Y_w=88,6$

Eingabe: w/rgb/cmyk -> rgb








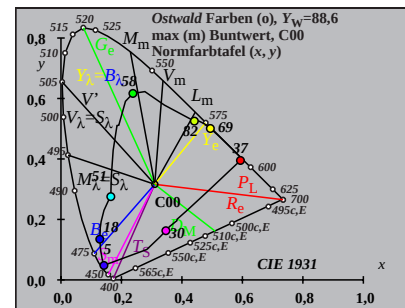


Ostwald-Optimalfarben (o) von maximalem (m) C_{AB} für P00, $Y_w=88,6$, $Y_m=520,770$

i_1, λ_1	i_2, λ_2	X	Y	Z	x	y	z	h_{xy}	i_d, λ_d	i_c, λ_c	Code
1	405	33	567	27.24	50.33	70.7	0.1837	0.3394	0.4768	184.4	17 486 38 594 Cm
7	435	33	567	23.68	50.61	51.5	0.1882	0.4023	0.4093	164.0	18 491 -1 491c
10	450	33	568	20.95	51.06	33.95	0.1977	0.4818	0.3204	141.6	19 499 -1 499c
12	460	34	570	19.8	51.65	22.7	0.2103	0.5485	0.2411	127.5	21 507 -1 507c
13	465	34	571	19.82	52.22	17.84	0.2205	0.5809	0.1984	121.5	22 513 -1 513c
13	470	34	572	21.05	53.56	17.84	0.2277	0.5792	0.1929	120.4	23 515 -1 515c
15	475	35	575	22.09	54.9	10.5	0.2524	0.6274	0.12	111.4	25 529 -1 529c Gm
16	480	36	580	25.6	57.9	7.96	0.2799	0.6329	0.087	106.0	27 537 -1 537c
17	485	37	589	33.5	63.52	6.02	0.325	0.6164	0.0584	97.6	29 547 -1 547c
18	490	45	625	63.97	78.78	4.54	0.4342	0.5348	0.0308	67.8	32 564 -1 564c max
18	495	-1	494c	78.64	84.48	4.54	0.469	0.5038	0.0271	54.2	34 570 12 460
20	500	-1	500c	78.59	82.05	2.49	0.4817	0.5029	0.0153	50.9	34 571 13 465
22	510	-1	510c	78.49	78.23	1.29	0.4967	0.495	0.0081	46.1	34 573 14 470
24	520	-1	520c	77.98	72.8	0.66	0.5148	0.4807	0.0043	39.5	35 575 14 474 Ym
25	530	-1	529c	77.44	69.57	0.47	0.525	0.4717	0.0032	35.7	35 577 15 476
28	540	-1	540c	74.34	58.47	0.16	0.559	0.4397	0.0012	23.5	36 582 16 481
28	545	-1	544c	74.34	58.47	0.16	0.559	0.4397	0.0012	23.5	36 582 16 481
30	550	-1	550c	70.8	50.39	0.08	0.5837	0.4155	0.0007	15.5	37 586 16 483
30	555	-1	554c	70.8	50.39	0.08	0.5837	0.4155	0.0007	15.5	37 586 16 483
32	560	-1	560c	65.87	42.17	0.05	0.6093	0.3901	0.0005	8.4	38 591 17 485
33	567	1	405	74.81	49.66	10.35	0.5548	0.3683	0.0767	4.4	38 594 17 486 Rm
33	567	7	435	78.37	49.38	29.55	0.4982	0.3139	0.1878	344.0	-1 491c 18 491
33	568	10	450	81.11	48.93	47.1	0.4578	0.2762	0.2659	321.7	-1 499c 19 499
34	570	12	460	82.26	48.34	58.35	0.4353	0.2558	0.3088	307.5	-1 507c 21 507
34	571	13	465	82.23	47.77	63.21	0.4256	0.2472	0.3271	301.6	-1 513c 22 513
34	572	13	470	81.0	46.43	63.21	0.4248	0.2435	0.3315	300.4	-1 515c 23 515
35	575	15	475	79.97	45.09	70.55	0.4088	0.2305	0.3606	291.5	-1 529c 25 529 Mm
36	580	16	480	76.45	42.09	73.09	0.3989	0.2196	0.3814	286.0	-1 537c 27 537
37	589	17	485	68.56	36.47	75.03	0.3807	0.2025	0.4167	277.6	-1 547c 29 547
45	625	18	490	38.09	21.21	76.51	0.2804	0.1561	0.5633	247.9	-1 564c 32 564 min
-1	494c	18	495	23.42	15.51	76.51	0.2028	0.1343	0.6627	234.2	12 460 34 570
-1	500c	20	500	23.47	17.94	78.56	0.1956	0.1495	0.6548	231.0	13 465 34 571
-1	510c	22	510	23.56	21.76	79.76	0.1883	0.1739	0.6376	226.1	14 470 34 573
-1	520c	24	520	24.07	27.19	80.39	0.1828	0.2065	0.6105	219.5	14 474 35 575 Bm
-1	529c	25	530	24.61	30.42	80.58	0.1815	0.2243	0.5941	215.7	15 476 35 577
-1	540c	28	540	27.72	41.52	80.89	0.1846	0.2765	0.5388	203.5	16 481 36 582
-1	544c	28	545	27.72	41.52	80.89	0.1846	0.2765	0.5388	203.5	16 481 36 582
-1	550c	30	550	31.26	49.6	80.97	0.1931	0.3065	0.5003	195.6	16 483 37 586
-1	554c	30	555	31.26	49.6	80.97	0.1931	0.3065	0.5003	195.6	16 483 37 586
-1	560c	32	560	36.19	57.82	81.0	0.2067	0.3303	0.4628	188.4	17 485 38 591
380	770	90.42	88.59	71.81	0.3604	0.3531	0.2863	0.0			

TUB-Prüfvorlage BG29; CIE (x, y) und Farbarten (a_i, b_i)

Ostwald-Optimalfarben für Lichtart P00; Diagramm für Lichtart P00, $Y_w=88,6$

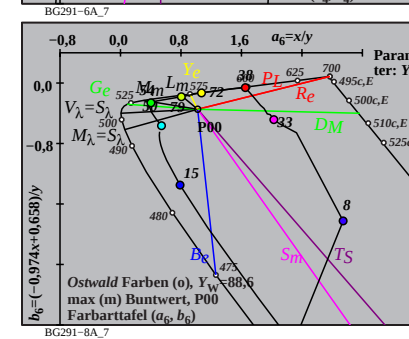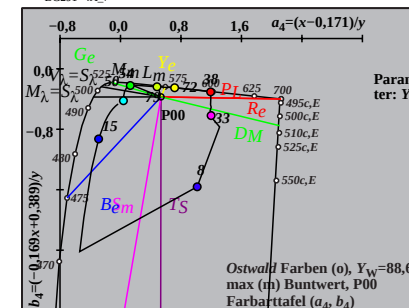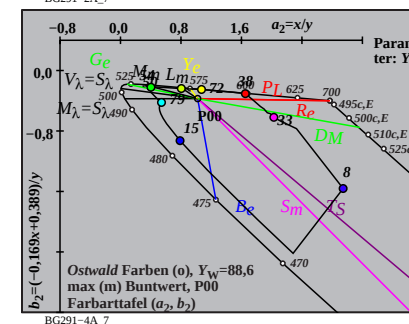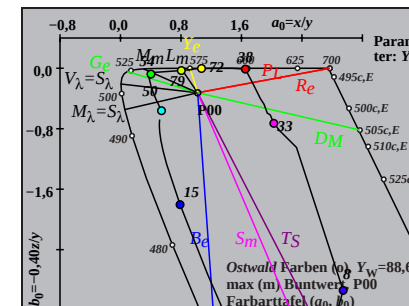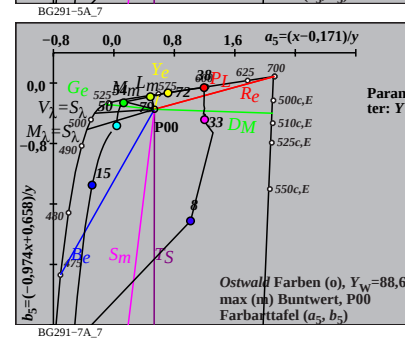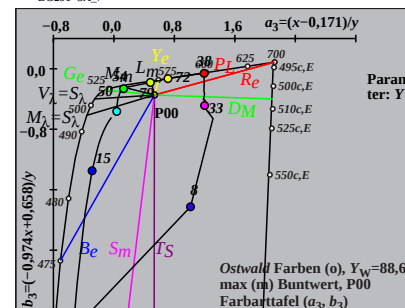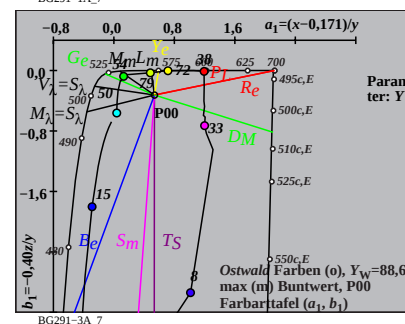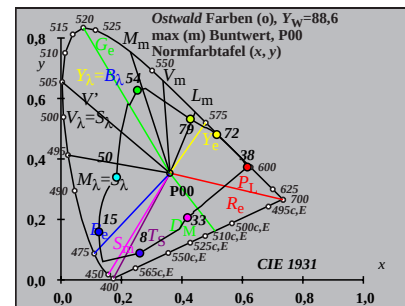

Eingabe: w/rgb/cmyk -> rgb

Ostwald-Optimalfarben (o) von maximalem (m) C_{AB} für Q00, $Y_w=88,6$, $Y_m=520,770$

i_1, λ_1	i_2, λ_2	X	Y	Z	x	y	z	h_{xy}	i_d, λ_d	i_c, λ_c	Code
1	405	32	562	30.39	51.28	103.44	0.1641	0.277	0.5587	194.9	16 482 38 590 Cm
7	435	32	562	24.57	51.72	72.55	0.165	0.3474	0.4874	167.4	17 488 -1 488c
10	450	32	564	20.35	52.44	46.16	0.171	0.4408	0.388	137.7	19 497 -1 497c
11	460	33	566	20.01	53.67	37.79	0.1795	0.4814	0.339	127.9	20 502 -1 502c
12	465	33	568	19.74	54.66	30.01	0.189	0.5234	0.2874	119.9	21 508 -1 508c
14	470	34	570	19.52	55.78	17.62	0.21	0.6002	0.1896	109.1	24 522 -1 522c
15	475	35	575	21.9	58.38	13.22	0.2342	0.6243	0.1413	103.6	26 530 -1 530c Gm
16	480	36	582	27.43	62.99	9.85	0.2735	0.6281	0.0982	96.4	27 539 -1 539c
17	485	40	602	42.96	72.6	7.33	0.3496	0.5907	0.0596	81.5	30 552 -1 552c
17	490	-1	489c	69.13	84.1	7.34	0.4305	0.5237	0.0457	59.7	33 565 11 455 max
18	495	-1	494c	69.02	83.02	5.43	0.4382	0.5271	0.0345	58.5	33 565 11 458
20	500	-1	500c	68.96	80.01	2.88	0.4541	0.5268	0.019	55.5	33 567 12 463
21	510	-1	509c	68.93	77.94	2.04	0.4628	0.5233	0.0137	53.4	33 568 13 465
23	520	-1	519c	68.64	72.51	1.01	0.4828	0.51	0.0071	48.1	34 571 14 470 Ym
26	530	-1	530c	66.8	61.69	0.34	0.5185	0.4788	0.0026	37.9	35 576 15 475
27	540	-1	539c	65.69	57.66	0.23	0.5315	0.4665	0.0018	34.1	35 578 15 477
28	545	-1	544c	64.3	53.52	0.16	0.545	0.4536	0.0013	30.3	36 580 15 478
29	550	-1	549c	62.62	49.33	0.11	0.5587	0.4402	0.001	26.5	36 582 15 479
30	555	-1	554c	60.64	45.14	0.08	0.5727	0.4264	0.0007	22.7	36 584 16 480
31	560	-1	559c	58.33	40.99	0.06	0.5869	0.4124	0.0006	19.2	37 587 16 481
32	562	1	405	67.54	48.71	15.51	0.5125	0.3697	0.1177	14.8	38 590 16 482 Rm
32	562	7	435	73.36	48.27	46.39	0.4365	0.2872	0.2761	347.5	-1 488c 17 488
32	564	10	450	77.57	47.55	72.78	0.3919	0.2402	0.3677	317.7	-1 497c 19 497
33	566	11	460	77.92	46.32	81.15	0.3793	0.2255	0.3951	308.0	-1 502c 20 502
33	568	12	465	78.18	45.33	88.93	0.368	0.2133	0.4186	300.0	-1 508c 21 508
34	570	14	470	78.4	44.21	101.32	0.3501	0.1974	0.4524	289.2	-1 522c 24 522
35	575	15	475	76.02	41.61	105.73	0.3403	0.1862	0.4733	283.6	-1 530c 26 530 Mm
36	582	16	480	70.49	37.0	109.09	0.3254	0.1708	0.5036	276.5	-1 539c 27 539
40	602	17	485	54.96	27.39	111.61	0.2833	0.1412	0.5754	261.6	-1 552c 30 552
-1	489c	17	490	28.79	15.89	111.61	0.1842	0.1016	0.714	239.7	11 455 33 565 min
-1	494c	18	495	28.9	16.97	113.51	0.1813	0.1065	0.7121	238.6	11 458 33 565
-1	500c	20	500	28.97	19.98	116.06	0.1755	0.1211	0.7033	235.5	12 463 33 567
-1	509c	21	510	28.99	22.05	116.9	0.1726	0.1312	0.696	233.5	13 465 33 568
-1	519c	23	520	29.28	27.48	117.93	0.1676	0.1573	0.675	228.2	14 470 34 571 Bm
-1	530c	26	530	31.12	38.3	118.61	0.1655	0.2037	0.6307	217.9	15 475 35 576
-1	539c	27	540	32.23	42.33	118.72	0.1667	0.219	0.6141	214.1	15 477 35 578
-1	544c	28	545	33.62	46.47	118.79	0.169	0.2336	0.5972	210.3	15 478 36 580
-1	549c	29	550	35.3	50.66	118.83	0.1723	0.2473	0.5802	206.5	15 479 36 582
-1	554c	30	555	37.29	54.85	118.87	0.1767	0.2599	0.5633	202.8	16 480 36 584
-1	559c	31	560	39.59	59.0	118.89	0.182	0.2713	0.5466	199.2	16 481 37 587
380	770	86.75	88.59	105.38	0.309	0.3155	0.3753	0.0			

TUB-Prüfvorlage BG29; CIE (x, y) und Farbarten (a_i, b_i)

Ostwald-Optimalfarben für Lichtart Q00; Diagramm für Lichtart Q00, $Y_w=88,6$

Eingabe: w/rgb/cmyk -> rgb

