









Ostwald-Optimalfarben (o) von maximalem (m) $C_{AB,10}$ für D65, $Y_{w,10}=88,6$, $Y_m=520_770$

λ_1	λ_2	X_{10}	Y_{10}	Z_{10}	x_{1010}	y_{10}	z_{10}	$h_{10xy,10}$	λ_d	i_c	λ_c	Code	
0	405	31	556	28.12	50.11	94.37	0.1629	0.2903	0.5467	195.0	15	476	37 585 Cm
6	435	31	557	24.8	50.86	74.08	0.1656	0.3396	0.4947	176.6	16	480	44 621
10	450	31	559	19.54	50.96	41.21	0.1749	0.4561	0.3689	137.9	18	491	-1 491c
11	460	32	562	19.75	52.51	33.04	0.1875	0.4986	0.3137	126.9	19	498	-1 498c
12	465	33	565	20.22	53.96	25.67	0.2025	0.5403	0.2571	117.9	21	506	-1 506c
14	470	34	570	21.81	55.87	14.19	0.2373	0.6081	0.1544	105.3	24	522	-1 522c
15	475	35	579	27.93	60.81	10.22	0.2822	0.6144	0.1032	96.3	26	533	-1 533c Gm
16	480	41	606	47.87	72.59	7.29	0.3746	0.5682	0.0571	75.5	30	550	-1 550c
16	485	-1	484c	68.26	81.76	7.29	0.4339	0.5197	0.0463	57.5	32	560	10 454
18	490	-1	490c	68.1	78.9	3.72	0.4518	0.5234	0.0247	54.3	32	562	11 459 max
19	495	-1	495c	68.08	77.11	2.63	0.4605	0.5216	0.0178	52.4	32	563	12 461
19	500	-1	499c	68.08	77.11	2.63	0.4605	0.5216	0.0178	52.4	32	563	12 461
22	510	-1	510c	67.71	70.07	0.89	0.4882	0.5052	0.0064	44.9	33	566	13 466
23	520	-1	519c	67.33	67.16	0.6	0.4983	0.4971	0.0045	41.9	33	568	13 468 Ym
26	530	-1	530c	64.81	56.85	0.14	0.532	0.4667	0.0012	31.8	34	573	14 472
27	540	-1	539c	63.44	53.07	0.07	0.5441	0.4551	0.0006	28.3	35	576	14 473
28	545	-1	544c	61.79	49.2	0.03	0.5565	0.4431	0.0003	24.7	35	578	14 474
29	550	-1	549c	59.85	45.28	0.01	0.5691	0.4306	0.0001	21.3	36	580	15 475
31	555	-1	555c	55.06	37.53	0.0	0.5946	0.4053	0.0	14.8	37	586	15 476
32	560	10	451	62.45	35.47	51.78	0.4171	0.2369	0.3458	317.7	-1	492c	18 492
31	556	0	405	66.68	49.88	12.95	0.5148	0.3851	0.1	15.0	37	585	15 476 Rm
31	557	6	435	70.0	49.13	33.24	0.4594	0.3224	0.2181	356.6	44	621	16 480
31	559	10	450	75.26	49.03	66.11	0.3952	0.2575	0.3472	317.9	-1	491c	18 491
32	562	11	460	75.06	47.48	74.29	0.3813	0.2412	0.3774	307.0	-1	498c	19 498
33	565	12	465	74.58	46.03	81.65	0.3687	0.2275	0.4036	298.0	-1	506c	21 506
34	570	14	470	73.0	44.12	93.14	0.3471	0.2098	0.4429	285.4	-1	522c	24 522
35	579	15	475	66.88	39.18	97.11	0.3291	0.1928	0.4779	276.3	-1	533c	26 533 Mm
41	606	16	480	46.93	27.4	100.03	0.2691	0.1571	0.5736	255.6	-1	550c	30 550
-1	484c	16	485	26.54	18.23	100.03	0.1833	0.1258	0.6907	237.5	10	454	32 560
-1	490c	18	490	26.71	21.09	103.61	0.1764	0.1393	0.6842	234.3	11	459	32 562 min
-1	495c	19	495	26.73	22.88	104.69	0.1732	0.1482	0.6784	232.4	12	461	32 563
-1	499c	19	500	26.73	22.88	104.69	0.1732	0.1482	0.6784	232.4	12	461	32 563
-1	510c	22	510	27.1	29.92	106.43	0.1657	0.183	0.6511	225.0	13	466	33 566
-1	519c	23	520	27.48	32.83	106.72	0.1645	0.1965	0.6389	222.0	13	468	33 568 Bm
-1	530c	26	530	30.0	43.14	107.18	0.1663	0.2392	0.5943	211.8	14	472	34 573
-1	539c	27	540	31.36	46.92	107.25	0.169	0.2529	0.578	208.3	14	473	35 576
-1	544c	28	545	33.01	50.79	107.29	0.1727	0.2657	0.5614	204.8	14	474	35 578
-1	549c	29	550	34.96	54.71	107.32	0.1774	0.2777	0.5447	201.3	15	475	36 580
-1	555c	31	555	39.75	62.46	107.33	0.1896	0.298	0.5122	194.8	15	476	37 586
10	451	32	560	32.36	64.52	55.55	0.2122	0.4232	0.3644	137.6	18	492	-1 492c
380	770	83.99	88.59	95.08	0.3137	0.3309	0.3552	0.0					

0-001030-L0

BG310-7N_16









TUB-Prüfvorlage BG31; CIE (x_{10}, y_{10}) und Farbarten ($a_{i,10}, b_{i,10}$) Eingabe: w/rgb/cmyk -> rgb
Ostwald-Optimalfarben für Lichtart D65; Diagramm für Lichtart D65, $Y_{w,10}=88,6$

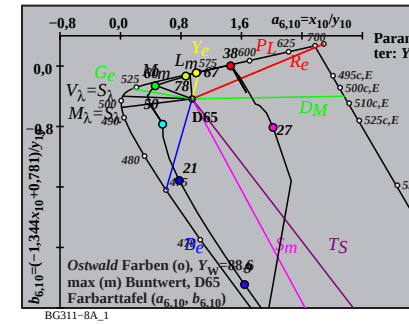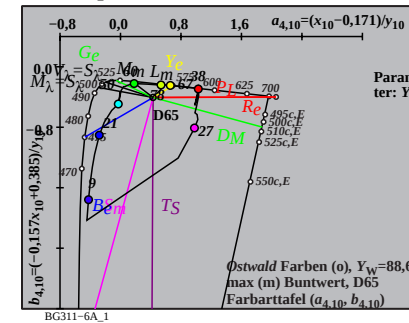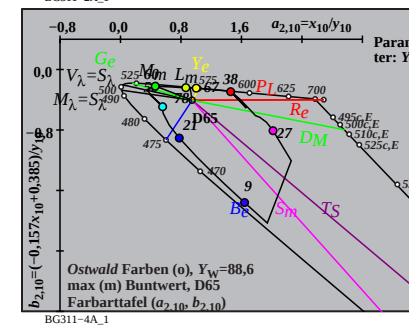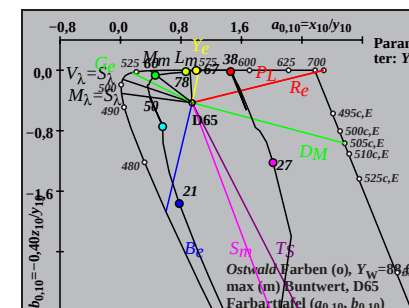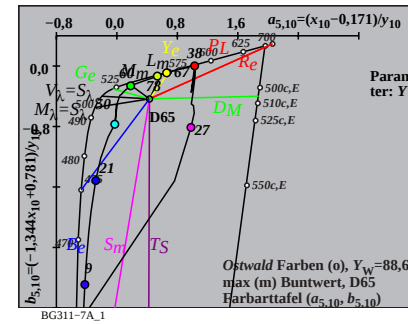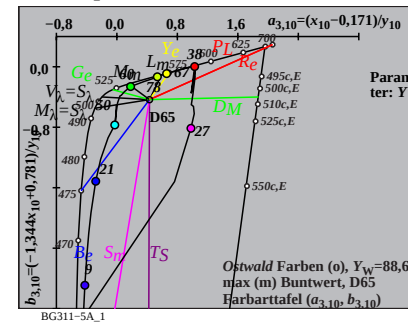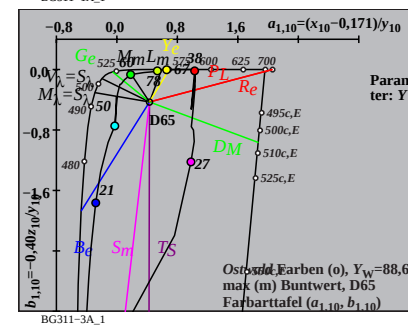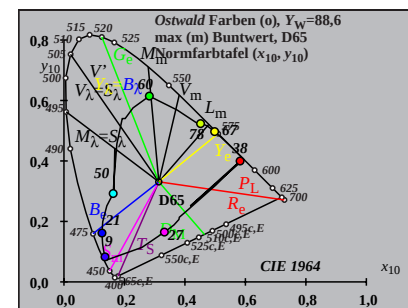

Ostwald-Optimalfarben (o) von maximalem (m) $C_{AB,10}$ für D50, $Y_{w,10}=88,6$, $Y_m=520_770$

i_D	λ_1	i_D	λ_2	X_{10}	Y_{10}	Z_{10}	$x_{10,10}$	y_{10}	z_{10}	$h_{10xy,10}$	λ_d	i_c	λ_c	Code
1	405	31	559	25.72	49.57	71.05	0.1757	0.3387	0.4855	186.9	15	479	37	589 Cm
7	435	32	561	22.74	49.98	52.96	0.1809	0.3976	0.4213	167.1	16	484	58	693
10	450	32	562	19.94	50.19	33.68	0.1921	0.4834	0.3244	141.4	18	493	-1	493c
12	460	32	564	19.11	50.86	21.5	0.2089	0.5559	0.2351	125.2	20	503	-1	503c
13	465	33	566	19.68	51.8	16.41	0.2239	0.5892	0.1867	118.3	22	512	-1	512c
14	470	34	570	21.54	53.71	12.21	0.2462	0.614	0.1396	111.7	24	521	-1	521c
15	475	35	576	25.74	57.15	8.92	0.2803	0.6224	0.0971	104.3	26	531	-1	531c Gm
16	480	38	590	36.57	64.56	6.46	0.3399	0.6	0.06	91.8	28	543	-1	543c
17	485	-1	485c	73.94	82.03	4.68	0.4602	0.5105	0.0291	53.2	32	563	11	458
18	490	-1	490c	73.91	80.7	3.39	0.4677	0.5107	0.0214	51.5	32	564	12	460 max
19	495	-1	495c	73.89	79.13	2.43	0.4753	0.509	0.0156	49.5	33	565	12	462
20	500	-1	500c	73.85	77.28	1.72	0.4831	0.5055	0.0113	47.1	33	566	12	464
21	510	-1	509c	73.75	75.15	1.22	0.4912	0.5005	0.0081	44.4	33	567	13	466
24	520	-1	520c	72.64	66.96	0.39	0.5188	0.4783	0.0027	34.7	34	571	14	471 Ym
25	530	-1	529c	71.83	63.63	0.24	0.5293	0.4688	0.0018	31.0	34	573	14	473
28	540	-1	540c	67.8	52.55	0.03	0.5631	0.4365	0.0002	19.6	35	579	15	476
29	545	-1	545c	65.86	48.65	0.01	0.575	0.4248	0.0001	16.0	36	581	15	477
29	550	-1	549c	65.86	48.65	0.01	0.575	0.4248	0.0001	16.0	36	581	15	477
31	555	-1	555c	61.01	40.81	0.0	0.5991	0.4008	0.0	9.3	37	587	15	479
32	560	2	411	58.5	37.02	1.78	0.6012	0.3804	0.0183	4.7	38	591	16	480
31	559	1	405	70.99	50.42	10.35	0.5387	0.3826	0.0785	6.9	37	589	15	479 Rm
32	561	7	435	73.98	50.01	28.44	0.4852	0.328	0.1866	347.1	58	693	16	484
32	562	10	450	76.78	49.8	47.72	0.4404	0.2857	0.2738	321.5	-1	493c	18	493
32	564	12	460	77.61	49.13	59.9	0.4158	0.2632	0.3209	305.2	-1	503c	20	503
33	566	13	465	77.03	48.19	64.99	0.4049	0.2533	0.3416	298.3	-1	512c	22	512
34	570	14	470	75.18	46.28	69.19	0.3943	0.2427	0.3629	291.7	-1	521c	24	521
35	576	15	475	70.98	42.84	72.48	0.3809	0.2299	0.389	284.4	-1	531c	26	531
38	590	16	480	60.14	35.43	74.95	0.3526	0.2077	0.4395	271.9	-1	543c	28	543
-1	485c	17	485	22.77	17.96	76.72	0.1938	0.1529	0.6531	233.3	11	458	32	563
-1	490c	18	490	22.81	19.29	78.02	0.1899	0.1605	0.6494	231.5	12	460	32	564
-1	495c	19	495	22.83	20.86	78.97	0.1861	0.1701	0.6437	229.5	12	462	33	565
-1	500c	20	500	22.86	22.71	79.68	0.1825	0.1813	0.636	227.1	12	464	33	566
-1	509c	21	510	22.96	24.84	80.18	0.1794	0.1941	0.6264	224.5	13	466	33	567
-1	520c	24	520	24.08	33.03	81.02	0.1743	0.2391	0.5865	214.7	14	471	34	571
-1	529c	25	530	24.88	36.36	81.16	0.1747	0.2553	0.5699	211.0	14	473	34	573
-1	540c	28	540	28.92	47.44	81.37	0.1833	0.3007	0.5158	199.6	15	476	35	579
-1	545c	29	545	30.86	51.34	81.39	0.1886	0.3138	0.4975	196.0	15	477	36	581
-1	549c	29	550	30.86	51.34	81.39	0.1886	0.3138	0.4975	196.0	15	477	36	581
-1	555c	31	555	35.7	59.18	81.41	0.2025	0.3356	0.4617	189.3	15	479	37	587
2	411	32	560	38.21	62.97	79.63	0.2113	0.3482	0.4403	184.7	16	480	38	591
380	770	85.68	88.58	72.12	0.3477	0.3595	0.2927	0.0						









TUB-Prüfvorlage BG31; CIE (x_{10}, y_{10}) und Farbarten ($a_{i,10}, b_{i,10}$) Eingabe: w/rgb/cmyk -> rgb
 Ostwald-Optimalfarben für Lichtart D50; Diagramm für Lichtart D50, $Y_{w,10}=88,6$

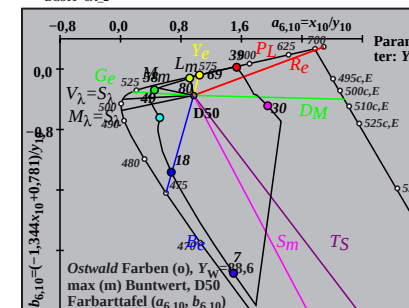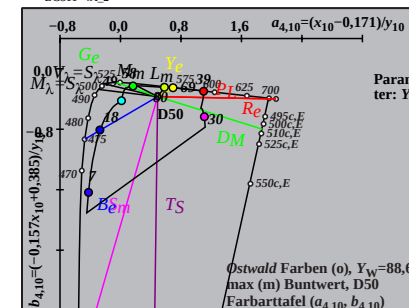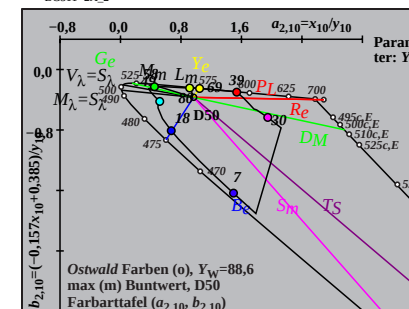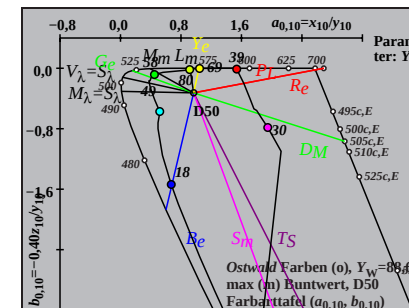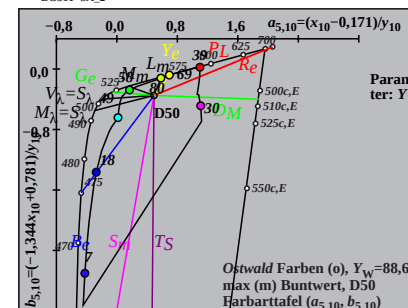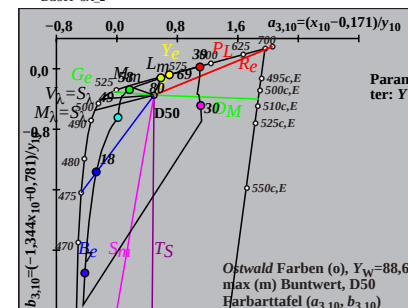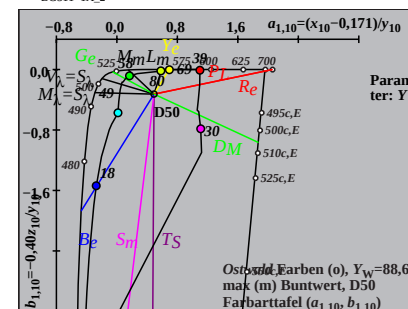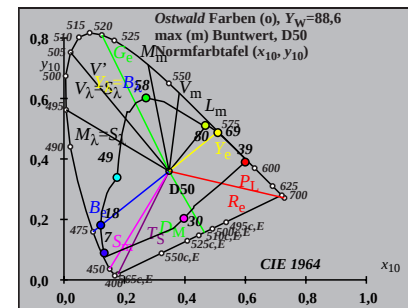

Ostwald-Optimalfarben (o) von maximalem (m) $C_{AB,10}$ für P40, $Y_{w,10}=88,6$, $Y_m=520,770$

i_0	λ_1	i_0	λ_2	X_{10}	Y_{10}	Z_{10}	x_{1010}	y_{10}	z_{10}	$h_{10xy,10}$	λ_d	i_c	λ_c	Code
0	405	32	563	25.22	48.29	56.71	0.1937	0.3708	0.4354	181.4	16	481	38	591 Cm
7	435	32	564	22.5	48.56	40.64	0.2014	0.4347	0.3638	161.8	17	487	-1	487c
10	450	33	565	20.53	48.79	26.34	0.2146	0.5099	0.2753	141.2	19	495	-1	495c
12	460	33	567	20.14	49.38	17.32	0.2319	0.5686	0.1994	127.9	21	505	-1	505c
12	465	33	568	21.3	50.64	17.32	0.2386	0.5673	0.194	126.8	21	506	-1	506c
14	470	34	571	22.34	51.74	10.14	0.2652	0.6142	0.1204	116.0	24	521	-1	521c
15	475	35	576	25.73	54.48	7.56	0.2931	0.6206	0.0861	109.9	26	531	-1	531c Gm
16	480	37	585	33.82	60.22	5.58	0.3394	0.6044	0.056	100.5	28	542	-1	542c
17	485	42	611	57.84	73.36	4.1	0.4274	0.5421	0.0303	74.7	31	558	-1	558c
17	490	-1	489c	80.89	83.41	4.1	0.4803	0.4952	0.0243	50.6	33	566	11	458 max
19	495	-1	495c	80.84	80.92	2.17	0.4931	0.4935	0.0132	46.7	33	568	12	463
20	500	-1	500c	80.81	79.31	1.56	0.4998	0.4905	0.0096	44.3	33	569	13	465
22	510	-1	510c	80.54	75.25	0.78	0.5143	0.4805	0.005	38.4	34	571	13	469
23	520	-1	519c	80.22	72.76	0.54	0.5225	0.4739	0.0035	35.0	34	572	14	471 Ym
25	530	-1	529c	78.98	66.96	0.22	0.5403	0.4581	0.0015	27.5	35	575	14	474
28	540	-1	540c	75.19	56.6	0.03	0.5703	0.4293	0.0002	15.9	36	581	15	477
28	545	-1	544c	75.19	56.6	0.03	0.5703	0.4293	0.0002	15.9	36	581	15	477
30	550	-1	550c	71.13	49.03	0.0	0.5919	0.408	0.0	8.7	37	585	15	479
31	555	-1	555c	68.55	45.14	0.0	0.6029	0.397	0.0	5.5	37	587	16	480
31	560	-1	559c	68.55	45.14	0.0	0.6029	0.397	0.0	5.5	37	587	16	480
32	563	0	405	76.52	51.7	7.73	0.5628	0.3803	0.0568	1.4	38	591	16	481 Rm
32	564	7	435	79.24	51.43	23.8	0.5129	0.3329	0.154	341.9	-1	487c	17	487
33	565	10	450	81.21	51.2	38.09	0.4762	0.3003	0.2234	321.3	-1	495c	19	495
33	567	12	460	81.6	50.61	47.12	0.455	0.2822	0.2627	307.9	-1	505c	21	505
33	568	12	465	80.44	49.35	47.12	0.4547	0.2789	0.2663	306.8	-1	506c	21	506
34	571	14	470	79.4	48.25	54.29	0.4363	0.2651	0.2984	296.1	-1	521c	24	521
35	576	15	475	76.01	45.51	56.88	0.426	0.255	0.3188	290.0	-1	531c	26	531 Mm
37	585	16	480	67.92	39.77	58.85	0.4078	0.2387	0.3533	280.6	-1	542c	28	542
42	611	17	485	43.9	26.63	60.34	0.3354	0.2034	0.461	254.8	-1	558c	31	558
-1	489c	17	490	20.85	16.58	60.34	0.2132	0.1696	0.6171	230.6	11	458	33	566 min
-1	495c	19	495	20.9	19.07	62.27	0.2044	0.1865	0.609	226.7	12	463	33	568
-1	500c	20	500	20.93	20.68	62.88	0.2003	0.1979	0.6017	224.3	13	465	33	569
-1	510c	22	510	21.2	24.74	63.66	0.1934	0.2257	0.5807	218.4	13	469	34	571
-1	519c	23	520	21.53	27.23	63.9	0.191	0.2417	0.5671	215.0	14	471	34	572 Bm
-1	529c	25	530	22.76	33.03	64.21	0.1897	0.2752	0.535	207.5	14	474	35	575
-1	540c	28	540	26.55	43.39	64.41	0.1976	0.3229	0.4794	195.9	15	477	36	581
-1	544c	28	545	26.55	43.39	64.41	0.1976	0.3229	0.4794	195.9	15	477	36	581
-1	550c	30	550	30.61	50.96	64.44	0.2096	0.349	0.4413	188.7	15	479	37	585
-1	555c	31	555	33.19	54.85	64.44	0.2176	0.3597	0.4226	185.5	16	480	37	587
-1	559c	31	560	33.19	54.85	64.44	0.2176	0.3597	0.4226	185.5	16	480	37	587
380	770	90.14	88.59	57.09	0.3822	0.3756	0.2421	0.0						









TUB-Prüfvorlage BG31; CIE (x_{10}, y_{10}) und Farbarten ($a_{i,10}, b_{i,10}$)
 Ostwald-Optimalfarben für Lichtart P40; Diagramm für Lichtart P40, $Y_{w,10}=88,6$

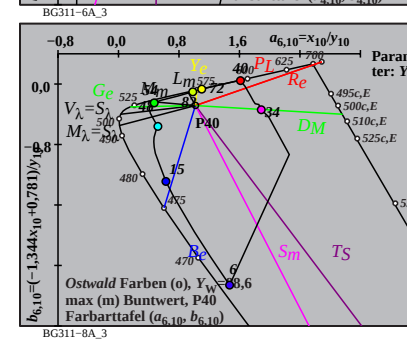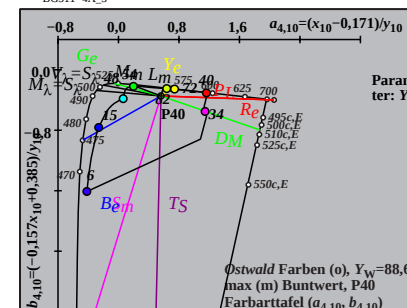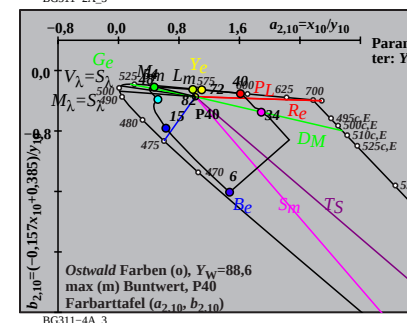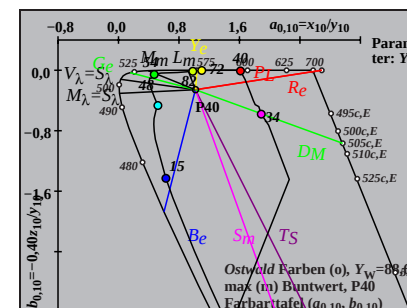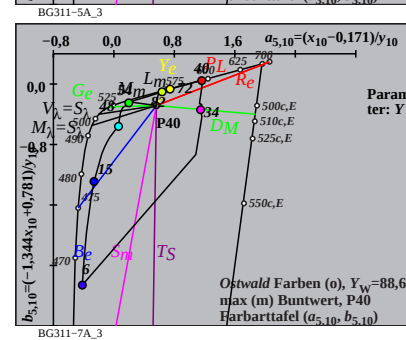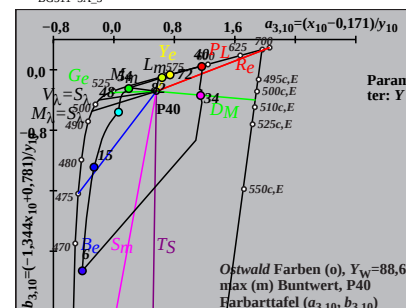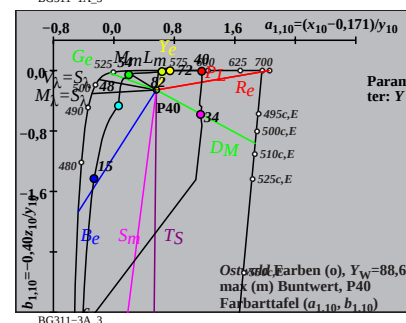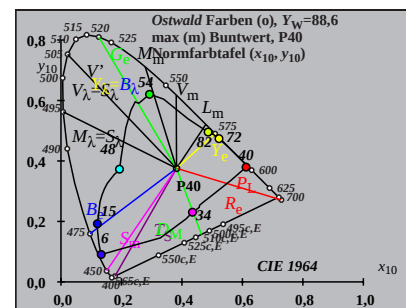

Ostwald-Optimalfarben (o) von maximalem (m) $C_{AB,10}$ für A00, $Y_{w,10}=88,6$, $Y_m=520_770$

i_0	λ_1	i_0	λ_2	X_{10}	Y_{10}	Z_{10}	x_{1010}	y_{10}	z_{10}	$h_{10xy,10}$	λ_d	i_c	λ_c	Code
1	405	34	570	24.41	46.3	30.85	0.2404	0.4558	0.3037	166.6	17 487	39	597	Cm
7	435	34	570	23.37	46.48	23.83	0.2494	0.4961	0.2544	155.9	18 491	47	639	
9	450	34	571	22.92	46.75	19.01	0.2584	0.5271	0.2144	147.8	19 495	-1	495c	
12	460	34	572	22.3	46.95	11.32	0.2768	0.5826	0.1405	134.6	21 505	-1	505c	
13	465	34	573	22.67	47.37	9.0	0.2867	0.5992	0.1139	130.3	22 512	-1	512c	
14	470	34	574	23.6	48.19	6.99	0.2995	0.6116	0.0887	126.3	24 520	-1	520c	
15	475	35	576	25.5	49.59	5.35	0.3169	0.6164	0.0665	122.5	25 528	-1	528c	Gm
16	480	36	581	29.32	52.34	4.06	0.342	0.6105	0.0474	118.0	27 537	-1	537c	
17	485	37	588	37.11	57.43	3.06	0.3802	0.5884	0.0313	111.2	29 547	-1	547c	
18	490	41	609	60.13	69.96	2.29	0.4542	0.5284	0.0173	88.5	32 561	-1	561c	max
19	495	-1	495c	93.65	83.69	1.7	0.523	0.4674	0.0095	40.5	34 573	13	465	
20	500	-1	500c	93.63	82.5	1.25	0.5278	0.4651	0.007	37.6	34 573	13	468	
21	510	-1	509c	93.56	81.07	0.91	0.5329	0.4618	0.0052	34.3	34 574	14	470	
24	520	-1	520c	92.73	75.08	0.31	0.5515	0.4465	0.0018	22.0	35 577	15	476	Ym
25	530	-1	529c	92.11	72.52	0.2	0.5588	0.4399	0.0012	17.5	35 578	15	477	
27	540	-1	539c	90.14	66.59	0.06	0.5748	0.4246	0.0004	8.6	36 581	16	480	
29	545	-1	545c	86.98	59.77	0.01	0.5926	0.4072	0.0	0.5	37 585	16	483	
30	550	-1	550c	84.87	56.1	0.0	0.602	0.3979	0.0	356.9	37 587	16	484	
31	555	-1	555c	82.34	52.29	0.0	0.6116	0.3883	0.0	353.7	37 589	17	485	
32	560	-1	560c	79.36	48.36	0.0	0.6213	0.3786	0.0	350.9	38 592	17	486	
34	570	1	405	86.73	53.69	4.34	0.599	0.3709	0.03	346.6	39 597	17	487	Rm
34	570	7	435	87.77	53.51	11.36	0.575	0.3505	0.0744	335.9	47 639	18	491	
34	571	9	450	88.22	53.24	16.18	0.5596	0.3377	0.1026	327.8	-1 495c	19	495	
34	572	12	460	88.84	53.04	23.87	0.5359	0.32	0.144	314.6	-1 505c	21	505	
34	573	13	465	88.47	52.62	26.19	0.5288	0.3145	0.1565	310.4	-1 512c	22	512	
34	574	14	470	87.54	51.8	28.2	0.5224	0.3091	0.1683	306.4	-1 520c	24	520	
35	576	15	475	85.64	50.4	29.84	0.5162	0.3038	0.1798	302.5	-1 528c	25	528	Mm
36	581	16	480	81.82	47.65	31.13	0.5094	0.2966	0.1938	298.1	-1 537c	27	537	
37	588	17	485	74.03	42.56	32.13	0.4977	0.2861	0.216	291.2	-1 547c	29	547	
41	609	18	490	51.01	30.03	32.9	0.4476	0.2635	0.2887	268.6	-1 561c	32	561	min
-1	495c	19	495	17.49	16.3	33.49	0.2599	0.2422	0.4977	220.5	13 465	34	573	
-1	500c	20	500	17.51	17.49	33.94	0.254	0.2536	0.4922	217.6	13 468	34	573	
-1	509c	21	510	17.58	18.92	34.28	0.2484	0.2672	0.4842	214.3	14 470	34	574	
-1	520c	24	520	18.41	24.91	34.88	0.2354	0.3185	0.446	202.0	15 476	35	577	Bm
-1	529c	25	530	19.03	27.47	34.99	0.2335	0.3371	0.4293	197.5	15 477	35	578	
-1	539c	27	540	21.0	33.4	35.13	0.2345	0.373	0.3923	188.6	16 480	36	581	
-1	545c	29	545	24.16	40.22	35.18	0.2426	0.4039	0.3533	180.5	16 483	37	585	
-1	550c	30	550	26.27	43.89	35.19	0.2494	0.4165	0.334	176.9	16 484	37	587	
-1	555c	31	555	28.8	47.7	35.19	0.2578	0.427	0.315	173.7	17 485	37	589	
-1	560c	32	560	31.78	51.63	35.19	0.2679	0.4352	0.2967	170.8	17 486	38	592	
380	770	98.46	88.59	31.18	0.4511	0.4059	0.1428	0.0						

TUB-Prüfvorlage BG31; CIE (x_{10}, y_{10}) und Farbarten ($a_{i,10}, b_{i,10}$) Eingabe: w/rgb/cmyk -> rgb
 Ostwald-Optimalfarben für Lichtart A00; Diagramm für Lichtart A00, $Y_{w,10}=88,6$

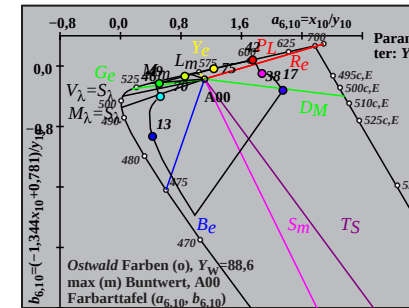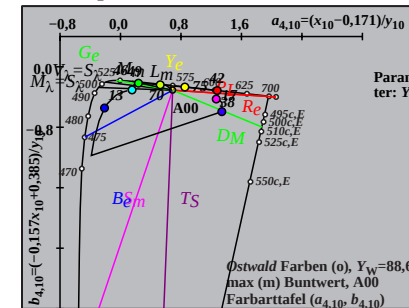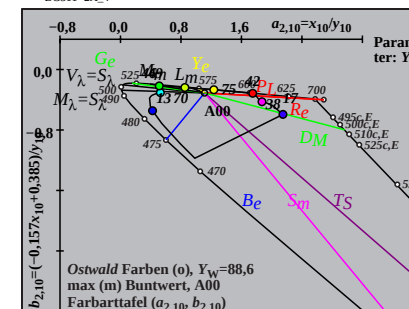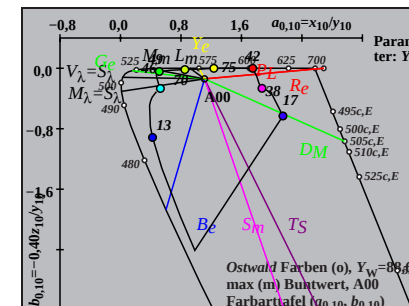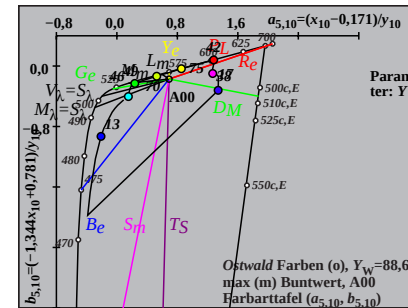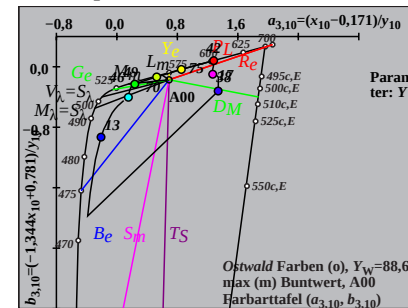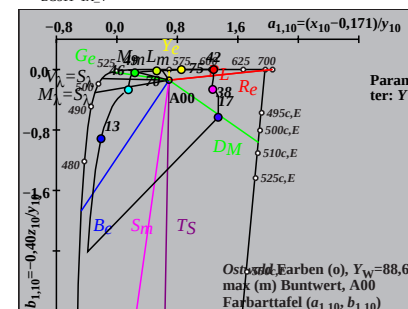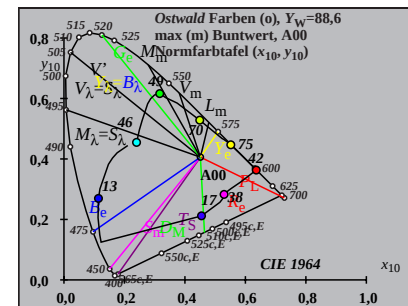

Ostwald-Optimalfarben (o) von maximalem (m) $C_{AB,10}$ für E00, $Y_{w,10}=88,6$, $Y_m=520_770$









i_0	λ_1	i_0	λ_2	X_{10}	Y_{10}	Z_{10}	x_{1010}	y_{10}	z_{10}	$h_{10xy,10}$	λ_d	i_c	λ_c	Code
1	405	31	559	28.18	49.32	86.6	0.1717	0.3005	0.5277	191.4	15 477	37	589	Cm
7	435	32	561	23.26	49.67	58.35	0.1772	0.3783	0.4444	163.8	16 484	-1	484c	
10	450	32	562	20.01	49.98	35.73	0.1893	0.4727	0.3379	135.9	18 493	-1	493c	
12	460	33	565	19.33	50.94	22.54	0.2082	0.5488	0.2429	120.1	21 506	-1	506c	
13	465	33	568	20.25	52.23	17.09	0.2261	0.583	0.1908	113.2	23 515	-1	515c	
13	470	34	572	23.54	55.57	17.09	0.2447	0.5775	0.1776	109.9	24 520	-1	520c	
14	475	36	581	29.38	60.42	12.63	0.2868	0.5897	0.1233	100.2	26 532	-1	532c	Gm
16	480	40	604	48.47	71.12	6.66	0.3839	0.5632	0.0528	77.5	30 551	-1	551c	
17	485	-1	485c	73.62	81.33	4.79	0.4608	0.5091	0.03	54.0	32 564	11	456	
18	490	-1	490c	73.58	79.94	3.43	0.4688	0.5093	0.0218	52.3	32 564	11	458	max
19	495	-1	495c	73.57	78.31	2.44	0.4766	0.5074	0.0158	50.5	33 565	12	460	
20	500	-1	500c	73.53	76.43	1.72	0.4847	0.5038	0.0113	48.3	33 566	12	462	
22	510	-1	510c	73.22	71.82	0.84	0.5019	0.4922	0.0057	43.2	33 569	13	466	
23	520	-1	519c	72.86	69.07	0.57	0.5113	0.4846	0.004	40.3	34 570	13	468	Ym
25	530	-1	529c	71.54	62.84	0.23	0.5314	0.4668	0.0017	33.9	34 573	14	470	
27	540	-1	539c	69.22	55.84	0.07	0.5531	0.4462	0.0006	27.1	35 577	14	473	
29	545	-1	545c	65.78	48.4	0.01	0.576	0.4238	0.0001	20.4	36 582	15	475	
29	550	-1	549c	65.78	48.4	0.01	0.576	0.4238	0.0001	20.4	36 582	15	475	
31	555	-1	555c	61.1	40.83	0.0	0.5993	0.4005	0.0	14.1	37 587	15	476	
32	560	3	415	59.5	37.2	5.75	0.5806	0.3631	0.0562	6.8	39 595	15	478	
31	559	1	405	71.8	50.67	13.4	0.5284	0.3729	0.0986	11.4	37 589	15	477	Rm
32	561	7	435	76.72	50.32	41.65	0.4547	0.2982	0.2469	343.9	-1 484c	16	484	
32	562	10	450	79.97	50.01	64.27	0.4116	0.2574	0.3308	315.9	-1 493c	18	493	
33	565	12	460	80.66	49.05	77.46	0.3893	0.2367	0.3738	300.1	-1 506c	21	506	
33	568	13	465	79.73	47.76	82.91	0.3789	0.2269	0.394	293.2	-1 515c	23	515	
34	572	13	470	76.44	44.42	82.91	0.3751	0.218	0.4068	289.9	-1 520c	24	520	
36	581	14	475	70.6	39.57	87.37	0.3573	0.2003	0.4422	280.3	-1 532c	26	532	Mm
40	604	16	480	51.51	28.87	93.34	0.2965	0.1662	0.5372	257.6	-1 551c	30	551	
-1	485c	17	485	26.36	18.66	95.21	0.1879	0.133	0.6789	234.0	11 456	32	564	
-1	490c	18	490	26.4	20.05	96.57	0.1845	0.1402	0.6752	232.4	11 458	32	564	min
-1	495c	19	495	26.41	21.68	97.56	0.1813	0.1488	0.6697	230.5	12 460	33	565	
-1	500c	20	500	26.45	23.56	98.28	0.1783	0.1588	0.6627	228.4	12 462	33	566	
-1	510c	22	510	26.76	28.17	99.16	0.1736	0.1828	0.6434	223.3	13 466	33	569	
-1	519c	23	520	27.12	30.92	99.43	0.1722	0.1963	0.6314	220.3	13 468	34	570	Bm
-1	529c	25	530	28.45	37.15	99.77	0.172	0.2246	0.6032	213.9	14 470	34	573	
-1	539c	27	540	30.76	44.15	99.93	0.1759	0.2525	0.5715	207.2	14 473	35	577	
-1	545c	29	545	34.2	51.59	99.99	0.1841	0.2776	0.5382	200.4	15 475	36	582	
-1	549c	29	550	34.2	51.59	99.99	0.1841	0.2776	0.5382	200.4	15 475	36	582	
-1	555c	31	555	38.88	59.16	100.0	0.1963	0.2987	0.5049	194.1	15 476	37	587	
3	415	32	560	40.49	62.79	94.25	0.2049	0.3178	0.4771	186.8	15 478	39	595	
380	770	88.58	88.58	88.59	0.3333	0.3333	0.3333	0.3333	0.3333	0.0				

0-001430-L0

BG310-7N_16

TUB-Prüfvorlage BG31; CIE (x_{10}, y_{10}) und Farbarten ($a_{i,10}, b_{i,10}$) Eingabe: w/rgb/cmyk -> rgb
Ostwald-Optimalfarben für Lichtart E00; Diagramm für Lichtart E00, $Y_{w,10}=88,6$









0-001430-E0

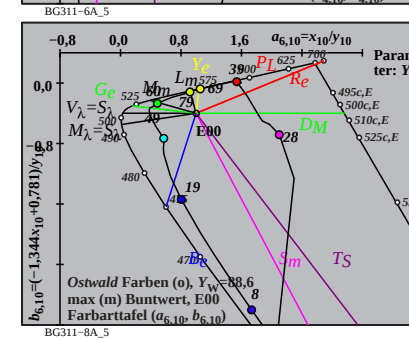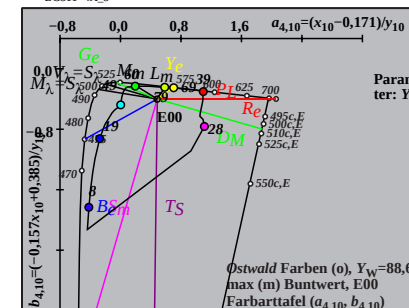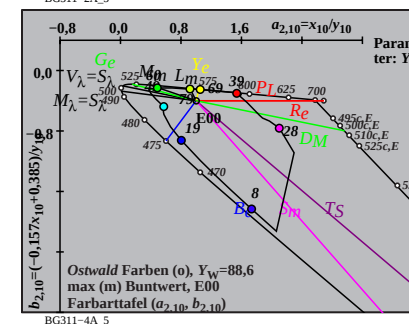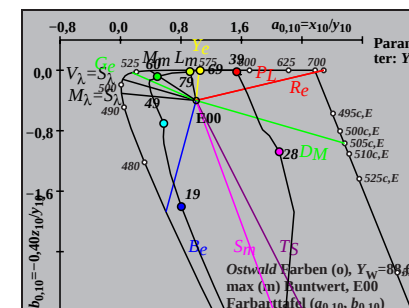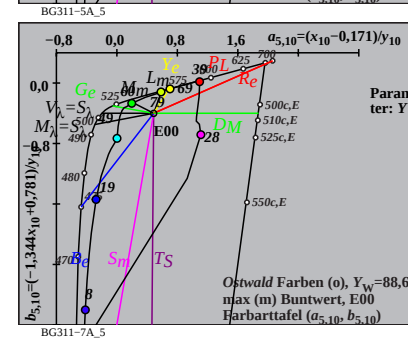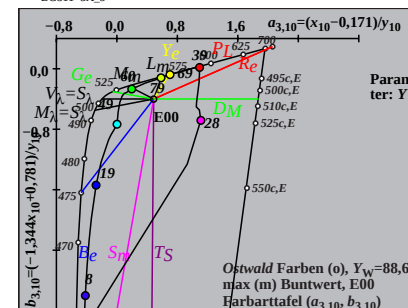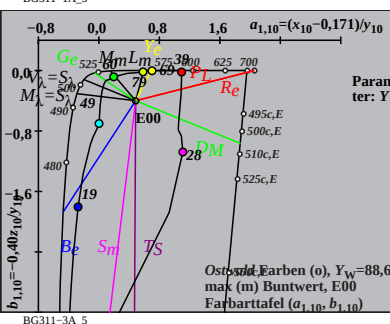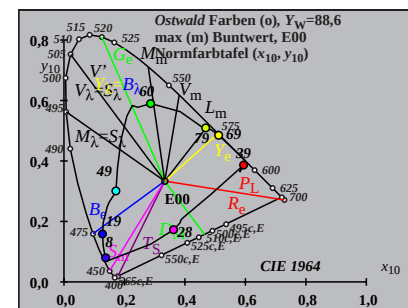

Ostwald-Optimalfarben (o) von maximalem (m) $C_{AB,10}$ für C00, $Y_{w,10}=88,6$, $Y_m=520_770$

i_0	λ_1	i_0	λ_2	X_{10}	Y_{10}	Z_{10}	x_{1010}	y_{10}	z_{10}	$h_{10xy,10}$	λ_d	i_c	λ_c	Code
1	405	31	556	29.28	49.5	101.47	0.1624	0.2746	0.5629	196.7	15 475	37	586	Cm
6	435	31	558	25.71	50.35	79.37	0.1654	0.3239	0.5106	178.0	16 480	44	623	
9	450	32	560	21.63	50.96	52.26	0.1732	0.4081	0.4185	146.9	17 487	-1	487c	
12	460	32	563	19.07	51.67	27.03	0.1951	0.5284	0.2764	118.8	20 504	-1	504c	
12	465	33	566	21.12	54.03	27.03	0.2066	0.5287	0.2645	116.2	21 507	-1	507c	
13	470	34	572	23.98	57.3	20.34	0.236	0.5638	0.2001	106.8	24 520	-1	520c	
14	475	36	582	31.09	63.12	14.85	0.285	0.5787	0.1362	95.5	26 533	-1	533c	Gm
16	480	44	622	58.22	76.76	7.52	0.4085	0.5386	0.0527	65.8	31 556	0	403	
17	485	-1	485c	68.92	79.83	5.25	0.4475	0.5183	0.0341	55.4	32 562	11	456	
18	490	-1	490c	68.87	78.19	3.64	0.457	0.5188	0.0241	53.7	32 563	11	459	max
19	495	-1	495c	68.86	76.34	2.51	0.4661	0.5168	0.017	51.7	32 564	12	461	
20	500	-1	500c	68.82	74.3	1.73	0.4751	0.5129	0.0119	49.6	33 565	12	463	
22	510	-1	510c	68.51	69.61	0.82	0.493	0.5009	0.0059	44.8	33 567	13	466	
24	520	-1	520c	67.63	64.04	0.37	0.5121	0.485	0.0028	39.4	34 570	13	468	Ym
26	530	-1	530c	65.87	57.57	0.14	0.5329	0.4658	0.0011	33.3	34 574	14	471	
28	540	-1	540c	62.96	50.2	0.03	0.5561	0.4434	0.0003	26.8	35 578	14	473	
28	545	-1	544c	62.96	50.2	0.03	0.5561	0.4434	0.0003	26.8	35 578	14	473	
29	550	-1	549c	61.02	46.31	0.01	0.5684	0.4314	0.0001	23.5	36 580	14	474	
31	555	-1	555c	56.12	38.38	0.0	0.5938	0.4061	0.0	17.0	37 585	15	475	
31	560	9	447	66.32	39.93	51.32	0.4208	0.2533	0.3257	329.3	-1 487c	17	487	
31	556	1	405	68.0	50.49	14.67	0.5106	0.3791	0.1101	16.6	37 586	15	475	Rm
31	558	6	435	71.57	49.64	36.77	0.453	0.3142	0.2327	358.0	44 623	16	480	
32	560	9	450	75.65	49.03	63.87	0.4012	0.26	0.3387	327.0	-1 487c	17	487	
32	563	12	460	78.2	48.32	89.11	0.3626	0.2241	0.4132	298.8	-1 504c	20	504	
33	566	12	465	76.16	45.96	89.11	0.3605	0.2175	0.4218	296.3	-1 507c	21	507	
34	572	13	470	73.29	42.69	95.8	0.346	0.2015	0.4523	286.9	-1 520c	24	520	
36	582	14	475	66.19	36.87	101.28	0.3239	0.1804	0.4956	275.6	-1 533c	26	533	Mm
44	622	16	480	39.06	23.23	108.62	0.2285	0.1359	0.6355	245.9	0 403	31	556	
-1	485c	17	485	28.35	20.16	110.89	0.1778	0.1264	0.6956	235.4	11 456	32	562	
-1	490c	18	490	28.4	21.8	112.5	0.1745	0.134	0.6913	233.7	11 459	32	563	min
-1	495c	19	495	28.42	23.65	113.62	0.1715	0.1427	0.6857	231.7	12 461	32	564	
-1	500c	20	500	28.46	25.69	114.41	0.1688	0.1524	0.6786	229.6	12 463	33	565	
-1	510c	22	510	28.77	30.38	115.31	0.1649	0.1741	0.6609	224.9	13 466	33	567	
-1	520c	24	520	29.65	35.95	115.77	0.1634	0.1982	0.6382	219.4	13 468	34	570	Bm
-1	530c	26	530	31.41	42.42	116.0	0.1654	0.2234	0.611	213.4	14 471	34	574	
-1	540c	28	540	34.32	49.79	116.1	0.1714	0.2486	0.5798	206.8	14 473	35	578	
-1	544c	28	545	34.32	49.79	116.1	0.1714	0.2486	0.5798	206.8	14 473	35	578	
-1	549c	29	550	36.25	53.68	116.13	0.1759	0.2605	0.5635	203.5	14 474	36	580	
-1	555c	31	555	41.16	61.61	116.14	0.188	0.2814	0.5305	197.0	15 475	37	585	
9	447	31	560	30.95	60.06	64.81	0.1986	0.3854	0.4159	149.2	17 487	-1	487c	
380	770	86.18	88.59	102.89	0.3103	0.319	0.3705	0.0						









TUB-Prüfvorlage BG31; CIE (x_{10}, y_{10}) und Farbarten ($a_{i,10}, b_{i,10}$) Eingabe: w/rgb/cmyk -> rgb
 Ostwald-Optimalfarben für Lichtart C00; Diagramm für Lichtart C00, $Y_{w,10}=88,6$

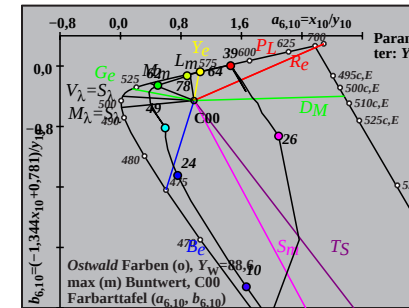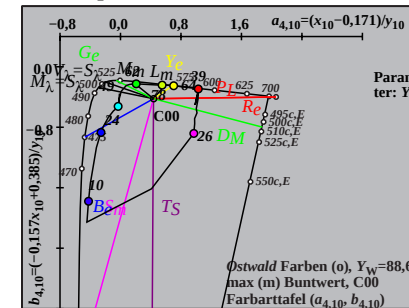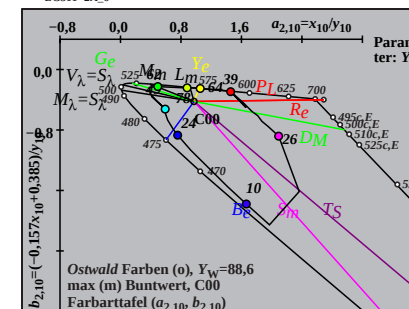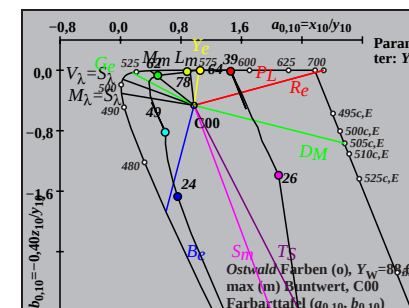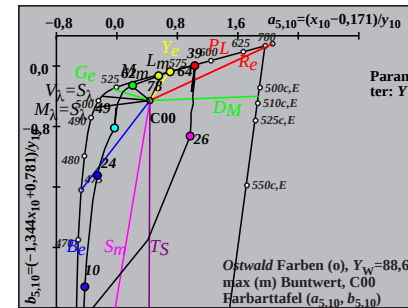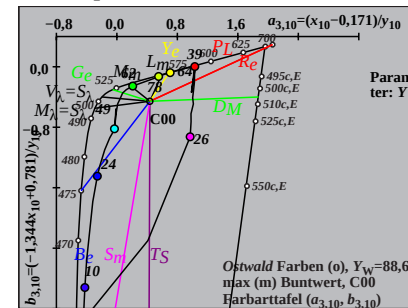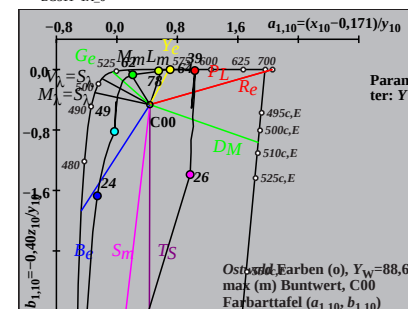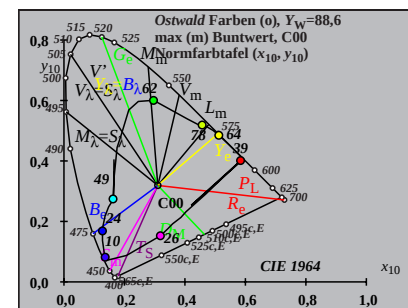

Ostwald-Optimalfarben (o) von maximalem (m) $C_{AB,10}$ für P00, $Y_{w,10}=88,6$, $Y_m=520,770$

i_0	λ_1	i_0	λ_2	X_{10}	Y_{10}	Z_{10}	x_{1010}	y_{10}	z_{10}	$h_{10xy,10}$	λ_d	i_c	λ_c	Code
0	405	32	562	26.98	48.64	71.34	0.1836	0.3309	0.4854	186.9	15	479	38	591 Cm
7	435	32	563	23.05	48.91	48.7	0.191	0.4053	0.4035	162.7	17	485	-1	485c
9	450	32	564	21.55	49.48	36.49	0.2004	0.4601	0.3394	146.1	18	491	-1	491c
12	460	33	567	20.0	49.93	19.53	0.2235	0.558	0.2183	123.7	21	506	-1	506c
13	465	33	569	20.73	50.97	14.94	0.2392	0.5882	0.1724	117.2	22	514	-1	514c
13	470	34	572	23.45	53.65	14.94	0.2547	0.5828	0.1623	114.7	23	518	-1	518c
15	475	35	579	27.57	56.67	8.21	0.2982	0.6129	0.0888	103.5	26	534	-1	534c Gm
16	480	38	593	40.32	64.97	5.99	0.3623	0.5837	0.0538	89.6	29	547	-1	547c
17	485	-1	485c	78.71	82.48	4.35	0.4754	0.4982	0.0263	51.7	33	566	11	457
17	490	-1	489c	78.71	82.48	4.35	0.4754	0.4982	0.0263	51.7	33	566	11	457 max
19	495	-1	495c	78.66	79.78	2.26	0.4894	0.4964	0.014	48.2	33	567	12	461
19	500	-1	499c	78.66	79.78	2.26	0.4894	0.4964	0.014	48.2	33	567	12	461
22	510	-1	510c	78.35	73.83	0.8	0.5121	0.4826	0.0052	40.6	34	570	13	467
23	520	-1	519c	78.01	71.27	0.54	0.5206	0.4756	0.0036	37.6	34	572	13	469 Ym
26	530	-1	530c	75.76	62.09	0.13	0.549	0.4499	0.0009	27.3	35	577	14	473
28	540	-1	540c	72.97	55.01	0.03	0.57	0.4297	0.0002	20.2	36	580	15	475
28	545	-1	544c	72.97	55.01	0.03	0.57	0.4297	0.0002	20.2	36	580	15	475
29	550	-1	549c	71.13	51.31	0.01	0.5808	0.419	0.0	16.8	36	583	15	476
31	555	-1	555c	66.45	43.74	0.0	0.603	0.3969	0.0	10.3	37	587	15	478
32	560	-1	560c	63.56	39.93	0.0	0.6141	0.3858	0.0	7.4	38	590	15	479
32	562	0	405	75.38	51.35	9.9	0.5516	0.3758	0.0724	6.9	38	591	15	479 Rm
32	563	7	435	79.31	51.08	32.54	0.4867	0.3134	0.1997	342.7	-1	485c	17	485
32	564	9	450	80.82	50.51	44.75	0.4589	0.2868	0.2541	326.1	-1	491c	18	491
33	567	12	460	82.37	50.06	61.71	0.4242	0.2578	0.3178	303.8	-1	506c	21	506
33	569	13	465	81.63	49.02	66.3	0.4144	0.2488	0.3366	297.3	-1	514c	22	514
34	572	13	470	78.92	46.34	66.3	0.4119	0.2419	0.3461	294.7	-1	518c	23	518
35	579	15	475	74.79	43.32	73.04	0.3912	0.2266	0.382	283.5	-1	534c	26	534 Mm
38	593	16	480	62.05	35.02	75.25	0.36	0.2032	0.4366	269.6	-1	547c	29	547
-1	485c	17	485	23.65	17.51	76.89	0.2003	0.1483	0.6512	231.8	11	457	33	566
-1	489c	17	490	23.65	17.51	76.89	0.2003	0.1483	0.6512	231.8	11	457	33	566 min
-1	495c	19	495	23.7	20.21	78.99	0.1928	0.1644	0.6426	228.2	12	461	33	567
-1	499c	19	500	23.7	20.21	78.99	0.1928	0.1644	0.6426	228.2	12	461	33	567
-1	510c	22	510	24.02	26.16	80.45	0.1838	0.2002	0.6158	220.7	13	467	34	570
-1	519c	23	520	24.35	28.72	80.7	0.182	0.2147	0.6032	217.6	13	469	34	572 Bm
-1	530c	26	530	26.6	37.9	81.11	0.1826	0.2602	0.557	207.3	14	473	35	577
-1	540c	28	540	29.39	44.98	81.21	0.1889	0.289	0.5219	200.2	15	475	36	580
-1	544c	28	545	29.39	44.98	81.21	0.1889	0.289	0.5219	200.2	15	475	36	580
-1	549c	29	550	31.23	48.68	81.24	0.1938	0.302	0.5041	196.8	15	476	36	583
-1	555c	31	555	35.92	56.25	81.25	0.2071	0.3243	0.4685	190.4	15	478	37	587
-1	560c	32	560	38.8	60.06	81.25	0.2154	0.3334	0.451	187.4	15	479	38	590
380	770	90.69	88.59	71.98	0.3609	0.3525	0.2864	0.0						

TUB-Prüfvorlage BG31; CIE (x_{10}, y_{10}) und Farbarten ($a_{i,10}, b_{i,10}$)
 Ostwald-Optimalfarben für Lichtart P00; Diagramm für Lichtart P00, $Y_{w,10}=88,6$

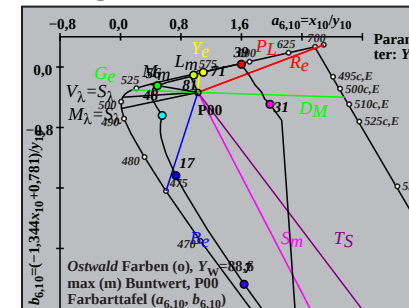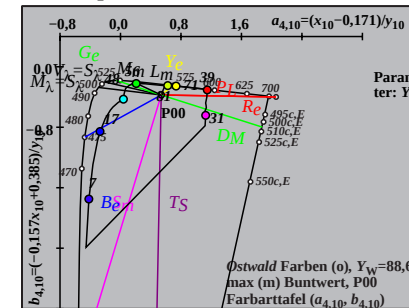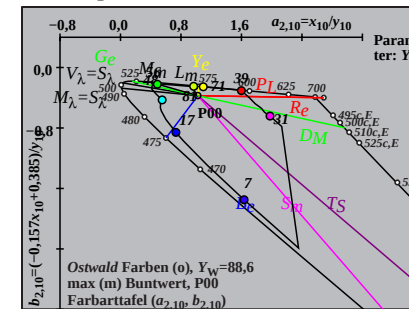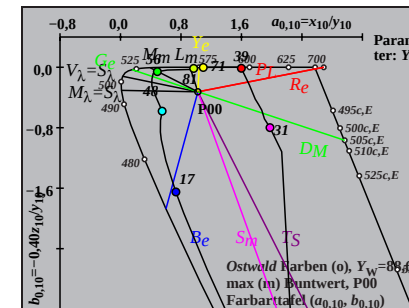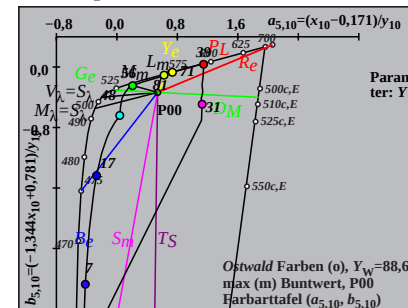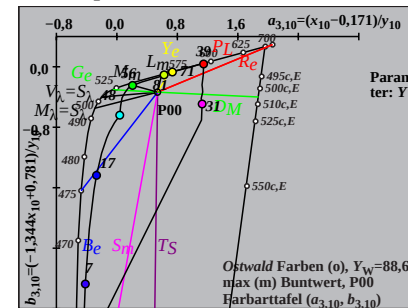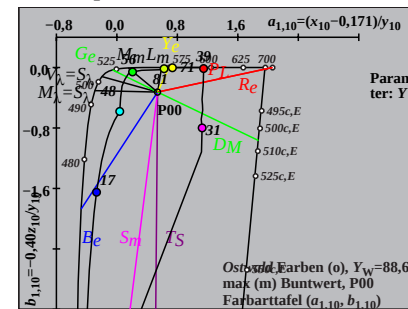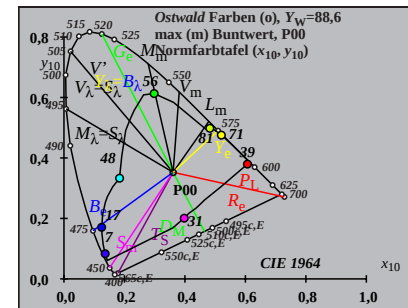

Ostwald-Optimalfarben (o) von maximalem (m) $C_{AB,10}$ für Q00, $Y_{w,10}=88,6$, $Y_m=520_770$


i_D	λ_1	i_D	λ_2	X_{10}	Y_{10}	Z_{10}	x_{1010}	y_{10}	z_{10}	$h_{10xy,10}$	λ_d	i_c	λ_c	Code
1	405	31	556	29.63	49.88	102.39	0.1628	0.2742	0.5628	196.1	15	475	37	587 Cm
7	435	31	558	23.53	50.34	67.82	0.166	0.3553	0.4786	164.7	16	482	-1	482c
10	450	32	560	19.56	50.73	40.9	0.1759	0.4562	0.3678	133.5	18	493	-1	493c
12	460	32	563	18.74	51.88	25.5	0.195	0.5396	0.2652	117.0	21	506	-1	506c
13	465	33	566	19.76	53.44	19.2	0.2138	0.5783	0.2077	109.9	23	515	-1	515c
13	470	34	572	23.64	57.44	19.2	0.2357	0.5727	0.1914	105.9	24	520	-1	520c
15	475	36	583	30.52	62.39	10.2	0.296	0.605	0.0989	92.5	27	536	-1	536c Gm
15	480	45	629	61.34	79.6	10.2	0.4058	0.5266	0.0674	65.2	31	556	2	413
17	485	-1	485c	68.63	80.21	5.23	0.4454	0.5206	0.0339	56.2	32	561	11	455
17	490	-1	489c	68.63	80.21	5.23	0.4454	0.5206	0.0339	56.2	32	561	11	455 max
18	495	-1	494c	68.58	78.66	3.71	0.4543	0.521	0.0246	54.6	32	562	11	458
19	500	-1	499c	68.57	76.87	2.62	0.463	0.5191	0.0177	52.7	32	563	12	460
21	510	-1	509c	68.42	72.48	1.28	0.4812	0.5097	0.009	48.2	33	566	12	464
24	520	-1	520c	67.23	63.73	0.39	0.5118	0.4851	0.0029	39.7	34	570	13	468 Ym
26	530	-1	530c	65.35	56.8	0.14	0.5343	0.4644	0.0011	33.2	34	574	14	471
27	540	-1	539c	64.02	53.11	0.07	0.5462	0.4531	0.0006	29.9	35	576	14	472
29	545	-1	545c	60.52	45.54	0.01	0.5705	0.4293	0.0001	23.3	36	581	14	474
30	550	-1	550c	58.34	41.75	0.0	0.5828	0.4171	0.0	20.1	36	583	15	475
30	555	-1	554c	58.34	41.75	0.0	0.5828	0.4171	0.0	20.1	36	583	15	475
31	560	9	447	67.0	39.61	55.74	0.4126	0.2439	0.3433	325.1	-1	488c	17	488
31	556	1	405	68.01	50.11	16.03	0.5069	0.3735	0.1194	16.0	37	587	15	475 Rm
31	558	7	435	74.11	49.65	50.6	0.425	0.2847	0.2902	344.7	-1	482c	16	482
32	560	10	450	78.08	49.26	77.51	0.3811	0.2404	0.3783	313.6	-1	493c	18	493
32	563	12	460	78.9	48.11	92.92	0.3587	0.2187	0.4224	297.0	-1	506c	21	506
33	566	13	465	77.88	46.55	99.22	0.3482	0.2081	0.4436	289.9	-1	515c	23	515
34	572	13	470	74.0	42.55	99.22	0.3429	0.1972	0.4598	285.9	-1	520c	24	520
36	583	15	475	67.12	37.6	108.22	0.3151	0.1766	0.5081	272.6	-1	536c	27	536 Mm
45	629	15	480	36.3	20.39	108.22	0.2201	0.1236	0.6561	245.2	2	413	31	556
-1	485c	17	485	29.01	19.78	113.19	0.1791	0.1221	0.6987	236.2	11	455	32	561
-1	489c	17	490	29.01	19.78	113.19	0.1791	0.1221	0.6987	236.2	11	455	32	561 min
-1	494c	18	495	29.06	21.33	114.7	0.176	0.1292	0.6947	234.6	11	458	32	562
-1	499c	19	500	29.07	23.12	115.79	0.173	0.1376	0.6892	232.7	12	460	32	563
-1	509c	21	510	29.22	27.51	117.13	0.168	0.1582	0.6736	228.3	12	464	33	566
-1	520c	24	520	30.41	36.26	118.03	0.1646	0.1963	0.639	219.7	13	468	34	570 Bm
-1	530c	26	530	32.29	43.19	118.28	0.1666	0.2229	0.6104	213.3	14	471	34	574
-1	539c	27	540	33.62	46.88	118.34	0.1691	0.2357	0.5951	209.9	14	472	35	576
-1	545c	29	545	37.12	54.45	118.41	0.1767	0.2593	0.5639	203.3	14	474	36	581
-1	550c	30	550	39.3	58.24	118.42	0.1819	0.2697	0.5483	200.2	15	475	36	583
-1	554c	30	555	39.3	58.24	118.42	0.1819	0.2697	0.5483	200.2	15	475	36	583
9	447	31	560	30.64	60.38	62.67	0.1993	0.3928	0.4077	145.0	17	488	-1	488c
380	770	86.5	88.59	104.91	0.3089	0.3163	0.3746	0.0						

0-001730-L0


BG310-7N_16

TUB-Prüfvorlage BG31; CIE (x_{10}, y_{10}) und Farbarten ($a_{i,10}, b_{i,10}$) Eingabe: w/rgb/cmyk -> rgb
Ostwald-Optimalfarben für Lichtart Q00; Diagramm für Lichtart Q00, $Y_{w,10}=88,6$


0-001730-F0

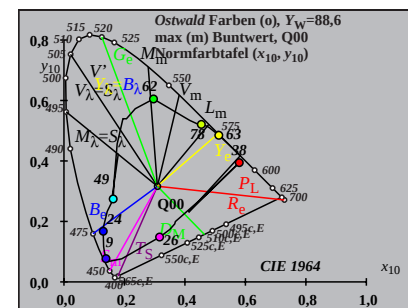


BG311-1A_8

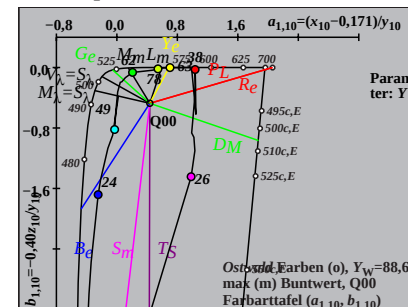


BG311-3A_8

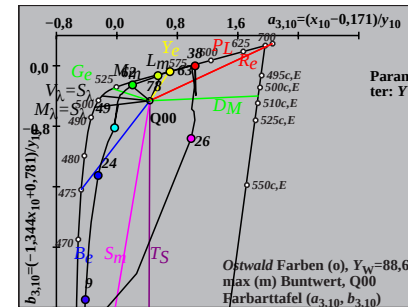


BG311-5A_8

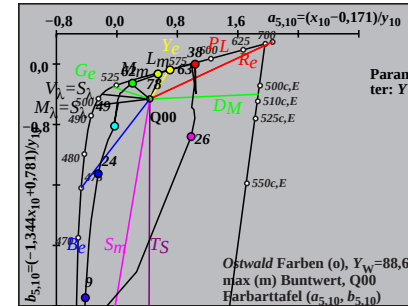


BG311-7A_8

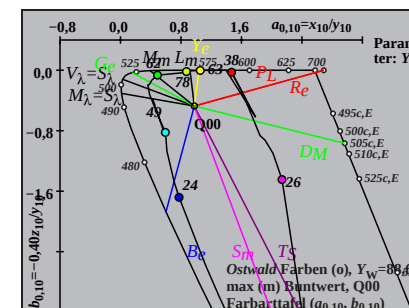


BG311-2A_8

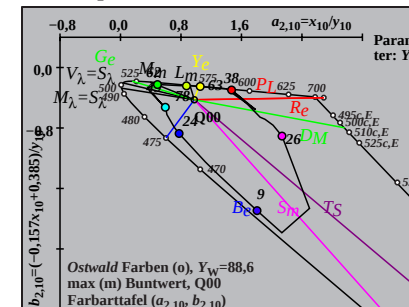

BG311-4A_8

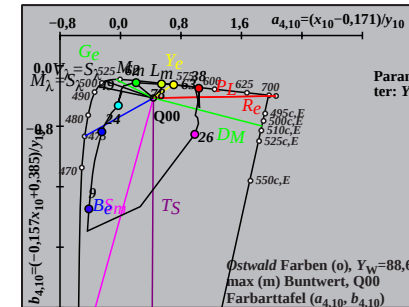

BG311-6A_8

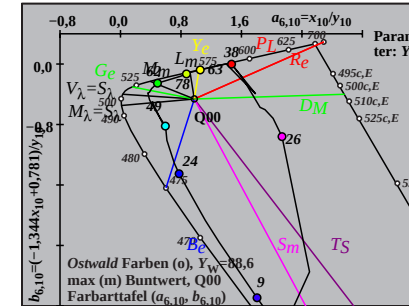

BG311-8A_8