









Ostwald-Optimalfarben (o) von maximalem (m) $C_{AB,10}$ für D65, $Y_{w,10}=100$, $Y_m=520_770$

i_D	λ_1	i_D	λ_2	Y_{10}	A_{10}	B_{10}	$C_{10AB,10}$	b_{10}	$h_{10ab,10}$	λ_d	i_c	λ_c	Code
0	405	31	556	56.57	-21.89	-18.32	28.54	0.5611	-0.7532	219.9	15	476	37 585 Cm
6	435	31	557	57.42	-26.44	-8.79	27.86	0.4876	-0.5825	198.4	16	480	44 621
10	450	31	559	57.53	-32.48	6.09	33.05	0.3834	-0.3234	169.3	18	491	-1 491c
11	460	32	562	59.27	-33.9	10.52	35.5	0.3761	-0.2517	162.7	19	498	-1 498c
12	465	33	565	60.92	-34.93	14.56	37.84	0.3747	-0.1903	157.3	21	506	-1 506c
14	470	34	570	63.07	-35.18	20.67	40.8	0.3903	-0.1016	149.5	24	522	-1 522c
15	475	35	579	68.64	-33.55	24.85	41.75	0.4593	-0.0672	143.4	26	533	-1 533c Gm
16	480	41	606	81.94	-23.65	31.88	39.7	0.6594	-0.0401	126.5	30	550	-1 550c
16	485	-1	484c	92.3	-10.45	36.33	37.8	0.8348	-0.0356	106.0	32	560	10 454
18	490	-1	490c	89.06	-7.57	36.55	37.33	0.863	-0.0188	101.7	32	562	11 459 max
19	495	-1	495c	87.05	-5.68	36.18	36.62	0.8828	-0.0136	98.9	32	563	12 461
19	500	-1	499c	87.05	-5.68	36.18	36.62	0.8828	-0.0136	98.9	32	563	12 461
22	510	-1	510c	79.1	1.43	33.55	33.58	0.9662	-0.0051	87.5	33	566	13 466
23	520	-1	519c	75.81	4.11	32.27	32.53	1.0024	-0.0036	82.7	33	568	13 468 Ym
26	530	-1	530c	64.17	12.31	27.48	30.11	1.14	-0.001	65.8	34	573	14 472
27	540	-1	539c	59.9	14.81	25.68	29.65	1.1955	-0.0005	60.0	35	576	14 473
28	545	-1	544c	55.54	17.09	23.83	29.32	1.2559	-0.0002	54.3	35	578	14 474
29	550	-1	549c	51.12	19.09	21.94	29.08	1.3215	-0.0001	48.9	36	580	15 475
31	555	-1	555c	42.37	21.98	18.19	28.53	1.4668	0.0	39.6	37	586	15 476
32	560	10	451	40.04	32.52	-6.18	33.11	1.7605	-0.5839	349.2	-1	492c	18 492
31	556	0	405	43.42	21.89	18.32	28.54	1.4522	-0.0074	39.9	37	585	15 476 Rm
31	557	6	435	42.57	26.44	8.79	27.86	1.5691	-0.2226	18.4	44	621	16 480
31	559	10	450	42.46	32.48	-6.09	33.05	1.713	-0.5727	349.3	-1	491c	18 491
32	562	11	460	40.72	33.9	-10.52	35.5	1.7806	-0.6878	342.7	-1	498c	19 498
33	565	12	465	39.07	34.93	-14.56	37.84	1.8419	-0.8019	337.3	-1	506c	21 506
34	570	14	470	36.92	35.18	-20.67	40.8	1.901	-0.9892	329.5	-1	522c	24 522
35	579	15	475	31.35	33.55	-24.85	41.75	2.0184	-1.2221	323.4	-1	533c	26 533 Mm
41	606	16	480	18.05	23.65	-31.88	39.7	2.2587	-2.1959	306.5	-1	550c	30 550
-1	484c	16	485	7.69	10.45	-36.33	37.8	2.306	-5.1484	286.0	10	454	32 560
-1	490c	18	490	10.93	7.57	-36.55	37.33	1.6407	-3.7725	281.7	11	459	32 562 min
-1	495c	19	495	12.94	5.68	-36.18	36.62	1.3873	-3.2239	278.9	12	461	32 563
-1	499c	19	500	12.94	5.68	-36.18	36.62	1.3873	-3.2239	278.9	12	461	32 563
-1	510c	22	510	20.89	-1.43	-33.55	33.58	0.8795	-2.035	267.5	13	466	33 566
-1	519c	23	520	24.18	-4.12	-32.27	32.53	0.7777	-1.7639	262.7	13	468	33 568 Bm
-1	530c	26	530	35.82	-12.31	-27.48	30.11	0.6044	-1.1965	245.8	14	472	34 573
-1	539c	27	540	40.09	-14.81	-25.68	29.65	0.5785	-1.0699	240.0	14	473	35 576
-1	544c	28	545	44.45	-17.09	-23.83	29.32	0.5635	-0.9653	234.3	14	474	35 578
-1	549c	29	550	48.87	-19.09	-21.94	29.08	0.5575	-0.8782	228.9	15	475	36 580
-1	555c	31	555	57.62	-21.98	-18.19	28.53	0.5667	-0.745	219.6	15	476	37 586
10	451	32	560	59.95	-32.52	6.18	33.11	0.4056	-0.3261	169.2	18	492	-1 492c
380	770	100.0	0.0	0.0	0.0	0.0	0.01	0.9481	-0.4293	0.0			

0-001030-L0









BG340-7N_16

TUB-Prüfvorlage BG34; CIE (x_{10}, y_{10}) und Buntwerte ($A_{i,10}, B_{i,10}$) Eingabe: w/rgb/cmyk -> rgb
Ostwald-Optimalfarben für Lichtart D65; Diagramm für Lichtart D65, $Y_{w,10}=100$

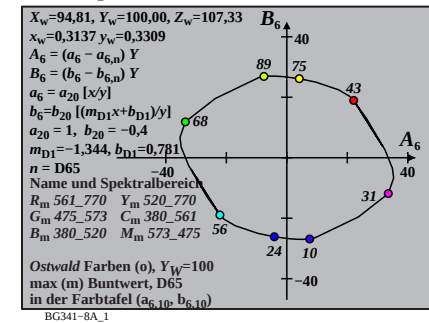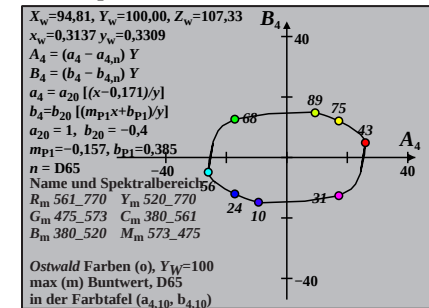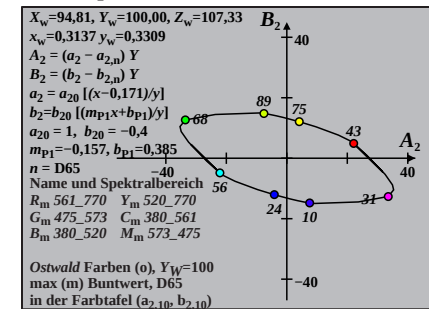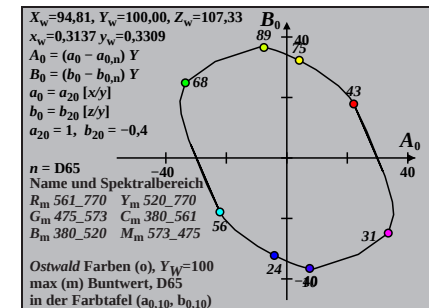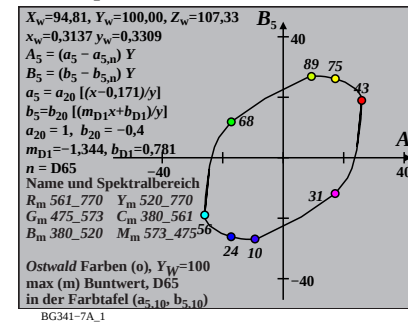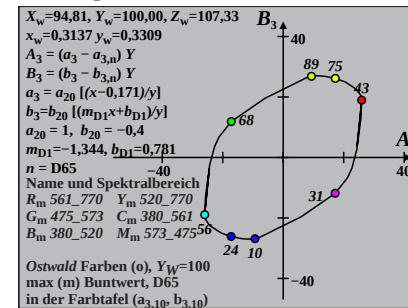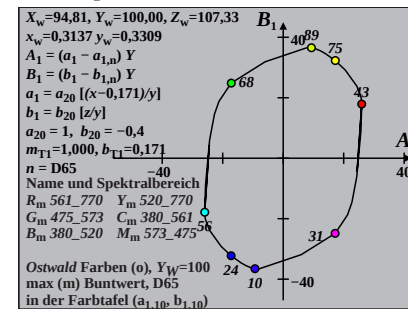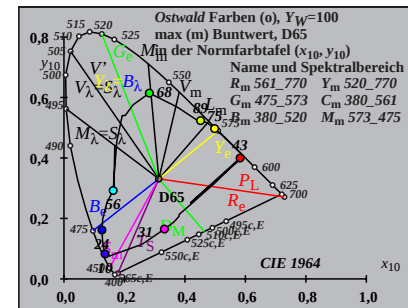









Ostwald-Optimalfarben (o) von maximalem (m) $C_{AB,10}$ für D50, $Y_{w,10}=100$, $Y_m=520_770$

i_D	λ_1	i_D	λ_2	Y_{10}	A_{10}	B_{10}	$C_{10AB,10}$	b_{10}	$h_{10ab,10}$	λ_d	i_c	λ_c	Code
1	405	31	559	55.95	-25.08	-13.86	28.66	0.5189	-0.5733	208.9	15	479	37 589 Cm
7	435	32	561	56.42	-28.9	-5.53	29.42	0.455	-0.4238	190.8	16	484	58 693
10	450	32	562	56.65	-32.28	3.24	32.45	0.3973	-0.2684	174.2	18	493	-1 493c
12	460	32	564	57.41	-33.95	8.98	35.12	0.3757	-0.1691	165.1	20	503	-1 503c
13	465	33	566	58.48	-34.34	11.63	36.25	0.38	-0.1267	161.2	22	512	-1 512c
14	470	34	570	60.63	-34.33	14.23	37.16	0.401	-0.0909	157.4	24	521	-1 521c
15	475	35	576	64.51	-33.34	16.97	37.41	0.4504	-0.0624	153.0	26	531	-1 531c Gm
16	480	38	590	72.88	-29.2	20.81	35.86	0.5665	-0.04	144.5	28	543	-1 543c
17	485	-1	485c	92.6	-6.09	28.04	28.69	0.9014	-0.0228	102.2	32	563	11 458
18	490	-1	490c	91.1	-4.69	28.13	28.52	0.9157	-0.0168	99.4	32	564	12 460 max
19	495	-1	495c	89.32	-2.98	27.98	28.14	0.9338	-0.0123	96.0	33	565	12 462
20	500	-1	500c	87.23	-1.0	27.62	27.64	0.9556	-0.0089	92.0	33	566	12 464
21	510	-1	509c	84.82	1.2	27.07	27.09	0.9814	-0.0065	87.4	33	567	13 466
24	520	-1	520c	75.59	8.88	24.43	26.0	1.0847	-0.0023	70.0	34	571	14 471 Ym
25	530	-1	529c	71.83	11.6	23.28	26.01	1.1288	-0.0015	63.4	34	573	14 473
28	540	-1	540c	59.32	19.15	19.3	27.19	1.29	-0.0002	45.2	35	579	15 476
29	545	-1	545c	54.91	21.22	17.87	27.75	1.3537	-0.0001	40.1	36	581	15 477
29	550	-1	549c	54.91	21.22	17.87	27.75	1.3537	-0.0001	40.1	36	581	15 477
31	555	-1	555c	46.06	24.31	15.0	28.56	1.4949	0.0	31.6	37	587	15 479
32	560	2	411	41.79	25.61	12.8	28.63	1.5801	-0.0192	26.5	38	591	16 480
31	559	1	405	44.04	25.08	13.86	28.66	1.5368	-0.0108	28.9	37	589	15 479 Rm
32	561	7	435	43.57	28.9	5.53	29.42	1.6305	-0.1985	10.8	58	693	16 484
32	562	10	450	43.34	32.28	-3.24	32.45	1.7121	-0.4004	354.2	-1	493c	18 493
32	564	12	460	42.58	33.95	-8.98	35.12	1.7646	-0.5366	345.1	-1	503c	20 503
33	566	13	465	41.51	34.34	-11.63	36.25	1.7943	-0.6057	341.2	-1	512c	22 512
34	570	14	470	39.36	34.33	-14.23	37.16	1.8394	-0.6871	337.4	-1	521c	24 521
35	576	15	475	35.48	33.34	-16.97	37.41	1.9067	-0.804	333.0	-1	531c	26 531 Mm
38	590	16	480	27.11	29.2	-20.81	35.86	2.0441	-1.0932	324.5	-1	543c	28 543
-1	485c	17	485	7.39	6.09	-28.04	28.69	1.7911	-4.1155	282.2	11	458	32 563
-1	490c	18	490	8.89	4.69	-28.13	28.52	1.4945	-3.4884	279.4	12	460	32 564 min
-1	495c	19	495	10.67	2.98	-27.98	28.14	1.247	-2.9472	276.0	12	462	33 565
-1	500c	20	500	12.76	1.0	-27.62	27.64	1.0462	-2.49	272.0	12	464	33 566
-1	509c	21	510	15.17	-1.2	-27.07	27.09	0.8876	-2.1102	267.4	13	466	33 567
-1	520c	24	520	24.4	-8.88	-24.43	26.0	0.6033	-1.3269	250.0	14	471	34 571 Bm
-1	529c	25	530	28.16	-11.6	-23.28	26.01	0.555	-1.1521	243.4	14	473	34 573
-1	540c	28	540	40.67	-19.15	-19.3	27.19	0.4963	-0.8002	225.2	15	476	35 579
-1	545c	29	545	45.08	-21.22	-17.87	27.75	0.4964	-0.7221	220.1	15	477	36 581
-1	549c	29	550	45.08	-21.22	-17.87	27.75	0.4964	-0.7221	220.1	15	477	36 581
-1	555c	31	555	53.93	-24.31	-15.0	28.56	0.5164	-0.6038	211.6	15	479	37 587
2	411	32	560	58.2	-25.61	-12.8	28.63	0.5271	-0.5456	206.5	16	480	38 591
380	770	99.99	0.0	0.0	0.0	0.0	0.01	0.9672	-0.3256	0.0			

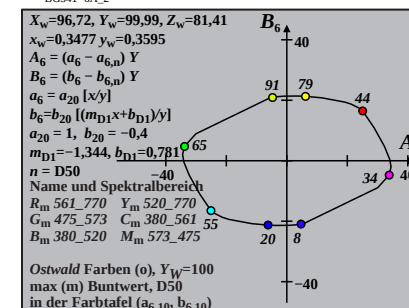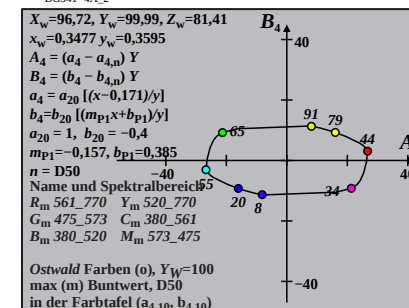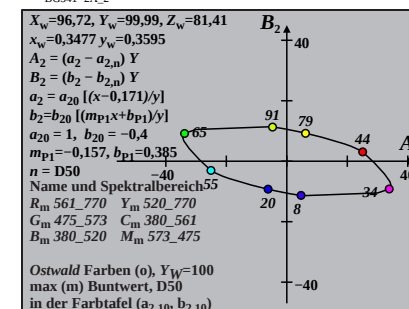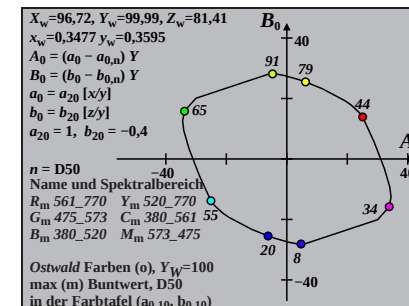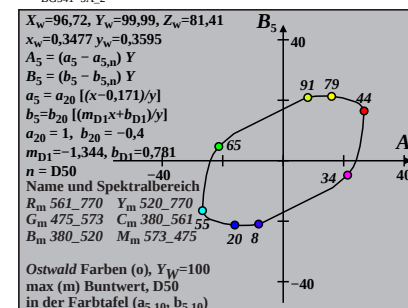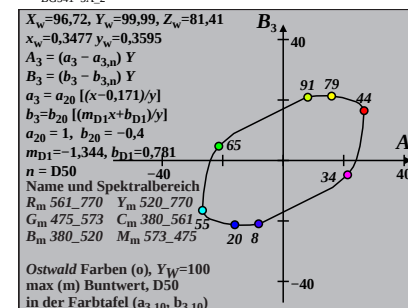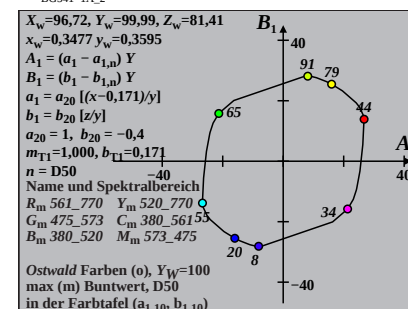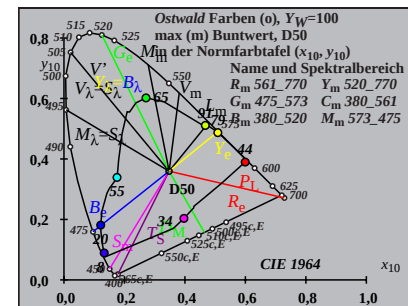









Ostwald-Optimalfarben (o) von maximalem (m) $C_{AB,10}$ für P40, $Y_{w,10}=100$, $Y_m=520_770$

i_0	λ_1	i_0	λ_2	Y_{10}	A_{10}	B_{10}	$C_{10AB,10}$	a_{10}	b_{10}	$h_{10ab,10}$	i_c	λ_c	Code	
0	405	32	563	54.51	-26.99	-11.55	29.36	0.5223	-0.4697	203.1	16	481	38 591	Cm
7	435	32	564	54.82	-30.38	-4.21	30.67	0.4633	-0.3347	187.9	17	487	-1 487c	
10	450	33	565	55.07	-32.85	2.3	32.93	0.4209	-0.216	175.9	19	495	-1 495c	
12	460	33	567	55.74	-33.98	6.54	34.61	0.4078	-0.1403	169.0	21	505	-1 505c	
12	465	33	568	57.17	-34.12	6.91	34.81	0.4206	-0.1368	168.5	21	506	-1 506c	
14	470	34	571	58.4	-34.2	10.47	35.77	0.4318	-0.0784	162.9	24	521	-1 521c	
15	475	35	576	61.5	-33.53	12.44	35.76	0.4722	-0.0555	159.6	26	531	-1 531c	Gm
16	480	37	585	67.98	-30.99	15.0	34.43	0.5616	-0.0371	154.1	28	542	-1 542c	
17	485	42	611	82.81	-18.97	19.49	27.2	0.7884	-0.0223	134.2	31	558	-1 558c	
17	490	-1	489c	94.15	-4.49	22.42	22.86	0.9698	-0.0196	101.3	33	566	11 458	max
19	495	-1	495c	91.34	-1.68	22.56	22.62	0.9991	-0.0107	94.2	33	568	12 463	
20	500	-1	500c	89.52	0.12	22.37	22.37	1.0189	-0.0078	89.6	33	569	13 465	
22	510	-1	510c	84.94	4.48	21.54	22.0	1.0703	-0.0041	78.2	34	571	13 469	
23	520	-1	519c	82.13	6.97	20.92	22.06	1.1024	-0.0029	71.5	34	572	14 471	Ym
25	530	-1	529c	75.59	12.23	19.38	22.92	1.1794	-0.0013	57.7	35	575	14 474	
28	540	-1	540c	63.89	19.86	16.45	25.79	1.3284	-0.0002	39.6	36	581	15 477	
28	545	-1	544c	63.89	19.86	16.45	25.79	1.3284	-0.0002	39.6	36	581	15 477	
30	550	-1	550c	55.35	23.97	14.26	27.89	1.4506	0.0	30.7	37	585	15 479	
31	555	-1	555c	50.95	25.53	13.13	28.71	1.5185	0.0	27.2	37	587	16 480	
31	560	-1	559c	50.95	25.53	13.13	28.71	1.5185	0.0	27.2	37	587	16 480	
32	563	0	405	45.48	26.99	11.55	29.36	1.6108	-0.0037	23.1	38	591	16 481	Rm
32	564	7	435	45.17	30.38	4.21	30.67	1.69	-0.1644	7.9	-1	487c	17 487	
33	565	10	450	44.92	32.85	-2.3	32.93	1.7488	-0.309	355.9	-1	495c	19 495	
33	567	12	460	44.25	33.98	-6.54	34.61	1.7854	-0.4057	349.0	-1	505c	21 505	
33	568	12	465	42.82	34.12	-6.91	34.81	1.8142	-0.4192	348.5	-1	506c	21 506	
34	571	14	470	41.59	34.2	-10.47	35.77	1.8399	-0.5096	342.9	-1	521c	24 521	
35	576	15	475	38.49	33.53	-12.44	35.76	1.8886	-0.5809	339.6	-1	531c	26 531	Mm
37	585	16	480	32.01	30.99	-15.0	34.43	1.9856	-0.7264	334.1	-1	542c	28 542	
42	611	17	485	17.18	18.97	-19.49	27.2	2.1216	-1.3924	314.2	-1	558c	31 558	
-1	489c	17	490	5.84	4.49	-22.42	22.86	1.7863	-4.0958	281.3	11	458	33 566	min
-1	495c	19	495	8.65	1.67	-22.56	22.62	1.2115	-2.8646	274.2	12	463	33 568	
-1	500c	20	500	10.47	-0.12	-22.37	22.37	1.0051	-2.3947	269.6	13	465	33 569	
-1	510c	22	510	15.05	-4.48	-21.54	22.0	0.7194	-1.6888	258.2	13	469	34 571	
-1	519c	23	520	17.86	-6.97	-20.92	22.06	0.6269	-1.4294	251.5	14	471	34 572	Bm
-1	529c	25	530	24.4	-12.23	-19.38	22.92	0.516	-1.0518	237.7	14	474	35 575	
-1	540c	28	540	36.1	-19.86	-16.45	25.79	0.4671	-0.7135	219.6	15	477	36 581	
-1	544c	28	545	36.1	-19.86	-16.45	25.79	0.4671	-0.7135	219.6	15	477	36 581	
-1	550c	30	550	44.64	-23.97	-14.26	27.89	0.4805	-0.5773	210.7	15	479	37 585	
-1	555c	31	555	49.04	-25.53	-13.13	28.71	0.4968	-0.5256	207.2	16	480	37 587	
-1	559c	31	560	49.04	-25.53	-13.13	28.71	0.4968	-0.5256	207.2	16	480	37 587	
380	770	100.0	0.0	0.0	0.0	0.01	1.0175	-0.2577	0.0					

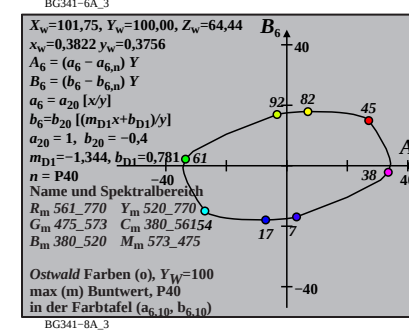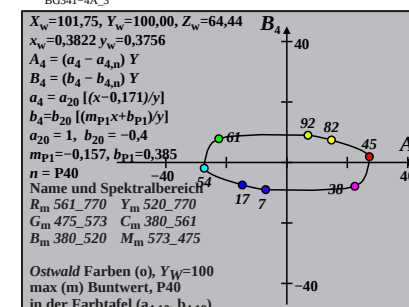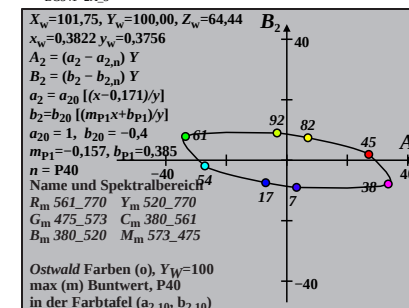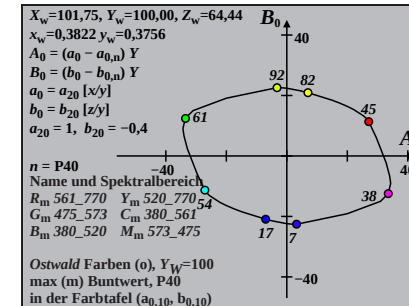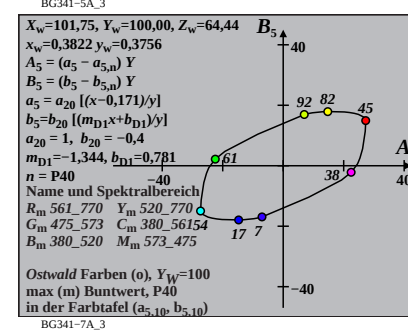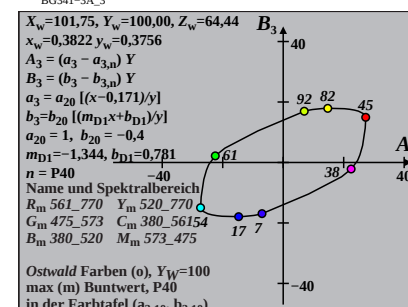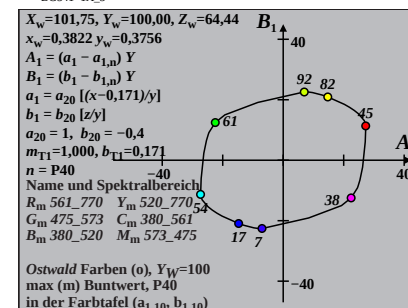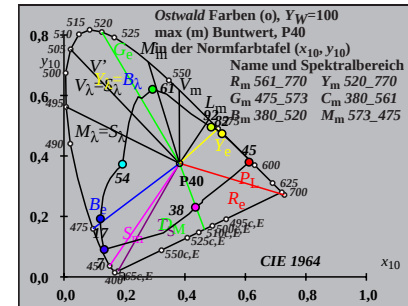









Ostwald-Optimalfarben (o) von maximalem (m) $C_{AB,10}$ für A00, $Y_{w,10}=100$, $Y_m=520_770$

i_D	λ_1	i_D	λ_2	Y_{10}	A_{10}	B_{10}	$C_{10AB,10}$	a_{10}	b_{10}	$h_{10ab,10}$	λ_d	i_c	λ_c	Code
1	405	34	570	52.26	-30.52	-6.57	31.22	0.5273	-0.2665	192.1	17	487	39	597 Cm
7	435	34	570	52.46	-31.93	-3.37	32.11	0.5027	-0.2051	186.0	18	491	47	639
9	450	34	571	52.77	-32.78	-1.15	32.8	0.4903	-0.1627	182.0	19	495	-1	495c
12	460	34	572	52.99	-33.72	2.34	33.8	0.4751	-0.0964	176.0	21	505	-1	505c
13	465	34	573	53.47	-33.84	3.46	34.02	0.4785	-0.076	174.1	22	512	-1	512c
14	470	34	574	54.4	-33.82	4.5	34.12	0.4898	-0.058	172.4	24	520	-1	520c
15	475	35	576	55.98	-33.44	5.46	33.88	0.5141	-0.0432	170.7	25	528	-1	528c Gm
16	480	36	581	59.09	-32.57	6.48	33.21	0.5602	-0.031	168.7	27	537	-1	537c
17	485	37	588	64.82	-30.16	7.74	31.14	0.6461	-0.0213	165.6	29	547	-1	547c
18	490	41	609	78.98	-19.9	10.08	22.31	0.8594	-0.0131	153.1	32	561	-1	561c max
19	495	-1	495c	94.47	0.7	12.53	12.55	1.1189	-0.0081	86.7	34	573	13	465
20	500	-1	500c	93.13	2.17	12.54	12.73	1.1348	-0.006	80.1	34	573	13	468
21	510	-1	509c	91.52	3.88	12.47	13.06	1.154	-0.0045	72.6	34	574	14	470
24	520	-1	520c	84.75	10.47	11.79	15.77	1.235	-0.0016	48.3	35	577	15	476 Ym
25	530	-1	529c	81.86	12.99	11.43	17.3	1.2701	-0.0011	41.3	35	578	15	477
27	540	-1	539c	75.17	18.19	10.55	21.03	1.3535	-0.0004	30.1	36	581	16	480
29	545	-1	545c	67.47	23.18	9.49	25.05	1.4551	0.0	22.2	37	585	16	483
30	550	-1	550c	63.33	25.4	8.91	26.92	1.5126	0.0	19.3	37	587	16	484
31	555	-1	555c	59.02	27.33	8.31	28.57	1.5746	0.0	16.9	37	589	17	485
32	560	-1	560c	54.59	28.9	7.68	29.9	1.6408	0.0	14.8	38	592	17	486
34	570	1	405	47.73	30.52	6.57	31.22	1.751	-0.0031	12.1	39	597	17	487 Rm
34	570	7	435	47.53	31.93	3.37	32.11	1.7834	-0.0697	6.0	47	639	18	491
34	571	9	450	47.22	32.78	1.15	32.8	1.8057	-0.1163	2.0	-1	495c	19	495
34	572	12	460	47.0	33.72	-2.34	33.8	1.8291	-0.1907	356.0	-1	505c	21	505
34	573	13	465	46.52	33.84	-3.46	34.02	1.839	-0.2152	354.1	-1	512c	22	512
34	574	14	470	45.59	33.82	-4.5	34.12	1.8533	-0.2395	352.4	-1	520c	24	520
35	576	15	475	44.01	33.44	-5.46	33.88	1.8713	-0.2649	350.7	-1	528c	25	528 Mm
36	581	16	480	40.9	32.57	-6.48	33.21	1.9078	-0.2993	348.7	-1	537c	27	537
37	588	17	485	35.17	30.16	-7.74	31.14	1.9692	-0.361	345.6	-1	547c	29	547
41	609	18	490	21.01	19.9	-10.08	22.31	2.0586	-0.6206	333.1	-1	561c	32	561 min
-1	495c	19	495	5.52	-0.7	-12.53	12.55	0.9836	-2.4099	266.7	13	465	34	573
-1	500c	20	500	6.86	-2.17	-12.54	12.73	0.7953	-1.9687	260.1	13	468	34	573
-1	509c	21	510	8.47	-3.88	-12.47	13.06	0.6527	-1.6117	252.6	14	470	34	574
-1	520c	24	520	15.24	-10.47	-11.79	15.77	0.4243	-0.9143	228.3	15	476	35	577 Bm
-1	529c	25	530	18.13	-12.99	-11.43	17.3	0.3952	-0.7712	221.3	15	477	35	578
-1	539c	27	540	24.82	-18.19	-10.55	21.03	0.3784	-0.5659	210.1	16	480	36	581
-1	545c	29	545	32.52	-23.18	-9.49	25.05	0.3985	-0.4327	202.2	16	483	37	585
-1	550c	30	550	36.66	-25.4	-8.91	26.92	0.4186	-0.3839	199.3	16	484	37	587
-1	555c	31	555	40.97	-27.33	-8.31	28.57	0.4442	-0.3436	196.9	17	485	37	589
-1	560c	32	560	45.4	-28.9	-7.68	29.9	0.4748	-0.3101	194.8	17	486	38	592
380	770	99.99	0.0	0.0	0.0	0.0	1.1115	-0.1407	0.0					

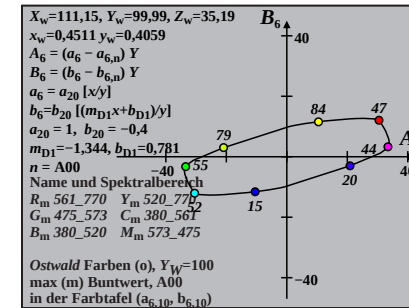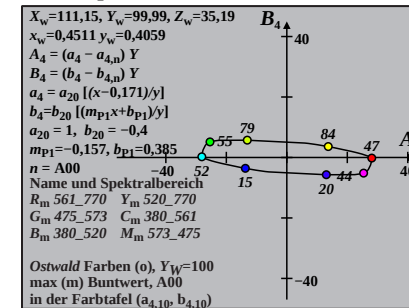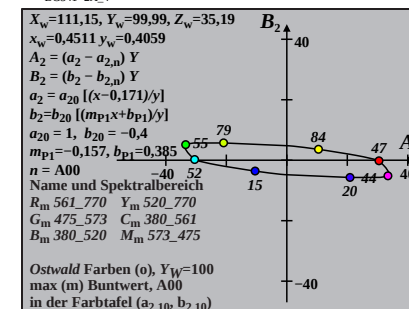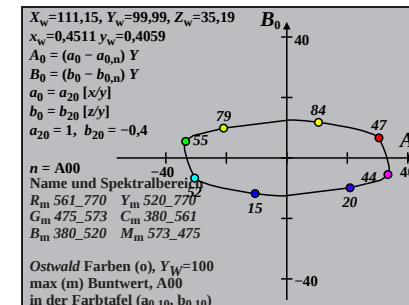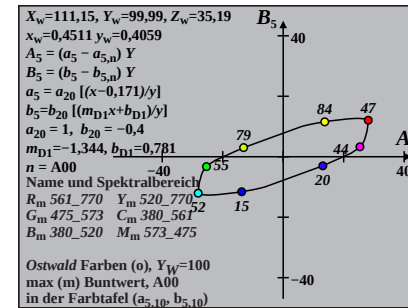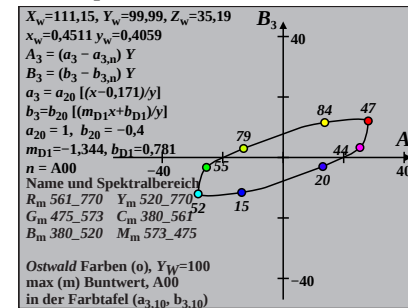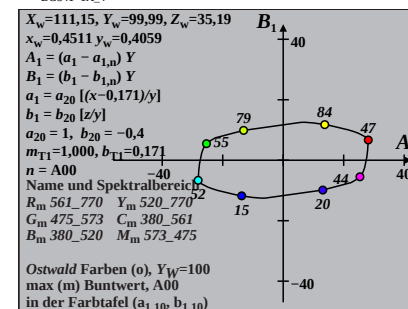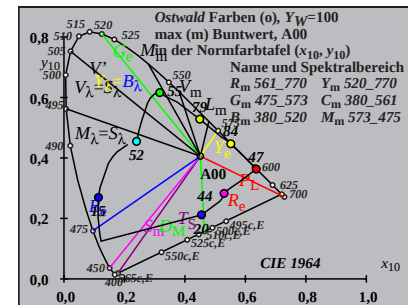









Ostwald-Optimalfarben (o) von maximalem (m) $C_{AB,10}$ für E00, $Y_{w,10}=100$, $Y_m=520_770$

i_D	λ_1	i_D	λ_2	Y_{10}	A_{10}	B_{10}	$C_{10AB,10}$	a_{10}	b_{10}	$h_{10ab,10}$	i_c	λ_c	Code	
1	405	31	559	55.67	-23.85	-16.83	29.19	0.5714	-0.7023	215.2	15	477	37 589	Cm
7	435	32	561	56.07	-29.8	-3.91	30.06	0.4683	-0.4698	187.4	16	484	-1 484c	
10	450	32	562	56.42	-33.81	6.43	34.42	0.4005	-0.2859	169.2	18	493	-1 493c	
12	460	33	565	57.5	-35.67	12.82	37.91	0.3794	-0.177	160.2	21	506	-1 506c	
13	465	33	568	58.96	-36.09	15.87	39.42	0.3878	-0.1308	156.2	23	515	-1 515c	
13	470	34	572	62.72	-36.13	17.37	40.09	0.4237	-0.123	154.3	24	520	-1 520c	
14	475	36	581	68.2	-35.02	21.58	41.14	0.4863	-0.0836	148.3	26	532	-1 532c	Gm
16	480	40	604	80.28	-25.55	29.1	38.73	0.6815	-0.0374	131.2	30	551	-1 551c	
17	485	-1	485c	91.81	-8.69	34.56	35.64	0.9052	-0.0235	104.1	32	564	11 456	
18	490	-1	490c	90.24	-7.16	34.54	35.28	0.9204	-0.0171	101.7	32	564	11 458	max
19	495	-1	495c	88.4	-5.35	34.26	34.67	0.9393	-0.0124	98.8	33	565	12 460	
20	500	-1	500c	86.28	-3.26	33.73	33.89	0.962	-0.009	95.5	33	566	12 462	
22	510	-1	510c	81.07	1.59	32.05	32.09	1.0195	-0.0047	87.1	33	569	13 466	
23	520	-1	519c	77.97	4.29	30.93	31.22	1.0549	-0.0033	82.1	34	570	13 468	Ym
25	530	-1	529c	70.93	9.82	28.26	29.92	1.1384	-0.0015	70.8	34	573	14 470	
27	540	-1	539c	63.03	15.1	25.18	29.36	1.2395	-0.0005	59.0	35	577	14 473	
29	545	-1	545c	54.64	19.62	21.85	29.37	1.359	0.0	48.0	36	582	15 475	
29	550	-1	549c	54.64	19.62	21.85	29.37	1.359	0.0	48.0	36	582	15 475	
31	555	-1	555c	46.09	22.87	18.44	29.38	1.4962	0.0	38.8	37	587	15 476	
32	560	3	415	41.99	25.16	14.2	28.89	1.5991	-0.0619	29.4	39	595	15 478	
31	559	1	405	44.32	23.85	16.83	29.19	1.5381	-0.0202	35.2	37	589	15 477	Rm
32	561	7	435	43.92	29.8	3.91	30.06	1.6786	-0.3109	7.4	-1 484c	16 484		
32	562	10	450	43.57	33.81	-6.43	34.42	1.7759	-0.5476	349.2	-1 493c	18 493		
33	565	12	460	42.49	35.67	-12.82	37.91	1.8394	-0.7017	340.2	-1 506c	21 506		
33	568	13	465	41.03	36.09	-15.87	39.42	1.8794	-0.7868	336.2	-1 515c	23 515		
34	572	13	470	37.27	36.13	-17.37	40.09	1.9694	-0.8661	334.3	-1 520c	24 520		
36	581	14	475	31.79	35.02	-21.57	41.14	2.1016	-1.0788	328.3	-1 532c	26 532		Mm
40	604	16	480	19.71	25.55	-29.1	38.73	2.2961	-1.8762	311.2	-1 551c	30 551		
-1	485c	17	485	8.18	8.69	-34.56	35.64	2.0622	-4.6232	284.1	11 456	32 564		
-1	490c	18	490	9.75	7.16	-34.54	35.28	1.7342	-3.9405	281.7	11 458	32 564		min
-1	495c	19	495	11.59	5.35	-34.26	34.67	1.4614	-3.3554	278.8	12 460	33 565		
-1	500c	20	500	13.71	3.26	-33.73	33.89	1.2379	-2.8589	275.5	12 462	33 566		
-1	510c	22	510	18.92	-1.59	-32.05	32.08	0.9156	-2.0933	267.1	13 466	33 569		
-1	519c	23	520	22.02	-4.29	-30.93	31.22	0.805	-1.8041	262.1	13 468	34 570		Bm
-1	529c	25	530	29.06	-9.82	-28.26	29.92	0.6618	-1.3726	250.8	14 470	34 573		
-1	539c	27	540	36.96	-15.1	-25.18	29.36	0.5912	-1.0813	239.0	14 473	35 577		
-1	545c	29	545	45.35	-19.62	-21.85	29.37	0.5673	-0.8818	228.0	15 475	36 582		
-1	549c	29	550	45.35	-19.62	-21.85	29.37	0.5673	-0.8818	228.0	15 475	36 582		
-1	555c	31	555	53.9	-22.87	-18.44	29.38	0.5754	-0.7421	218.8	15 476	37 587		
3	415	32	560	58.0	-25.16	-14.2	28.89	0.5659	-0.6448	209.4	15 478	39 595		
380	770	99.99	0.0	0.0	0.0	0.0	0.01	0.9999	-0.4	0.0				

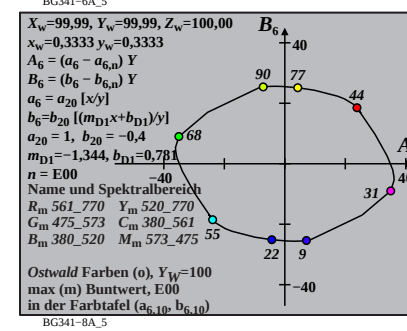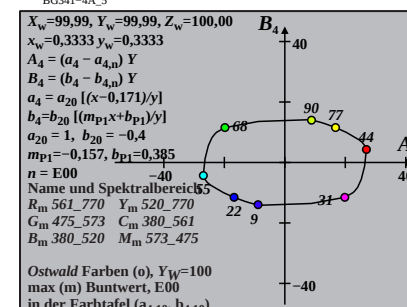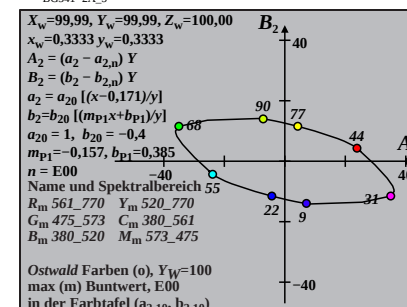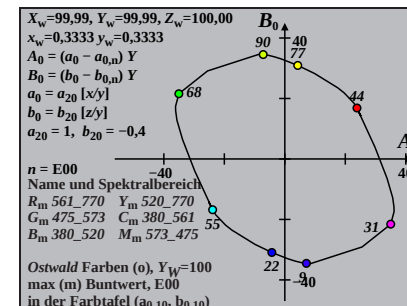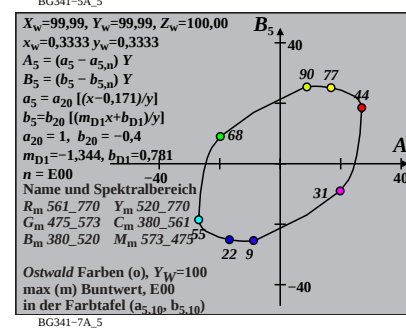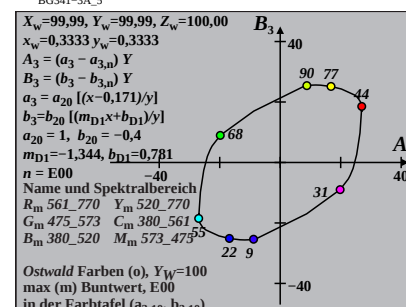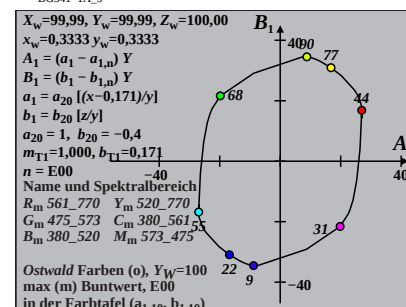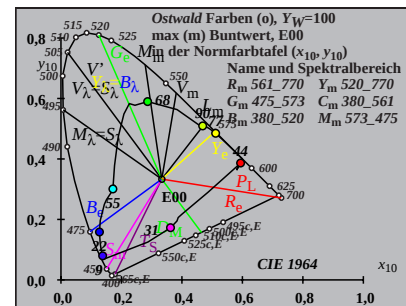









Ostwald-Optimalfarben (o) von maximalem (m) $C_{AB,10}$ für C00, $Y_{w,10}=100$, $Y_m=520_770$

i_D	λ_1	i_D	λ_2	Y_{10}	A_{10}	B_{10}	$C_{10AB,10}$	a_{10}	b_{10}	$h_{10ab,10}$	λ_d	i_c	λ_c	Code
1	405	31	556	55.88	-21.31	-19.85	29.12	0.5914	-0.8198	222.9	15	475	37	586 Cm
6	435	31	558	56.84	-26.27	-9.43	27.91	0.5106	-0.6304	199.7	16	480	44	623
9	450	32	560	57.53	-31.55	3.12	31.7	0.4244	-0.4102	174.3	17	487	-1	487c
12	460	32	563	58.32	-35.2	14.89	38.22	0.3692	-0.2092	157.0	20	504	-1	504c
12	465	33	566	60.99	-35.5	16.13	38.99	0.3908	-0.2001	155.5	21	507	-1	507c
13	470	34	572	64.68	-35.85	20.86	41.48	0.4185	-0.1419	149.8	24	520	-1	520c
14	475	36	582	71.25	-34.22	26.39	43.21	0.4925	-0.0941	142.3	26	533	-1	533c Gm
16	480	44	622	86.65	-18.57	36.86	41.27	0.7584	-0.0391	116.7	31	556	0	403
17	485	-1	485c	90.11	-9.86	39.49	40.7	0.8633	-0.0263	104.0	32	562	11	456
18	490	-1	490c	88.26	-8.11	39.35	40.18	0.8809	-0.0186	101.6	32	563	11	459 max
19	495	-1	495c	86.17	-6.11	38.9	39.37	0.9019	-0.0131	98.9	32	564	12	461
20	500	-1	500c	83.86	-3.9	38.18	38.38	0.9262	-0.0093	95.8	33	565	12	463
22	510	-1	510c	78.57	0.89	36.13	36.14	0.9842	-0.0047	88.5	33	567	13	466
24	520	-1	520c	72.29	6.0	33.41	33.95	1.0559	-0.0023	79.8	34	570	13	468 Ym
26	530	-1	530c	64.98	11.13	30.12	32.11	1.1441	-0.0009	69.7	34	574	14	471
28	540	-1	540c	56.66	15.93	26.31	30.76	1.2541	-0.0002	58.7	35	578	14	473
28	545	-1	544c	56.66	15.93	26.31	30.76	1.2541	-0.0002	58.7	35	578	14	473
29	550	-1	549c	52.27	18.02	24.28	30.24	1.3177	-0.0001	53.4	36	580	14	474
31	555	-1	555c	43.32	21.19	20.12	29.23	1.462	0.0	43.5	37	585	15	475
31	560	9	447	45.07	31.01	-2.23	31.09	1.6609	-0.5141	355.8	-1	487c	17	487
31	556	1	405	44.11	21.31	19.85	29.12	1.4559	-0.0145	42.9	37	586	15	475 Rm
31	558	6	435	43.15	26.27	9.43	27.91	1.5816	-0.246	19.7	44	623	16	480
32	560	9	450	42.46	31.55	-3.12	31.7	1.7158	-0.5382	354.3	-1	487c	17	487
32	563	12	460	41.67	35.2	-14.89	38.22	1.8176	-0.8219	337.0	-1	504c	20	504
33	566	12	465	39.0	35.5	-16.13	38.99	1.883	-0.8782	335.5	-1	507c	21	507
34	572	13	470	35.31	35.85	-20.86	41.48	1.9881	-1.0554	329.8	-1	520c	24	520
36	582	14	475	28.74	34.22	-26.39	43.21	2.1633	-1.3826	322.3	-1	533c	26	533 Mm
44	622	16	480	13.34	18.57	-36.86	41.27	2.3643	-3.2256	296.7	0	403	31	556
-1	485c	17	485	9.88	9.86	-39.49	40.7	1.971	-4.4603	284.0	11	456	32	562
-1	490c	18	490	11.73	8.11	-39.35	40.18	1.6642	-3.8176	281.6	11	459	32	563 min
-1	495c	19	495	13.82	6.11	-38.9	39.37	1.415	-3.2791	278.9	12	461	32	564
-1	500c	20	500	16.13	3.9	-38.18	38.38	1.2152	-2.8316	275.8	12	463	33	565
-1	510c	22	510	21.42	-0.89	-36.13	36.14	0.9312	-2.1511	268.5	13	466	33	567
-1	520c	24	520	27.7	-6.0	-33.41	33.95	0.7559	-1.6709	259.8	13	468	34	570 Bm
-1	530c	26	530	35.01	-11.13	-30.12	32.11	0.6549	-1.325	249.7	14	471	34	574
-1	540c	28	540	43.33	-15.93	-26.31	30.76	0.6049	-1.0718	238.7	14	473	35	578
-1	544c	28	545	43.33	-15.93	-26.31	30.76	0.6049	-1.0718	238.7	14	473	35	578
-1	549c	29	550	47.72	-18.02	-24.28	30.24	0.595	-0.9733	233.4	14	474	36	580
-1	555c	31	555	56.67	-21.19	-20.12	29.23	0.5988	-0.8197	223.5	15	475	37	585
9	447	31	560	54.92	-31.01	2.23	31.09	0.4081	-0.4238	175.8	17	487	-1	487c
380	770	99.99	0.0	0.0	0.0	0.0	0.01	0.9728	-0.4645	0.0				

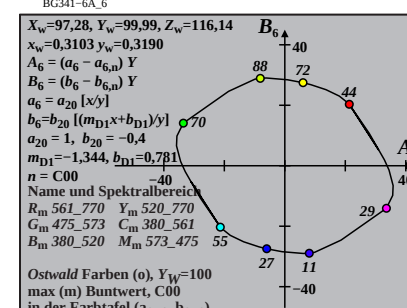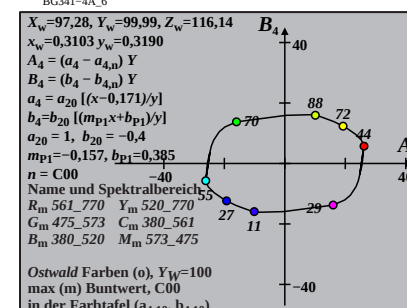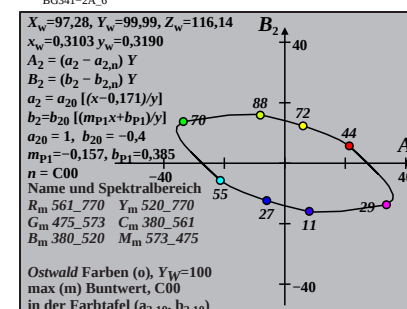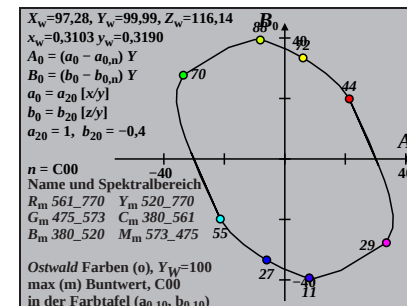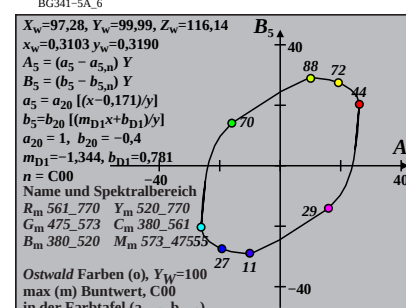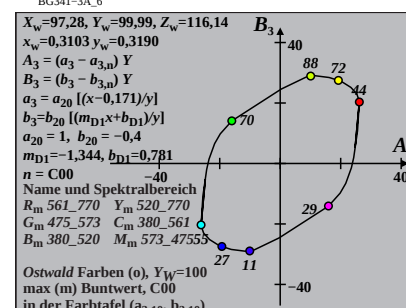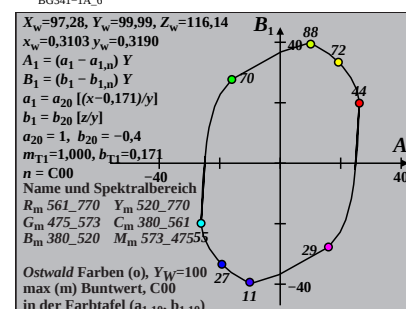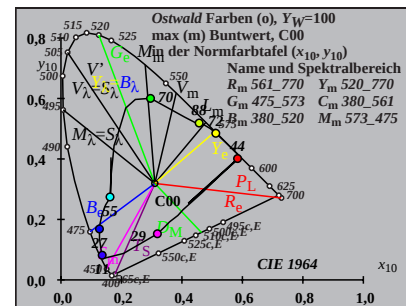

Ostwald-Optimalfarben (o) von maximalem (m) C_{AB,10} für P00, Y_{w,10}=100, Y_m=520_770

iD	λ ₁	iD	λ ₂	Y ₁₀	A ₁₀	B ₁₀	C _{10AB,10}	a ₁₀	b ₁₀	h _{10ab,10}	iD	λ _d	i _c	λ _c	Code
0	405	32	562	54.9	-25.74	-14.37	29.48	0.5548	-0.5867	209.1	15	479	38	591	Cm
7	435	32	563	55.22	-30.5	-4.04	30.77	0.4712	-0.3982	187.5	17	485	-1	485c	
9	450	32	564	55.85	-32.85	1.67	32.89	0.4356	-0.295	177.0	18	491	-1	491c	
12	460	33	567	56.37	-35.12	9.49	36.39	0.4005	-0.1565	164.8	21	506	-1	506c	
13	465	33	569	57.54	-35.5	11.95	37.45	0.4067	-0.1172	161.3	22	514	-1	514c	
13	470	34	572	60.57	-35.53	12.93	37.81	0.437	-0.1114	159.9	23	518	-1	518c	
15	475	35	579	63.97	-34.37	17.08	38.38	0.4865	-0.0579	153.5	26	534	-1	534c	Gm
16	480	38	593	73.33	-29.56	21.12	36.33	0.6206	-0.0369	144.4	29	547	-1	547c	
17	485	-1	485c	93.1	-6.46	28.29	29.02	0.9543	-0.0211	102.8	33	566	11	457	
17	490	-1	489c	93.1	-6.46	28.29	29.02	0.9543	-0.0211	102.8	33	566	11	457	max
19	495	-1	495c	90.06	-3.4	28.25	28.45	0.9859	-0.0113	96.8	33	567	12	461	
19	500	-1	499c	90.06	-3.4	28.25	28.45	0.9859	-0.0113	96.8	33	567	12	461	
22	510	-1	510c	83.34	3.11	26.72	26.9	1.0611	-0.0043	83.3	34	570	13	467	
23	520	-1	519c	80.45	5.69	25.9	26.52	1.0945	-0.003	77.5	34	572	13	469	Ym
26	530	-1	530c	70.09	13.77	22.71	26.56	1.2202	-0.0008	58.7	35	577	14	473	
28	540	-1	540c	62.1	18.79	20.16	27.57	1.3264	-0.0002	47.0	36	580	15	475	
28	545	-1	544c	62.1	18.79	20.16	27.57	1.3264	-0.0002	47.0	36	580	15	475	
29	550	-1	549c	57.92	20.99	18.82	28.19	1.3862	0.0	41.8	36	583	15	476	
31	555	-1	555c	49.38	24.45	16.04	29.25	1.5189	0.0	33.2	37	587	15	478	
32	560	-1	560c	45.08	25.6	14.65	29.49	1.5916	0.0	29.7	38	590	15	479	
32	562	0	405	45.09	25.74	14.37	29.48	1.5946	-0.0063	29.1	38	591	15	479	Rm
32	563	7	435	44.77	30.5	4.04	30.77	1.705	-0.2347	7.5	-1	485c	17	485	
32	564	9	450	44.14	32.85	-1.67	32.89	1.7678	-0.3629	357.0	-1	491c	18	491	
33	567	12	460	43.62	35.12	-9.49	36.39	1.8289	-0.5427	344.8	-1	506c	21	506	
33	569	13	465	42.45	35.5	-11.95	37.45	1.8599	-0.6065	341.3	-1	514c	22	514	
34	572	13	470	39.42	35.53	-12.93	37.81	1.9249	-0.6531	339.9	-1	518c	23	518	
35	579	15	475	36.02	34.37	-17.08	38.38	1.9779	-0.7993	333.5	-1	534c	26	534	Mm
38	593	16	480	26.66	29.56	-21.12	36.33	2.1325	-1.1174	324.4	-1	547c	29	547	
-1	485c	17	485	6.89	6.46	-28.29	29.02	1.9612	-4.43	282.8	11	457	33	566	
-1	489c	17	490	6.89	6.46	-28.29	29.02	1.9612	-4.43	282.8	11	457	33	566	min
-1	495c	19	495	9.93	3.4	-28.25	28.45	1.3663	-3.1682	276.8	12	461	33	567	
-1	499c	19	500	9.93	3.4	-28.25	28.45	1.3663	-3.1682	276.8	12	461	33	567	
-1	510c	22	510	16.65	-3.11	-26.72	26.9	0.8366	-1.9299	263.3	13	467	34	570	
-1	519c	23	520	19.54	-5.69	-25.9	26.52	0.7321	-1.65	257.5	13	469	34	572	Bm
-1	530c	26	530	29.9	-13.77	-22.71	26.56	0.5632	-1.0846	238.7	14	473	35	577	
-1	540c	28	540	37.89	-18.8	-20.16	27.57	0.5276	-0.8572	227.0	15	475	36	580	
-1	544c	28	545	37.89	-18.8	-20.16	27.57	0.5276	-0.8572	227.0	15	475	36	580	
-1	549c	29	550	42.07	-20.99	-18.82	28.19	0.5246	-0.7723	221.8	15	476	36	583	
-1	555c	31	555	50.61	-24.45	-16.04	29.25	0.5406	-0.642	213.2	15	478	37	587	
-1	560c	32	560	54.91	-25.6	-14.65	29.49	0.5575	-0.5917	209.7	15	479	38	590	
380	770	99.99	0.0	0.0	0.0	0.0	0.01	1.0237	-0.325	0.0					

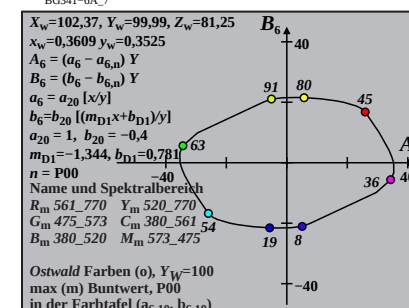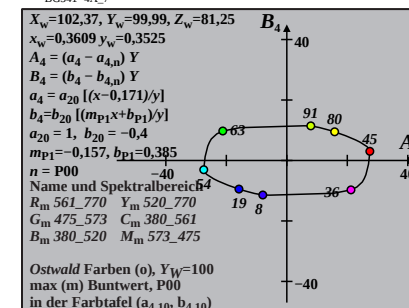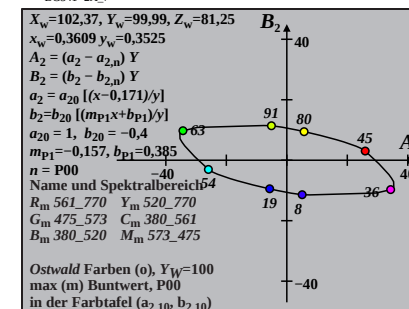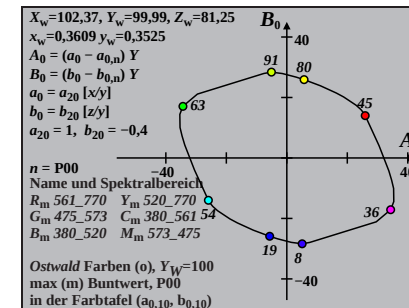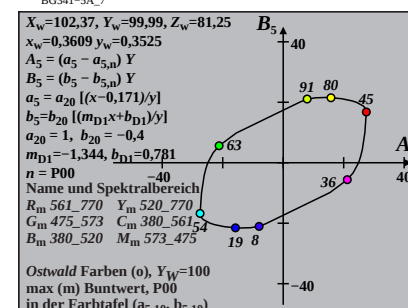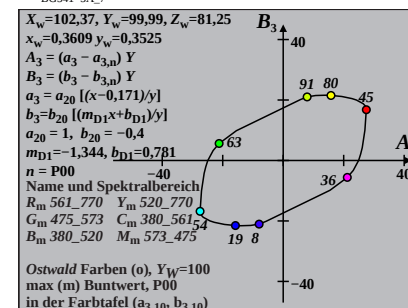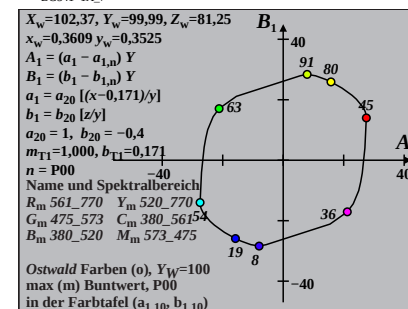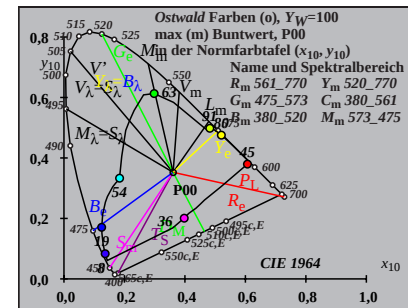

Ostwald-Optimalfarben (o) von maximalem (m) $C_{AB,10}$ für Q00, $Y_w=100$, $Y_m=520_770$

i_D	λ_1	i_D	λ_2	Y_{10}	A_{10}	B_{10}	$C_{10AB,10}$	a_{10}	b_{10}	$h_{10ab,10}$	λ_d	i_c	λ_c	Code
1	405	31	556	56.3	-21.53	-19.55	29.09	0.594	-0.821	222.2	15	475	37	587 Cm
7	435	31	558	56.83	-28.93	-3.7	29.16	0.4674	-0.5388	187.2	16	482	-1	482c
10	450	32	560	57.26	-33.83	8.65	34.92	0.3856	-0.3225	165.6	18	493	-1	493c
12	460	32	563	58.56	-36.02	16.22	39.51	0.3613	-0.1966	155.7	21	506	-1	506c
13	465	33	566	60.33	-36.6	19.9	41.66	0.3697	-0.1437	151.4	23	515	-1	515c
13	470	34	572	64.84	-36.63	22.04	42.75	0.4115	-0.1337	148.9	24	520	-1	520c
15	475	36	583	70.42	-34.31	28.75	44.76	0.4892	-0.0654	140.0	27	536	-1	536c Gm
15	480	45	629	89.85	-18.5	37.95	42.22	0.7706	-0.0512	115.9	31	556	2	413
17	485	-1	485c	90.54	-10.94	40.53	41.98	0.8556	-0.026	105.1	32	561	11	455
17	490	-1	489c	90.54	-10.94	40.53	41.98	0.8556	-0.026	105.1	32	561	11	455 max
18	495	-1	494c	88.8	-9.29	40.38	41.44	0.8718	-0.0189	102.9	32	562	11	458
19	500	-1	499c	86.78	-7.33	39.92	40.59	0.8919	-0.0136	100.4	32	563	12	460
21	510	-1	509c	81.81	-2.65	38.17	38.26	0.944	-0.007	93.9	33	566	12	464
24	520	-1	520c	71.94	5.64	33.9	34.36	1.0549	-0.0024	80.5	34	570	13	468 Ym
26	530	-1	530c	64.11	11.15	30.3	32.29	1.1505	-0.001	69.7	34	574	14	471
27	540	-1	539c	59.95	13.72	28.36	31.51	1.2053	-0.0005	64.1	35	576	14	472
29	545	-1	545c	51.41	18.12	24.34	30.35	1.3289	-0.0001	53.3	36	581	14	474
30	550	-1	550c	47.12	19.83	22.32	29.86	1.3974	0.0	48.3	36	583	15	475
30	555	-1	554c	47.12	19.83	22.32	29.86	1.3974	0.0	48.3	36	583	15	475
31	560	9	447	44.71	31.96	-3.98	32.21	1.6912	-0.5628	352.8	-1	488c	17	488
31	556	1	405	43.69	21.53	19.55	29.09	1.4694	-0.026	42.2	37	587	15	475 Rm
31	558	7	435	43.16	28.93	3.7	29.16	1.6467	-0.3879	7.2	-1	482c	16	482
32	560	10	450	42.73	33.83	-8.65	34.92	1.7683	-0.6762	345.6	-1	493c	18	493
32	563	12	460	41.43	36.02	-16.22	39.51	1.8458	-0.8653	335.7	-1	506c	21	506
33	566	13	465	39.66	36.6	-19.9	41.66	1.8992	-0.9755	331.4	-1	515c	23	515
34	572	13	470	35.15	36.63	-22.04	42.75	2.0184	-1.1008	328.9	-1	520c	24	520
36	583	15	475	29.57	34.31	-28.75	44.76	2.1367	-1.446	320.0	-1	536c	27	536 Mm
45	629	15	480	10.14	18.49	-37.95	42.22	2.8002	-4.2157	295.9	2	413	31	556
-1	485c	17	485	9.45	10.94	-40.52	41.98	2.1345	-4.7616	285.1	11	455	32	561
-1	489c	17	490	9.45	10.94	-40.52	41.98	2.1345	-4.7616	285.1	11	455	32	561 min
-1	494c	18	495	11.19	9.29	-40.38	41.44	1.8061	-4.0798	282.9	11	458	32	562
-1	499c	19	500	13.21	7.33	-39.92	40.58	1.5316	-3.4935	280.4	12	460	32	563
-1	509c	21	510	18.18	2.65	-38.17	38.26	1.1226	-2.573	273.9	12	464	33	566
-1	520c	24	520	28.05	-5.64	-33.9	34.36	0.7753	-1.682	260.5	13	468	34	570 Bm
-1	530c	26	530	35.88	-11.15	-30.3	32.29	0.6655	-1.3184	249.7	14	471	34	574
-1	539c	27	540	40.04	-13.72	-28.36	31.51	0.6338	-1.182	244.1	14	472	35	576
-1	545c	29	545	48.58	-18.12	-24.34	30.35	0.6035	-0.9748	233.3	14	474	36	581
-1	550c	30	550	52.87	-19.83	-22.32	29.86	0.6012	-0.8959	228.3	15	475	36	583
-1	554c	30	555	52.87	-19.83	-22.32	29.86	0.6012	-0.8959	228.3	15	475	36	583
9	447	31	560	55.28	-31.96	3.98	32.21	0.3982	-0.4015	172.8	17	488	-1	488c
380	770	100.0	0.0	0.0	0.0	0.0	0.01	0.9764	-0.4736	0.0				

0-001730-L0

BG340-7N_16

TUB-Prüfvorlage BG34; CIE (x_{10}, y_{10}) und Buntwerte ($A_{i,10}, B_{i,10}$) Eingabe: w/rgb/cmyk -> rgb
Ostwald-Optimalfarben für Lichtart Q00; Diagramm für Lichtart Q00, $Y_w=100$

0-001730-F0

