
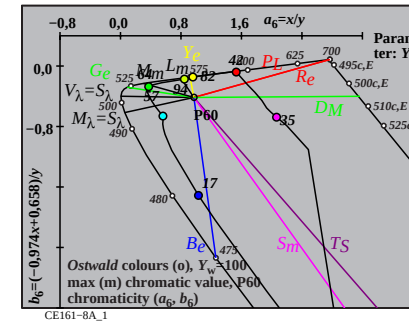
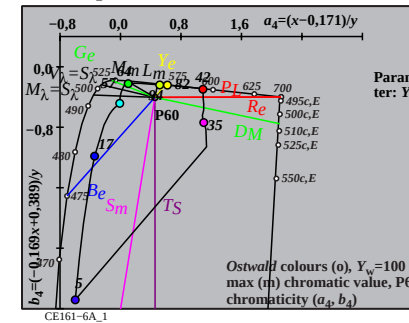
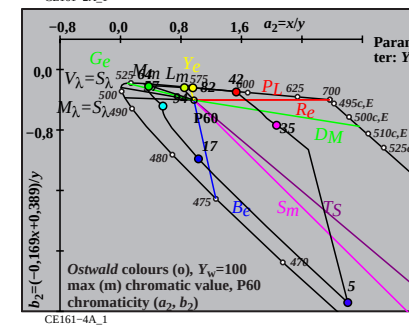
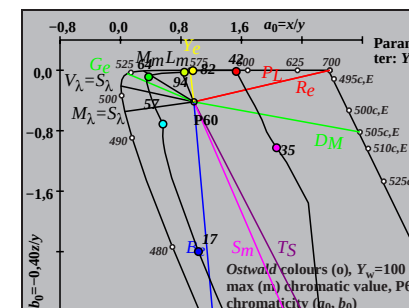
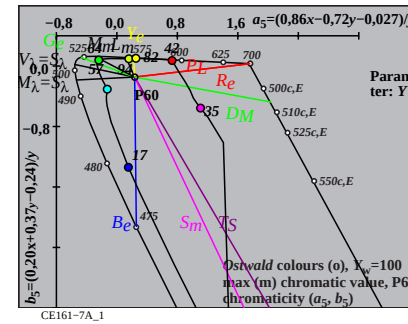
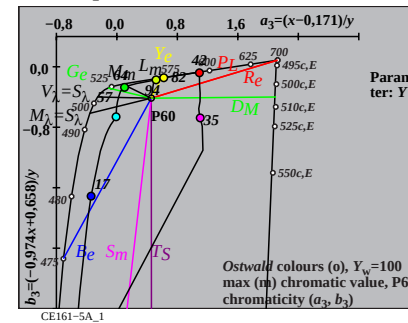
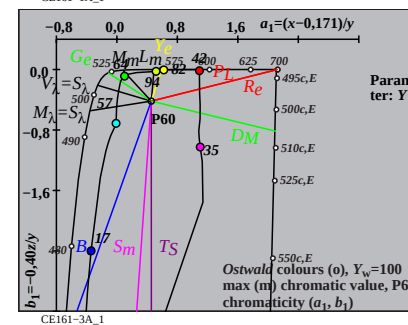


Ostwald optimal colours (o) of maximum (m) C _{AB} for P60, Y _w =100, Y _m =520_770													
i ₁ , λ ₁	i ₂ , λ ₂	X	Y	Z	x	y	z	h _{xy}	i _d , λ _d	i _c , λ _c	Code		
0 405	32 563	32.54	57.75	103.62	0.1678	0.2978	0.5343	192.3	16 483	38 590	Cm		
6 435	32 563	28.58	58.29	82.04	0.1692	0.345	0.4856	174.9	17 487	44 621			
10 450	33 565	22.8	58.9	47.87	0.1759	0.4545	0.3694	139.8	19 497	-1 497c			
11 460	33 566	22.48	60.12	39.44	0.1842	0.4925	0.3231	130.4	20 502	-1 502c			
13 465	33 568	21.08	60.68	24.55	0.1982	0.5707	0.2309	117.2	22 513	-1 513c			
14 470	34 570	21.89	62.18	18.77	0.2129	0.6045	0.1825	111.7	24 521	-1 521c			
15 475	34 574	24.2	64.7	14.16	0.2348	0.6277	0.1374	106.3	25 529	-1 529c	Gm		
15 480	36 580	29.74	69.95	14.17	0.2611	0.6143	0.1245	102.0	27 535	-1 535c			
17 485	39 595	42.39	78.0	7.95	0.3303	0.6077	0.0619	88.2	29 549	-1 549c			
18 490	-1 490c	79.69	94.22	5.93	0.4431	0.5238	0.0329	57.7	33 566	11 459	max		
19 495	-1 495c	79.65	92.78	4.38	0.4504	0.5247	0.0247	56.3	33 567	12 461			
20 500	-1 500c	79.63	90.97	3.18	0.4582	0.5234	0.0183	54.5	33 568	12 464			
22 510	-1 510c	79.5	85.98	1.6	0.4758	0.5145	0.0095	49.9	34 570	13 469			
24 520	-1 520c	78.85	79.07	0.8	0.4967	0.4981	0.005	43.5	34 572	14 473	Ym		
25 530	-1 529c	78.18	75.03	0.56	0.5084	0.4879	0.0036	39.9	34 574	15 475			
27 540	-1 539c	75.99	66.2	0.26	0.5334	0.4647	0.0018	32.1	35 578	15 478			
29 545	-1 545c	72.53	56.82	0.13	0.5601	0.4388	0.001	24.2	36 582	16 480			
29 550	-1 549c	72.53	56.82	0.13	0.5601	0.4388	0.001	24.2	36 582	16 480			
30 555	-1 554c	70.27	52.07	0.09	0.5739	0.4252	0.0007	20.3	36 584	16 481			
32 560	-1 560c	64.66	42.7	0.05	0.6019	0.3975	0.0005	13.2	37 589	16 483			
32 563	0 405	64.52	42.24	0.94	0.599	0.3921	0.0087	12.3	38 590	16 483	Rm		
32 563	6 435	68.48	41.7	22.52	0.516	0.3142	0.1697	354.9	44 621	17 487			
33 565	10 450	74.26	41.09	56.7	0.4316	0.2388	0.3295	319.8	-1 497c	19 497			
33 566	11 460	74.58	39.87	65.12	0.4153	0.222	0.3626	310.5	-1 502c	20 502			
33 568	13 465	75.98	39.31	80.02	0.389	0.2012	0.4096	297.3	-1 513c	22 513			
34 570	14 470	75.17	37.81	85.8	0.3781	0.1902	0.4316	291.7	-1 521c	24 521			
34 574	15 475	72.86	35.29	90.4	0.3669	0.1777	0.4552	286.3	-1 529c	25 529	Mm		
36 580	15 480	67.32	30.04	90.39	0.3585	0.1599	0.4814	282.1	-1 535c	27 535			
39 595	17 485	54.67	21.99	96.61	0.3154	0.1269	0.5575	268.2	-1 549c	29 549			
-1 490c	18 490	17.37	5.77	98.64	0.1426	0.0474	0.8099	237.7	11 459	33 566	min		
-1 495c	19 495	17.41	7.21	100.19	0.1395	0.0578	0.8026	236.3	12 461	33 567			
-1 500c	20 500	17.43	9.02	101.39	0.1363	0.0705	0.793	234.6	12 464	33 568			
-1 510c	22 510	17.56	14.01	102.97	0.1305	0.1041	0.7653	229.9	13 469	34 570			
-1 520c	24 520	18.21	20.92	103.76	0.1274	0.1464	0.7261	223.6	14 473	34 572	Bm		
-1 529c	25 530	18.88	24.96	104.01	0.1277	0.1688	0.7034	219.9	15 475	34 574			
-1 539c	27 540	21.07	33.79	104.3	0.1324	0.2122	0.6552	212.2	15 478	35 578			
-1 545c	29 545	24.53	43.17	104.44	0.1425	0.2507	0.6066	204.2	16 480	36 582			
-1 549c	29 550	24.53	43.17	104.44	0.1425	0.2507	0.6066	204.2	16 480	36 582			
-1 554c	30 555	26.78	47.92	104.47	0.1495	0.2674	0.583	200.4	16 481	36 584			
-1 560c	32 560	32.4	57.29	104.51	0.1668	0.2949	0.5381	193.2	16 483	37 589			
380	770	97.06	99.99	104.57	0.3218	0.3315	0.3466	0.0					

TUB-test chart CE16; CIE (x, y) and chromaticities (a_i, b_i)
Ostwald optimal colours for illuminant P60; diagram for illuminant P60, Y_w=100

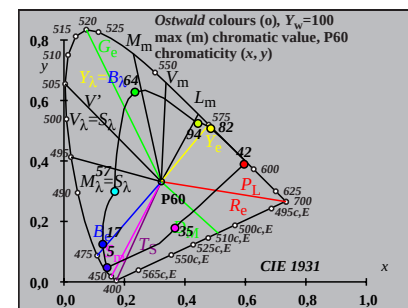

TUB registration: 20170801-CE16/CE16L0NA.TXT /PS
application for measurement of offset print output

TUB material: code=rha4ta

input: w/rgb/cmyk -> rgb

input: w/rgb/cmyk $\rightarrow$ rgb









Ostwald optimal colours (o) of maximum (m) C_{AB} for P50, $Y_w=100$, $Y_m=520\text{--}770$

i_1, λ_1	i_2, λ_2	X	Y	Z	x	y	z	h_{xy}	i_d, λ_d	i_c, λ_c	Code
0	405	33	565	30.59	57.35	85.81	0.176	0.33	0.4938	187.1	17 485 38 592 Cm
7	435	33	565	26.3	57.7	62.61	0.1793	0.3935	0.427	165.6	18 490 -1 490c
9	450	33	566	24.34	58.44	48.57	0.1853	0.4449	0.3697	149.5	19 495 -1 495c
11	460	33	568	22.73	59.26	34.4	0.1953	0.5091	0.2955	133.4	20 502 -1 502c
12	465	33	569	22.47	60.07	27.73	0.2037	0.5447	0.2514	126.0	21 507 -1 507c
14	470	34	571	22.23	60.91	16.79	0.2224	0.6094	0.168	115.3	24 520 -1 520c
15	475	34	574	24.11	62.96	12.79	0.2414	0.6304	0.128	110.2	25 528 -1 528c Gm
16	480	35	579	28.21	66.58	9.67	0.27	0.6373	0.0926	104.6	27 536 -1 536c
16	485	37	589	37.74	74.17	9.68	0.3103	0.6099	0.0796	97.5	28 544 -1 544c
17	490	47	636	75.97	92.98	7.31	0.431	0.5274	0.0415	63.8	33 565 -1 565c max
19	495	-1 495c	83.93	93.68	4.09	0.4618	0.5155	0.0225	54.4	33 568 12 462	
20	500	-1 500c	83.91	92.03	2.99	0.4689	0.5143	0.0167	52.6	33 569 13 465	
21	510	-1 509c	83.88	89.95	2.15	0.4766	0.5111	0.0122	50.4	34 570 13 468	
24	520	-1 520c	83.18	80.88	0.78	0.5046	0.4906	0.0047	41.0	34 574 14 474 Ym	
26	530	-1 530c	81.62	72.86	0.38	0.527	0.4704	0.0024	33.1	35 577 15 478	
28	540	-1 540c	78.88	63.92	0.18	0.5516	0.447	0.0013	24.8	36 581 16 481	
28	545	-1 544c	78.88	63.92	0.18	0.5516	0.447	0.0013	24.8	36 581 16 481	
30	550	-1 550c	74.77	54.53	0.09	0.5778	0.4214	0.0007	16.7	37 585 16 483	
30	555	-1 554c	74.77	54.53	0.09	0.5778	0.4214	0.0007	16.7	37 585 16 483	
32	560	-1 560c	69.12	45.11	0.06	0.6047	0.3947	0.0005	9.4	38 590 17 485	
33	565	0	405	67.52	42.64	0.68	0.6091	0.3846	0.0062	7.1	38 592 17 485 Rm
33	565	7	435	71.82	42.29	23.88	0.5204	0.3064	0.173	345.6	-1 490c 18 490
33	566	9	450	73.78	41.55	37.93	0.4813	0.2711	0.2474	329.6	-1 495c 19 495
33	568	11	460	75.38	40.73	52.09	0.4481	0.2421	0.3097	313.4	-1 502c 20 502
33	569	12	465	75.64	39.92	58.77	0.4339	0.229	0.337	306.1	-1 507c 21 507
34	571	14	470	75.88	39.08	69.7	0.4109	0.2116	0.3774	295.3	-1 520c 24 520
34	574	15	475	74.0	37.03	73.7	0.4005	0.2004	0.3989	290.3	-1 528c 25 528 Mm
35	579	16	480	69.9	33.41	76.82	0.388	0.1854	0.4264	284.6	-1 536c 27 536
37	589	16	485	60.37	25.82	76.81	0.3703	0.1583	0.4712	277.6	-1 544c 28 544
47	636	17	490	22.14	7.01	79.18	0.2043	0.0647	0.7308	243.9	-1 565c 33 565 min
-1 495c	19	495	14.19	6.31	82.4	0.1378	0.0613	0.8007	234.5	12 462 33 568	
-1 500c	20	500	14.2	7.96	83.5	0.1344	0.0753	0.7901	232.7	13 465 33 569	
-1 509c	21	510	14.23	10.04	84.34	0.131	0.0924	0.7765	230.4	13 468 34 570	
-1 520c	24	520	14.93	19.11	85.71	0.1247	0.1596	0.7156	221.0	14 474 34 574 Bm	
-1 530c	26	530	16.49	27.13	86.11	0.1271	0.2091	0.6637	213.1	15 478 35 577	
-1 540c	28	540	19.23	36.07	86.31	0.1358	0.2547	0.6094	204.8	16 481 36 581	
-1 544c	28	545	19.23	36.07	86.31	0.1358	0.2547	0.6094	204.8	16 481 36 581	
-1 550c	30	550	23.34	45.46	86.4	0.1504	0.2929	0.5566	196.7	16 483 37 585	
-1 554c	30	555	23.34	45.46	86.4	0.1504	0.2929	0.5566	196.7	16 483 37 585	
-1 560c	32	560	28.99	54.88	86.44	0.1702	0.3222	0.5075	189.4	17 485 38 590	
380	770	98.12	100.0	86.5	0.3447	0.3513	0.3039	0.0			

TUB-test chart CE16; CIE (x, y) and chromaticities (a_i, b_i)

Ostwald optimal colours for illuminant P50; diagram for illuminant P50, $Y_w=100$

input: w/rgb/cmyk -> rgb

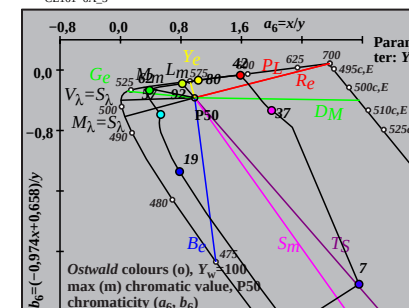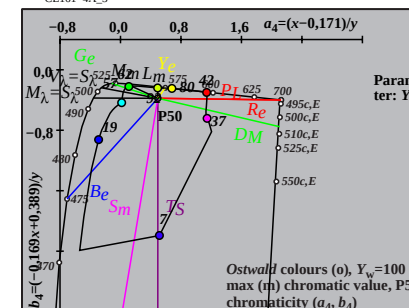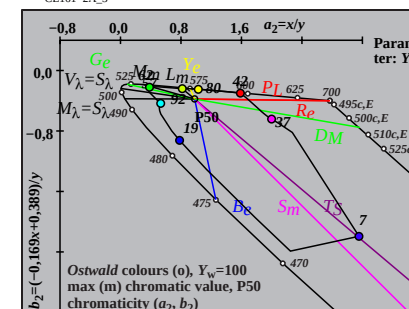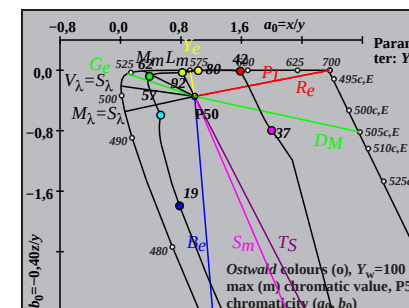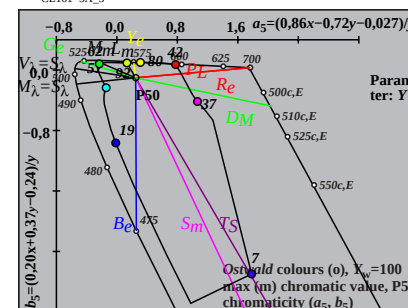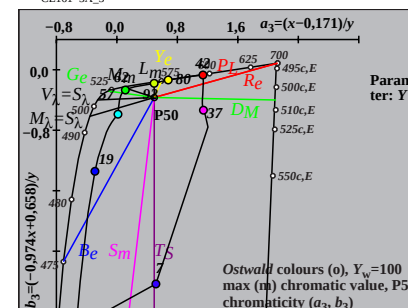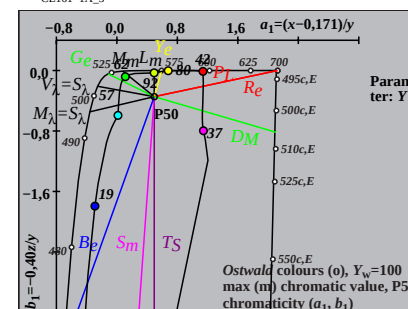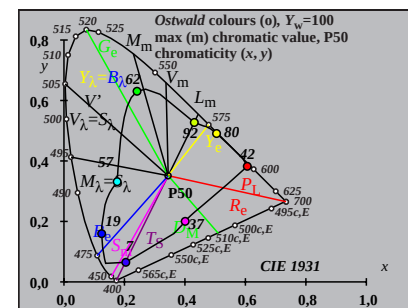

TUB registration: 20170801-CE16/CE16L0NA.TXT /PS
application for measurement of offset print output

TUB material: code=rha4ta









Ostwald optimal colours (o) of maximum (m) C_{AB} for P45, $Y_w=100$, $Y_m=520-770$

i_1, λ_1	i_2, λ_2	X	Y	Z	x	y	z	h_{xy}	i_d, λ_d	i_c, λ_c	Code
1 405	33 566	29.57	57.01	75.07	0.1829	0.3527	0.4643	183.4	17 487	38 593	Cm
7 435	33 567	26.05	57.33	55.94	0.1869	0.4114	0.4015	164.4	18 491	-1 491c	
10 450	33 568	23.2	57.83	37.52	0.1957	0.4877	0.3165	142.8	19 498	-1 498c	
12 460	33 569	21.94	58.45	25.38	0.2074	0.5525	0.2399	128.9	21 507	-1 507c	
13 465	34 570	21.89	59.09	20.05	0.2166	0.5848	0.1984	122.9	22 512	-1 512c	
13 470	34 571	23.19	60.51	20.05	0.2235	0.5831	0.1932	121.8	22 514	-1 514c	
15 475	34 574	24.18	61.91	11.91	0.2467	0.6316	0.1216	112.9	25 528	-1 528c	Gm
15 480	35 578	28.04	65.64	11.92	0.2655	0.6215	0.1129	110.1	26 532	-1 532c	
17 485	37 587	35.45	70.76	6.88	0.3134	0.6256	0.0608	100.1	28 544	-1 544c	
17 490	42 611	60.47	85.47	6.89	0.3956	0.5592	0.0451	79.7	31 559	-1 559c	max
19 495	-1 495c	86.85	94.24	3.9	0.4694	0.5094	0.021	53.2	33 569	12 463	
20 500	-1 500c	86.84	92.68	2.87	0.4761	0.5081	0.0157	51.3	34 570	13 466	
22 510	-1 510c	86.73	88.3	1.48	0.4913	0.5002	0.0084	46.2	34 572	14 471	Ym
24 520	-1 520c	86.14	82.03	0.76	0.5098	0.4855	0.0045	39.2	34 574	15 475	
26 530	-1 530c	84.63	74.25	0.37	0.5313	0.4662	0.0023	31.0	35 578	15 479	
27 540	-1 539c	83.44	69.96	0.26	0.5429	0.4552	0.0017	26.7	35 579	16 480	
29 545	-1 545c	80.08	60.86	0.13	0.5676	0.4314	0.0009	18.1	36 583	16 483	
29 550	-1 549c	80.08	60.86	0.13	0.5676	0.4314	0.0009	18.1	36 583	16 483	
30 555	-1 554c	77.86	56.17	0.1	0.5804	0.4187	0.0007	14.1	37 585	16 484	
31 560	-1 559c	75.23	51.44	0.07	0.5935	0.4058	0.0006	10.3	37 588	17 485	
33 566	1 405	69.63	42.98	0.99	0.6129	0.3783	0.0087	3.4	38 593	17 487	Rm
33 567	7 435	73.14	42.66	20.12	0.5381	0.3138	0.148	344.4	-1 491c	18 491	
33 568	10 450	76.0	42.16	38.54	0.4849	0.269	0.2459	322.9	-1 498c	19 498	
33 569	12 460	77.25	41.54	50.68	0.4558	0.245	0.299	308.9	-1 507c	21 507	
34 570	13 465	77.31	40.9	56.02	0.4437	0.2347	0.3215	302.9	-1 512c	22 512	
34 571	13 470	76.01	39.48	56.01	0.4431	0.2302	0.3266	301.9	-1 514c	22 514	
34 574	15 475	75.02	38.08	64.15	0.4232	0.2148	0.3619	292.9	-1 528c	25 528	Mm
35 578	15 480	71.15	34.35	64.14	0.4194	0.2024	0.378	290.1	-1 532c	26 532	
37 587	17 485	63.75	29.23	69.19	0.3931	0.1802	0.4266	280.1	-1 544c	28 544	
42 611	17 490	38.73	14.52	69.17	0.3163	0.1186	0.5649	259.8	-1 559c	31 559	min
-1 495c	19 495	12.34	5.75	72.16	0.1367	0.0637	0.7994	233.2	12 463	33 569	
-1 500c	20 500	12.36	7.31	73.19	0.1331	0.0787	0.7881	231.3	13 466	34 570	
-1 510c	22 510	12.47	11.69	74.58	0.1262	0.1184	0.7552	226.2	14 471	34 572	
-1 520c	24 520	13.06	17.96	75.3	0.1228	0.1689	0.7082	219.2	15 475	34 574	Bm
-1 530c	26 530	14.57	25.74	75.69	0.1256	0.2218	0.6524	211.0	15 479	35 578	
-1 539c	27 540	15.76	30.03	75.8	0.1296	0.2469	0.6234	206.7	16 480	35 579	
-1 545c	29 545	19.12	39.13	75.93	0.1424	0.2916	0.5659	198.2	16 483	36 583	
-1 549c	29 550	19.12	39.13	75.93	0.1424	0.2916	0.5659	198.2	16 483	36 583	
-1 554c	30 555	21.34	43.82	75.97	0.1512	0.3105	0.5382	194.1	16 484	37 585	
-1 559c	31 560	23.96	48.55	75.99	0.1613	0.3269	0.5117	190.3	17 485	37 588	
380	770	99.2	100.0	76.07	0.3603	0.3632	0.2763	0.0			

TUB-test chart CE16; CIE (x, y) and chromaticities (a_i, b_i)

Ostwald optimal colours for illuminant P45; diagram for illuminant P45, $Y_w=100$

input: w/rgb/cmyk -> rgb

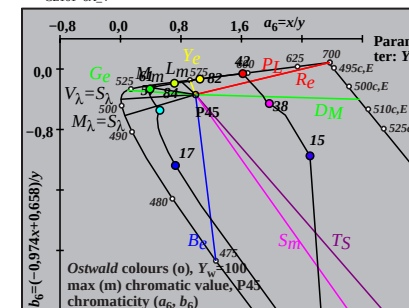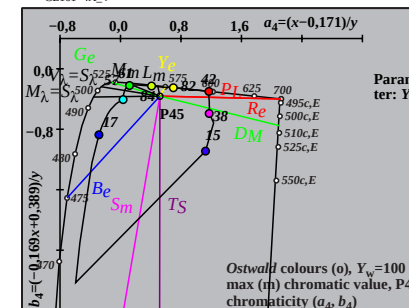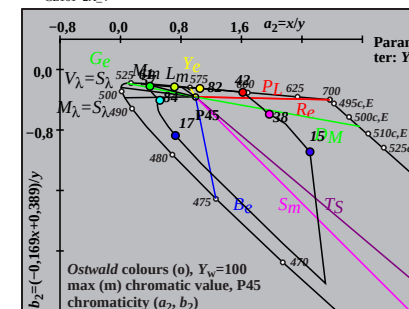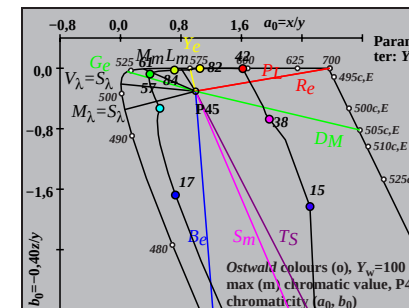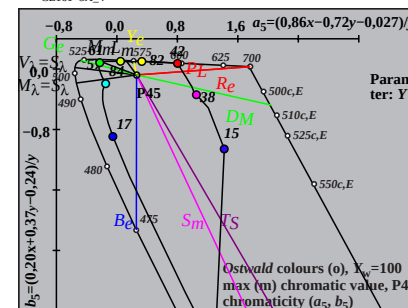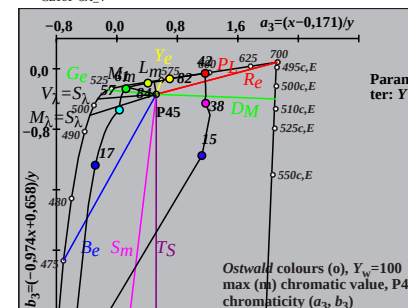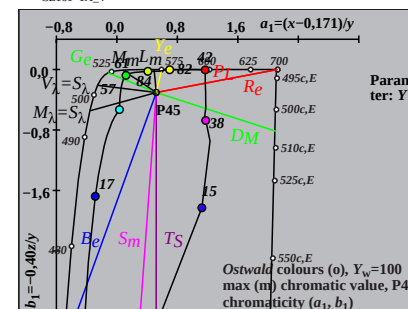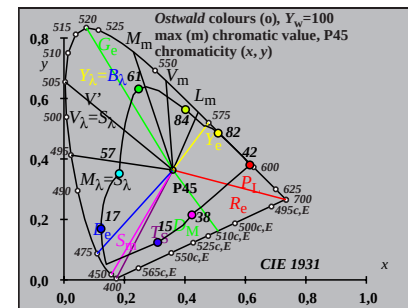









TUB registration: 20170801-CE16/CE16L0NA.TXT /PS
application for measurement of offset print output

TUB material: code=rha4ta

Ostwald optimal colours (o) of maximum (m) C_{AB} for P40, $Y_w=100$, $Y_m=520\text{--}770$

i_1, λ_1	i_2, λ_2	X	Y	Z	x	y	z	h_{xy}	i_d, λ_d	i_c, λ_c	Code
0 405	33 568	28.76	56.58	64.26	0.1922	0.3782	0.4295	179.4	17 488	38 594	Cm
7 435	33 568	25.87	56.85	48.49	0.1971	0.4333	0.3695	162.7	18 493	54 674	
10 450	33 569	23.49	57.27	33.07	0.2063	0.5031	0.2905	143.8	19 499	-1 499c	
12 460	34 570	22.45	57.79	22.67	0.2181	0.5615	0.2202	131.1	21 507	-1 507c	
13 465	34 571	22.44	58.31	18.03	0.2271	0.5902	0.1825	125.5	22 512	-1 512c	
14 470	34 572	22.98	59.17	14.1	0.2387	0.6147	0.1464	120.6	23 519	-1 519c	
14 475	34 574	24.78	61.12	14.1	0.2477	0.6111	0.141	119.3	24 522	-1 522c	Gm
15 480	35 578	27.65	63.82	10.88	0.2701	0.6234	0.1063	113.9	26 531	-1 531c	
17 485	37 585	33.55	68.02	6.37	0.3108	0.6301	0.059	105.2	28 543	-1 543c	
17 490	40 600	50.32	79.03	6.38	0.3707	0.5822	0.047	92.5	30 554	-1 554c	max
19 495	-1 495c	90.57	94.87	3.66	0.4789	0.5016	0.0193	51.6	34 571	12 464	
20 500	-1 500c	90.56	93.44	2.71	0.485	0.5004	0.0145	49.6	34 571	13 467	
21 510	-1 509c	90.54	91.62	1.97	0.4916	0.4975	0.0107	47.2	34 572	13 469	
24 520	-1 520c	89.9	83.41	0.74	0.5164	0.4792	0.0042	36.9	35 575	15 476	Ym
26 530	-1 530c	88.44	75.94	0.37	0.5368	0.4609	0.0022	28.2	35 578	16 480	
27 540	-1 539c	87.29	71.77	0.26	0.5478	0.4504	0.0016	23.7	36 580	16 481	
29 545	-1 545c	84.0	62.86	0.13	0.5714	0.4276	0.0009	14.9	36 584	16 484	
29 550	-1 549c	84.0	62.86	0.13	0.5714	0.4276	0.0009	14.9	36 584	16 484	
31 555	-1 555c	79.18	53.5	0.07	0.5963	0.403	0.0006	6.9	37 588	17 486	
32 560	-1 560c	76.14	48.79	0.06	0.6091	0.3903	0.0005	3.4	38 591	17 487	
33 568	0 405	72.16	43.41	0.42	0.622	0.3742	0.0037	359.4	38 594	17 488	Rm
33 568	7 435	75.05	43.14	16.19	0.5584	0.3209	0.1205	342.7	54 674	18 493	
33 569	10 450	77.44	42.72	31.61	0.5102	0.2814	0.2082	323.9	-1 499c	19 499	
34 570	12 460	78.47	42.2	42.01	0.4823	0.2593	0.2582	311.1	-1 507c	21 507	
34 571	13 465	78.48	41.68	46.65	0.4704	0.2498	0.2796	305.5	-1 512c	22 512	
34 572	14 470	77.94	40.82	50.58	0.4602	0.241	0.2987	300.6	-1 519c	23 519	
34 574	14 475	76.15	38.87	50.58	0.4598	0.2347	0.3054	299.4	-1 522c	24 522	Mm
35 578	15 480	73.27	36.17	53.8	0.4488	0.2215	0.3295	294.0	-1 531c	26 531	
37 585	17 485	67.37	31.97	58.31	0.4273	0.2028	0.3698	285.2	-1 543c	28 543	
40 600	17 490	50.61	20.96	58.3	0.3896	0.1614	0.4488	272.6	-1 554c	30 554	min
-1 495c	19 495	10.35	5.12	61.02	0.1353	0.0669	0.7977	231.6	12 464	34 571	
-1 500c	20 500	10.36	6.55	61.97	0.1313	0.083	0.7855	229.7	13 467	34 571	
-1 509c	21 510	10.38	8.37	62.71	0.1275	0.1028	0.7696	227.3	13 469	34 572	
-1 520c	24 520	11.02	16.58	63.94	0.1204	0.1811	0.6984	216.9	15 476	35 575	Bm
-1 530c	26 530	12.48	24.05	64.31	0.1237	0.2385	0.6377	208.3	16 480	35 578	
-1 539c	27 540	13.63	28.22	64.42	0.1282	0.2655	0.6061	203.7	16 481	36 580	
-1 545c	29 545	16.92	37.13	64.55	0.1427	0.313	0.5442	194.9	16 484	36 584	
-1 549c	29 550	16.92	37.13	64.55	0.1427	0.313	0.5442	194.9	16 484	36 584	
-1 555c	31 555	21.74	46.49	64.6	0.1636	0.3499	0.4863	186.9	17 486	37 588	
-1 560c	32 560	24.79	51.2	64.62	0.1762	0.3641	0.4595	183.4	17 487	38 591	
380	770	100.93	100.0	64.68	0.3799	0.3764	0.2435	0.0			

TUB-test chart CE16; CIE (x, y) and chromaticities (a_i, b_i)
Ostwald optimal colours for illuminant P40; diagram for illuminant P40, $Y_w=100$

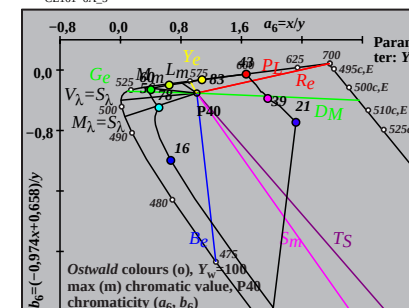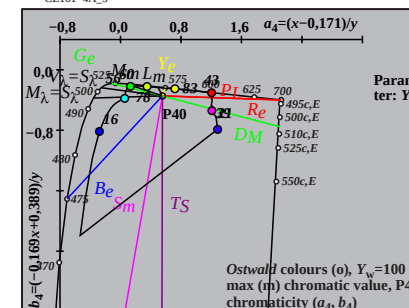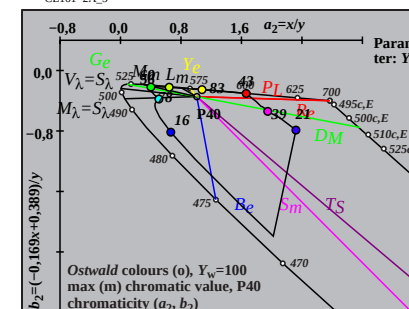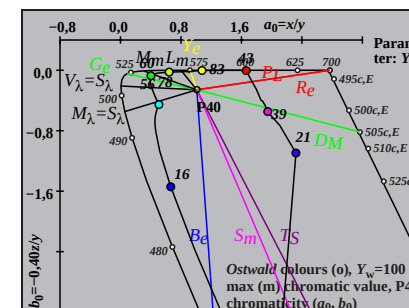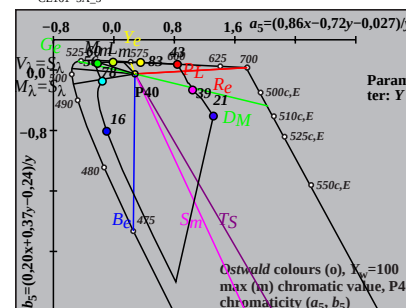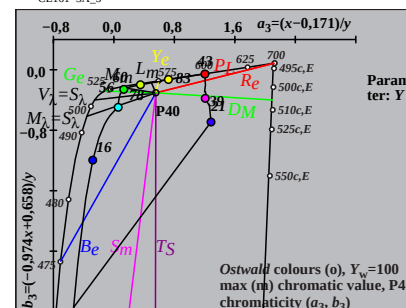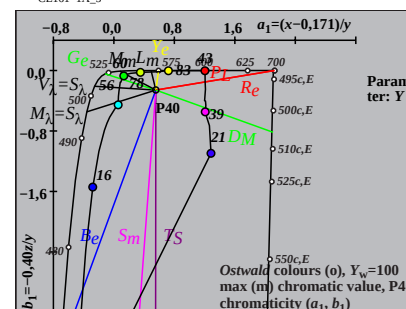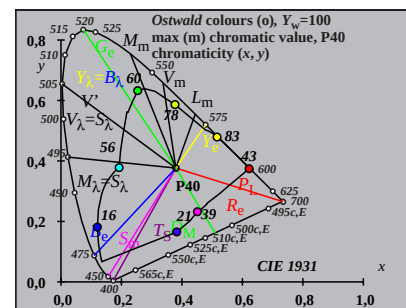

TUB registration: 20170801-CE16/CE16L0NA.TXT /PS
application for measurement of offset print output

TUB material: code=rha4ta









input: w/rgb/cmyk -> rgb

Ostwald optimal colours (o) of maximum (m) C_{AB} for P35, $Y_w=100$, $Y_m=520\text{--}770$

i_1, λ_1	i_2, λ_2	X	Y	Z	x	y	z	h_{xy}	i_d, λ_d	i_c, λ_c	Code
1 405	34 570	27.94	55.96	51.88	0.2057	0.4121	0.382	173.7	18 490	39 596	Cm
7 435	34 570	25.85	56.18	40.23	0.2114	0.4595	0.329	160.3	18 494	48 640	
9 450	34 571	24.83	56.61	32.26	0.2183	0.4979	0.2837	150.0	19 498	-1 498c	
12 460	34 572	23.22	56.91	19.53	0.2329	0.571	0.1959	133.5	21 507	-1 507c	
12 465	34 572	23.81	57.56	19.53	0.236	0.5703	0.1935	133.1	21 508	-1 508c	
14 470	34 573	23.63	58.03	12.38	0.2513	0.617	0.1316	124.0	23 519	-1 519c	
14 475	35 575	25.15	59.59	12.38	0.2589	0.6135	0.1274	123.1	24 520	-1 520c	Gm
15 480	35 578	27.46	61.75	9.65	0.2777	0.6246	0.0976	118.4	25 529	-1 529c	
17 485	36 583	32.02	64.96	5.75	0.3117	0.6322	0.0559	111.0	28 542	-1 542c	
18 490	38 593	43.3	72.36	4.42	0.3605	0.6026	0.0368	101.7	30 552	-1 552c	max
19 495	52 661	92.84	94.66	3.37	0.4864	0.4959	0.0176	52.2	34 572	12 460	
20 500	-1 500c	95.42	94.32	2.52	0.4963	0.4905	0.0131	47.5	34 573	13 468	
22 510	-1 510c	95.33	90.59	1.35	0.509	0.4837	0.0072	41.7	34 574	14 473	Ym
23 520	-1 519c	95.15	88.05	0.98	0.5165	0.478	0.0053	38.0	35 576	15 475	
26 530	-1 530c	93.43	78.01	0.36	0.5437	0.454	0.0021	24.5	35 579	16 481	
27 540	-1 539c	92.33	74.02	0.26	0.5541	0.4442	0.0015	19.8	36 581	16 483	
29 545	-1 545c	89.12	65.37	0.13	0.5763	0.4227	0.0008	10.6	37 585	17 486	
29 550	-1 549c	89.12	65.37	0.13	0.5763	0.4227	0.0008	10.6	37 585	17 486	
31 555	-1 555c	84.37	56.13	0.08	0.6001	0.3992	0.0005	2.5	37 589	17 488	
32 560	-1 560c	81.32	51.42	0.06	0.6123	0.3871	0.0004	359.0	38 591	17 489	
34 570	1 405	75.72	44.03	0.54	0.6294	0.3659	0.0045	353.7	39 596	18 490	Rm
34 570	7 435	77.8	43.81	12.2	0.5814	0.3273	0.0911	340.3	48 640	18 494	
34 571	9 450	78.83	43.38	20.16	0.5536	0.3046	0.1416	330.0	-1 498c	19 498	
34 572	12 460	80.44	43.08	32.89	0.5142	0.2754	0.2103	313.6	-1 507c	21 507	
34 572	12 465	79.84	42.43	32.89	0.5145	0.2734	0.2119	313.1	-1 508c	21 508	
34 573	14 470	80.02	41.96	40.05	0.4938	0.2589	0.2471	304.1	-1 519c	23 519	
35 575	14 475	78.51	40.4	40.04	0.4939	0.2541	0.2519	303.2	-1 520c	24 520	Mm
35 578	15 480	76.2	38.24	42.78	0.4846	0.2432	0.272	298.5	-1 529c	25 529	
36 583	17 485	71.64	35.03	46.68	0.4671	0.2284	0.3043	291.0	-1 542c	28 542	
38 593	18 490	60.36	27.63	48.01	0.4438	0.2031	0.353	281.8	-1 552c	30 552	min
52 661	19 495	10.82	5.33	49.06	0.1659	0.0817	0.7522	232.2	12 460	34 572	
-1 500c	20 500	8.24	5.67	49.91	0.1291	0.0889	0.7819	227.5	13 468	34 573	
-1 510c	22 510	8.33	9.4	51.08	0.1211	0.1366	0.7422	221.8	14 473	34 574	
-1 519c	23 520	8.51	11.94	51.44	0.1184	0.166	0.7154	218.0	15 475	35 576	Bm
-1 530c	26 530	10.23	21.98	52.06	0.1214	0.2608	0.6177	204.5	16 481	35 579	
-1 539c	27 540	11.33	25.97	52.17	0.1267	0.2902	0.583	199.8	16 483	36 581	
-1 545c	29 545	14.53	34.62	52.29	0.1432	0.3412	0.5154	190.6	17 486	37 585	
-1 549c	29 550	14.53	34.62	52.29	0.1432	0.3412	0.5154	190.6	17 486	37 585	
-1 555c	31 555	19.29	43.86	52.35	0.167	0.3797	0.4532	182.5	17 488	37 589	
-1 560c	32 560	22.33	48.57	52.36	0.1812	0.394	0.4247	179.0	17 489	38 591	
380	770	103.66	99.99	52.43	0.4047	0.3904	0.2047	0.0			

TUB-test chart CE16; CIE (x, y) and chromaticities (a_i, b_i)
Ostwald optimal colours for illuminant P35; diagram for illuminant P35, $Y_w=100$

input: w/rgb/cmyk -> rgb

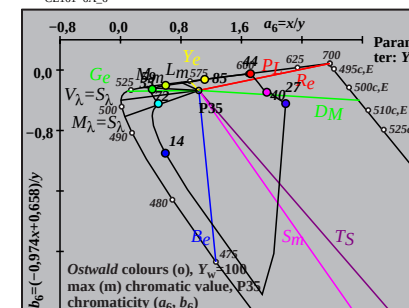
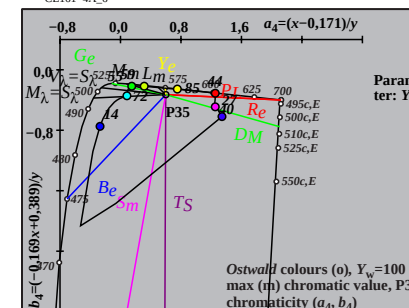
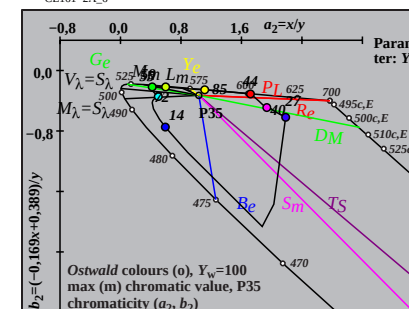
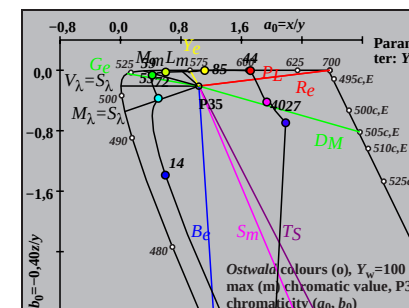
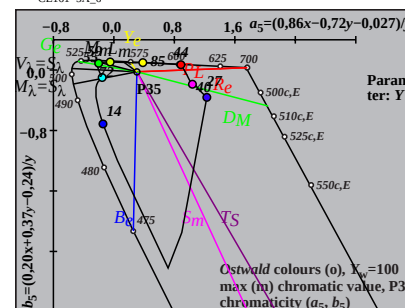
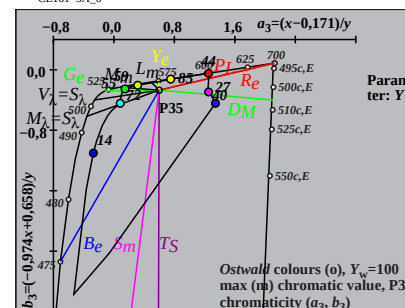
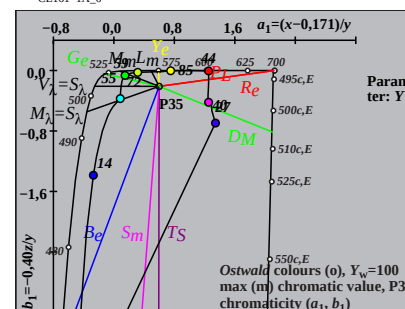
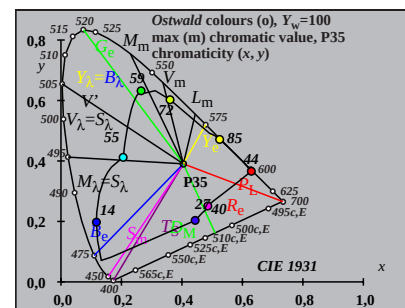


Ostwald optimal colours (o) of maximum (m) C_{AB} for P30, $Y_w=100$, $Y_m=520\text{--}770$

i_1, λ_1	i_2, λ_2	X	Y	Z	x	y	z	h_{xy}	i_d, λ_d	i_c, λ_c	Code
0 405	34 573	27.64	55.03	39.34	0.2265	0.451	0.3224	167.3	18 493	39 598	Cm
6 435	34 573	26.71	55.24	33.71	0.2309	0.4775	0.2914	160.2	19 495	42 612	
10 450	34 573	24.91	55.46	22.36	0.2424	0.5398	0.2177	144.9	20 502	-1 502c	
12 460	34 574	24.29	55.76	15.93	0.253	0.5809	0.166	135.9	21 508	-1 508c	
13 465	34 574	24.26	56.07	12.95	0.2601	0.601	0.1388	131.7	22 512	-1 512c	
14 470	35 575	24.65	56.58	10.35	0.2691	0.6178	0.113	127.9	23 518	-1 518c	
15 475	35 576	25.59	57.45	8.16	0.2806	0.6298	0.0895	124.5	25 525	-1 525c	Gm
16 480	35 579	27.41	58.97	6.39	0.2954	0.6355	0.0689	121.2	26 533	-1 533c	
17 485	36 582	30.95	61.63	4.98	0.3172	0.6316	0.0511	117.5	28 540	-1 540c	
18 490	37 589	38.29	66.7	3.87	0.3517	0.6126	0.0356	112.0	29 549	-1 549c	max
19 495	41 606	58.87	78.16	2.99	0.4204	0.5581	0.0213	95.8	32 561	-1 561c	
20 500	-1 500c	101.99	95.33	2.27	0.5109	0.4776	0.0113	44.6	35 575	13 469	
21 510	-1 509c	101.97	93.9	1.68	0.5161	0.4752	0.0085	41.7	35 576	14 472	
24 520	-1 520c	101.44	87.11	0.67	0.536	0.4603	0.0035	29.4	35 578	15 479	Ym
25 530	-1 529c	100.92	84.03	0.49	0.5442	0.4531	0.0026	24.5	36 580	16 481	
28 540	-1 540c	97.78	72.83	0.18	0.5724	0.4264	0.001	9.4	36 584	17 486	
29 545	-1 545c	96.07	68.59	0.13	0.5829	0.4162	0.0008	4.7	37 586	17 488	
30 550	-1 550c	93.97	64.15	0.1	0.5938	0.4054	0.0006	0.5	37 588	17 489	
31 555	-1 555c	91.42	59.57	0.08	0.6051	0.3943	0.0005	356.7	38 590	18 490	
32 560	-1 560c	88.4	54.9	0.06	0.6166	0.3829	0.0004	353.3	38 592	18 491	
34 573	0 405	80.39	44.96	0.2	0.6402	0.358	0.0016	347.3	39 598	18 493	Rm
34 573	6 435	81.32	44.75	5.83	0.6164	0.3392	0.0442	340.2	42 612	19 495	
34 573	10 450	83.13	44.53	17.18	0.5738	0.3074	0.1186	324.9	-1 502c	20 502	
34 574	12 460	83.74	44.23	23.61	0.5524	0.2917	0.1557	316.0	-1 508c	21 508	
34 574	13 465	83.77	43.92	26.59	0.5429	0.2846	0.1723	311.8	-1 512c	22 512	
35 575	14 470	83.39	43.41	29.19	0.5345	0.2782	0.1871	308.0	-1 518c	23 518	
35 576	15 475	82.44	42.54	31.38	0.5272	0.272	0.2006	304.6	-1 525c	25 525	Mm
35 579	16 480	80.62	41.02	33.15	0.5208	0.265	0.2141	301.3	-1 533c	26 533	
36 582	17 485	77.08	38.36	34.56	0.5138	0.2557	0.2303	297.6	-1 540c	28 540	
37 589	18 490	69.74	33.29	35.67	0.5027	0.24	0.2571	292.0	-1 549c	29 549	min
41 606	19 495	49.16	21.83	36.55	0.457	0.203	0.3398	275.9	-1 561c	32 561	
-1 500c	20 500	6.04	4.66	37.28	0.126	0.0971	0.7768	224.6	13 469	35 575	
-1 509c	21 510	6.06	6.09	37.86	0.1212	0.1219	0.7568	221.8	14 472	35 576	
-1 520c	24 520	6.6	12.88	38.87	0.1131	0.2208	0.666	209.5	15 479	35 578	Bm
-1 529c	25 530	7.11	15.96	39.05	0.1144	0.2569	0.6285	204.5	16 481	36 580	
-1 540c	28 540	10.25	27.16	39.36	0.1336	0.3537	0.5126	189.4	17 486	36 584	
-1 545c	29 545	11.96	31.4	39.41	0.1445	0.3793	0.476	184.8	17 488	37 586	
-1 550c	30 550	14.07	35.84	39.44	0.1574	0.4011	0.4414	180.5	17 489	37 588	
-1 555c	31 555	16.61	40.42	39.46	0.1721	0.4188	0.4089	176.7	18 490	38 590	
-1 560c	32 560	19.63	45.09	39.48	0.1884	0.4327	0.3788	173.3	18 491	38 592	
380	770	108.04	100.0	39.55	0.4363	0.4038	0.1597	0.0			

TUB-test chart CE16; CIE (x, y) and chromaticities (a_i, b_i)
Ostwald optimal colours for illuminant P30; diagram for illuminant P30, $Y_w=100$

input: w/rgb/cmyk -> rgb

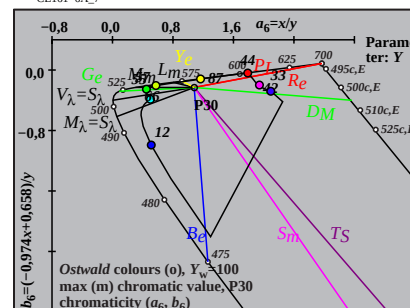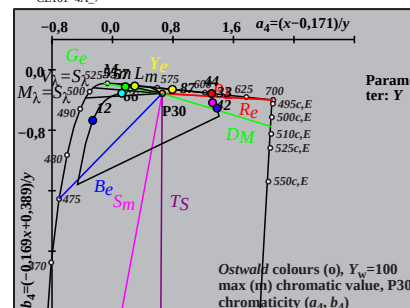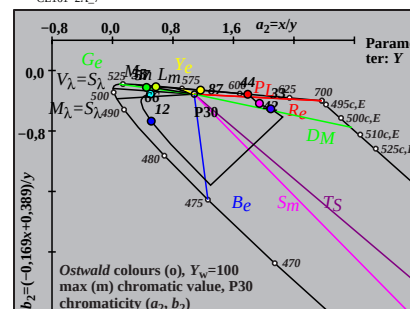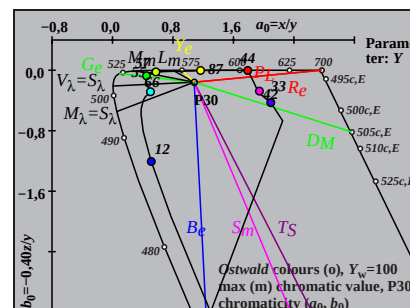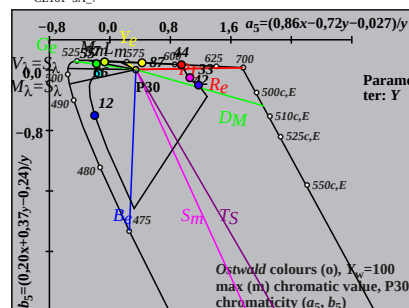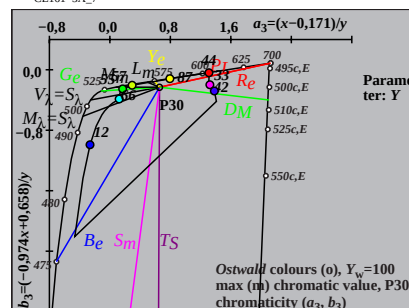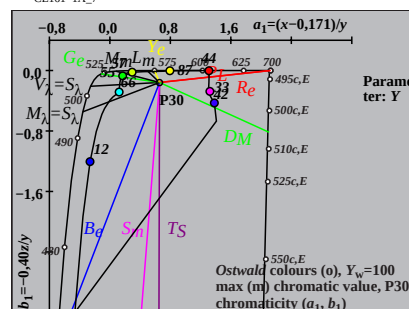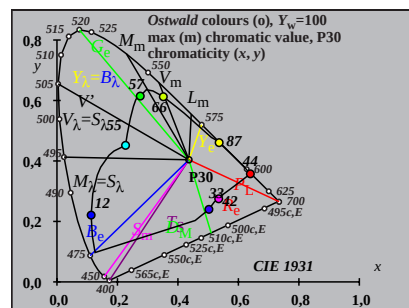

TUB registration: 20170801-CE16/CE16L0NA.TXT /PS
application for measurement of offset print output

TUB material: code=rha4ta

Ostwald optimal colours (o) of maximum (m) C_{AB} for P25, $Y_w=100$, $Y_m=520\text{--}770$

i_1, λ_1	i_2, λ_2	X	Y	Z	x	y	z	h_{xy}	i_d, λ_d	i_c, λ_c	Code
1 405	35 576	27.93	53.61	26.39	0.2588	0.4966	0.2445	159.1	19 497	40 601	Cm
6 435	35 576	27.46	53.74	23.27	0.2628	0.5144	0.2227	154.7	19 499	42 611	
10 450	35 577	26.38	53.9	16.18	0.2735	0.5587	0.1677	144.4	20 504	-1 504c	
11 460	35 577	26.38	54.19	14.04	0.2788	0.5726	0.1484	141.1	21 506	-1 506c	
13 465	35 577	26.03	54.3	9.82	0.2887	0.6022	0.1089	134.8	22 513	-1 513c	
14 470	35 578	26.3	54.64	7.98	0.2957	0.6144	0.0897	131.9	23 518	-1 518c	
15 475	35 579	26.93	55.22	6.4	0.3041	0.6235	0.0723	129.3	24 524	-1 524c	Gm
16 480	36 580	28.21	56.22	5.1	0.3151	0.6278	0.057	126.9	26 531	-1 531c	
17 485	36 582	30.63	57.93	4.04	0.3307	0.6255	0.0437	124.4	27 539	-1 539c	
18 490	37 586	35.18	61.06	3.19	0.3537	0.614	0.0321	121.4	29 546	-1 546c	max
18 495	38 594	45.09	67.89	3.2	0.3881	0.5843	0.0275	117.3	30 553	-1 553c	
20 500	44 620	79.03	83.78	1.93	0.4797	0.5085	0.0117	87.9	34 570	-1 570c	
21 510	-1 509c	111.27	95.32	1.46	0.5348	0.4581	0.007	37.2	35 578	14 474	Ym
24 520	-1 520c	110.81	89.58	0.62	0.5512	0.4456	0.003	23.1	36 581	16 481	
25 530	-1 529c	110.36	86.89	0.45	0.5581	0.4394	0.0023	17.5	36 582	16 484	
28 540	-1 540c	107.51	76.78	0.18	0.5827	0.4162	0.0009	1.4	37 586	17 489	
28 545	-1 544c	107.51	76.78	0.18	0.5827	0.4162	0.0009	1.4	37 586	17 489	
29 550	-1 549c	105.92	72.82	0.13	0.5921	0.4071	0.0007	356.7	37 588	18 491	
30 555	-1 554c	103.93	68.62	0.1	0.6019	0.3974	0.0006	352.6	37 589	18 492	
32 560	-1 560c	98.53	59.65	0.07	0.6226	0.3769	0.0004	345.9	38 594	18 494	
35 576	1 405	87.24	46.38	0.19	0.6519	0.3466	0.0014	339.1	40 601	19 497	Rm
35 576	6 435	87.71	46.25	3.32	0.6389	0.3368	0.0241	334.7	42 611	19 499	
35 577	10 450	88.79	46.09	10.41	0.611	0.3172	0.0716	324.4	-1 504c	20 504	
35 577	11 460	88.79	45.8	12.54	0.6034	0.3112	0.0852	321.1	-1 506c	21 506	
35 577	13 465	89.14	45.69	16.77	0.5879	0.3013	0.1106	314.8	-1 513c	22 513	
35 578	14 470	88.88	45.35	18.6	0.5815	0.2967	0.1217	311.9	-1 518c	23 518	
35 579	15 475	88.24	44.77	20.18	0.576	0.2922	0.1317	309.4	-1 524c	24 524	Mm
36 580	16 480	86.96	43.77	21.48	0.5712	0.2875	0.1411	306.9	-1 531c	26 531	
36 582	17 485	84.55	42.06	22.54	0.5668	0.282	0.1511	304.5	-1 539c	27 539	
37 586	18 490	80.0	38.93	23.39	0.562	0.2735	0.1643	301.4	-1 546c	29 546	min
38 594	18 495	70.08	32.1	23.38	0.558	0.2556	0.1862	297.3	-1 553c	30 553	
44 620	20 500	36.14	16.21	24.65	0.4692	0.2105	0.3201	268.0	-1 570c	34 570	
-1 509c	21 510	3.91	4.67	25.12	0.116	0.1386	0.7453	217.3	14 474	35 578	
-1 520c	24 520	4.36	10.41	25.97	0.1071	0.2555	0.6373	203.1	16 481	36 581	Bm
-1 529c	25 530	4.81	13.1	26.13	0.1093	0.2973	0.5932	197.5	16 484	36 582	
-1 540c	28 540	7.66	23.21	26.41	0.1338	0.4051	0.461	181.4	17 489	37 586	
-1 544c	28 545	7.66	23.21	26.41	0.1338	0.4051	0.461	181.4	17 489	37 586	
-1 549c	29 550	9.25	27.17	26.45	0.1472	0.432	0.4206	176.7	18 491	37 588	
-1 554c	30 555	11.25	31.37	26.48	0.1628	0.4539	0.3832	172.6	18 492	37 589	
-1 560c	32 560	16.65	40.34	26.52	0.1993	0.483	0.3175	165.9	18 494	38 594	
380	770	115.18	100.0	26.59	0.4764	0.4136	0.1099	0.0			

TUB-test chart CE16; CIE (x, y) and chromaticities (a_i, b_i)
Ostwald optimal colours for illuminant P25; diagram for illuminant P25, $Y_w=100$

input: w/rgb/cmyk -> rgb

TUB registration: 20170801-CE16/CE16L0NA.TXT /PS
application for measurement of offset print output

TUB material: code=rha4ta