


Colorimetric workflow: analog input -> copier -> analog output based on the ergonomic Standard ISO 9241-306:2018 for work places


In this default case the copier driver has the relative gamma $\gamma = 1,000$.

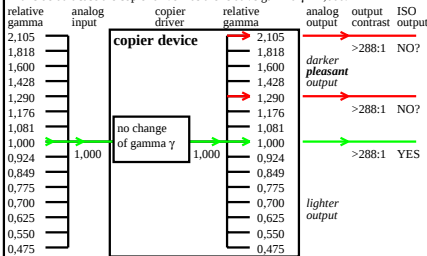

EE050-5A

Colorimetric workflow: digital input -> display -> analog output based on the ergonomic Standard ISO 9241-306:2018 for work places


In this special case the display driver has eight relative gamma $\gamma = x?$

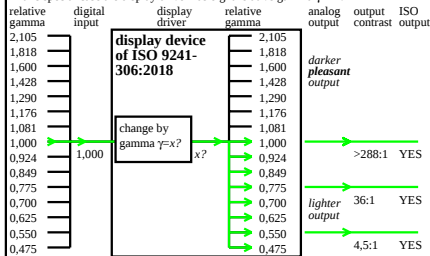

EE050-6A

Colorimetric workflow: digital input -> printer -> analog output based on the ergonomic Standard ISO 9241-306:2018 for work places


In this default case the printer driver has the relative gamma $\gamma = 1,000$.

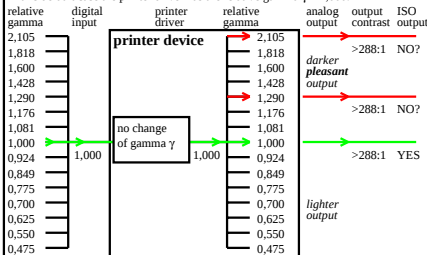

EE050-7A

Colorimetric workflow: digital input -> printer -> analog output based on the ergonomic Standard ISO 9241-306:2018 for work places

In this special case the printer driver has the relative gamma $\gamma = 2,105$.

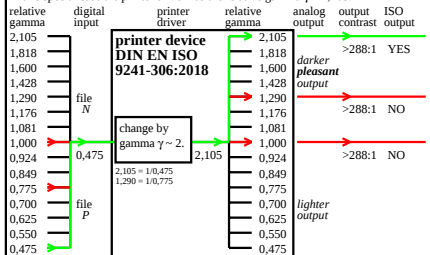

EE050-8A

EE050-7N