
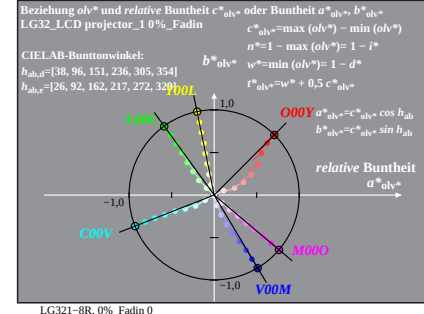
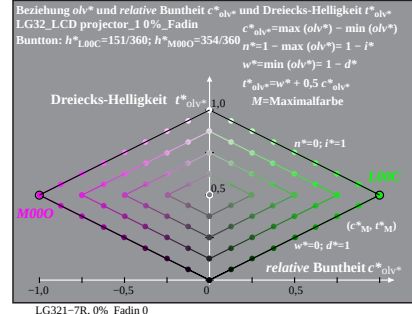
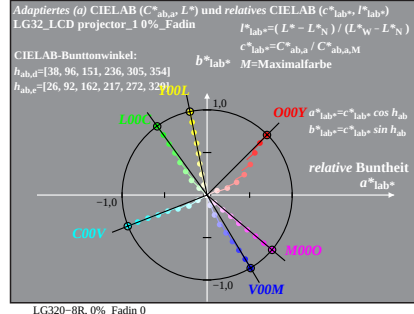
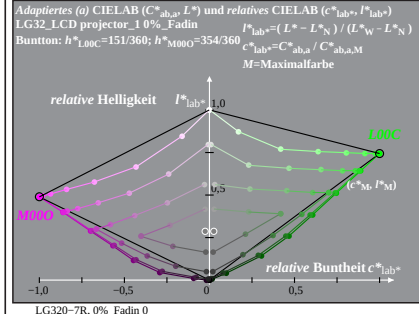
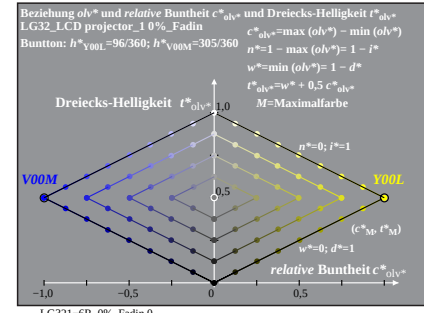
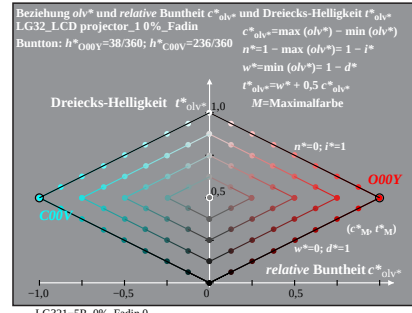
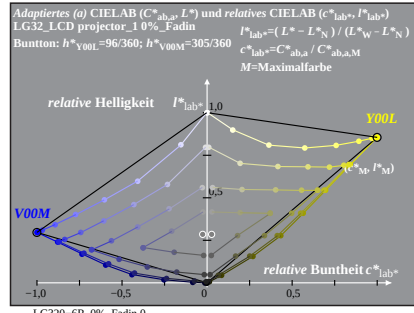
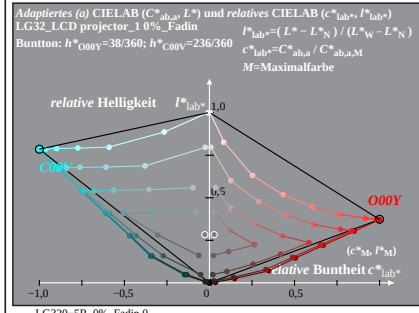
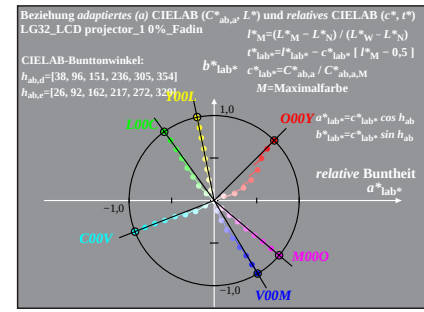
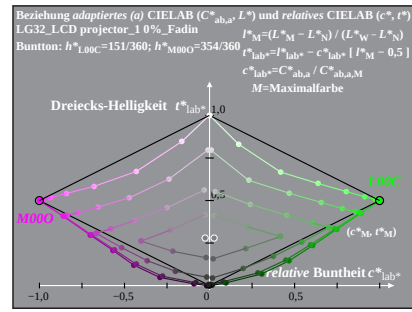
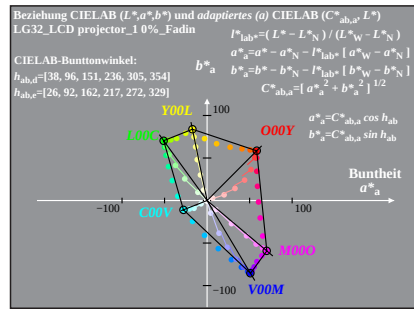
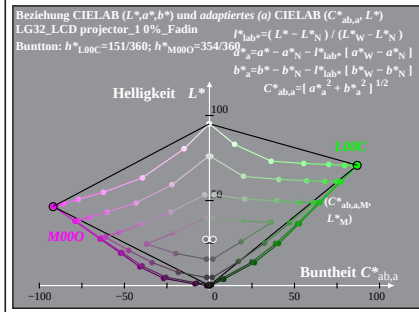
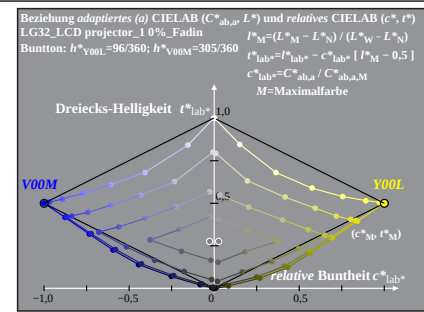
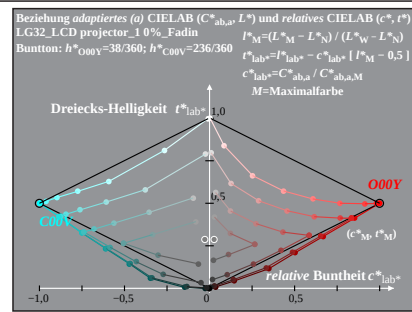
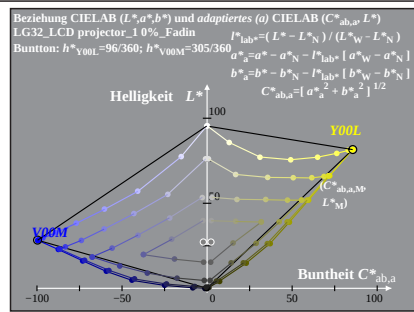


% LG32-7R, Prüfvorlage mit 1080 Norm-Farben; digital gleichabständige 9stufige Buntton- und unbunte Reihen; Leuchtdichteefaktor gemessen: Ym und normiert: Yn = Yw = 89, Seite 1/6; Display-Type: LCD_projector_100828_1

008421	-0667	-0023	%3	0	0647	*	095929	-0024	000018	%3	0	0728	*	000000	000000	000000	%3	0	0809	*	000000	000000	000000	%3	0	0890	*	000000	000000	000000	%3	0	0971	*	006260	-00080	-00145	%3	0	1052	*
% LG32_LCD projector_1 0%_Fadin																																									

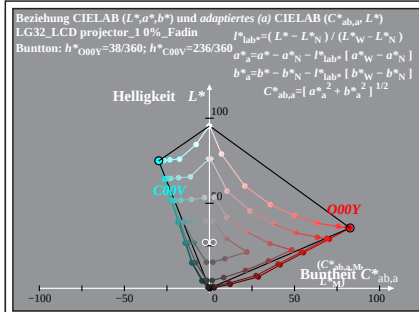

007086	-02384	-01795	%3	1	0080	=0	007390	-02084	-01570	%3	1	0161	=0	007695	-01785	-01344	%3	1	0242	=0	007999	-01486	-01119	%3	1	0323	=0	008304	-01187	-00894	%3	1	0404	=0	008599	-00987	-00675	%3	1	0485	=0	008903	-00898	-00450	%3	1	0566	=0
% LG320-7R, Prüfverfahren mit 1080 Norm-Farben; digital gleichabständige 9stufige Buntton- und unbunte Reihen; Leuchtdichtefaktor gemessen: Yn = Yw = 89, Seite 4/6; Display-Typ: LCD_projector_100828.1 % LG32_LCD projector_1 0%_Faelt																																																

009235	-00481	000154	%3	1	0646 #	009160	-00036	000913	%3	1	0727 #	000451	000744	0000354	%3	1	0808 #	000842	-00036	000913	%3	1	0889 #	000917	-00481	000154	%3	1	0970 #	006975	000000	000000	%3	1	1051 #
009208	-00299	-00225	%3	1	0647 #	009512	000000	000913	%3	1	0728 #	000000	000000	000000	%3	1	0809 #	000000	000000	000000	%3	1	0890 #	000000	000000	000000	%3	1	0971 #	007610	000000	000000	%3	1	1052 #

% LG320-7 R, Prüfvorlage mit 1080 Norm-Farben; digital gleichabständige 5stufige Buntton- und unbunte Reihen; Leuchtdektefaktor gemessen: Yn und normiert: Yn = Yw = 89, Seite 5/6; Display-Typ: LCD projector 100828 1 % LG32 LCD projector 1 0% Faeit

