

% LG380-7R, Prüfvorlage mit 1080 Norm-Farben; digital gleichabständige 9stufige Bunnton- und unbunte Reihen;; Leuchtdichtefaktor gemessen: Y_m und normiert: $Y_n = Y_w = 89$, Seite 1/14; Display-Typ: LCD_projector_100828_1 % LG38_LCD projector_1 0%_Fadin

















0874	1000	0874	%3 0 0646 #	1000	1000	0874	%3 0 0727 #	0125	0000	0000	%3 0 0808 #	0125	0125	0000	%3 0 0889 #	0000	0125	0000	%3 0 0970 #	0733	0733	0733	%3 0 1051 #
0874	1000	1000	%C 0 0647 #	1000	1000	1000	%C 0 0720 #	0000	0000	0000	%C 0 0800 #	0000	0000	0000	%C 0 0890 #	0000	0000	0000	%C 0 0971 #	0000	0000	0000	%C 0 1052 #

000	255	223	%3	0 0079 #	031	255	223	%3	0 0160 #	063	255	223	%3	0 0241 #	095	255	223	%3	0 0322 #	127	255	223	%3	0 0403 #	159	255	223	%3	0 0484 #	191	255	223	%3	0 0565 #	
000	255	255	%3	0 0080 #	031	255	255	%3	0 0161 #	063	255	255	%3	0 0242 #	095	255	255	%3	0 0323 #	127	255	255	%3	0 0404 #	159	255	255	%3	0 0485 #	191	255	255	%3	0 0566 #	

% LG380-7R, Prüfvorlage mit 1080 Norm-Farben; digital gleichabständige 9stufige Buntton- und unbunte Reihen;; Leuchtdichtefaktor gemessen: Y_m und normiert: $Y_n = Y_w = 89$, Seite 4/14; Display-Typ: LCD_projector_100828_1 % LG38_LCD projector_1 0% Fadin

% LG38-7R, Prüfvorlage mit 1080 Norm-Farben; digital gleichabständige 9stufige Buntton- und unbunte Reihen; Leuchtdichteefaktor gemessen: Ym und normiert: Yn = Yw = 89, Seite 5/14; Display-Typ: LCD_projector_100828_1

[illegible]

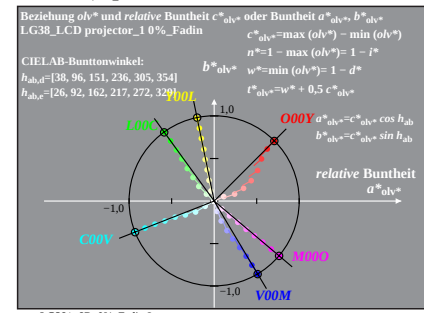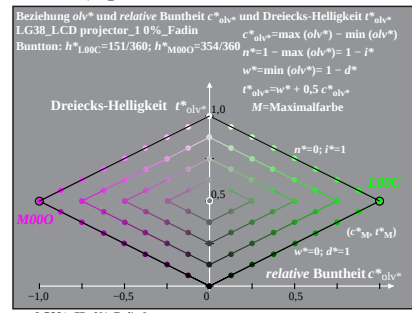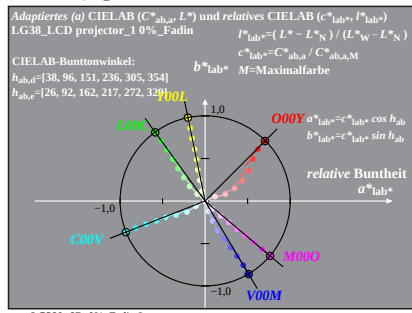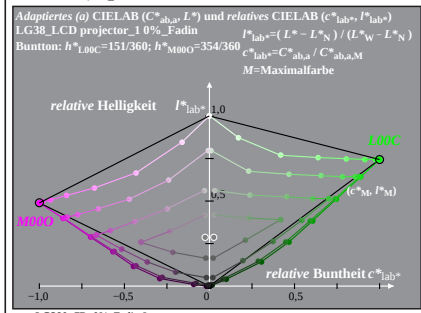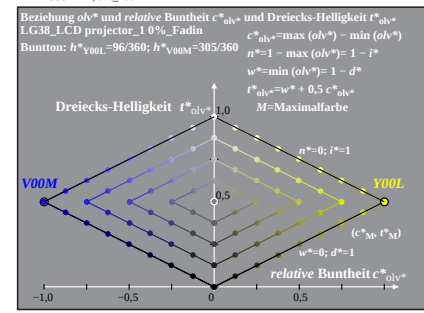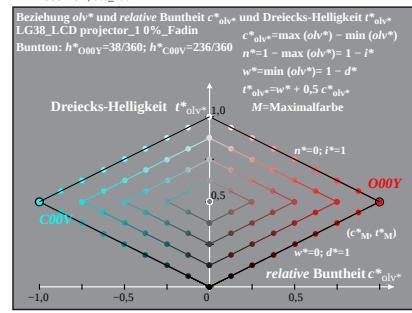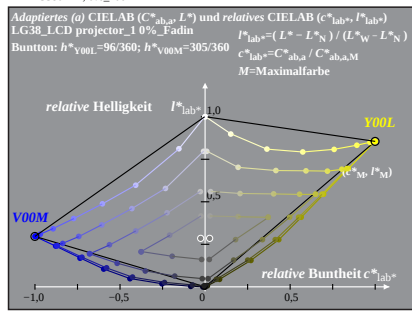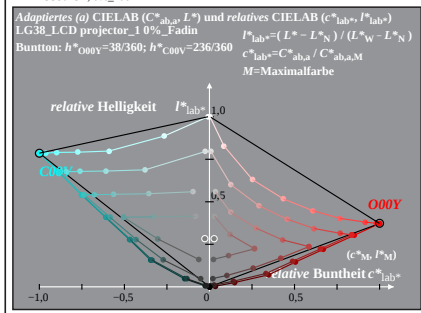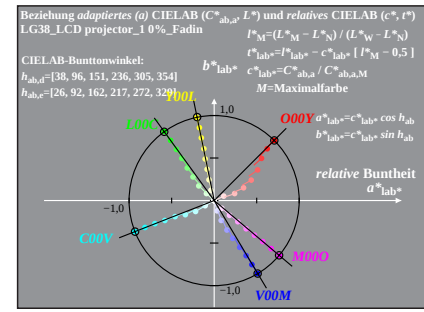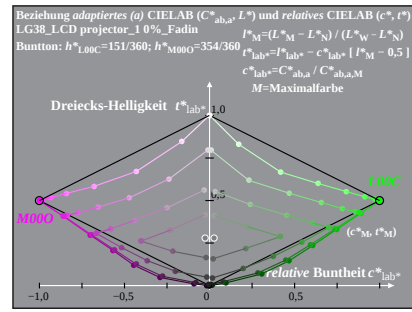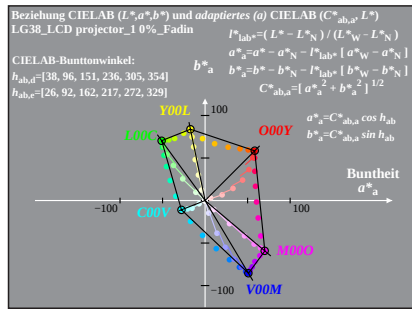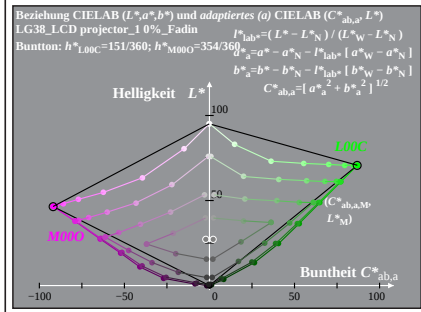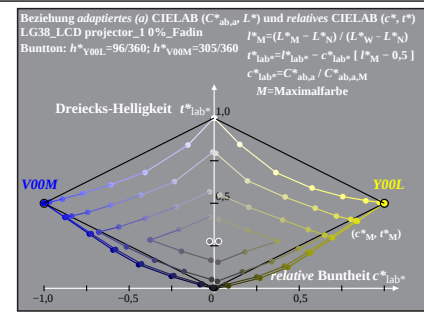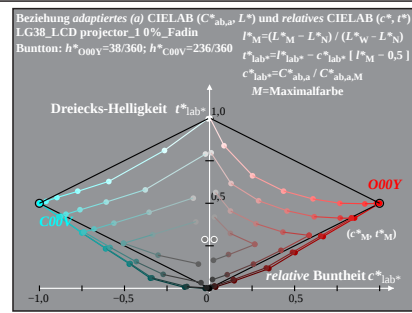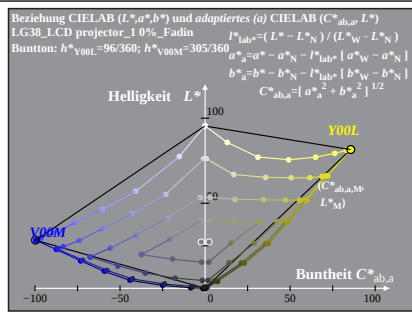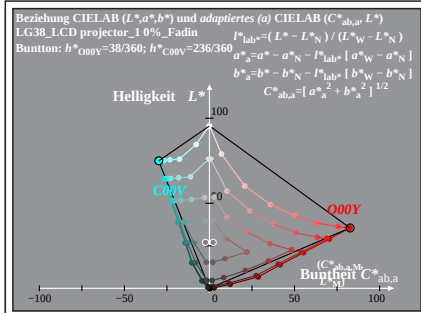

0000	0963	1000	%3	1	0079 #	0125	0966	1000	%3	1	0160 #	0250	0971	1000	%3	1	0241 #	0376	0977	1000	%3	1	0322 #	0501	0987	1000	%3	1	0403 #	0623	1000	0994	%3	1	0484 #	0749	1000	0951	%3	1	0565 #
0000	0940	1000	%3	1	0080 #	0125	0940	1000	%3	1	0161 #	0250	0940	1000	%3	1	0242 #	0376	0940	1000	%3	1	0323 #	0501	0940	1000	%3	1	0404 #	0623	0940	1000	%3	1	0485 #	0749	0940	1000	%3	1	0566 #

% LG380-7R, Prüfvorlage mit 1080 Norm-Farben; digital gleichabständige 9stufige Buntton- und unbunte Reihen; Leuchtdektefaktor gemessen: Yn = Yw = 89, Seite 8/14; Display-Typ: LCD projector 100828 1

% LG38 LCD projector 1 0% Faet

0874	0940	1000	%3 1 0647 #	1000	1000	1000	%3 0728 #	0000	0000	0000	%3 1 0809 #	0000	0000	0000	%3 1 0890 #	0000	0000	0000	%3 1 0971 #	0800	0800	0800	%3 1 1052 #
------	------	------	-------------	------	------	------	-----------	------	------	------	-------------	------	------	------	-------------	------	------	------	-------------	------	------	------	-------------

000	245	255	%3	1 0079 #	031	246	255	%3	0161 #	063	247	255	%3	1 0241 #	095	249	255	%3	1 0322 #	127	251	255	%3	1 0403 #	159	255	253	%3	1 0484 #	191	255	242	%3	1 0565 #
-----	-----	-----	----	----------	-----	-----	-----	----	--------	-----	-----	-----	----	----------	-----	-----	-----	----	----------	-----	-----	-----	----	----------	-----	-----	-----	----	----------	-----	-----	-----	----	----------

% LG380-7R, Prüfvorlage mit 1080 Norm-Farben; digital gleichabständige 9stufige Buntton- und unbunte Reihen;; Leuchtdichtefaktor gemessen: Y_m und normiert: $Y_n = Y_w = 89$, Seite 11/14; Display-Typ: LCD_projector_100828_1 % LG38_LCD projector_1 0% Faeit

0070986	-02384	-01795	alg 1	0080	no	007390	-02084	-01570	alg 3	0161	no	007695	-01785	-01344	alg 3	0142	no	007999	-01486	-01119	alg 3	0323	no	008304	-01187	-00894	alg 3	0404	no	008599	-00897	-00675	alg 3	0485	no	008903	-00598	-00450	alg 3	0566	no
* LG380-79r. Prüfvorlage mit 1080 Norm-Farben; digital gleichabständige Stufige Bunton- und unbunte Reihen; Leuchtdichtefaktor gemessen: Yn und normiert: Yn = 89, Seite 12 1147; Display-Typ: LCD projector 100828 1																																	* LG38 LCD projector 10% Faet								

009235	-00481	000154	%3	1	0646	#	009160	-00036	000913	%3	1	0727	#	000451	000744	0000354	%3	1	0808	#	000842	-00036	000913	%3	1	0889	#	000917	-00481	000154	%3	1	0970	#	006975	000000	000000	%3	1	1051	#
009208	-00299	-00225	%3	1	0647	#	009512	000000	000913	%3	1	0728	#	000000	000000	000000	%3	1	0809	#	000000	000000	000000	%3	1	0890	#	000000	000000	000000	%3	1	0971	#	007610	000000	000000	%3	1	1052	#

% LG380-7R, Prüfvorlage mit 1080 Norm-Farben; digital gleichabständige 9stufige Buntton- und unbunte Reihen; Leuchtdektefaktor gemessen: Ym und normiert: Yn = Yw = 89, Seite 13/14; Display-Typ: LCD projector 100828 1

% LG38 LCD-projtor 1 0% Faeit

