




See similar ISO test charts: <http://www.ps.bam.de/247051E>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1

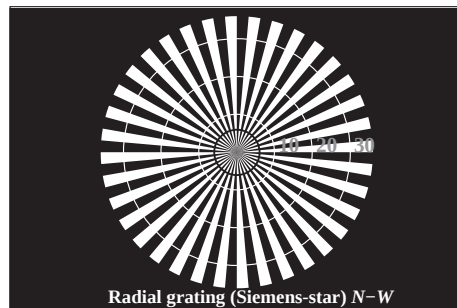


Radial grating (Siemens-star) N-W



Radial grating (Siemens-star) W-N

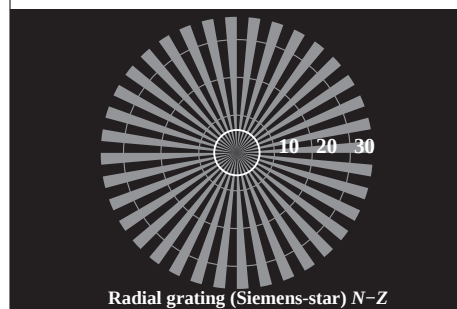


Radial grating (Siemens-star) N-Z




Radial grating (Siemens-star) W-Z

OE500-3N, Picture A1-000-0: Radial grating N-W, W-N, N-Z, W-Z; PS operator: 0 0 0 n* setcmykcolor

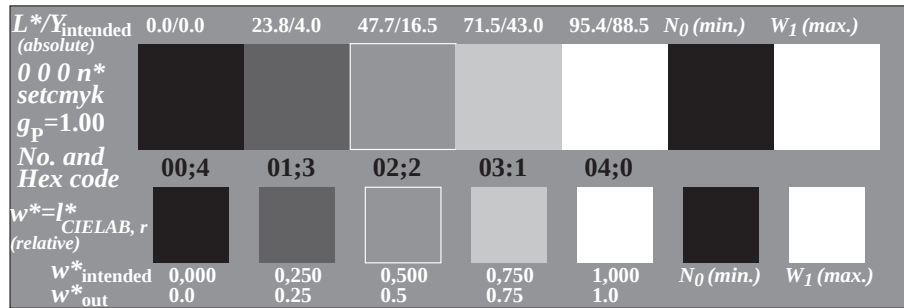

OE500-5N, Picture A2-000-0: 5 equidistant L^* -grey steps+N0+W1; PS operator: 0 0 0 n* setcmykcolor

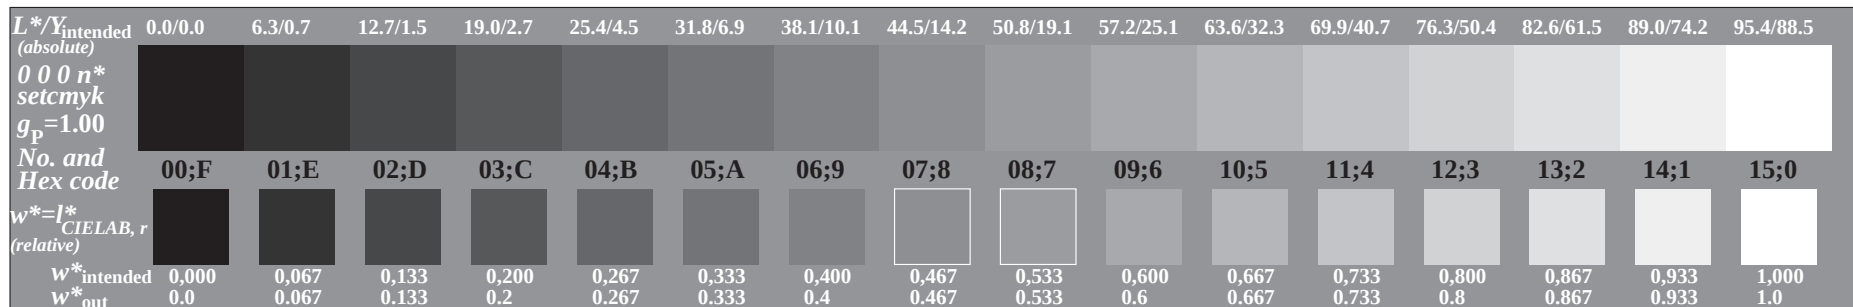

OE500-7N, Picture A3-000-0: 16 visual equidistant L^* -grey steps; PS operator: 0 0 0 n* setcmykcolor

OE50: similar ME16 according to ISO 9241-306; DH
Viewing Y contrast $Y_W:Y_N=88,9:0,31$; Y_N range 0,0 to <0,46


input: 000n (->rgb*d) setcmyk
output 000-0: no change

background step 0		1	ring step	0-1
Hex code		8	Hex code	7-8
7				
E		F		E-F
2		0		2-0
8		6		8-6
F		D		F-D

Landolt-rings W-N


code: background-ring

OE501-1N, Picture A4-000-0: Landolt-rings W-N; PS operator: 0 0 0 n* setcmykcolor

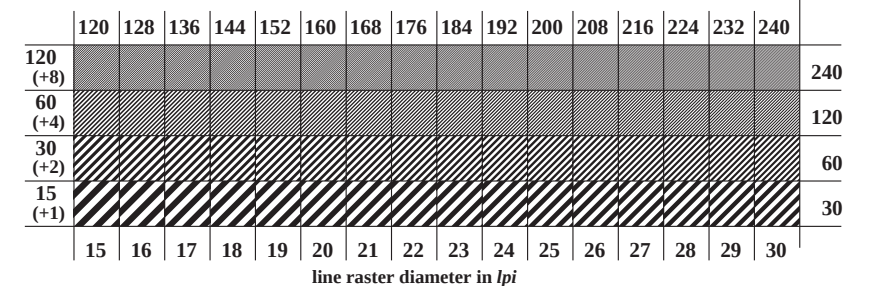

line raster diameter in lpi

OE501-3N, Picture A5-000-0: Line raster under 45° (or 135°); PS operator: 0 0 0 n* setcmykcolor

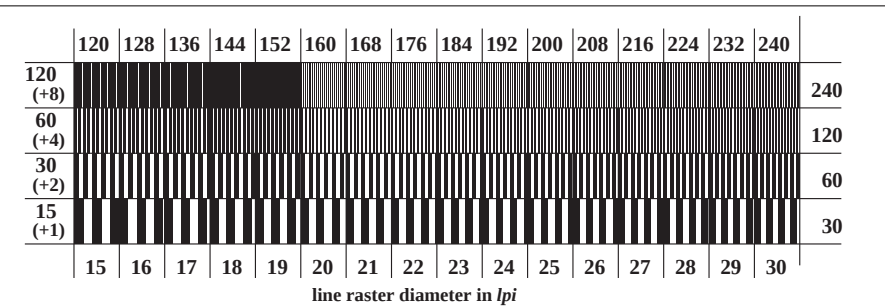

line raster diameter in lpi

OE501-5N, Picture A6-000-0: Line raster under 90° (or 0°); PS operator: 0 0 0 n* setcmykcolor

TUB registration: 20110801-OE50/OE50L1NA.TXT /PS
application for output of displays: monitor systems or data projector systems

TUB material: code=rha4ta