




See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

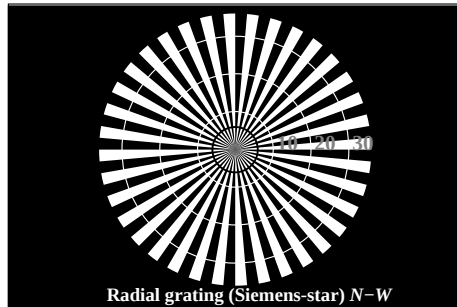


Radial grating (Siemens-star) N-W



Radial grating (Siemens-star) W-N

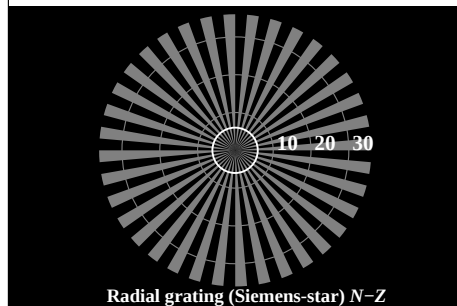


Radial grating (Siemens-star) N-Z




Radial grating (Siemens-star) W-Z

OE520-3N, Picture A1-130-0: Radial grating N-W, W-N, N-Z, W-Z; PS operator: $w^* w^* w^* \text{setrgbcolor}$

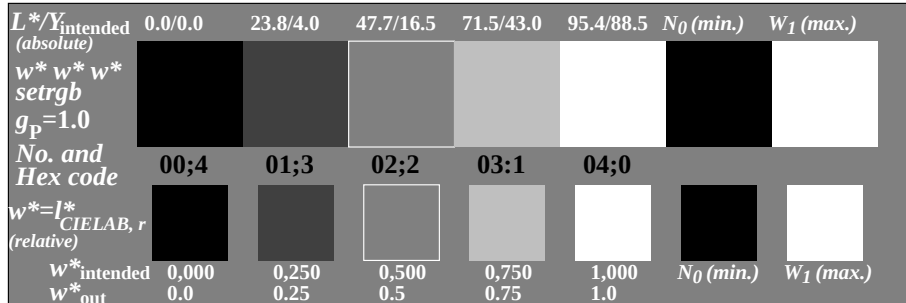


OE520-5N, Picture A2-130-0: 5 equidistant L^* -grey steps+ N_0 + W_1 ; PS operator: $w^* w^* w^* \text{setrgbcolor}$

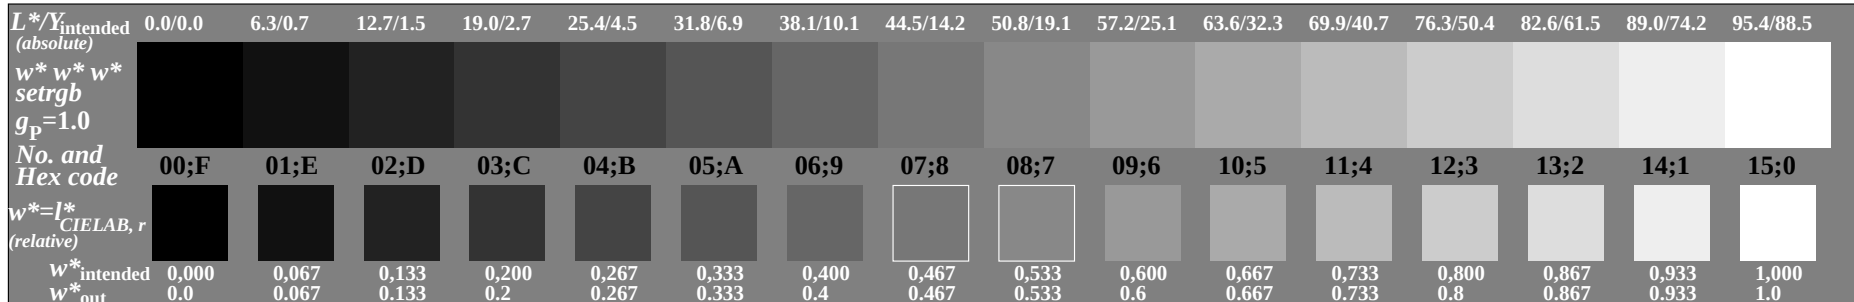


OE520-7N, Picture A3-130-0: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^* \text{setrgbcolor}$

OE52: similar ME16 according to ISO 9241-306; 1MR, DH
Viewing Y contrast $Y_W:Y_N=88,9:0,31$; Y_N range 0,0 to <0,46

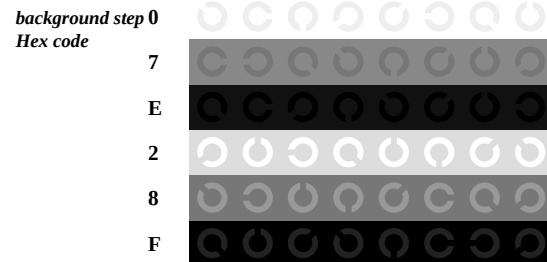


Landolt-rings W-N




code: background-ring

OE521-1N, Picture A4-130-0: Landolt-rings W-N; PS operator: $w^* w^* w^* \text{setrgbcolor}$

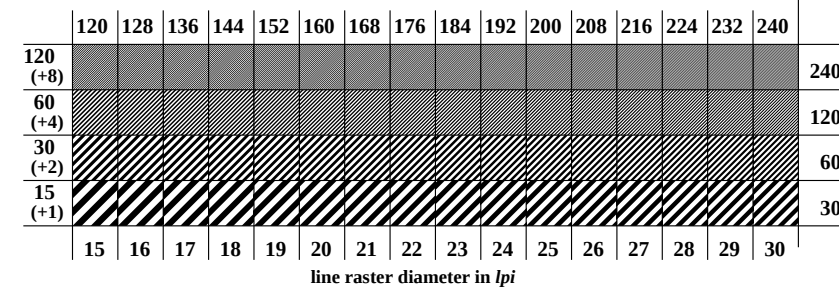

line raster diameter in lpi

OE521-3N, Picture A5-130-0: Line raster under 45° (or 135°); PS operator: $w^* w^* w^* \text{setrgbcolor}$

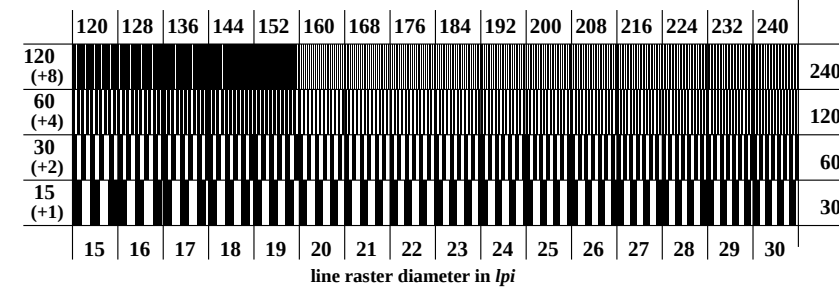


line raster diameter in lpi

OE521-5N, Picture A6-130-0: Line raster under 90° (or 0°); PS operator: $w^* w^* w^* \text{setrgbcolor}$


input: cmy0 ($\rightarrow \text{rgb}^*_d$) setcmyk
output 130-0: $g_p=1.0$; $g_N=1.0$

TUB registration: 20110801-OE52/OE52L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta


See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

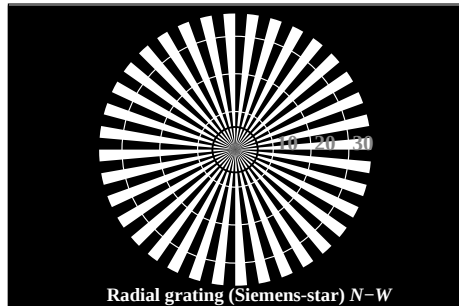


Radial grating (Siemens-star) N-W



Radial grating (Siemens-star) W-N

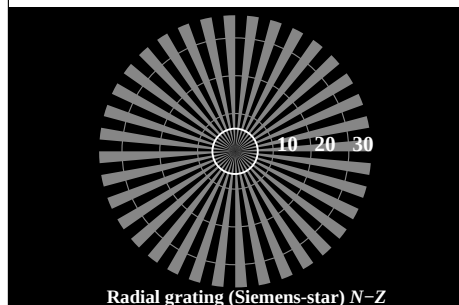


Radial grating (Siemens-star) N-Z




Radial grating (Siemens-star) W-Z

OE520-3N, Picture A1-131-0: Radial grating N-W, W-N, N-Z, W-Z; PS operator: $w^* w^* w^* \text{setrgbcolor}$

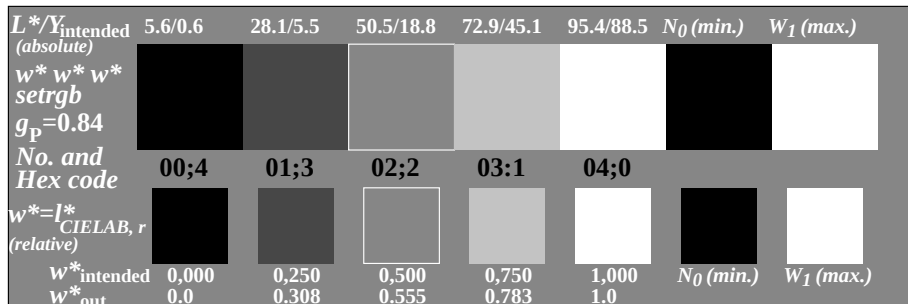


OE520-5N, Picture A2-131-0: 5 equidistant L^* -grey steps+ N_0 + W_1 ; PS operator: $w^* w^* w^* \text{setrgbcolor}$

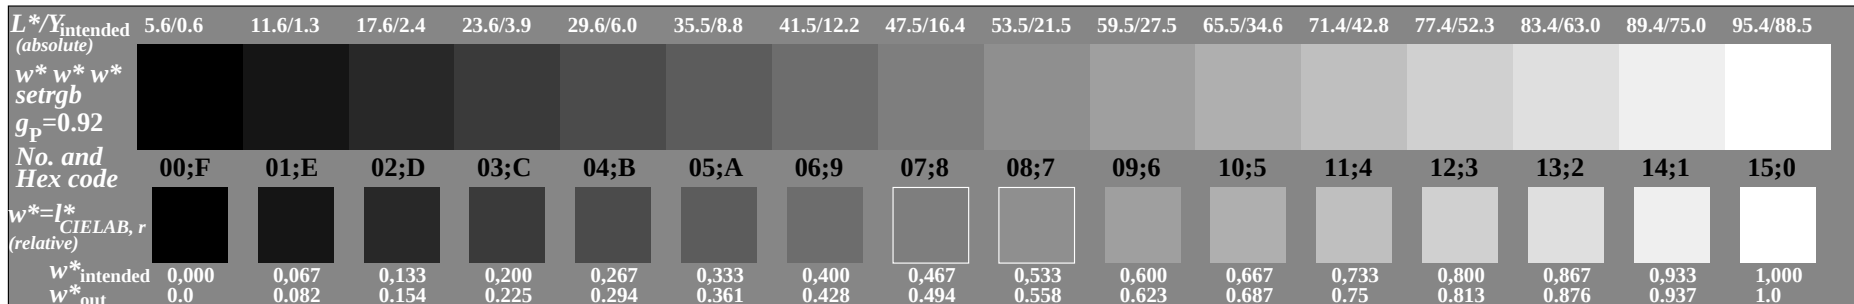


OE520-7N, Picture A3-131-0: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^* \text{setrgbcolor}$

OE52: similar ME16 according to ISO 9241-306; 1MR, DH
Viewing Y contrast $Y_W:Y_N=88,9:0,62$; Y_N range 0,46 to <0,93

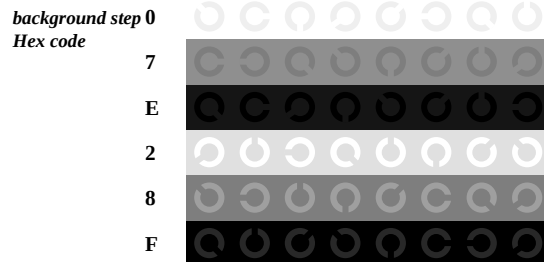


Landolt-rings W-N




code: background-ring

OE521-1N, Picture A4-131-0: Landolt-rings W-N; PS operator: $w^* w^* w^* \text{setrgbcolor}$

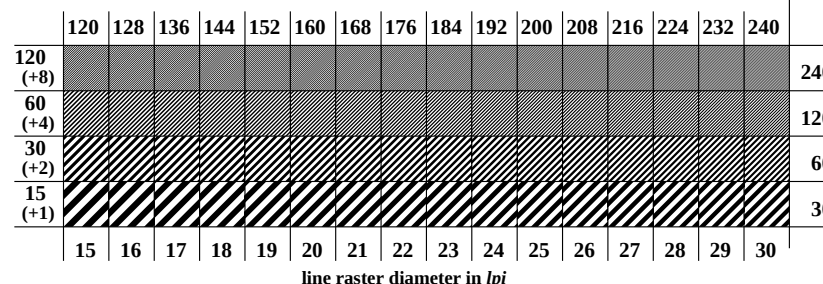

line raster diameter in lpi

OE521-3N, Picture A5-131-0: Line raster under 45° (or 135°); PS operator: $w^* w^* w^* \text{setrgbcolor}$

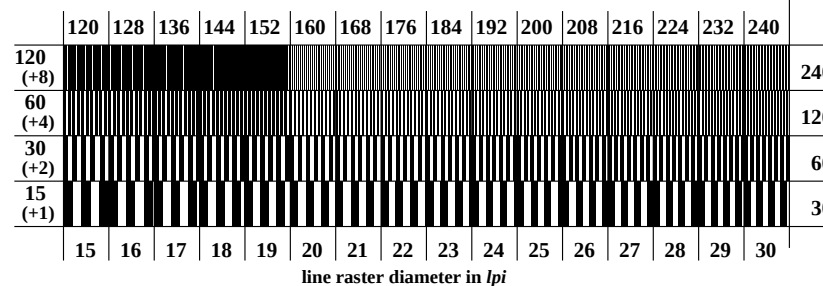


line raster diameter in lpi

OE521-5N, Picture A6-131-0: Line raster under 90° (or 0°); PS operator: $w^* w^* w^* \text{setrgbcolor}$


input: $\text{cmy0} (-> \text{rgb}^*_d) \text{setcmyk}$
output 131-0: $g_p=0.92$; $g_N=1.0$

TUB registration: 20110801-OE52/OE52L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta


See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

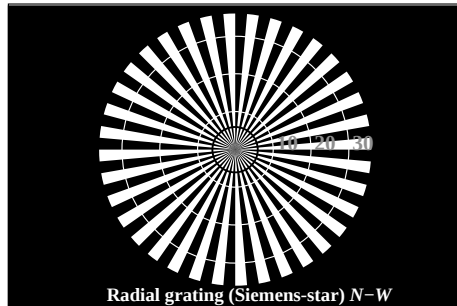


Radial grating (Siemens-star) N-W



Radial grating (Siemens-star) W-N

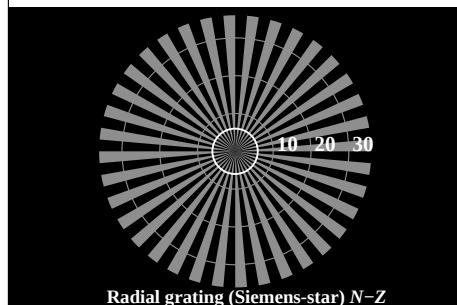


Radial grating (Siemens-star) N-Z




Radial grating (Siemens-star) W-Z

OE520-3N, Picture A1-132-0: Radial grating N-W, W-N, N-Z, W-Z; PS operator: $w^* w^* w^* \text{setrgbcolor}$

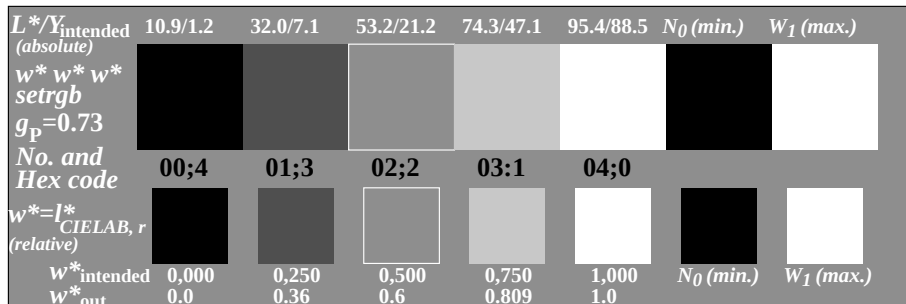


OE520-5N, Picture A2-132-0: 5 equidistant L^* -grey steps+ N_0 + W_1 ; PS operator: $w^* w^* w^* \text{setrgbcolor}$

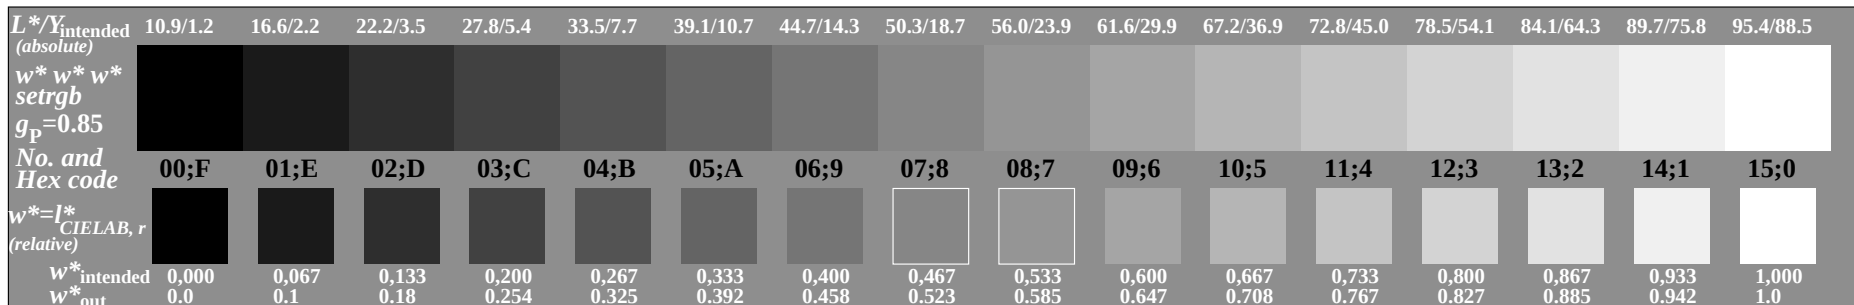

OE520-7N, Picture A3-132-0: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^* \text{setrgbcolor}$

OE52: similar ME16 according to ISO 9241-306; 1MR, DH
Viewing Y contrast $Y_W:Y_N=88,9:1,25$; Y_N range 0,93 to <1,87

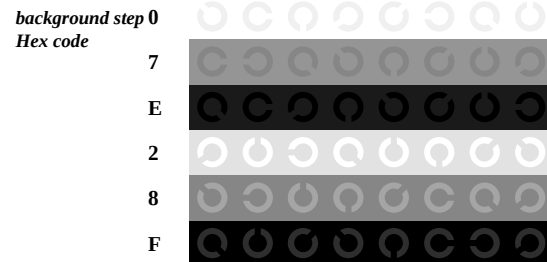


Landolt-rings W-N

background step 0	1	ring step	0-1
Hex code	Hex code		
7	8		7-8
E	F		E-F
2	0		2-0
8	6		8-6
F	D		F-D


code: background-ring

OE521-1N, Picture A4-132-0: Landolt-rings W-N; PS operator: $w^* w^* w^* \text{setrgbcolor}$

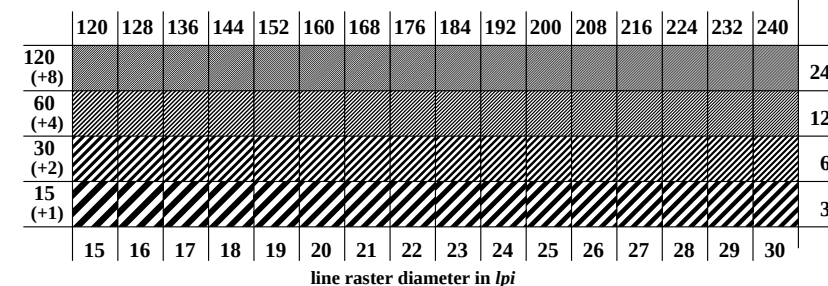

line raster diameter in lpi

OE521-3N, Picture A5-132-0: Line raster under 45° (or 135°); PS operator: $w^* w^* w^* \text{setrgbcolor}$

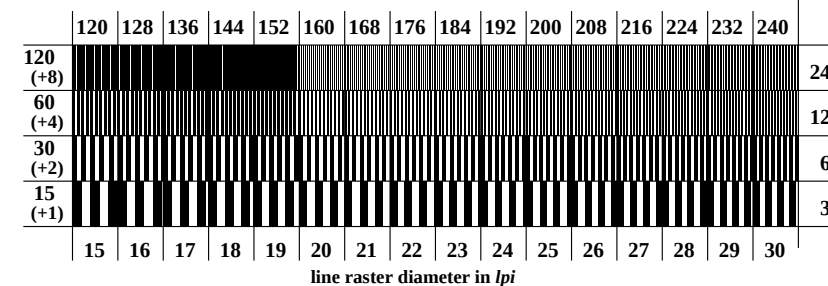


line raster diameter in lpi

OE521-5N, Picture A6-132-0: Line raster under 90° (or 0°); PS operator: $w^* w^* w^* \text{setrgbcolor}$


input: $\text{cmy0} (-> \text{rgb}^*_d) \text{setcmyk}$
output 132-0: $g_p=0.85$; $g_N=1.0$

TUB registration: 20110801-OE52/OE52L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rha4ta


See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

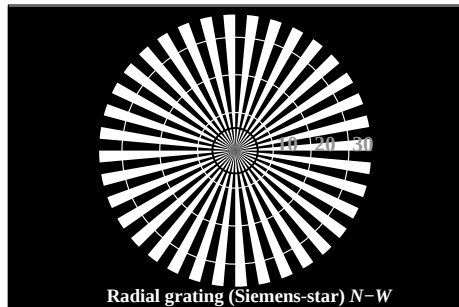


Radial grating (Siemens-star) N-W



Radial grating (Siemens-star) W-N

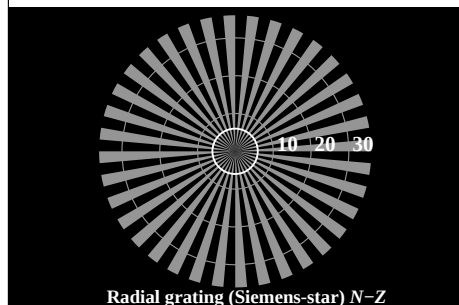


Radial grating (Siemens-star) N-Z




Radial grating (Siemens-star) W-Z

OE520-3N, Picture A1-133-0: Radial grating N-W, W-N, N-Z, W-Z; PS operator: $w^* w^* w^* \text{setrgbcolor}$

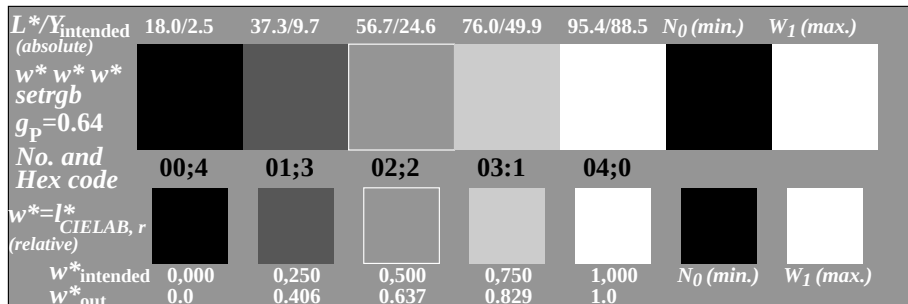


OE520-5N, Picture A2-133-0: 5 equidistant L^* -grey steps+ N_0 + W_1 ; PS operator: $w^* w^* w^* \text{setrgbcolor}$

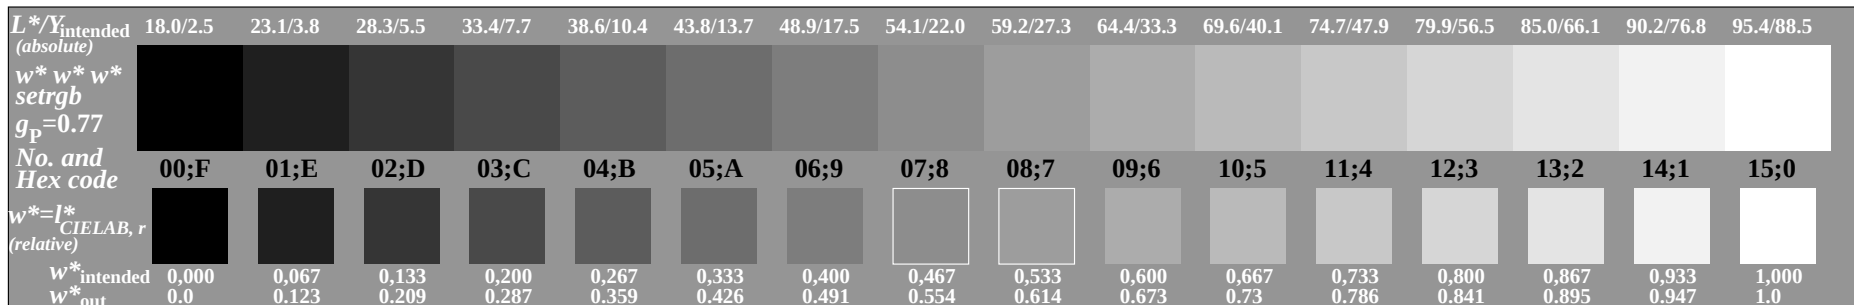


OE520-7N, Picture A3-133-0: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^* \text{setrgbcolor}$

OE52: similar ME16 according to ISO 9241-306; 1MR, DH
Viewing Y contrast $Y_W:Y_N=88,9:2,5$; Y_N range 1,87 to <3,75

input: $\text{cmy0} (-> \text{rgb}^*_d) \text{setcmyk}$
output 133-0: $g_p=0.77$; $g_N=1.0$

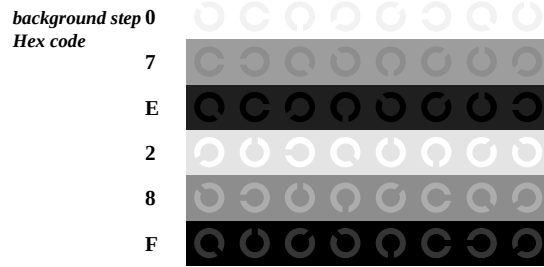


Landolt-rings W-N




code: background-ring

OE521-1N, Picture A4-133-0: Landolt-rings W-N; PS operator: $w^* w^* w^* \text{setrgbcolor}$

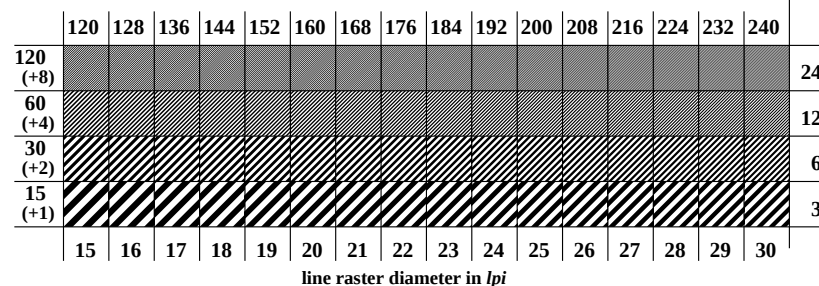

line raster diameter in lpi

OE521-3N, Picture A5-133-0: Line raster under 45° (or 135°); PS operator: $w^* w^* w^* \text{setrgbcolor}$

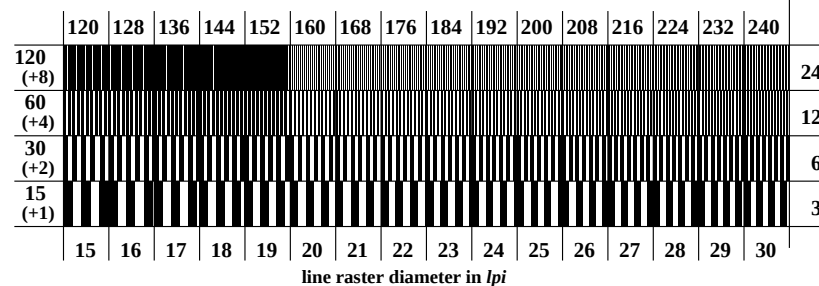


line raster diameter in lpi


OE521-5N, Picture A6-133-0: Line raster under 90° (or 0°); PS operator: $w^* w^* w^* \text{setrgbcolor}$

TUB registration: 20110801-OE52/OE52L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta


See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

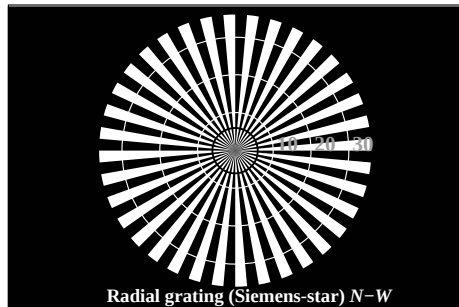


Radial grating (Siemens-star) N-W



Radial grating (Siemens-star) W-N

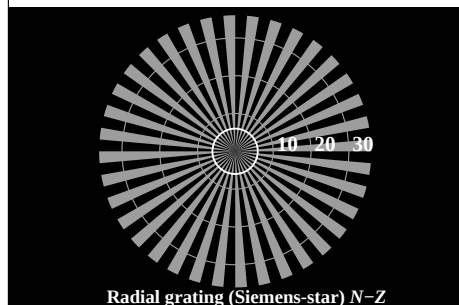


Radial grating (Siemens-star) N-Z




Radial grating (Siemens-star) W-Z

OE520-3N, Picture A1-134-0: Radial grating N-W, W-N, N-Z, W-Z; PS operator: $w^* w^* w^* \text{setrgbcolor}$

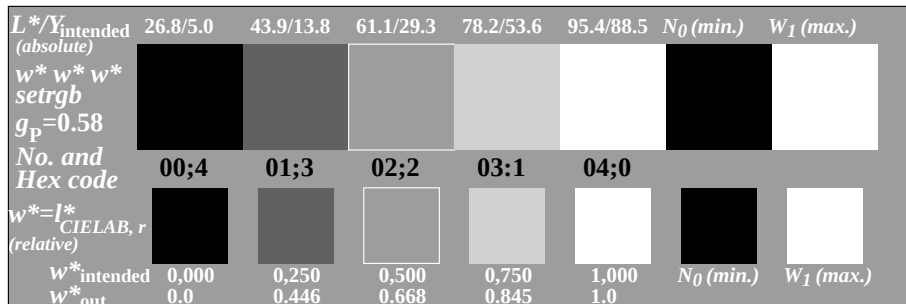

OE520-5N, Picture A2-134-0: 5 equidistant L^* -grey steps+ N_0 + W_1 ; PS operator: $w^* w^* w^* \text{setrgbcolor}$

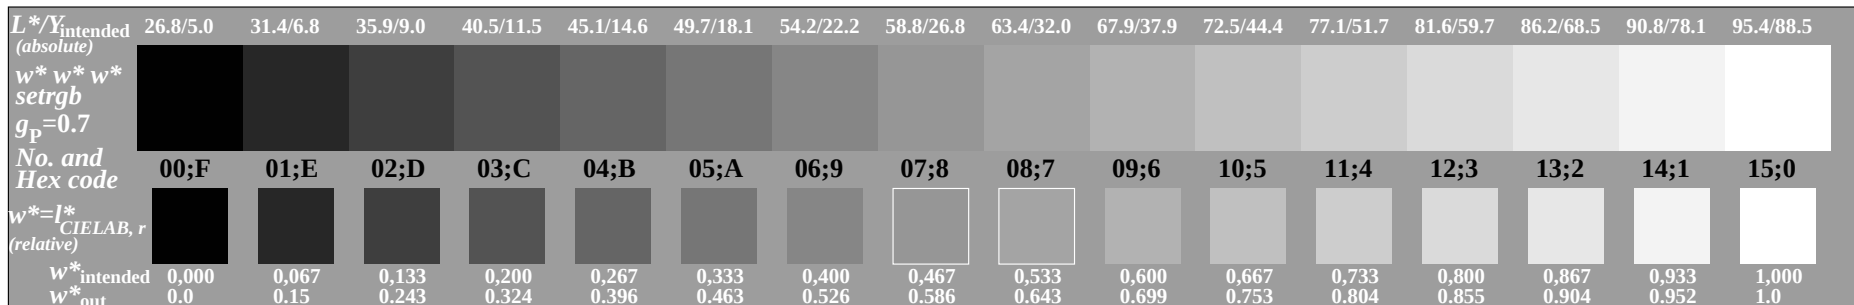

OE520-7N, Picture A3-134-0: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^* \text{setrgbcolor}$

OE52: similar ME16 according to ISO 9241-306; 1MR, DH
Viewing Y contrast $Y_W:Y_N=88,9:5$; Y_N range 3,75 to <7,5


input: $\text{cmy0} (-> \text{rgb}^*_d) \text{setcmyk}$
output 134-0: $g_p=0.7$; $g_N=1.0$

background step 0		1	ring step	0-1
Hex code		8	Hex code	7-8
7		F		E-F
E		0		2-0
2		6		8-6
8		D		F-D
F				

Landolt-rings W-N


code: background-ring

OE521-1N, Picture A4-134-0: Landolt-rings W-N; PS operator: $w^* w^* w^* \text{setrgbcolor}$

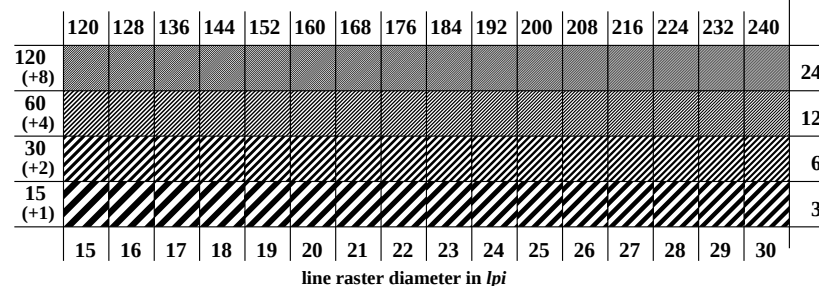

line raster diameter in lpi

OE521-3N, Picture A5-134-0: Line raster under 45° (or 135°); PS operator: $w^* w^* w^* \text{setrgbcolor}$

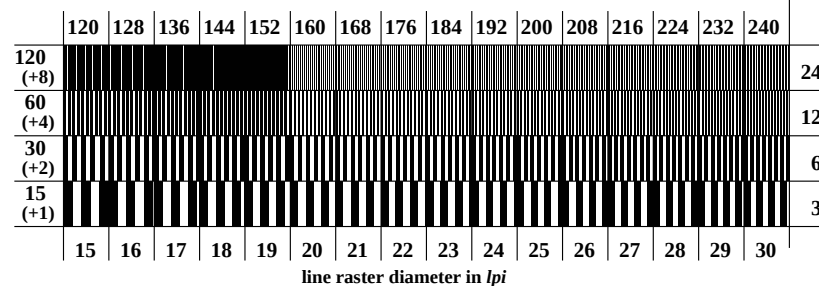


line raster diameter in lpi


OE521-5N, Picture A6-134-0: Line raster under 90° (or 0°); PS operator: $w^* w^* w^* \text{setrgbcolor}$

TUB registration: 20110801-OE52/OE52L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta


See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

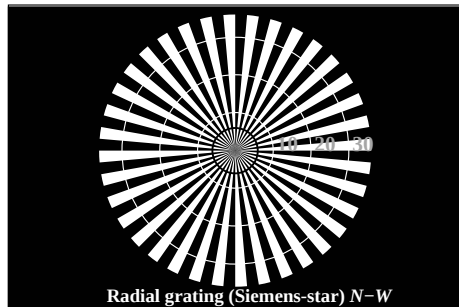


Radial grating (Siemens-star) N-W



Radial grating (Siemens-star) W-N

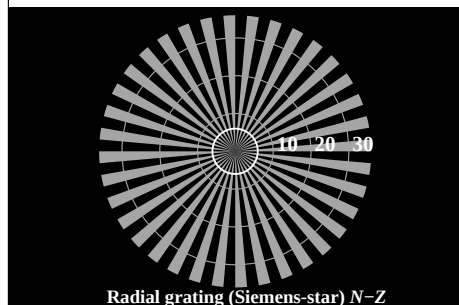


Radial grating (Siemens-star) N-Z




Radial grating (Siemens-star) W-Z

OE520-3N, Picture A1-135-0: Radial grating N-W, W-N, N-Z, W-Z; PS operator: $w^* w^* w^* \text{setrgbcolor}$

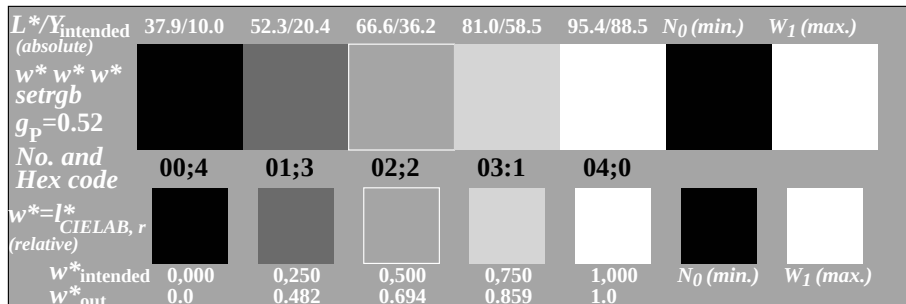


OE520-5N, Picture A2-135-0: 5 equidistant L^* -grey steps+ N_0 + W_1 ; PS operator: $w^* w^* w^* \text{setrgbcolor}$

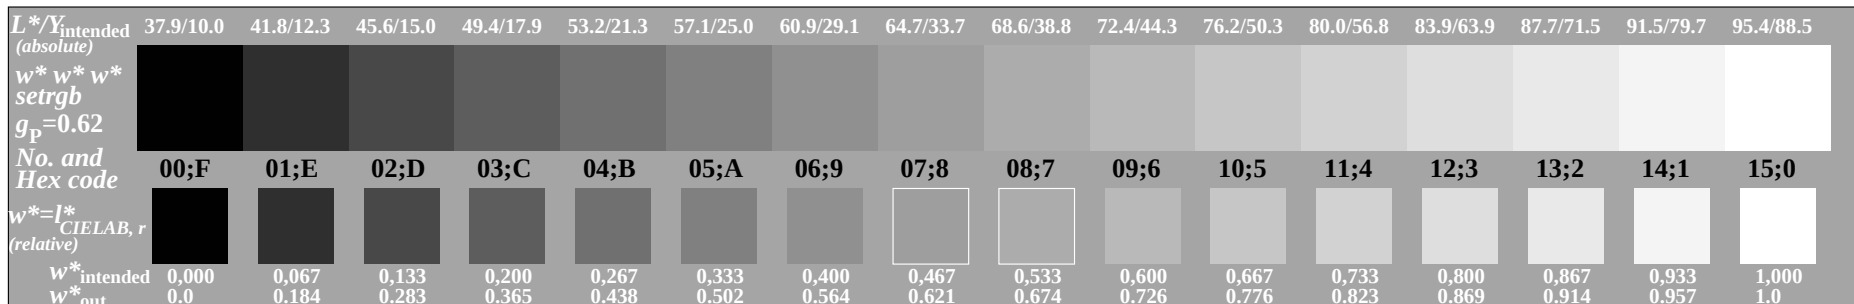

OE520-7N, Picture A3-135-0: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^* \text{setrgbcolor}$

OE52: similar ME16 according to ISO 9241-306; 1MR, DH
Viewing Y contrast $Y_W:Y_N=88,9:10$; Y_N range 7,5 to <15


input: $\text{cmy0} (-> \text{rgb}^*_d) \text{setcmyk}$
output 135-0: $g_p=0.62$; $g_N=1.0$

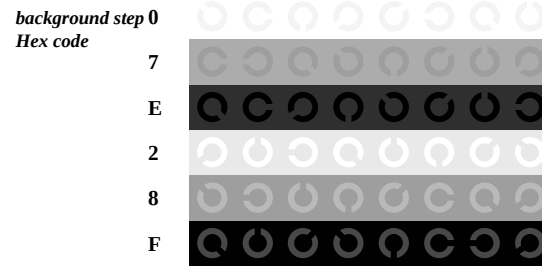


Landolt-rings W-N

code: background-ring

OE521-1N, Picture A4-135-0: Landolt-rings W-N; PS operator: $w^* w^* w^* \text{setrgbcolor}$

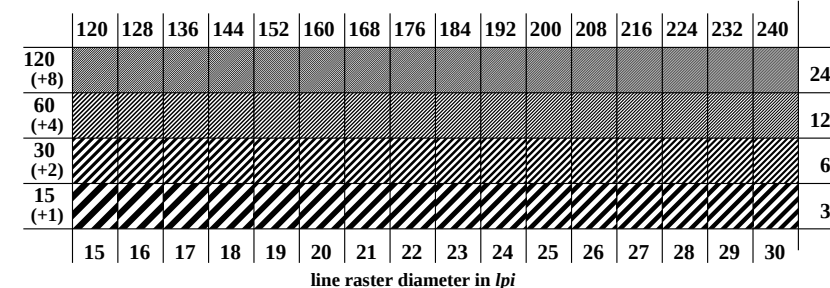


OE521-3N, Picture A5-135-0: Line raster under 45° (or 135°); PS operator: $w^* w^* w^* \text{setrgbcolor}$

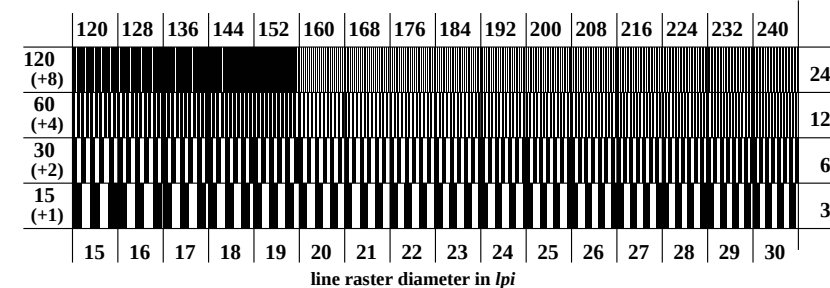


OE521-5N, Picture A6-135-0: Line raster under 90° (or 0°); PS operator: $w^* w^* w^* \text{setrgbcolor}$

TUB registration: 20110801-OE52/OE52L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta


See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

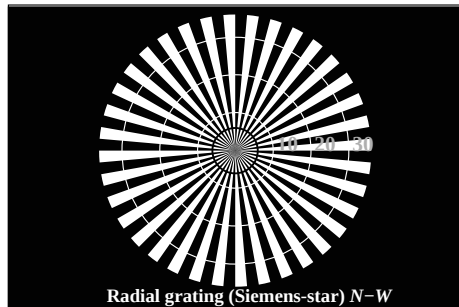


Radial grating (Siemens-star) N-W



Radial grating (Siemens-star) W-N

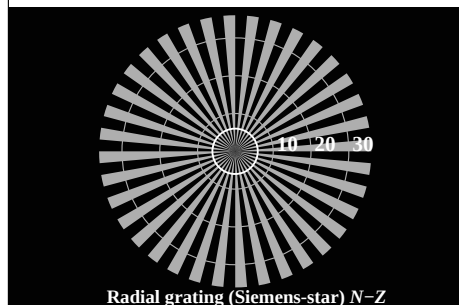


Radial grating (Siemens-star) N-Z




Radial grating (Siemens-star) W-Z

OE520-3N, Picture A1-136-0: Radial grating N-W, W-N, N-Z, W-Z; PS operator: $w^* w^* w^* \text{setrgbcolor}$

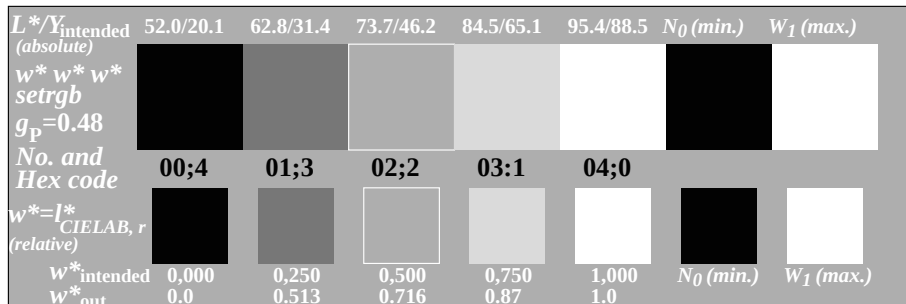

OE520-5N, Picture A2-136-0: 5 equidistant L^* -grey steps+ N_0 + W_1 ; PS operator: $w^* w^* w^* \text{setrgbcolor}$

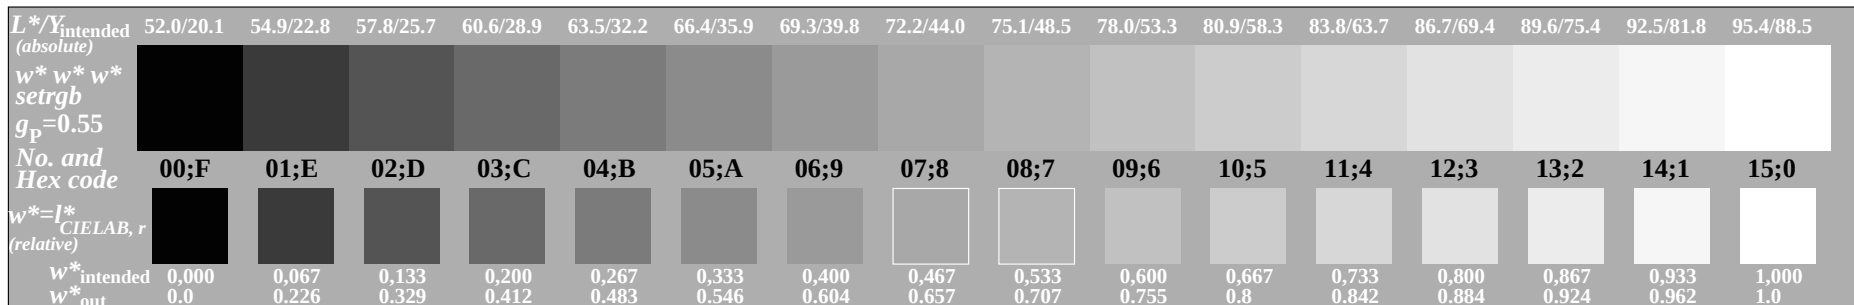

OE520-7N, Picture A3-136-0: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^* \text{setrgbcolor}$


OE52: similar ME16 according to ISO 9241-306; 1MR, DH
Viewing Y contrast $Y_W:Y_N=88,9:20$; Y_N range 15 to <30

background step 0		1	ring step	0-1
Hex code		8	Hex code	7-8
7		F		E-F
E		0		2-0
2		6		8-6
8		D		F-D
F				

Landolt-rings W-N


code: background-ring

OE521-1N, Picture A4-136-0: Landolt-rings W-N; PS operator: $w^* w^* w^* \text{setrgbcolor}$

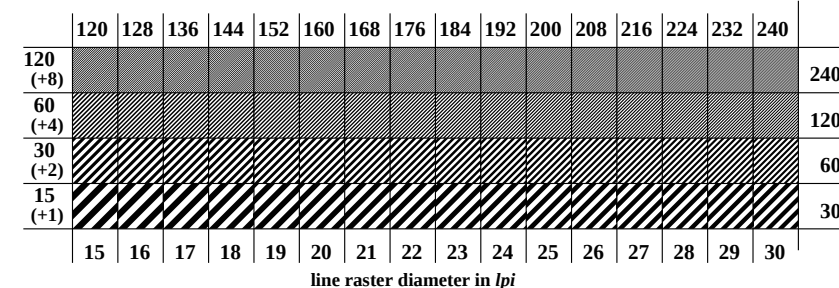

line raster diameter in lpi

OE521-3N, Picture A5-136-0: Line raster under 45° (or 135°); PS operator: $w^* w^* w^* \text{setrgbcolor}$

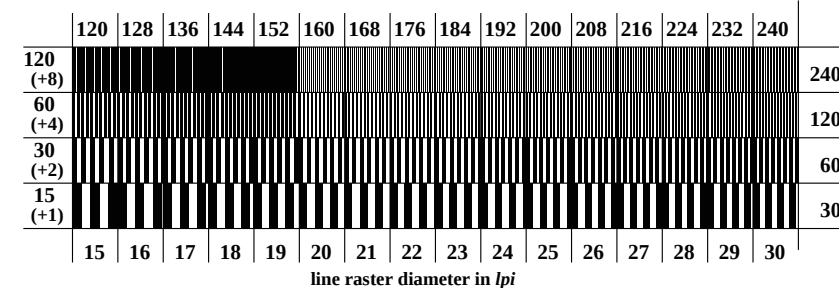


line raster diameter in lpi

OE521-5N, Picture A6-136-0: Line raster under 90° (or 0°); PS operator: $w^* w^* w^* \text{setrgbcolor}$


input: $\text{cmy0} (-> \text{rgb}^*_d) \text{setcmyk}$
output 136-0: $g_p=0.55$; $g_N=1.0$

TUB registration: 20110801-OE52/OE52L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta


See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

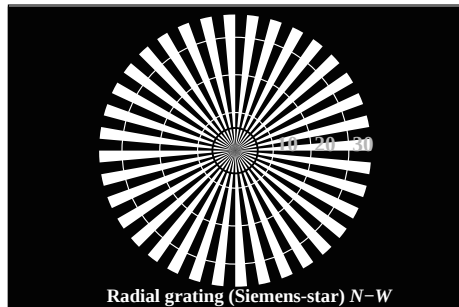


Radial grating (Siemens-star) N-W



Radial grating (Siemens-star) W-N

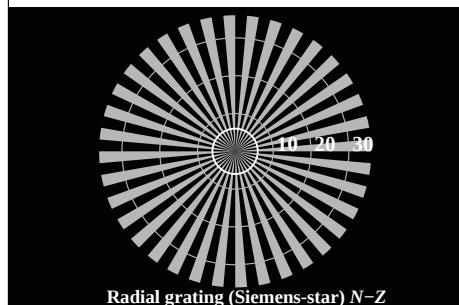


Radial grating (Siemens-star) N-Z




Radial grating (Siemens-star) W-Z

OE520-3N, Picture A1-137-0: Radial grating N-W, W-N, N-Z, W-Z; PS operator: $w^* w^* w^* \text{setrgbcolor}$

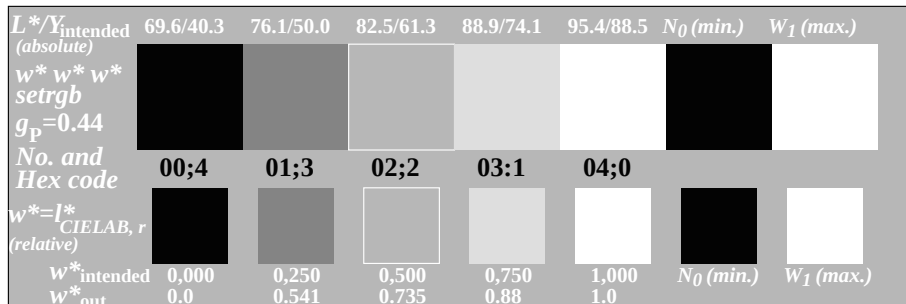

OE520-5N, Picture A2-137-0: 5 equidistant L^* -grey steps+ N_0 + W_1 ; PS operator: $w^* w^* w^* \text{setrgbcolor}$

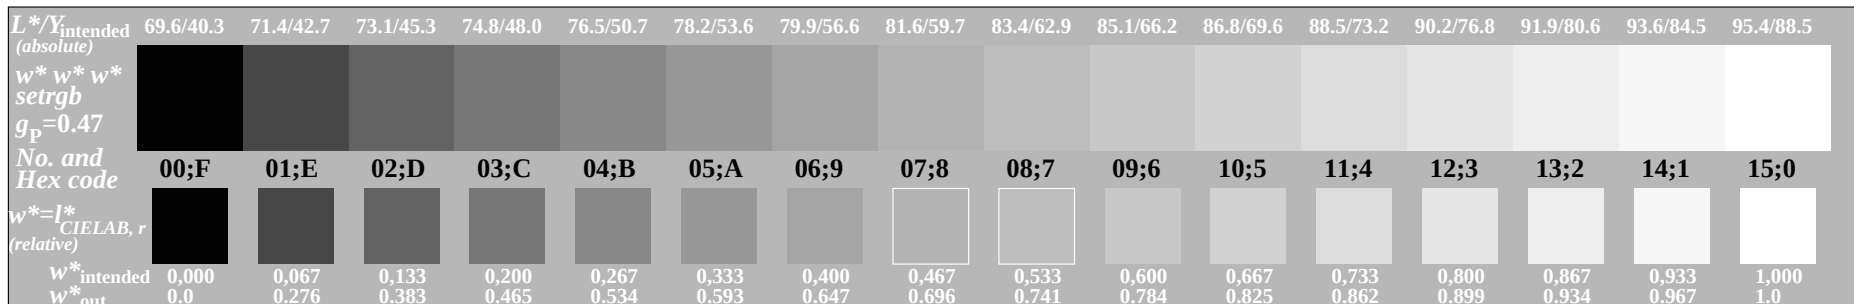

OE520-7N, Picture A3-137-0: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^* \text{setrgbcolor}$

OE52: similar ME16 according to ISO 9241-306; 1MR, DH
Viewing Y contrast $Y_W:Y_N=88,9:40$; Y_N range 30 to <60


input: $\text{cmy0} (-> \text{rgb}^*_d) \text{setcmyk}$
output 137-0: $g_p=0.47$; $g_N=1.0$

background step 0		1	ring step	0-1
Hex code		8	Hex code	7-8
7		F		E-F
E		0		2-0
2		6		8-6
8		D		F-D
F				

Landolt-rings W-N


code: background-ring

OE521-1N, Picture A4-137-0: Landolt-rings W-N; PS operator: $w^* w^* w^* \text{setrgbcolor}$

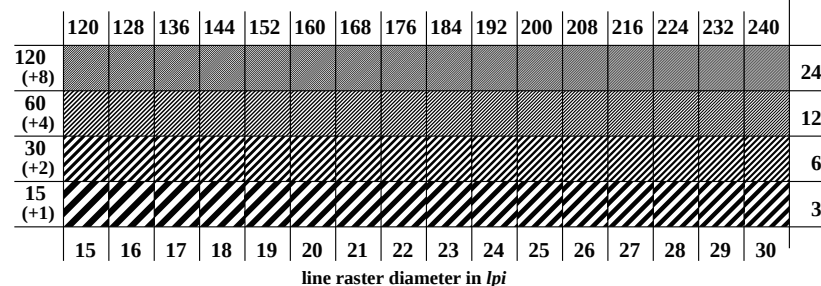

line raster diameter in lpi

OE521-3N, Picture A5-137-0: Line raster under 45° (or 135°); PS operator: $w^* w^* w^* \text{setrgbcolor}$

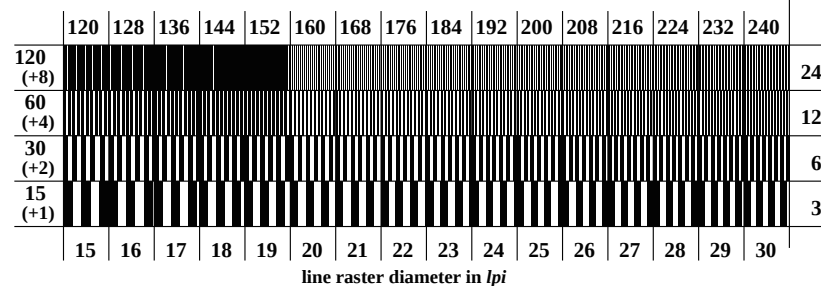

line raster diameter in lpi

OE521-5N, Picture A6-137-0: Line raster under 90° (or 0°); PS operator: $w^* w^* w^* \text{setrgbcolor}$

TUB registration: 20110801-OE52/OE52L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta