




See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

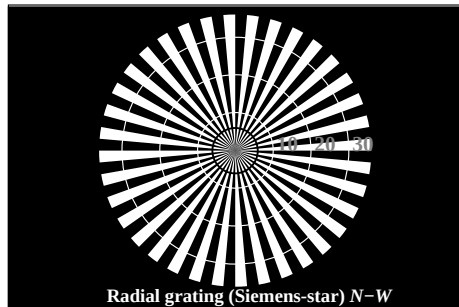


Radial grating (Siemens-star) N-W



Radial grating (Siemens-star) W-N

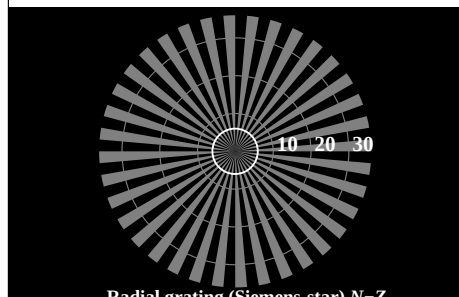


Radial grating (Siemens-star) N-Z




Radial grating (Siemens-star) W-Z

OE540-3N, Picture A1-100-0: Radial grating N-W, W-N, N-Z, W-Z; PS operator: 0 0 0 n* setcmykcolor

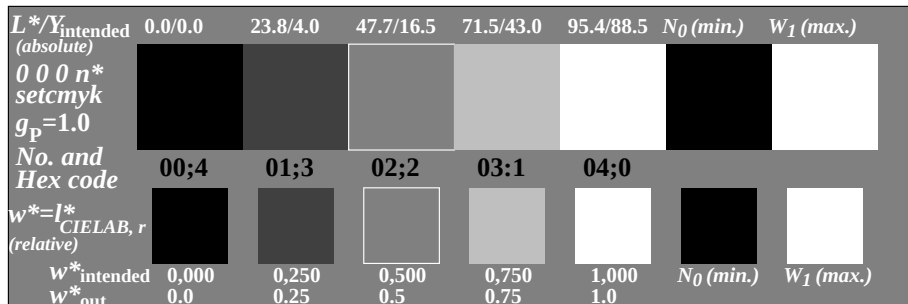

OE540-5N, Picture A2-100-0: 5 equidistant L^* -grey steps+ N_0 + W_1 ; PS operator: 0 0 0 n* setcmykcolor

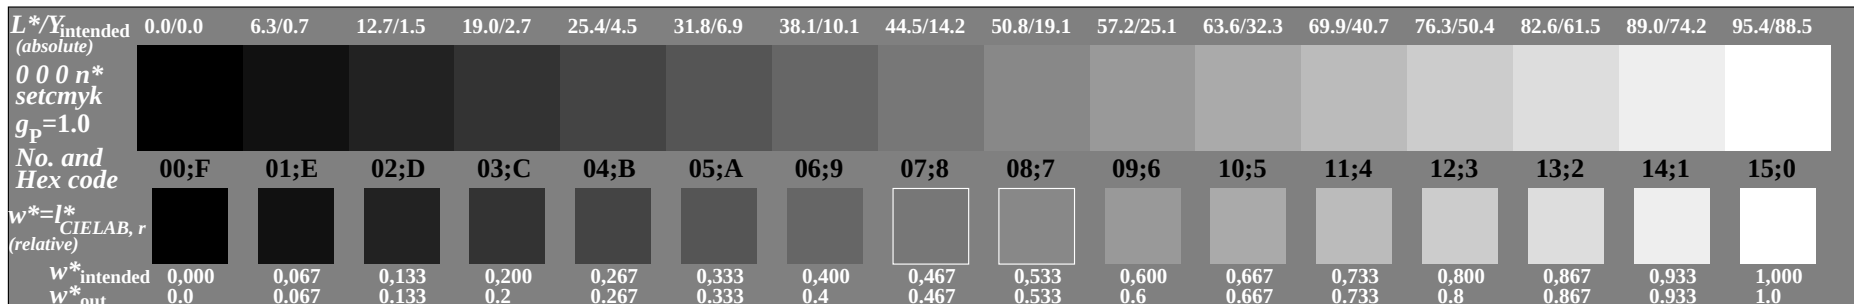

OE540-7N, Picture A3-100-0: 16 visual equidistant L^* -grey steps; PS operator: 0 0 0 n* setcmykcolor


OE54: similar ME16 according to ISO 9241-306; 1MR, DH
Viewing Y contrast $Y_W:Y_N=88,9:0,31$; Y_N range 0,0 to <0,46

background step 0		1	ring step	0-1
Hex code		8	Hex code	7-8
7		E	F	E-F
E		0	6	2-0
2		8	D	8-6
8		F		F-D

Landolt-rings W-N


code: background-ring

OE541-1N, Picture A4-100-0: Landolt-rings W-N; PS operator: 0 0 0 n* setcmykcolor

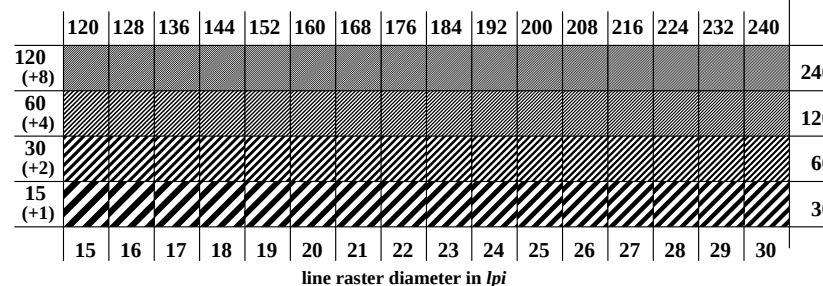

line raster diameter in lpi

OE541-3N, Picture A5-100-0: Line raster under 45° (or 135°); PS operator: 0 0 0 n* setcmykcolor

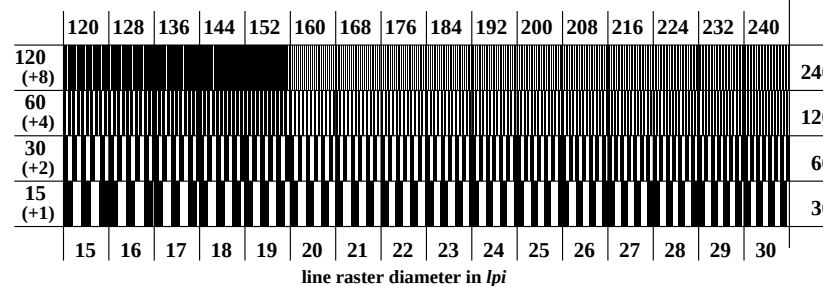

line raster diameter in lpi

OE541-5N, Picture A6-100-0: Line raster under 90° (or 0°); PS operator: 0 0 0 n* setcmykcolor

input: all (->rgb*d) setrgbcolor
output 130-0: $g_p=1.0$; $g_N=1.0$

TUB registration: 20110801-OE54/OE54L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta