




OE580-7, Picture D1W-030-0: Flower motif, 14 CIE-test colours and 2 + 16 grey steps (sf); PS operators *settransfer*, 3 *colorimage*




OE580-5, Picture D2W-030-0: Radial gratings W-R_d; W-G_d; W-B_d; W-N; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

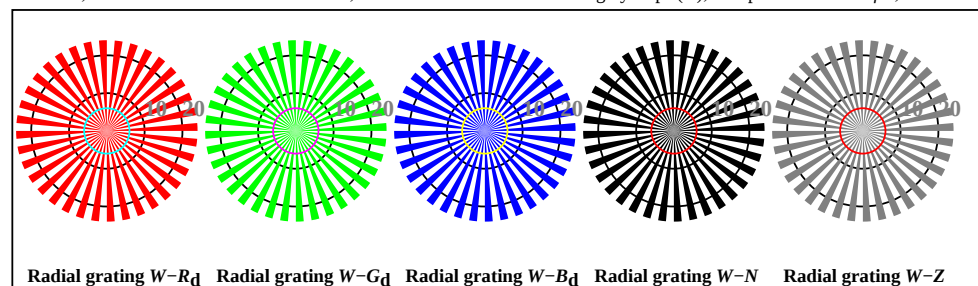


OE580-7, Picture D3W-030-0: 14 CIE-test colours and 2 + 16 grey steps; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$


OE58: Test chart 4 according to ISO 15775, TR 24705; DH
Test chart according to ISO 9241-306, Annex E, C_{Y8} = 288:1

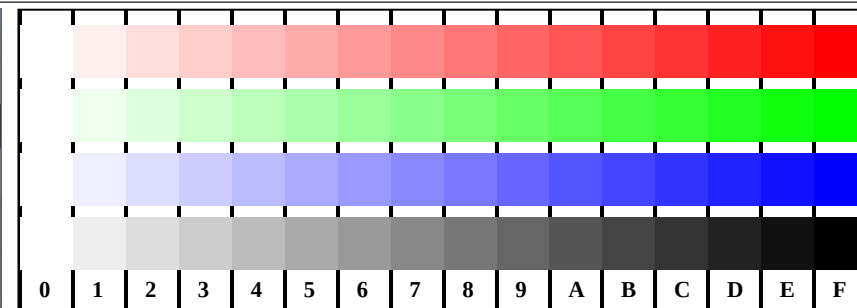


OE581-1, Picture D4W-L-030-0: 16 equidistant steps W-R_d; W-G_d; W-B_d; W-N; PS: $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

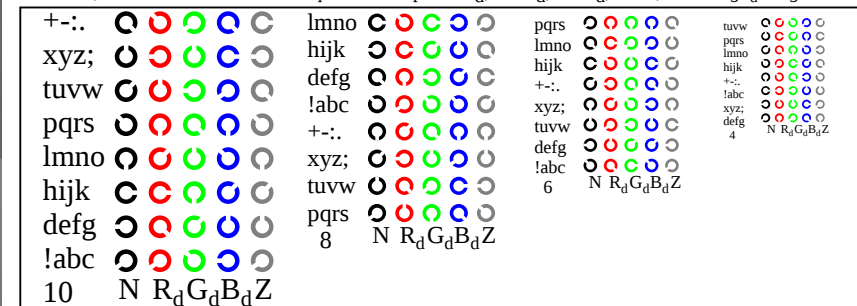

OE581-3, Picture D5W-030-0: Script and Landolt-rings N; R_d; G_d; B_d; Z; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

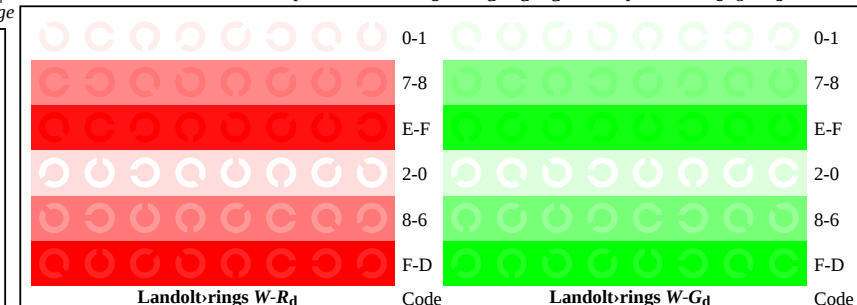

OE581-5, Picture D6W-L-030-0: Landolt-rings W-R_d; W-G_d; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

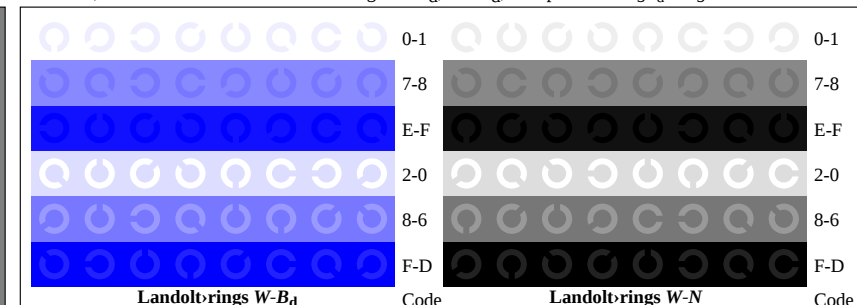

OE581-7, Picture D7W-L-030-0: Landolt-rings W-B_d; W-N; PS operator $\rightarrow \text{rgb}_d \text{ setrgbcolor}$

input: *rgb* ($\rightarrow \text{rgb}_d$) *setrgbcolor*
output 030-0: no change

Test for the visual linearized output of Pictures D1W-030-0 to D7W-030-0, page 1/3

Output test with computer () or data projector () display please mark by (x)!

Is an original offset print on standard offset paper for comparison available? Yes/No

Test of the (flower) image according to picture D1W-030-0, if an offset print is available

Are clear (immediately conspicuous) differences recognized between reproduction and test chart? Yes/No

Subjective remarks about the colour reproduction of the (flower) image, the CIE-test colours and the 16 grey steps within the image, for example "less contrast":
.....
.....
.....

Test of the resolution of radial gratings $W-R_d$, $W-G_d$, $W-B_d$ according to picture D2W-030-0

	$W-R_d$	$W-G_d$	$W-B_d$	$W-N$	$W-Z$
Is the resolution diameter < 6 mm?	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
Test with magnifying glass (6x), Resolution diameter:	 mm	 mm	 mm	 mm	 mm

Test of the 14 CIE-test colours according to picture D3W-030-0, if an offset print is available

Are clear (immediately conspicuous) differences recognized between reproduction and test chart? Yes/No
If Yes: How many colours have clear differences? of the given 14 steps: Steps

Test of 16 visual equidistant L^* -grey steps according to picture D3W-030-0

Are the 16 steps on the upper rows distinguishable? Yes/No
If No: How many steps can be distinguished? of the given 16 steps: Steps

Part 1

OE580-3N-030-1

Documentation of file format, hardware and software for this test:

PDF-File: http://130.149.60.45/farbmetrik/OE58/OE58D0NP.PDF underline Yes/No

PS-File: http://130.149.60.45/farbmetrik/OE58/OE58D0NA.PS or underline Yes/No

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline monitor/data projector/printer

Device model, driver and version:.....

Device output with PDF/PS-file: underline PDF/PS-file

For device output with PDF-file OE58D0NP.PDF:

either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software. e. g. Adobe-Reader-/Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file OE58D0NA.PS:

either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks: Special remarks, e. g. output of Landscape (L)
.....
.....
.....

Part 3

OE580-7N-030-1

OE58: Form A for test chart 4 according to ISO 15775; DH
Test chart according to ISO 9241-306, Annex E, $C_{Y8} = 288:1$

Test of 16 visually equally spaced steps of the colour rows $W-R_d$, $W-G_d$, $W-B_d$ and $W-N$ according to picture D4W-030-0

	Are all the 16 steps distinguishable?	Yes/No
$W-R_d$ White - Orangered:	If No: How many steps can be distinguished? of the given 16 steps	 Steps
$W-G_d$ White - Leafgreen:	If No: How many steps can be distinguished? of the given 16 steps	 Steps
$W-B_d$ White - Violetblue:	If No: How many steps can be distinguished? of the given 16 steps	 Steps
$W-N$ White - Black:	If No: How many steps can be distinguished? of the given 16 steps	 Steps

Test of characters and Landolt-rings in four sizes according to picture D5W-030-0

Is the recognition frequency > 50% for letters (17 from 32 at least) and for Landolt-rings (minimum 5 of 8)?

Relative size	Letters	Ring N	Ring R_d	Ring G_d	Ring B_d
10	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
8	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
6	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
4	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No

Test of recognition frequency of Landolt-rings $W-R_d$, $W-G_d$, $W-B_d$ and $W-N$ according to pictures D6W-030-0, and D7W-030-0

Is the recognition frequency of the Landolt-rings > 50% (min. 5 of 8 at least)?

Colour row $W-R_d$ background - ring	Colour row $W-G_d$ background - ring	Colour row $W-B_d$ background - ring	Colour row $W-N$ background - ring
0 - 1 Yes/No	0 - 1 Yes/No	0 - 1 Yes/No	0 - 1 Yes/No
7 - 8 Yes/No	7 - 8 Yes/No	7 - 8 Yes/No	7 - 8 Yes/No
E - F Yes/No	E - F Yes/No	E - F Yes/No	E - F Yes/No
2 - 0 Yes/No	2 - 0 Yes/No	2 - 0 Yes/No	2 - 0 Yes/No
8 - 6 Yes/No	8 - 6 Yes/No	8 - 6 Yes/No	8 - 6 Yes/No
F - D Yes/No	F - D Yes/No	F - D Yes/No	F - D Yes/No

Part 2

OE581-3N-030-1

Documentation of assessor colour vision properties for visual assessment

The assessor has normal colour vision according to one test:
either according to DIN 6160:1996 with Anomaloskop of Nagel
or with test charts using colour points according to Ishihara
or tested with, please specify:

underline Yes/No
underline Yes/unknown
underline Yes/unknown
underline Yes/unknown

Visual output evaluation of the computer or data projector display, page 3/3

Office workplace illumination is daylight (clouded/north sky)

PDF file: http://130.149.60.45/farbmetrik/OE58/OE58D0NP.PDF

PS file: http://130.149.60.45/farbmetrik/OE58/OE58D0NA.PS

Picture A7-030-2: contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)

compare standard print output according to ISO/IEC 15775 with range F:0

Remark: In daylighted offices the contrast range is in many cases:

on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output, page 3/3

PDF-File: http://130.149.60.45/farbmetrik/OE58/OE58D0NP.PDF

picture A7-030-2

underline Yes/No

PS-File: http://130.149.60.45/farbmetrik/OE58/OE58D0NA.PS

picture A7-030-2

or underline Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry:

If No, please give other parameters:

underline Yes/No

Colorimetric specification with PS file for colours in the columns A to T

Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer

of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF

underline Yes/No

If No, please describe other method:

Part 4

OE581-7N-030-1

input: rgb ($\rightarrow rgb^*_d$) $setrgbcolor$
output 030-1: no change

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> <http://130.149.60.45/~farbmetrik/OE58>

TUB registration: 20110801-OE58/OE58D0NP.PDF /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rha4ta

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*
1	0.0	0.0	0.0	0.0	0.01
2	6.36	0.0	0.07	6.36	0.01
3	12.72	0.0	0.13	12.72	0.01
4	19.08	0.0	0.2	19.08	0.01
5	25.44	0.0	0.27	25.44	0.01
6	31.8	0.0	0.33	31.8	0.01
7	38.16	0.0	0.4	38.16	0.01
8	44.52	0.0	0.47	44.52	0.01
9	50.89	0.0	0.53	50.89	0.01
10	57.25	0.0	0.6	57.25	0.01
11	63.61	0.0	0.67	63.61	0.01
12	69.97	0.0	0.73	69.97	0.01
13	76.33	0.0	0.8	76.33	0.01
14	82.69	0.0	0.87	82.69	0.01
15	89.05	0.0	0.93	89.05	0.01
16	95.41	0.0	1.0	95.41	0.01
17	0.0	0.0	0.0	0.0	0.01
18	23.85	0.0	0.25	23.85	0.01
19	47.71	0.0	0.5	47.71	0.01
20	71.56	0.0	0.75	71.56	0.01
21	95.41	0.0	1.0	95.41	0.01


Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G

Mean lightness difference (16 steps)
 $\Delta E^*_{\text{CIELAB}} = 0.0$

Mean lightness difference (5 steps)
 $\Delta L^*_{\text{CIELAB}} = 0.0$

Mean colour reproduction index:
 $R^*_{\text{ab,m}} = 100$

OE580-3N-030-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

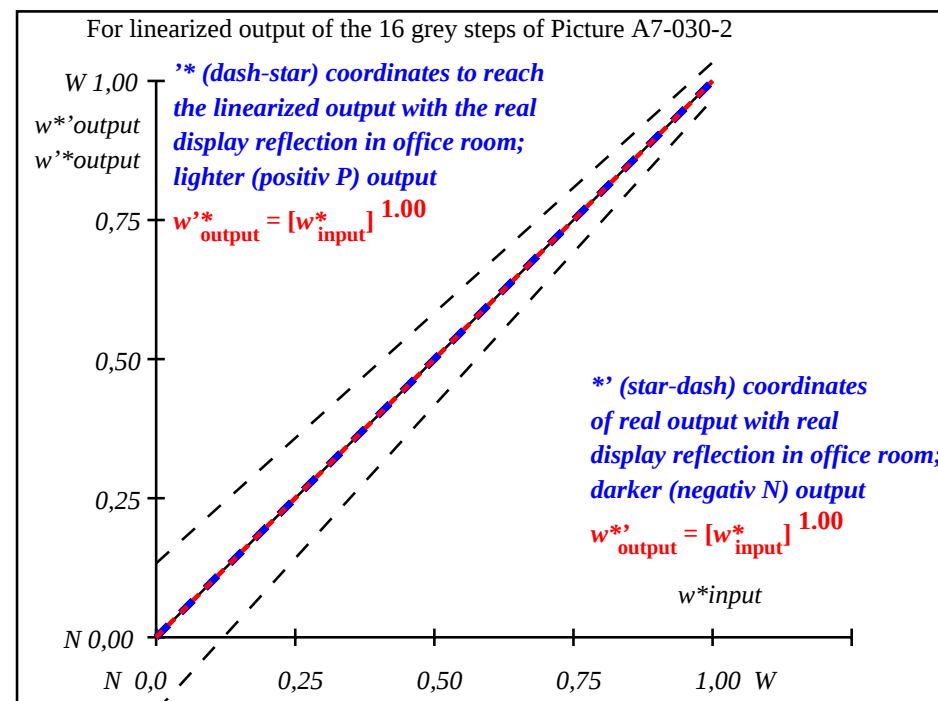

OE581-3N-030-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

L*/Y _{intended} (absolute)	0.0/0.0	6.4/0.7	12.7/1.5	19.1/2.8	25.4/4.6	31.8/7.0	38.2/10.2	44.5/14.2	50.9/19.2	57.2/25.2	63.6/32.3	70.0/40.7	76.3/50.4	82.7/61.6	89.0/74.3	95.4/88.6
w* w* w* setrgb g _P =1.00																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
w*=L*/ CIE LAB, r (relative)																
w* _{intended}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w* _{out}	0,0	0,067	0,133	0,2	0,267	0,333	0,4	0,467	0,533	0,6	0,667	0,733	0,8	0,867	0,933	1,0

OE580-7N, Picture A7-030-2: 16 visual equidistant L*-grey steps; PS operator: w* w* w* setrgbcolor

OE58: In-output relation according to ISO 9241-306; DH
Test chart according to ISO 9241-306, Annex E, C_{Y8} = 288:1

input: rgb (->rgb*a) setrgbcolor
output 030-2: no change