




See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

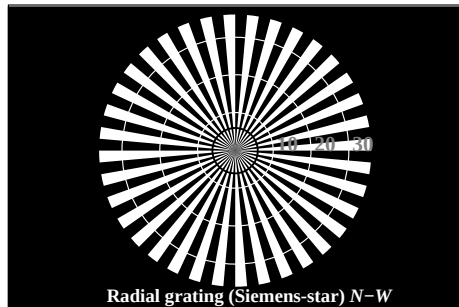


Radial grating (Siemens-star) N-W



Radial grating (Siemens-star) W-N

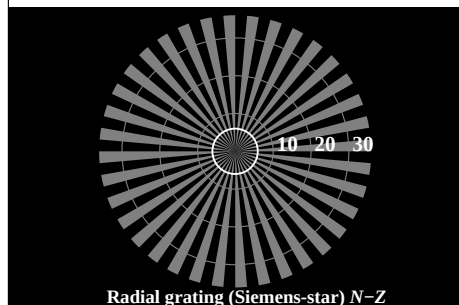


Radial grating (Siemens-star) N-Z




Radial grating (Siemens-star) W-Z

OE600-3N, Picture A1-130-0: Radial grating N-W, W-N, N-Z, W-Z; PS operator: $w^* w^* w^* \text{setrgbcolor}$

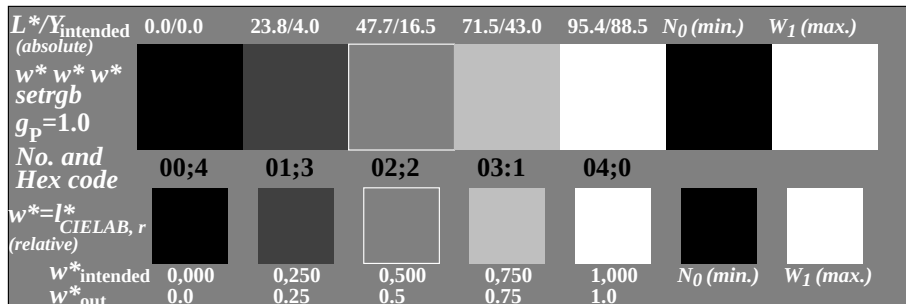


OE600-5N, Picture A2-130-0: 5 equidistant L^* -grey steps+ N_0 + W_1 ; PS operator: $w^* w^* w^* \text{setrgbcolor}$

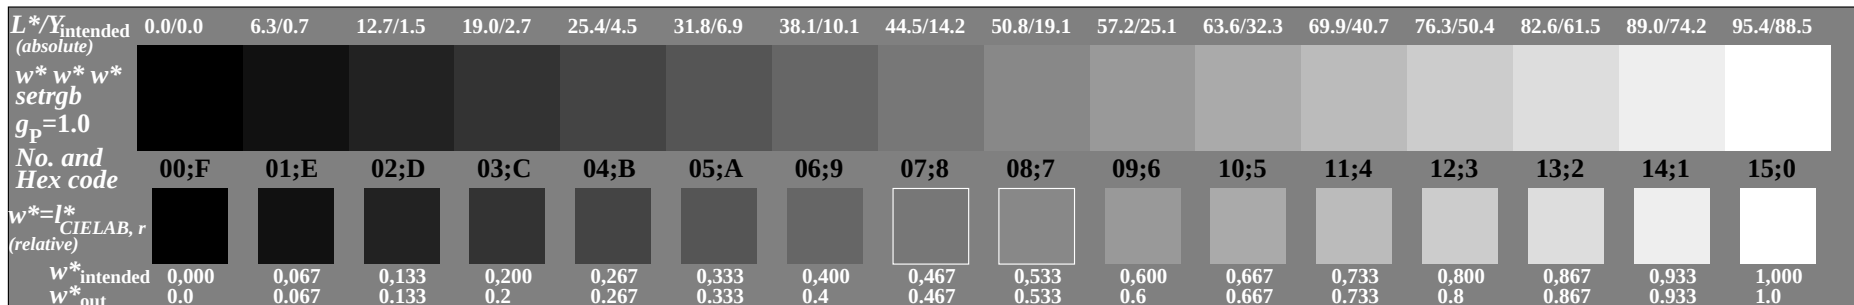


OE600-7N, Picture A3-130-0: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^* \text{setrgbcolor}$

OE60: similar ME16 according to ISO 9241-306; 1MR, DEH
Viewing Y contrast $Y_W:Y_N=88,9:0,31$; Y_N range 0,0 to <0,46

input: 000n ($\rightarrow \text{rgb}^*_{\text{de}}$) setcmyk
output 130-0: $g_p=1.0$; $g_N=1.0$

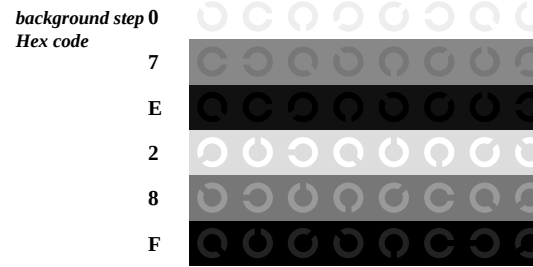


Landolt-rings W-N




code: background-ring

OE601-1N, Picture A4-130-0: Landolt-rings W-N; PS operator: $w^* w^* w^* \text{setrgbcolor}$

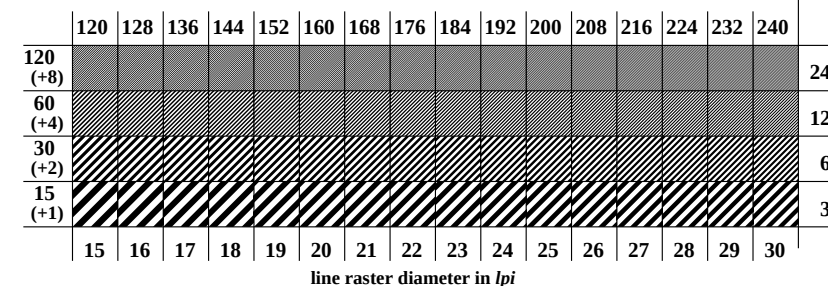

line raster diameter in lpi


OE601-3N, Picture A5-130-0: Line raster under 45° (or 135°); PS operator: $w^* w^* w^* \text{setrgbcolor}$

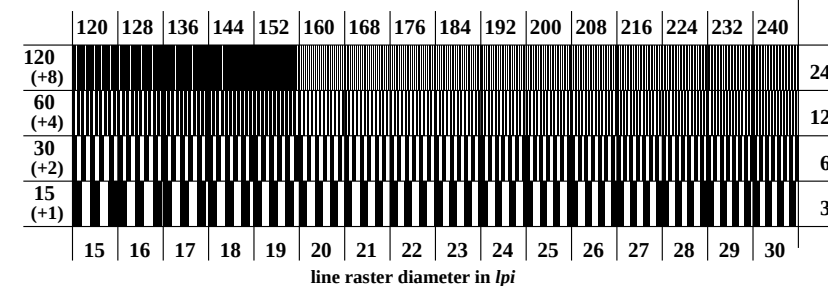


line raster diameter in lpi

OE601-5N, Picture A6-130-0: Line raster under 90° (or 0°); PS operator: $w^* w^* w^* \text{setrgbcolor}$


TUB registration: 20110801-OE60/OE60L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta



See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB




<http://130.149.60.45/~farbmetrik/OE60/OE60L0NA.TXT> / .PS; linearized output, Page 2/3
 F: Output Linearization (OL) data OE60/OE60L0NA.TXT / .PS in File (F)



TUB registration: 20110801-OE60/OE60L0NA.TXT / .PS
 application for output of displays: monitor systems or data projector systems

TUB material: code=rh4ta



Test for the best visual linearized output of Picture A7-130-0 Yes/No
Output test with the computer display () or the external display ()

Test of the radial grating according to picture A1-130-0

N-W-radial grating: Is the resolution diameter < 6 mm? Yes/No
 Test with magnifying glass (e.g. 6x) resolution diameter mm

W-N-radial grating: Is the resolution diameter < 6 mm? Yes/No
 Test with magnifying glass (e.g. 6x) resolution diameter mm

N-Z-radial grating: Is the resolution diameter < 6 mm? Yes/No
 Test with magnifying glass (e.g. 6x) resolution diameter mm

W-Z-radial grating: Is the resolution diameter < 6 mm? Yes/No
 Test with magnifying glass (e.g. 6x) resolution diameter mm

Test of 5 visual equidistant L*-grey steps according to picture A2-130-0

Are the 5 steps on the upper rows distinguishable? Yes/No
 If No: How many steps can be distinguished? of the given 5 steps: Steps

Test of 16 visual equidistant L*-grey steps according to picture A3-130-0

Are the 16 steps on the upper rows distinguishable? Yes/No
 If No: How many steps can be distinguished? of the given 16 steps: Steps

Part 1

OE600-3N-130-1

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE60/OE60L0NP.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE60/OE60L0NA.PS> or underline Yes/No

Used computer operating system:
 either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline monitor/data projector/printer
 Device model, driver and version:.....

Device output with PDF/PS-file: underline PDF/PS-file

For device output with PDF-file OE60L0NP.PDF:
 either PDF-file transfer "download, copy" to PDF device.....
 or with computer system interpretation by "Display-PDF":.....
 or with software e. g. Adobe-Reader/-Acrobat and version:.....
 or with software e. g. Ghostscript and version:.....

For device output with PS-file OE60L0NA.PS:
 either PS-file transfer "download, copy" to PS device.....
 or with computer system interpretation by "Display-PS":.....
 or with software e. g. Ghostscript and version:.....
 or with software e. g. Mac-Yap and version:.....

Special remarks: Special remarks, e. g. output of Landscape (L)

Part 3

OE600-7N-130-1



OE60: Form A for test chart according to ISO 9241-306; 1MR, DEHinput: 000n (->rgb*_{de}) setcmyk
 Viewing Y contrast $Y_W:Y_N=88,9:0,31$; Y_N range 0,0 to <0,46 output 130-1: $g_P=1.0$; $g_N=1.0$

Test for the best visual linearized output of Picture A7-130-0 Yes/No
Output test with the computer display () or the external display ()

Test of the Landolt-rings N-W according to picture A4-130-0

N-W-radial grating:
 Is the recognition frequency of the Landolt-rings > 50% (5 of 8 at least)?
 background - ring
 0 - 1 Yes/No
 7 - 8 Yes/No
 E - F Yes/No
 2 - 0 Yes/No
 8 - 6 Yes/No
 F - D Yes/No

Test of the radial grating under 45° according to picture A5-130-0

Can equally spaced lines be seen?
 Visual testing: for radial diameter from 15 to 60 lpi Yes/No
 Test with a magnifying glass (e.g. 6x): - from 15 lpi: to lpi

Test of the radial grating under 90° according to picture A6-130-0

Can equally spaced lines be seen?
 Visual testing: for radial diameter from 15 to 60 lpi Yes/No
 Test with a magnifying glass (e.g. 6x): - from 15 lpi: to lpi

Part 2

OE601-3N-130-1

Documentation of assessor colour vision properties for visual assessment

The assessor has normal colour vision according to one test: underline Yes/No
 either according to DIN 6160:1996 with Anomaloskop of Nagel underline Yes/unknown
 or with test charts using colour points according to Ishihara underline Yes/unknown
 or tested with, please specify: underline Yes/unknown

For visual evaluation of the display (monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky) underline Yes/No

PDF file: <http://130.149.60.45/farbmetrik/OE60/OE60F1P2.PDF> underline Yes/No

PS file: <http://130.149.60.45/farbmetrik/OE60/OE60F1P2.PS> underline Yes/No

Picture A7-130-2: contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)
 compare standard print output according to ISO/IEC 15775 with range F:0 underline range

Remark: In daylighted offices the contrast range is in many cases:
 on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF-File: <http://130.149.60.45/farbmetrik/OE60/OE60F1P2.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE60/OE60F1P2.PS> or underline Yes/No

picture A7-130-2
 picture A7-130-2

colour measurement and specification for:
 CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry: underline Yes/No
 If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T

Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer
 of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF underline Yes/No
 If No, please describe other method:

Part 4


OE601-7N-130-1



See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*	Start output S1
1	0.0	0.0	0.0	0.0	0.0	0.01
2	6.36	0.0	0.07	6.36	0.0	0.01
3	12.72	0.0	0.13	12.72	0.0	0.01
4	19.08	0.0	0.2	19.08	0.0	0.01
5	25.44	0.0	0.27	25.44	0.0	0.01
6	31.8	0.0	0.33	31.8	0.0	0.01
7	38.16	0.0	0.4	38.16	0.0	0.01
8	44.52	0.0	0.47	44.52	0.0	0.01
9	50.89	0.0	0.53	50.89	0.0	0.01
10	57.25	0.0	0.6	57.25	0.0	0.01
11	63.61	0.0	0.67	63.61	0.0	0.01
12	69.97	0.0	0.73	69.97	0.0	0.01
13	76.33	0.0	0.8	76.33	0.0	0.01
14	82.69	0.0	0.87	82.69	0.0	0.01
15	89.05	0.0	0.93	89.05	0.0	0.01
16	95.41	0.0	1.0	95.41	0.0	0.01
17	0.0	0.0	0.0	0.0	0.0	0.01
18	23.85	0.0	0.25	23.85	0.0	0.01
19	47.71	0.0	0.5	47.71	0.0	0.01
20	71.56	0.0	0.75	71.56	0.0	0.01
21	95.41	0.0	1.0	95.41	0.0	0.01
Mean lightness difference (16 steps)						ΔE* _{CIELAB} = 0.0
Mean lightness difference (5 steps)						ΔL* _{CIELAB} = 0.0
Mean colour reproduction index:						R* _{ab,m} = 100

OE600-3N-130-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

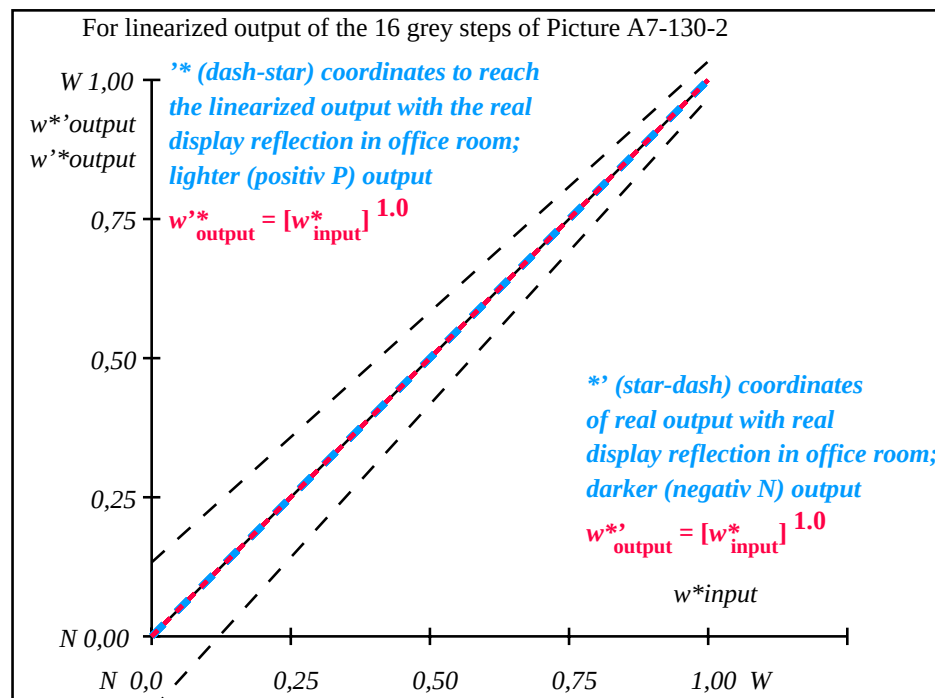

OE601-3N-130-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

$L^*/Y^*_{\text{intended}}$ (absolute)	0.0/0.0	6.4/0.7	12.7/1.5	19.1/2.8	25.4/4.6	31.8/7.0	38.2/10.2	44.5/14.2	50.9/19.2	57.2/25.2	63.6/32.3	70.0/40.7	76.3/50.4	82.7/61.6	89.0/74.3	95.4/88.6
$w^* w^* w^*$ setrgb $g_P=1.0$																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = [L^*_{\text{CIELAB}, r}]$ (relative)																
w^*_{intended}	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
w^*_{out}	0.0	0.067	0.133	0.2	0.267	0.333	0.4	0.467	0.533	0.6	0.667	0.733	0.8	0.867	0.933	1.0

OE600-7N, Picture A7-130-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*$ setrgbcolor

OE60: In-output relation according to ISO 9241-306; 1MR, DEH
Viewing Y contrast $Y_W:Y_N=88,9:0,31$; Y_N range 0,0 to <0,46

input: 000n (->rgb*_{de}) setcmyk
output 130-2: $g_P=1.0$; $g_N=1.0$

TUB registration: 20110801-OE60/OE60L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta