




See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1

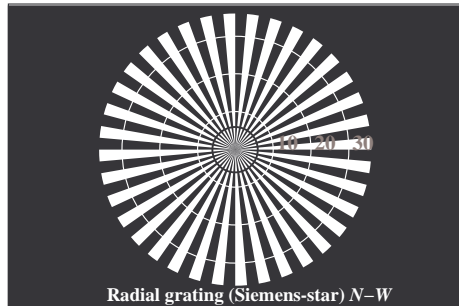


Radial grating (Siemens-star) N-W



Radial grating (Siemens-star) W-N

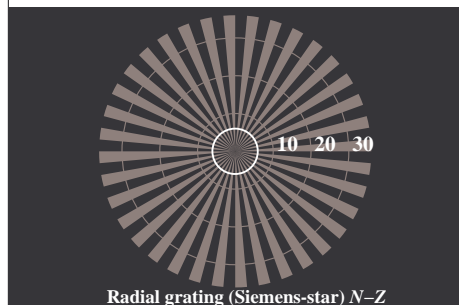

Radial grating (Siemens-star) N-Z



Radial grating (Siemens-star) W-Z

OE620-3N, Picture A1-020-0: Radial grating N-W, W-N, N-Z, W-Z; PS operator: $n^*n^*n^*0$ setcmykcolor


$L^*/Y_{intended}$ (absolute)	0.0/0.0	23.8/4.0	47.7/16.5	71.5/43.0	95.4/88.5	N_0 (min.)	W_1 (max.)
$n^*n^*n^*0$ setcmyk $g_p=1.00$ No. and Hex code	00;4	01;3	02;2	03;1	04;0		
$w^*=l^*$ CIELAB, r (relative)							
$w^*_{intended}$	0,000	0,250	0,500	0,750	1,000	N_0 (min.)	W_1 (max.)
w^*_{out}	0.0	0.25	0.5	0.75	1.0		

OE620-5N, Picture A2-020-0: 5 equidistant L^* -grey steps+ N_0 + W_1 ; PS operator: $n^*n^*n^*0$ setcmykcolor


$L^*/Y_{intended}$ (absolute)	0.0/0.0	6.3/0.7	12.7/1.5	19.0/2.7	25.4/4.5	31.8/6.9	38.1/10.1	44.5/14.2	50.8/19.1	57.2/25.1	63.6/32.3	69.9/40.7	76.3/50.4	82.6/61.5	89.0/74.2	95.4/88.5
$n^*n^*n^*0$ setcmyk $g_p=1.00$ No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*$ CIELAB, r (relative)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0.0	0.067	0.133	0.2	0.267	0.333	0.4	0.467	0.533	0.6	0.667	0.733	0.8	0.867	0.933	1.0

OE620-7N, Picture A3-020-0: 16 visual equidistant L^* -grey steps; PS operator: $n^*n^*n^*0$ setcmykcolor

OE62: similar ME16 according to ISO 9241-306; DH
Viewing Y contrast $Y_W:Y_N=88,9:0,31$; Y_N range 0,0 to <0,46

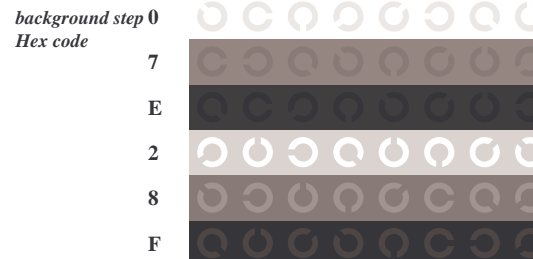

Landolt-rings W-N



code: background-ring

OE621-1N, Picture A4-020-0: Landolt-rings W-N; PS operator: $n^*n^*n^*0$ setcmykcolor

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

line raster diameter in lpi

OE621-3N, Picture A5-020-0: Line raster under 45° (or 135°); PS operator: $n^*n^*n^*0$ setcmykcolor

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	


line raster diameter in lpi

OE621-5N, Picture A6-020-0: Line raster under 90° (or 0°); PS operator: $n^*n^*n^*0$ setcmykcolor

input: $cmy0$ ($\rightarrow rgb^*_d$) setcmyk
output 020-0: no change

TUB registration: 20110801-OE62/OE62L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta




TUB material: code=rha4ta
ctor systems



See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*	Start output S1
1	0.0	0.0	0.0	0.0	0.0	0.01
2	6.36	0.0	0.07	6.36	0.0	0.01
3	12.72	0.0	0.13	12.72	0.0	0.01
4	19.08	0.0	0.2	19.08	0.0	0.01
5	25.44	0.0	0.27	25.44	0.0	0.01
6	31.8	0.0	0.33	31.8	0.0	0.01
7	38.16	0.0	0.4	38.16	0.0	0.01
8	44.52	0.0	0.47	44.52	0.0	0.01
9	50.89	0.0	0.53	50.89	0.0	0.01
10	57.25	0.0	0.6	57.25	0.0	0.01
11	63.61	0.0	0.67	63.61	0.0	0.01
12	69.97	0.0	0.73	69.97	0.0	0.01
13	76.33	0.0	0.8	76.33	0.0	0.01
14	82.69	0.0	0.87	82.69	0.0	0.01
15	89.05	0.0	0.93	89.05	0.0	0.01
16	95.41	0.0	1.0	95.41	0.0	0.01
17	0.0	0.0	0.0	0.0	0.0	0.01
18	23.85	0.0	0.25	23.85	0.0	0.01
19	47.71	0.0	0.5	47.71	0.0	0.01
20	71.56	0.0	0.75	71.56	0.0	0.01
21	95.41	0.0	1.0	95.41	0.0	0.01
Mean lightness difference (16 steps)					ΔE* _{CIELAB} =	0.0
Mean lightness difference (5 steps)					ΔE* _{CIELAB} =	0.0
Mean colour reproduction index:					R* _{ab,m} =	100

OE620-3N-020-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

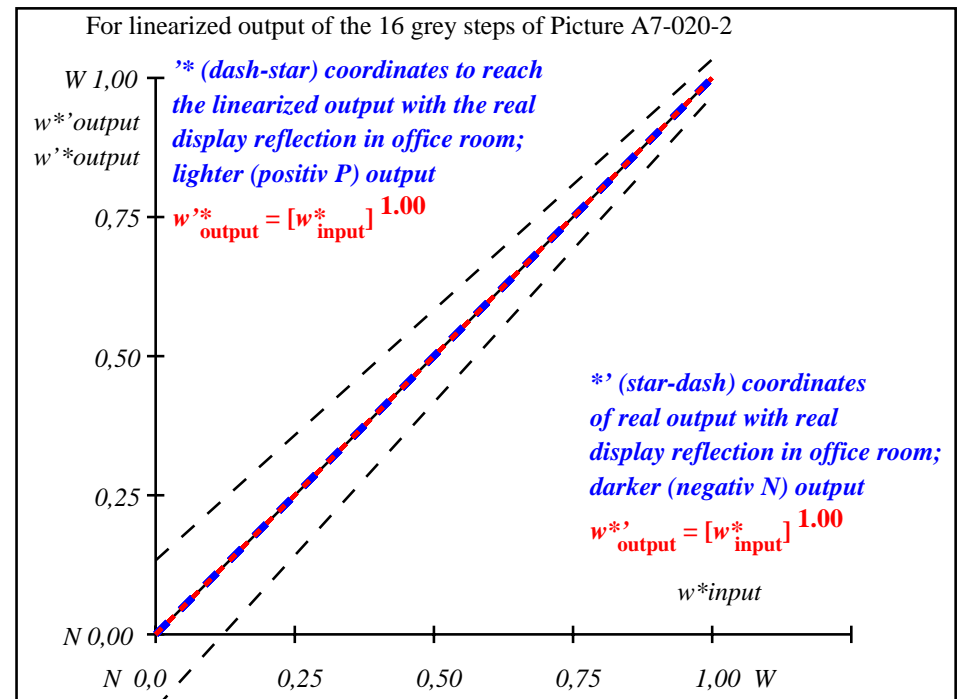

OE621-3N-020-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

$L^*/Y_{intended}$ (absolute)	0.0/0.0	6.4/0.7	12.7/1.5	19.1/2.8	25.4/4.6	31.8/7.0	38.2/10.2	44.5/14.2	50.9/19.2	57.2/25.2	63.6/32.3	70.0/40.7	76.3/50.4	82.7/61.6	89.0/74.3	95.4/88.6
$n^* n^* n^* 0$ setcmk g _p =1.00																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = [L^*_{CIELAB, r}]$ (relative)																
$w^*_{intended}$	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
w^*_{out}	0.0	0.067	0.133	0.2	0.267	0.333	0.4	0.467	0.533	0.6	0.667	0.733	0.8	0.867	0.933	1.0

OE620-7N, Picture A7-020-2: 16 visual equidistant L^* -grey steps; PS operator: $n^* n^* n^* 0$ setcmkcolor

OE62: In-output relation according to ISO 9241-306; DH
Viewing Y contrast $Y_W:Y_N=88,9:0,31$; Y_N range 0,0 to <0,46

input: $cmk0 (->rgb*_d)$ setcmk
output 020-2: no change

TUB registration: 20110801-OE62/OE62L0NA.TXT / .PS
application for output of displays: monitor systems or data projector systems
TUB material: code=thata