


See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB



Radial grating (Siemens-star) N-W

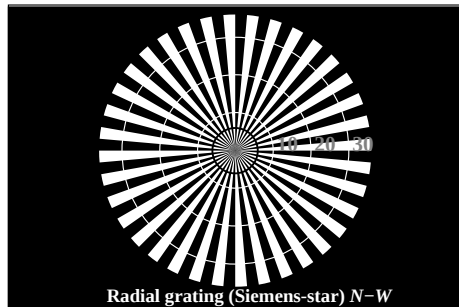

Radial grating (Siemens-star) W-N




Radial grating (Siemens-star) N-Z




Radial grating (Siemens-star) W-Z

OE640-3N, Picture A1-120-6: Radial grating N-W, W-N, N-Z, W-Z; PS operator: $n^*n^*n^*0$ setcmkcolor

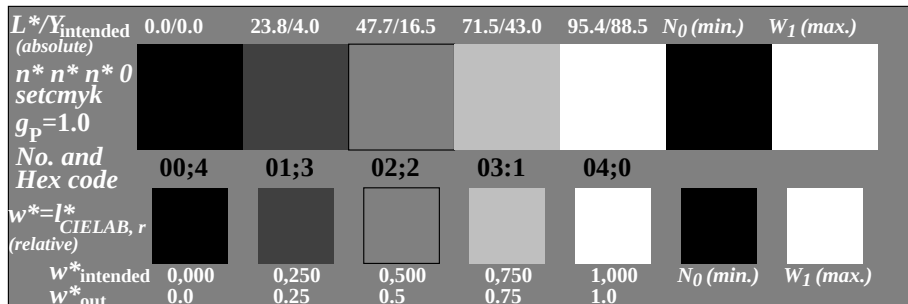


OE640-5N, Picture A2-120-6: 5 equidistant L^* -grey steps+ N_0 + W_1 ; PS operator: $n^*n^*n^*0$ setcmkcolor

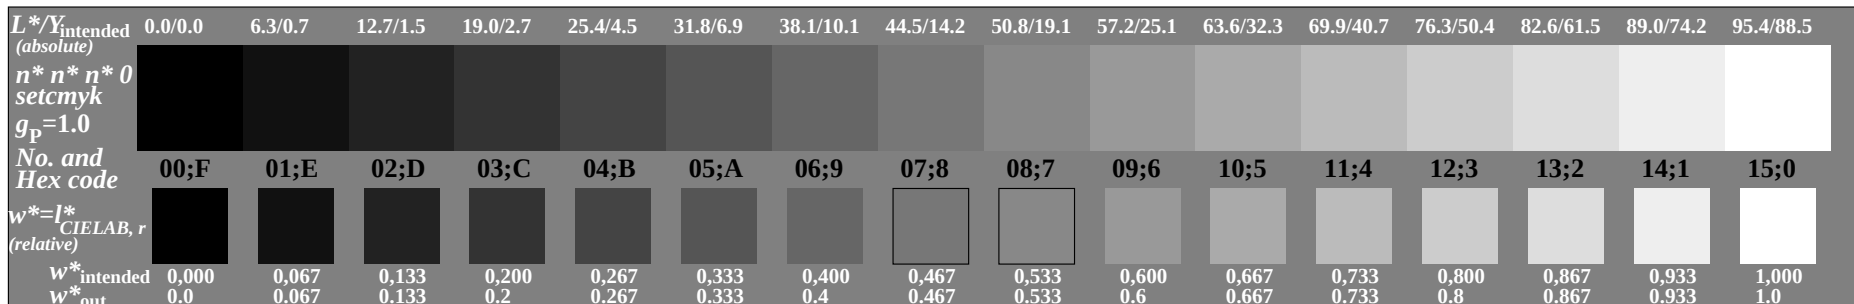


OE640-7N, Picture A3-120-6: 16 visual equidistant L^* -grey steps; PS operator: $n^*n^*n^*0$ setcmkcolor

OE64: similar ME16 according to ISO 9241-306; 1MR, DEH
Viewing Y contrast $Y_W:Y_N=88,9:0,31$; Y_N range 0,0 to <0,46

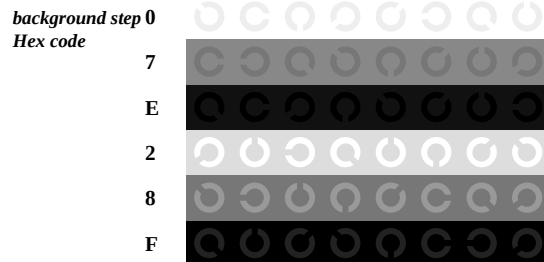


Landolt-rings W-N




code: background-ring

OE641-1N, Picture A4-120-6: Landolt-rings W-N; PS operator: $n^*n^*n^*0$ setcmkcolor

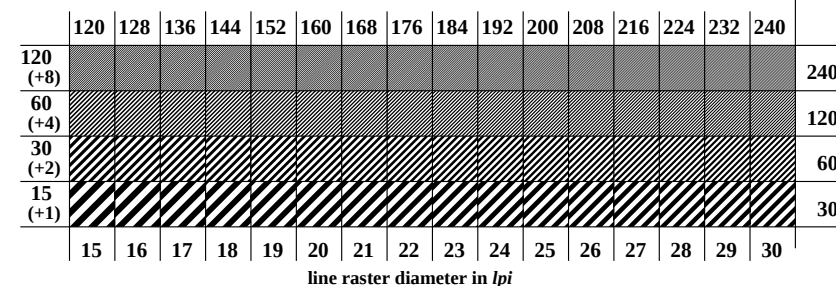

line raster diameter in lpi

OE641-3N, Picture A5-120-6: Line raster under 45° (or 135°); PS operator: $n^*n^*n^*0$ setcmkcolor

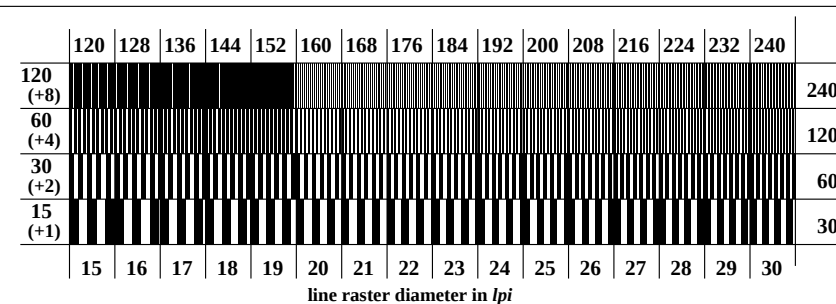


line raster diameter in lpi

OE641-5N, Picture A6-120-6: Line raster under 90° (or 0°); PS operator: $n^*n^*n^*0$ setcmkcolor


input: all ($\rightarrow rgb^*_{de}$) setrgbcolor
output 130-6: $g_P=1.0$; $g_N=1.0$

TUB registration: 20110801-OE64/OE64L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta


See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

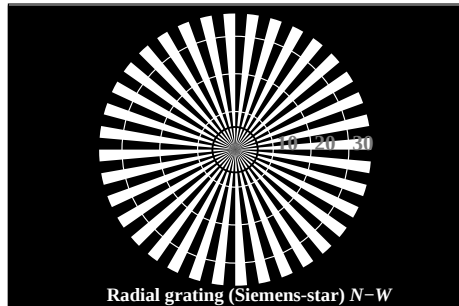


Radial grating (Siemens-star) N-W



Radial grating (Siemens-star) W-N

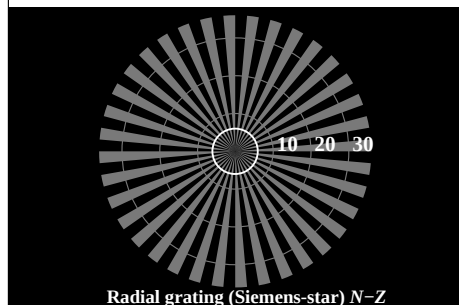

Radial grating (Siemens-star) N-Z



Radial grating (Siemens-star) W-Z

OE640-3N, Picture A1-121-6: Radial grating N-W, W-N, N-Z, W-Z; PS operator: $n^*n^*n^*0$ setcmykcolor

$L^*/Y_{intended}$ (absolute)	5.6/0.6	28.1/5.5	50.5/18.8	72.9/45.1	95.4/88.5	N_0 (min.)	W_1 (max.)
$n^*n^*n^*0$ setcmyk							
$g_N=1.18$							
No. and Hex code	00;4	01;3	02;2	03;1	04;0		
$w^*=l^*$ CIELAB, r (relative)							
$w^*_{intended}$	0,000	0,250	0,500	0,750	1,000	N_0 (min.)	W_1 (max.)
w^*_{out}	0.0	0.194	0.441	0.712	1.0		

OE640-5N, Picture A2-121-6: 5 equidistant L^* -grey steps+ N_0 + W_1 ; PS operator: $n^*n^*n^*0$ setcmykcolor

$L^*/Y_{intended}$ (absolute)	5.6/0.6	11.6/1.3	17.6/2.4	23.6/3.9	29.6/6.0	35.5/8.8	41.5/12.2	47.5/16.4	53.5/21.5	59.5/27.5	65.5/34.6	71.4/42.8	77.4/52.3	83.4/63.0	89.4/75.0	95.4/88.5
$n^*n^*n^*0$ setcmyk																
$g_N=1.18$																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*$ CIELAB, r (relative)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0.0	0.041	0.092	0.149	0.21	0.273	0.339	0.407	0.475	0.547	0.62	0.693	0.768	0.845	0.921	1.0

OE640-7N, Picture A3-121-6: 16 visual equidistant L^* -grey steps; PS operator: $n^*n^*n^*0$ setcmykcolor

OE64: similar ME16 according to ISO 9241-306; 1MR, DEH
Viewing Y contrast $Y_W:Y_N=88,9:0,62$; Y_N range 0,46 to <0,93

background step 0		1	ring step	0-1
Hex code		8	Hex code	7-8
7		F	E	E-F
E		0	0	2-0
2		6	6	8-6
8		D	D	F-D
F				

Landolt-rings W-N

code: background-ring

OE641-1N, Picture A4-121-6: Landolt-rings W-N; PS operator: $n^*n^*n^*0$ setcmykcolor

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

line raster diameter in lpi

OE641-3N, Picture A5-121-6: Line raster under 45° (or 135°); PS operator: $n^*n^*n^*0$ setcmykcolor

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	


line raster diameter in lpi

OE641-5N, Picture A6-121-6: Line raster under 90° (or 0°); PS operator: $n^*n^*n^*0$ setcmykcolor


input: all ($\rightarrow rgb^*_{de}$) setrgbcolor
output 130-6: $g_P=1.0$; $g_N=1.08$

TUB registration: 20110801-OE64/OE64L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta


See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

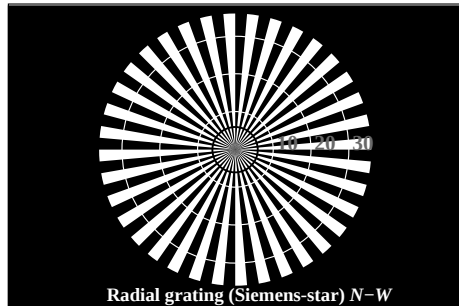


Radial grating (Siemens-star) N-W



Radial grating (Siemens-star) W-N

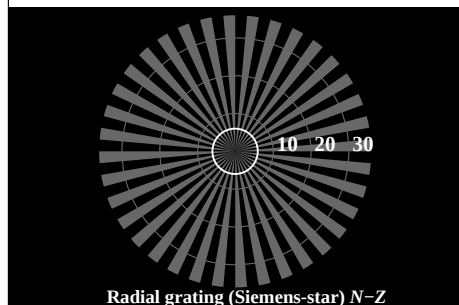

Radial grating (Siemens-star) N-Z



Radial grating (Siemens-star) W-Z

OE640-3N, Picture A1-123-6: Radial grating N-W, W-N, N-Z, W-Z; PS operator: $n^*n^*n^*0$ setcmykcolor

$L^*/Y_{intended}$ (absolute)	18.0/2.5	37.3/9.7	56.7/24.6	76.0/49.9	95.4/88.5	N_0 (min.)	W_1 (max.)
$n^*n^*n^*0$ setcmyk							
$g_N=1.54$							
No. and Hex code	00;4	01;3	02;2	03;1	04;0		
$w^*=l^*$ CIELAB, r (relative)							
$w^*_{intended}$	0,000	0,250	0,500	0,750	1,000	N_0 (min.)	W_1 (max.)
w^*_{out}	0.0	0.118	0.343	0.642	1.0		

OE640-5N, Picture A2-123-6: 5 equidistant L^* -grey steps+ N_0 + W_1 ; PS operator: $n^*n^*n^*0$ setcmykcolor

$L^*/Y_{intended}$ (absolute)	18.0/2.5	23.1/3.8	28.3/5.5	33.4/7.7	38.6/10.4	43.8/13.7	48.9/17.5	54.1/22.0	59.2/27.3	64.4/33.3	69.6/40.1	74.7/47.9	79.9/56.5	85.0/66.1	90.2/76.8	95.4/88.5
$n^*n^*n^*0$ setcmyk																
$g_N=1.54$																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*$ CIELAB, r (relative)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0.0	0.015	0.044	0.083	0.13	0.183	0.243	0.309	0.379	0.455	0.535	0.619	0.709	0.802	0.898	1.0

OE640-7N, Picture A3-123-6: 16 visual equidistant L^* -grey steps; PS operator: $n^*n^*n^*0$ setcmykcolor

OE64: similar ME16 according to ISO 9241-306; 1MR, DEH
Viewing Y contrast $Y_W:Y_N=88,9:2,5$; Y_N range 1,87 to <3,75

background step 0		1	ring step	0-1
Hex code		8	Hex code	7-8
7		F		E-F
E		0		2-0
2		6		8-6
8		D		F-D
F				

Landolt-rings W-N

code: background-ring

OE641-1N, Picture A4-123-6: Landolt-rings W-N; PS operator: $n^*n^*n^*0$ setcmykcolor

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

line raster diameter in lpi

OE641-3N, Picture A5-123-6: Line raster under 45° (or 135°); PS operator: $n^*n^*n^*0$ setcmykcolor

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	


line raster diameter in lpi

OE641-5N, Picture A6-123-6: Line raster under 90° (or 0°); PS operator: $n^*n^*n^*0$ setcmykcolor


input: all ($\rightarrow rgb^*_{de}$) setrgbcolor
output 130-6: $g_P=1.0$; $g_N=1.29$

TUB registration: 20110801-OE64/OE64L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta


See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

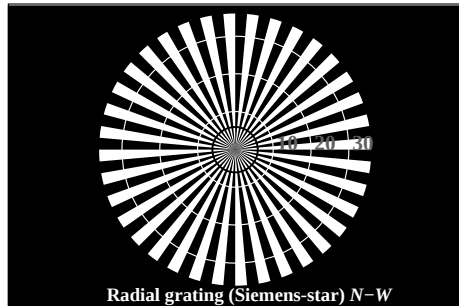


Radial grating (Siemens-star) N-W



Radial grating (Siemens-star) W-N

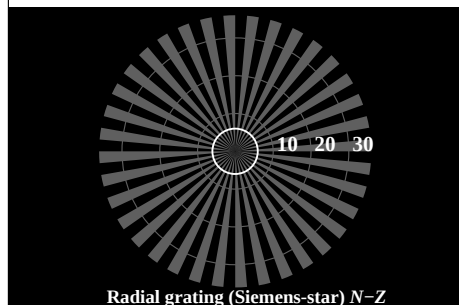


Radial grating (Siemens-star) N-Z




Radial grating (Siemens-star) W-Z

OE640-3N, Picture A1-124-6: Radial grating N-W, W-N, N-Z, W-Z; PS operator: $n^*n^*n^*0$ setcmkcolor

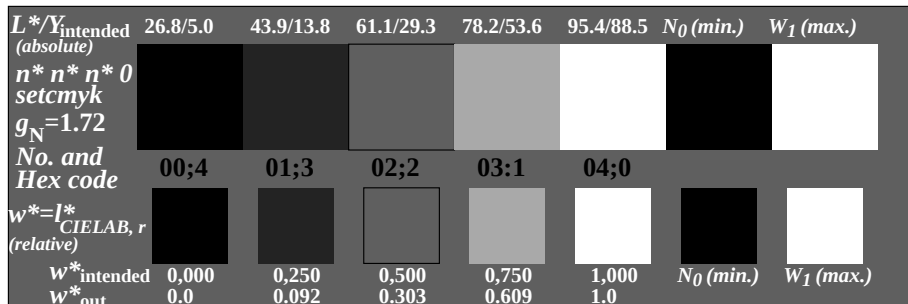


OE640-5N, Picture A2-124-6: 5 equidistant L^* -grey steps+ N_0 + W_1 ; PS operator: $n^*n^*n^*0$ setcmkcolor

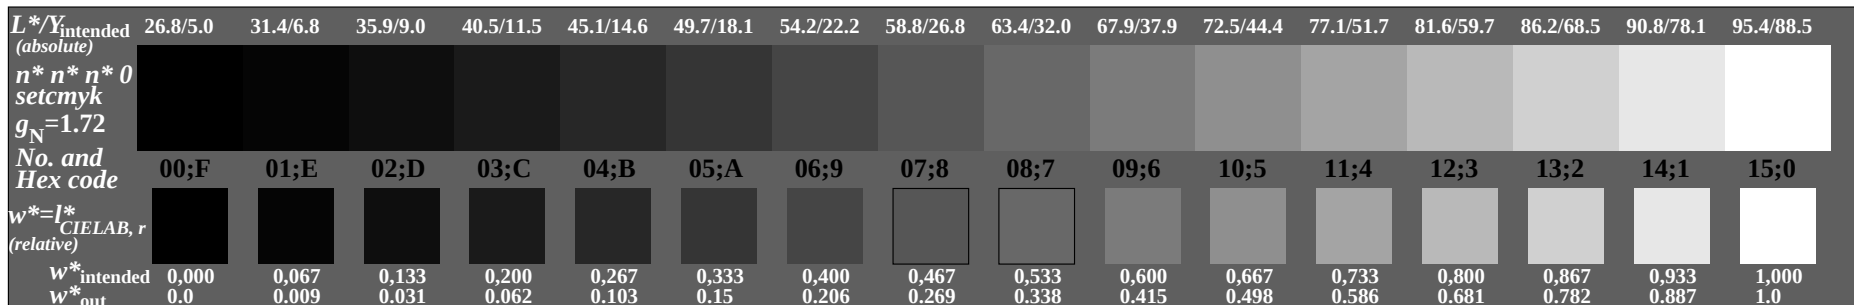


OE640-7N, Picture A3-124-6: 16 visual equidistant L^* -grey steps; PS operator: $n^*n^*n^*0$ setcmkcolor

OE64: similar ME16 according to ISO 9241-306; 1MR, DEH
Viewing Y contrast $Y_W:Y_N=88,9:5$; Y_N range 3,75 to <7,5

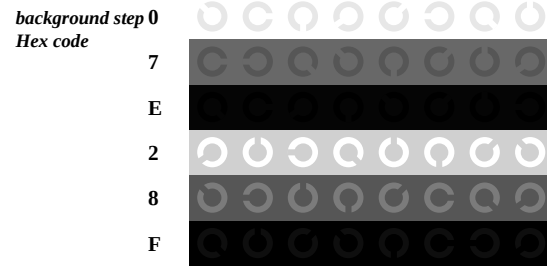


Landolt-rings W-N




code: background-ring

OE641-1N, Picture A4-124-6: Landolt-rings W-N; PS operator: $n^*n^*n^*0$ setcmkcolor

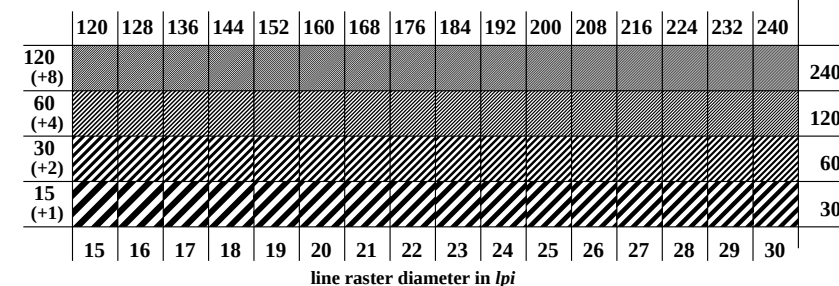

line raster diameter in lpi

OE641-3N, Picture A5-124-6: Line raster under 45° (or 135°); PS operator: $n^*n^*n^*0$ setcmkcolor

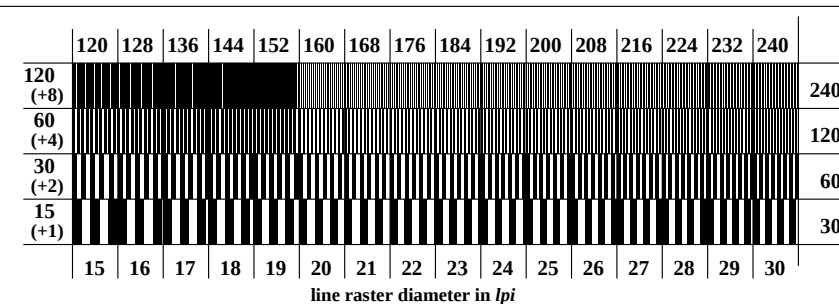


line raster diameter in lpi

OE641-5N, Picture A6-124-6: Line raster under 90° (or 0°); PS operator: $n^*n^*n^*0$ setcmkcolor


input: all ($\rightarrow rgb^*_{de}$) setrgbcolor
output 130-6: $g_P=1.0$; $g_N=1.42$

TUB registration: 20110801-OE64/OE64L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta


See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

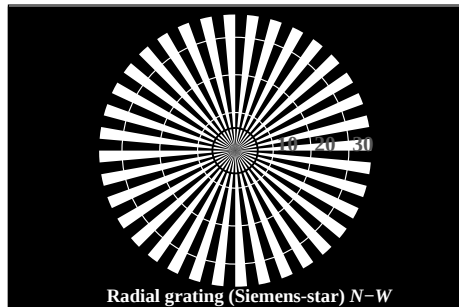


Radial grating (Siemens-star) N-W



Radial grating (Siemens-star) W-N

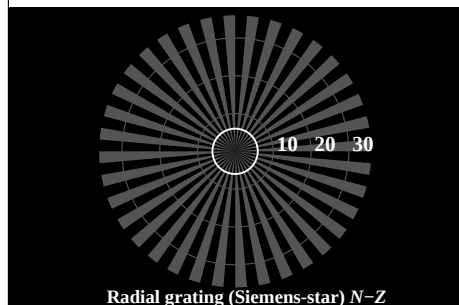

Radial grating (Siemens-star) N-Z



Radial grating (Siemens-star) W-Z

OE640-3N, Picture A1-125-6: Radial grating N-W, W-N, N-Z, W-Z; PS operator: $n^*n^*n^*0$ setcmykcolor

$L^*/Y_{intended}$ (absolute)	37.9/10.0	52.3/20.4	66.6/36.2	81.0/58.5	95.4/88.5	N_0 (min.)	W_1 (max.)
$n^*n^*n^*0$ setcmyk							
$g_N=1.9$							
No. and Hex code	00;4	01;3	02;2	03;1	04;0		
$w^*=l^*$ CIELAB, r (relative)							
$w^*_{intended}$	0,000	0,250	0,500	0,750	1,000	N_0 (min.)	W_1 (max.)
w^*_{out}	0.0	0.071	0.267	0.578	1.0		

OE640-5N, Picture A2-125-6: 5 equidistant L^* -grey steps+ N_0 + W_1 ; PS operator: $n^*n^*n^*0$ setcmykcolor

$L^*/Y_{intended}$ (absolute)	37.9/10.0	41.8/12.3	45.6/15.0	49.4/17.9	53.2/21.3	57.1/25.0	60.9/29.1	64.7/33.7	68.6/38.8	72.4/44.3	76.2/50.3	80.0/56.8	83.9/63.9	87.7/71.5	91.5/79.7	95.4/88.5
$n^*n^*n^*0$ setcmyk																
$g_N=1.9$																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*$ CIELAB, r (relative)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0.0	0.005	0.021	0.046	0.081	0.123	0.175	0.235	0.302	0.378	0.463	0.554	0.654	0.762	0.876	1.0

OE640-7N, Picture A3-125-6: 16 visual equidistant L^* -grey steps; PS operator: $n^*n^*n^*0$ setcmykcolor

OE64: similar ME16 according to ISO 9241-306; 1MR, DEH
Viewing Y contrast $Y_W:Y_N=88,9:10$; Y_N range 7,5 to <15

input: all ($\rightarrow rgb^*_{de}$) setrgbcolor
output 130-6: $g_P=1.0$; $g_N=1.6$

background step 0	1	ring step	0-1
Hex code		Hex code	
7		8	7-8
E		F	E-F
2		0	2-0
8		6	8-6
F		D	F-D

Landolt-rings W-N

code: background-ring

OE641-1N, Picture A4-125-6: Landolt-rings W-N; PS operator: $n^*n^*n^*0$ setcmykcolor

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

line raster diameter in lpi

OE641-3N, Picture A5-125-6: Line raster under 45° (or 135°); PS operator: $n^*n^*n^*0$ setcmykcolor


	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

line raster diameter in lpi


OE641-5N, Picture A6-125-6: Line raster under 90° (or 0°); PS operator: $n^*n^*n^*0$ setcmykcolor

TUB registration: 20110801-OE64/OE64L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta


See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

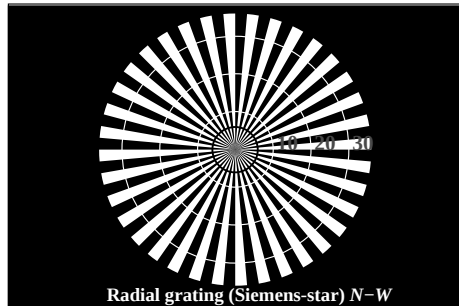


Radial grating (Siemens-star) N-W



Radial grating (Siemens-star) W-N

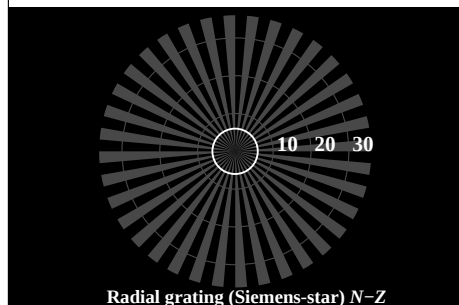

Radial grating (Siemens-star) N-Z



Radial grating (Siemens-star) W-Z

OE640-3N, Picture A1-126-6: Radial grating N-W, W-N, N-Z, W-Z; PS operator: $n^*n^*n^*0$ setcmykcolor

$L^*/Y_{intended}$ (absolute)	52.0/20.1	62.8/31.4	73.7/46.2	84.5/65.1	95.4/88.5	N_0 (min.)	W_1 (max.)
$n^*n^*n^*0$ setcmyk							
$g_N=2.08$							
No. and Hex code	00;4	01;3	02;2	03;1	04;0		
$w^*=l^*$ CIELAB, r (relative)							
$w^*_{intended}$	0,000	0,250	0,500	0,750	1,000	N_0 (min.)	W_1 (max.)
w^*_{out}	0.0	0.055	0.236	0.549	1.0		

OE640-5N, Picture A2-126-6: 5 equidistant L^* -grey steps+ N_0 + W_1 ; PS operator: $n^*n^*n^*0$ setcmykcolor

$L^*/Y_{intended}$ (absolute)	52.0/20.1	54.9/22.8	57.8/25.7	60.6/28.9	63.5/32.2	66.4/35.9	69.3/39.8	72.2/44.0	75.1/48.5	78.0/53.3	80.9/58.3	83.8/63.7	86.7/69.4	89.6/75.4	92.5/81.8	95.4/88.5
$n^*n^*n^*0$ setcmyk																
$g_N=2.08$																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*$ CIELAB, r (relative)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0.0	0.003	0.015	0.035	0.064	0.101	0.148	0.205	0.27	0.345	0.43	0.524	0.628	0.743	0.865	1.0

OE640-7N, Picture A3-126-6: 16 visual equidistant L^* -grey steps; PS operator: $n^*n^*n^*0$ setcmykcolor

OE64: similar ME16 according to ISO 9241-306; 1MR, DEH
Viewing Y contrast $Y_W:Y_N=88,9:20$; Y_N range 15 to <30

background step 0		1	ring step	0-1
Hex code		8	Hex code	7-8
7		F		E-F
E		0		2-0
2		6		8-6
8		D		F-D
F				

Landolt-rings W-N

code: background-ring

OE641-1N, Picture A4-126-6: Landolt-rings W-N; PS operator: $n^*n^*n^*0$ setcmykcolor

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

line raster diameter in lpi

OE641-3N, Picture A5-126-6: Line raster under 45° (or 135°); PS operator: $n^*n^*n^*0$ setcmykcolor

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	


line raster diameter in lpi

OE641-5N, Picture A6-126-6: Line raster under 90° (or 0°); PS operator: $n^*n^*n^*0$ setcmykcolor

input: all ($\rightarrow rgb^*_{de}$) setrgbcolor
output 130-6: $g_P=1.0$; $g_N=1.81$

TUB registration: 20110801-OE64/OE64L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

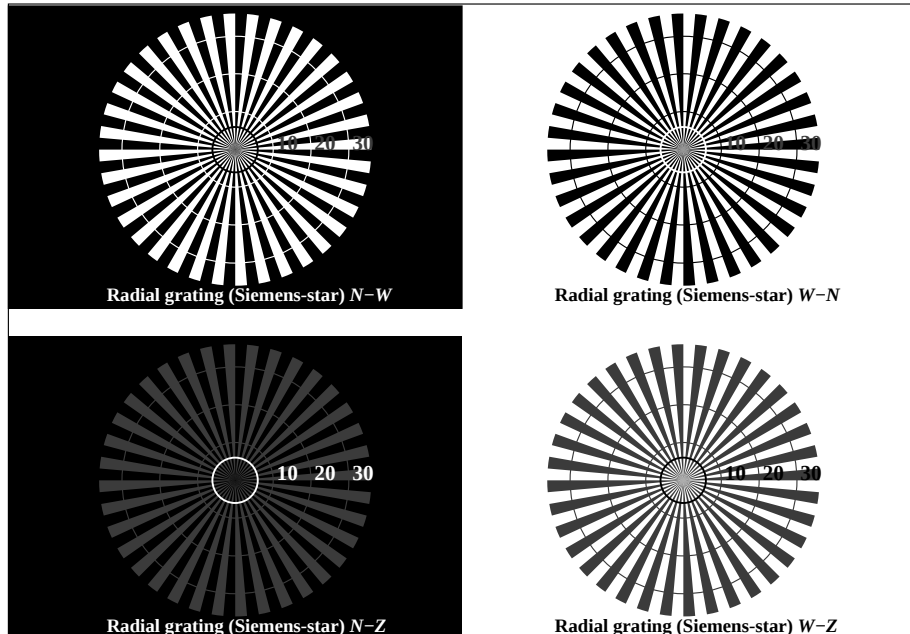

OE640-3N, Picture A1-127-6: Radial grating N-W, W-N, N-Z, W-Z; PS operator: $n^* n^* n^* 0$ setcmykcolor

$L^*/Y_{intended}$ (absolute)	69.6/40.3	76.1/50.0	82.5/61.3	88.9/74.1	95.4/88.5	N_0 (min.)	W_1 (max.)
$n^* n^* n^* 0$ setcmyk							
$g_N=2.26$							
No. and Hex code	00;4	01;3	02;2	03;1	04;0		
$w^*=l^*_{CIELAB, r}$ (relative)							
$w^*_{intended}$	0,000	0,250	0,500	0,750	1,000	N_0 (min.)	W_1 (max.)
w^*_{out}	0.0	0.043	0.208	0.521	1.0		

OE640-5N, Picture A2-127-6: 5 equidistant L^* -grey steps+ N_0 + W_1 ; PS operator: $n^* n^* n^* 0$ setcmykcolor

$L^*/Y_{intended}$ (absolute)	69.6/40.3	71.4/42.7	73.1/45.3	74.8/48.0	76.5/50.7	78.2/53.6	79.9/56.6	81.6/59.7	83.4/62.9	85.1/66.2	86.8/69.6	88.5/73.2	90.2/76.8	91.9/80.6	93.6/84.5	95.4/88.5
$n^* n^* n^* 0$ setcmyk																
$g_N=2.26$																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*_{CIELAB, r}$ (relative)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0.0	0.002	0.01	0.026	0.05	0.083	0.126	0.178	0.241	0.315	0.4	0.495	0.603	0.724	0.854	1.0

OE640-7N, Picture A3-127-6: 16 visual equidistant L^* -grey steps; PS operator: $n^* n^* n^* 0$ setcmykcolor

OE64: similar ME16 according to ISO 9241-306; 1MR, DEH
Viewing Y contrast $Y_W:Y_N=88,9:40$; Y_N range 30 to <60

background step 0		1	ring step	0-1
Hex code		8	Hex code	7-8
7		F		E-F
E		0		2-0
2		6		8-6
8		D		F-D
F				

OE641-1N, Picture A4-127-6: Landolt-rings W-N; PS operator: $n^* n^* n^* 0$ setcmykcolor

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

OE641-3N, Picture A5-127-6: Line raster under 45° (or 135°); PS operator: $n^* n^* n^* 0$ setcmykcolor

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

OE641-5N, Picture A6-127-6: Line raster under 90° (or 0°); PS operator: $n^* n^* n^* 0$ setcmykcolor

input: all ($\rightarrow rgb^*_{de}$) setrgbcolor
output 130-6: $g_P=1.0$; $g_N=2.1$