

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 40/360 = 0.111$


lab^*tch and lab^*nch

D65: hue O

LCH*Ma: 51 100 40

ol v^* Ma: 1.0 0.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 40/360 = 0.111$


lab^*tch and lab^*nch

D65: hue O

LCH*Ma: 51 100 40

ol v^* Ma: 1.0 0.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

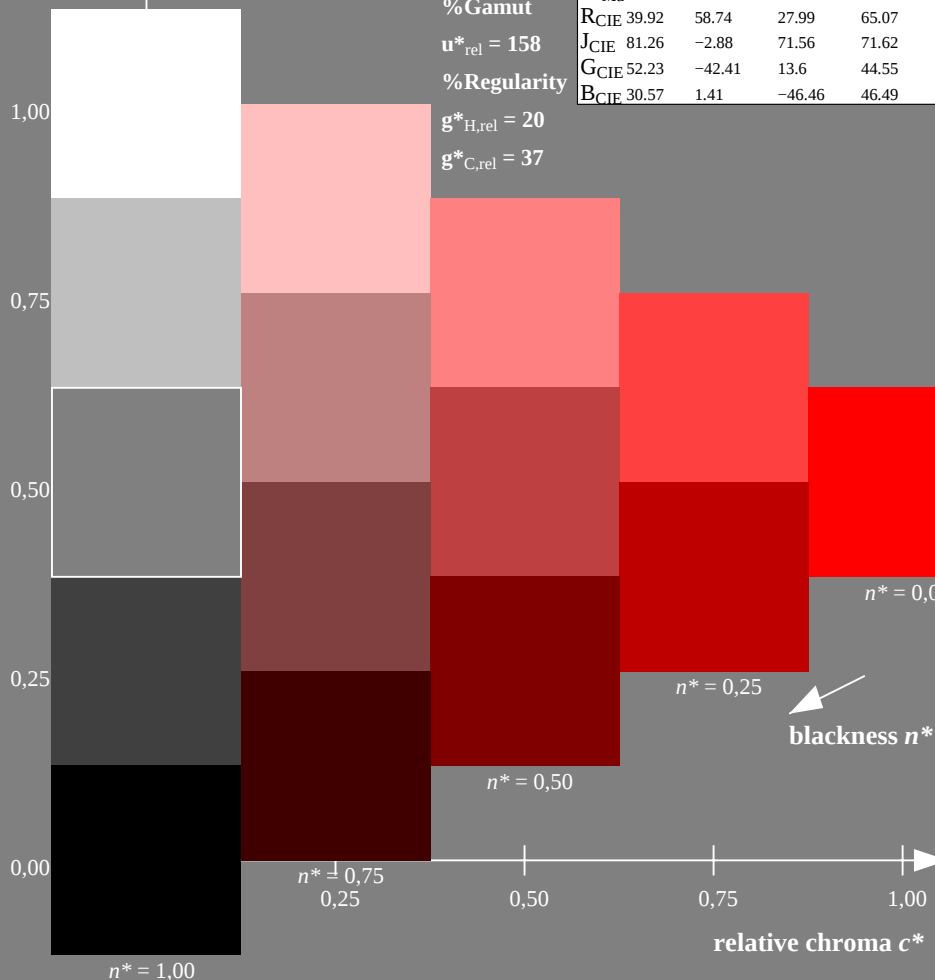

OE730-7N-130-0: 5 step scales for constant CIELAB hue 40/360 = 0.111 (left)

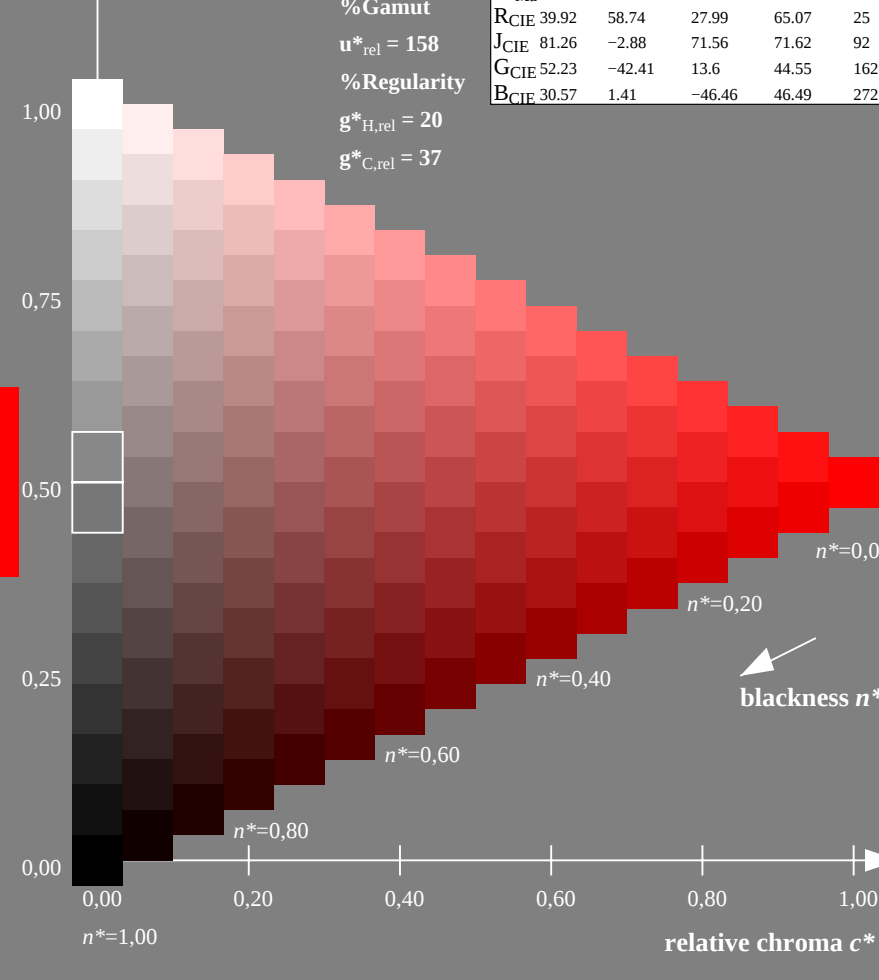

16 step scales for constant CIELAB hue 40/360 = 0.111 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue O; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{\Delta}$) $setcmyk$
output 130-0: $g_P=1.0$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 103/360 = 0.286$


lab^*tch and lab^*nch

D65: hue Y

LCH*Ma: 93 93 103

ol v^* Ma: 1.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 103/360 = 0.286$


lab^*tch and lab^*nch

D65: hue Y

LCH*Ma: 93 93 103

ol v^* Ma: 1.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

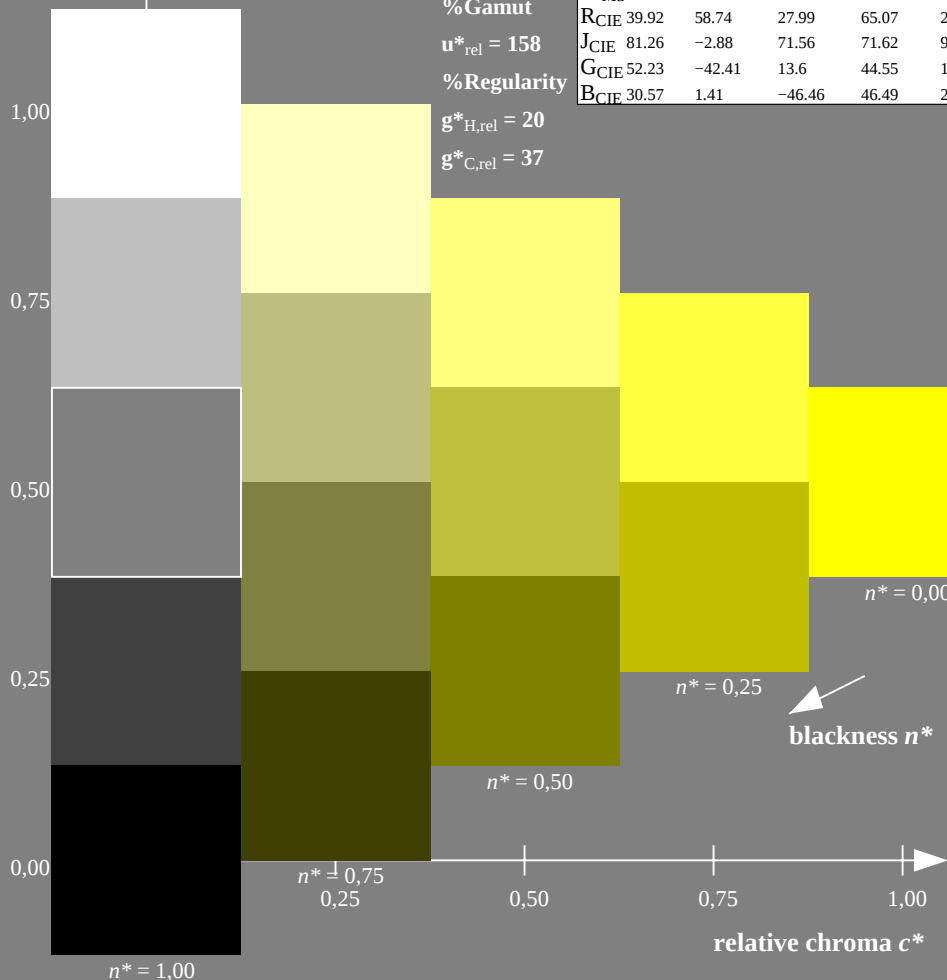

OE730-7N-130-1: 5 step scales for constant CIELAB hue 103/360 = 0.286 (left)

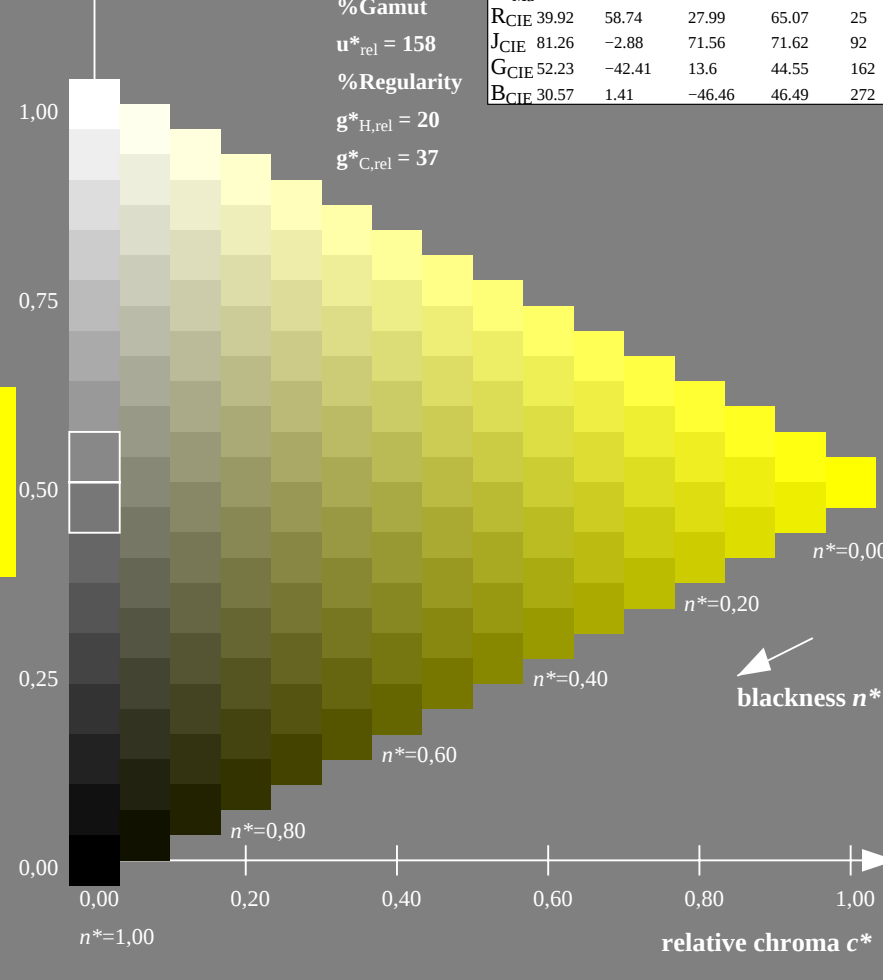

16 step scales for constant CIELAB hue 103/360 = 0.286 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue Y; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{\Delta}$) $setcmyk$
output 130-1: $g_P=1.0$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 136/360 = 0.378$


lab^*tch and lab^*nch

D65: hue L

LCH*Ma: 84 115 136

ol v^* Ma: 0.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data					
	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 136/360 = 0.378$


lab^*tch and lab^*nch

D65: hue L

LCH*Ma: 84 115 136

ol v^* Ma: 0.0 1.0 0.0

triangle lightness t^*



%Gamut


$u^*_{rel} = 158$

%Regularity


$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data					
	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

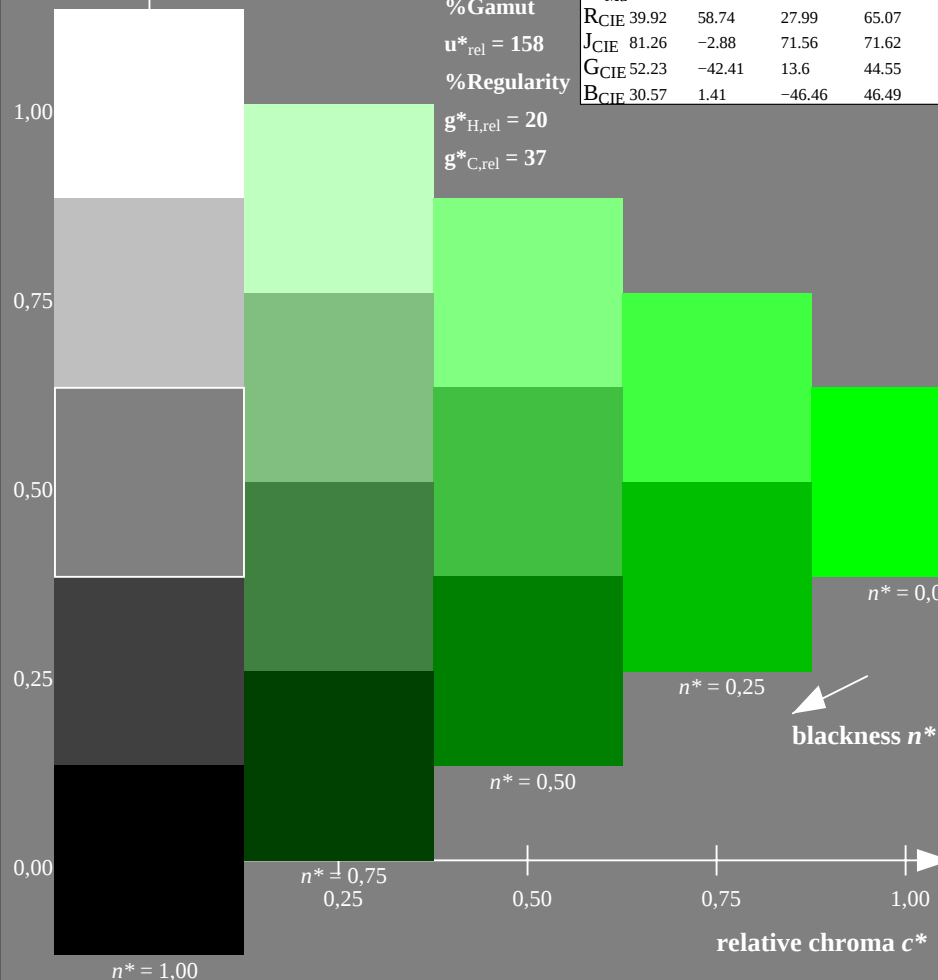

OE730-7N-130-2: 5 step scales for constant CIELAB hue 136/360 = 0.378 (left)

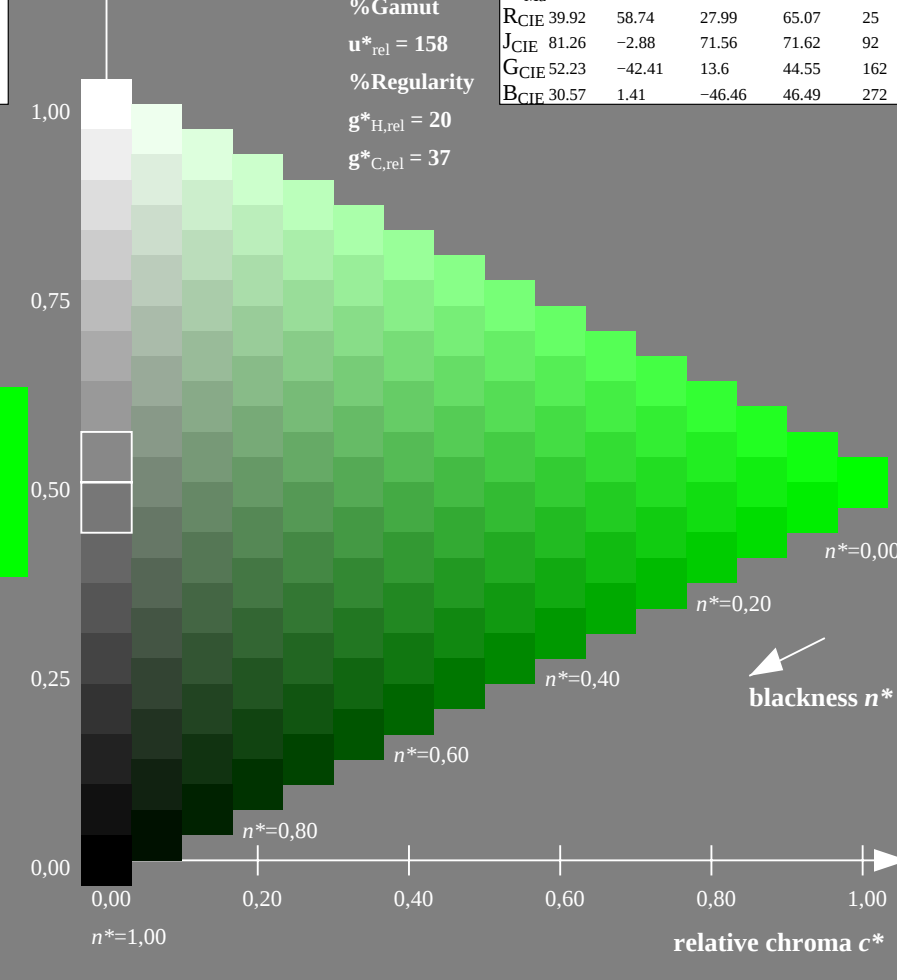

16 step scales for constant CIELAB hue 136/360 = 0.378 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue L; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_d$) $setcmyk$
output 130-2: $g_P=1.0$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 196/360 = 0.545$


lab^*tch and lab^*nch

D65: hue C

LCH*Ma: 87 48 196

ol v^* Ma: 0.0 1.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 196/360 = 0.545$


lab^*tch and lab^*nch

D65: hue C

LCH*Ma: 87 48 196

ol v^* Ma: 0.0 1.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

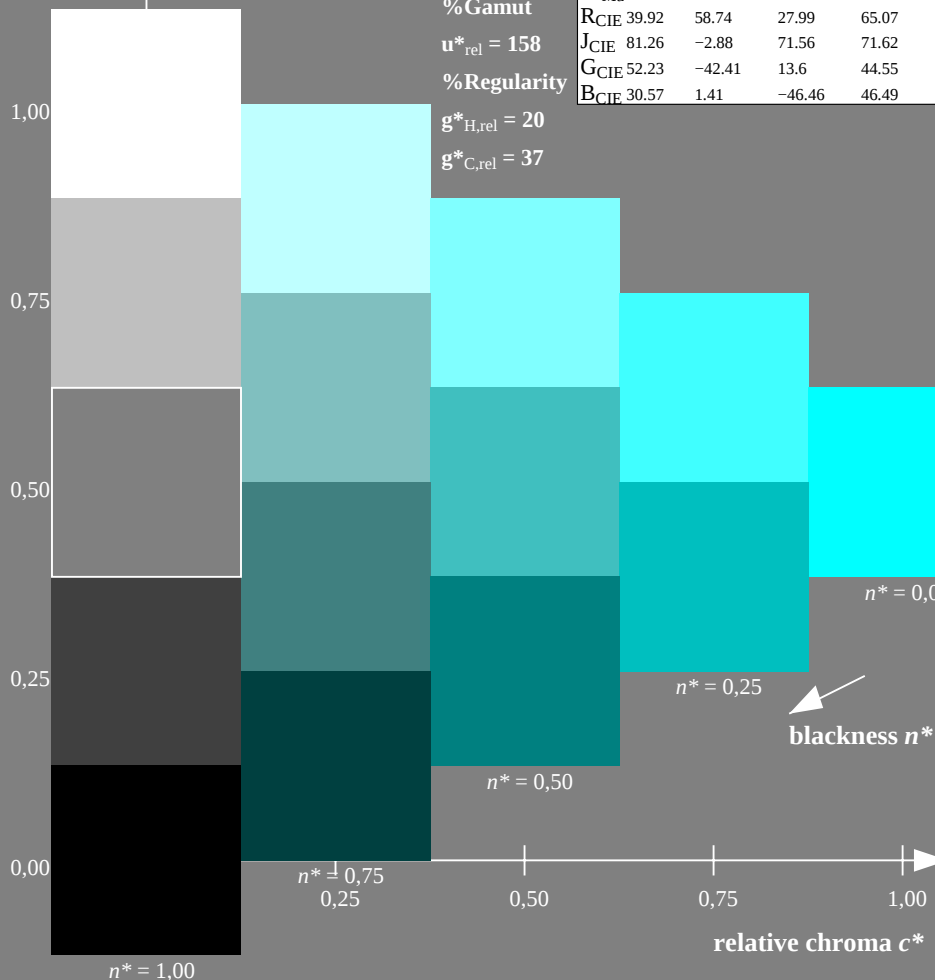

OE730-7N-130-3: 5 step scales for constant CIELAB hue 196/360 = 0.545 (left)

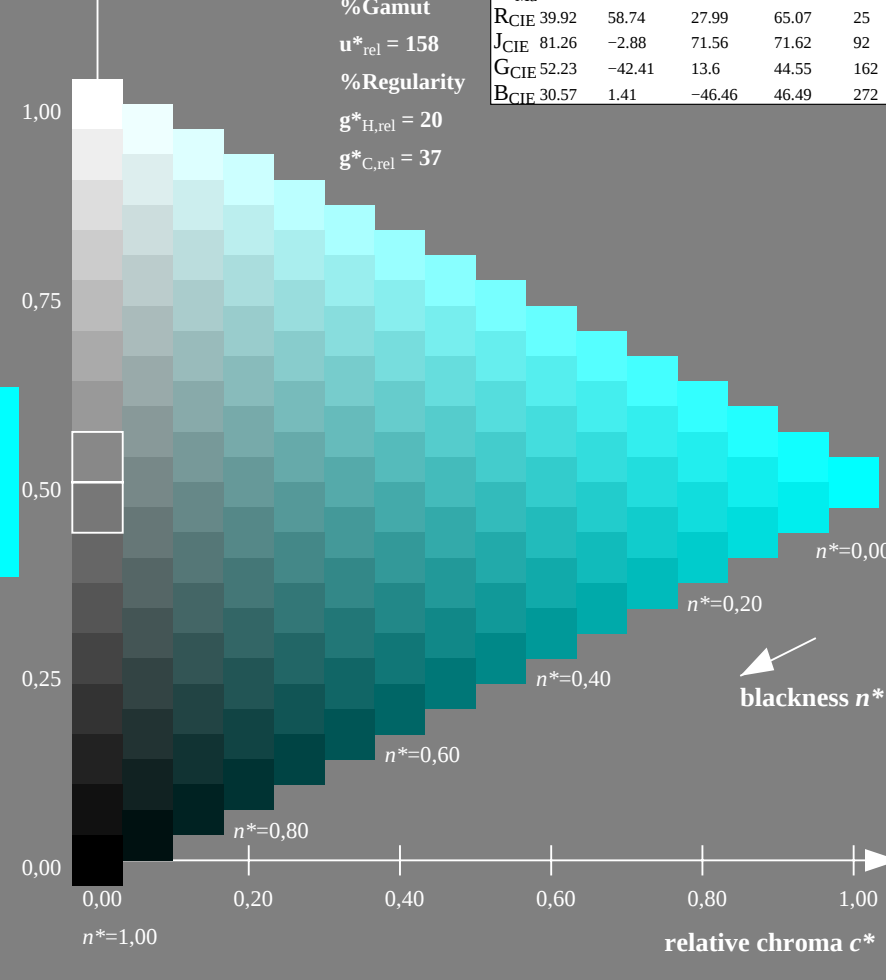

16 step scales for constant CIELAB hue 196/360 = 0.545 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue C; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_d$) $setcmyk$
output 130-3: $g_P=1.0$; $g_N=1.0$

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 306/360 = 0.851$


lab^*tch and lab^*nch

D65: hue V

LCH*Ma: 30 129 306

ol v^* Ma: 0.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 306/360 = 0.851$


lab^*tch and lab^*nch

D65: hue V

LCH*Ma: 30 129 306

ol v^* Ma: 0.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

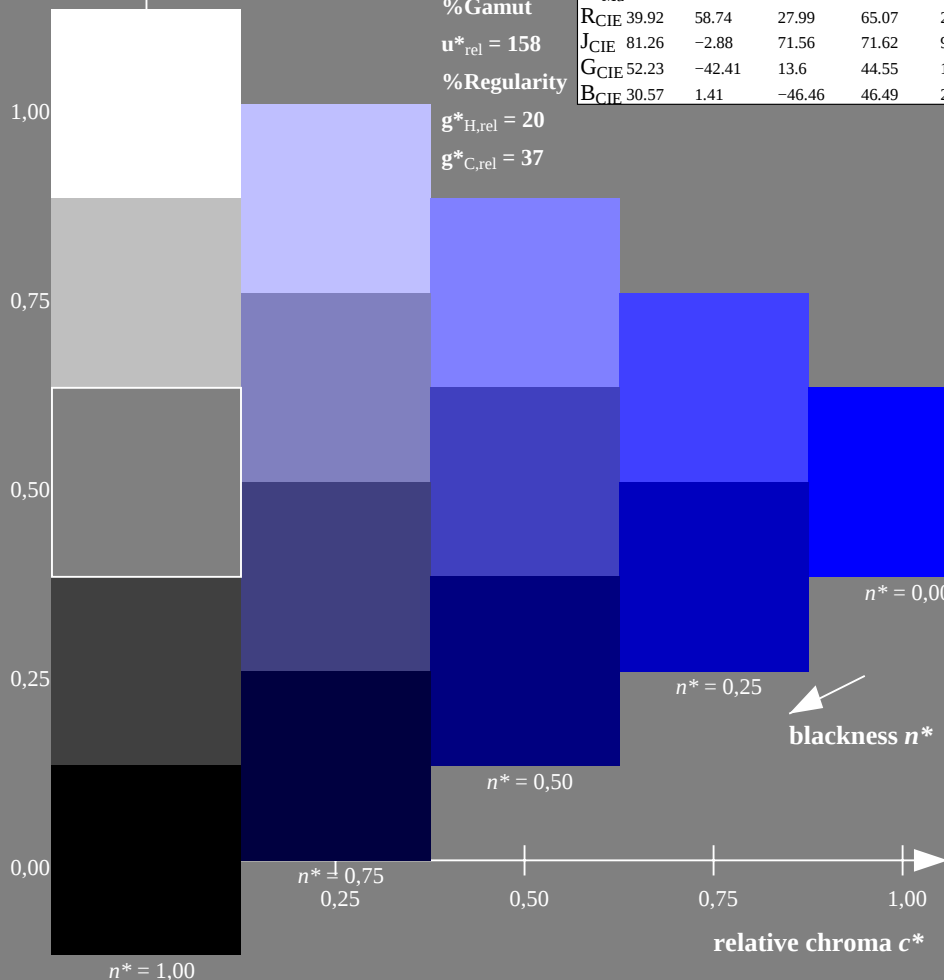

OE730-7N-130-4: 5 step scales for constant CIELAB hue 306/360 = 0.851 (left)

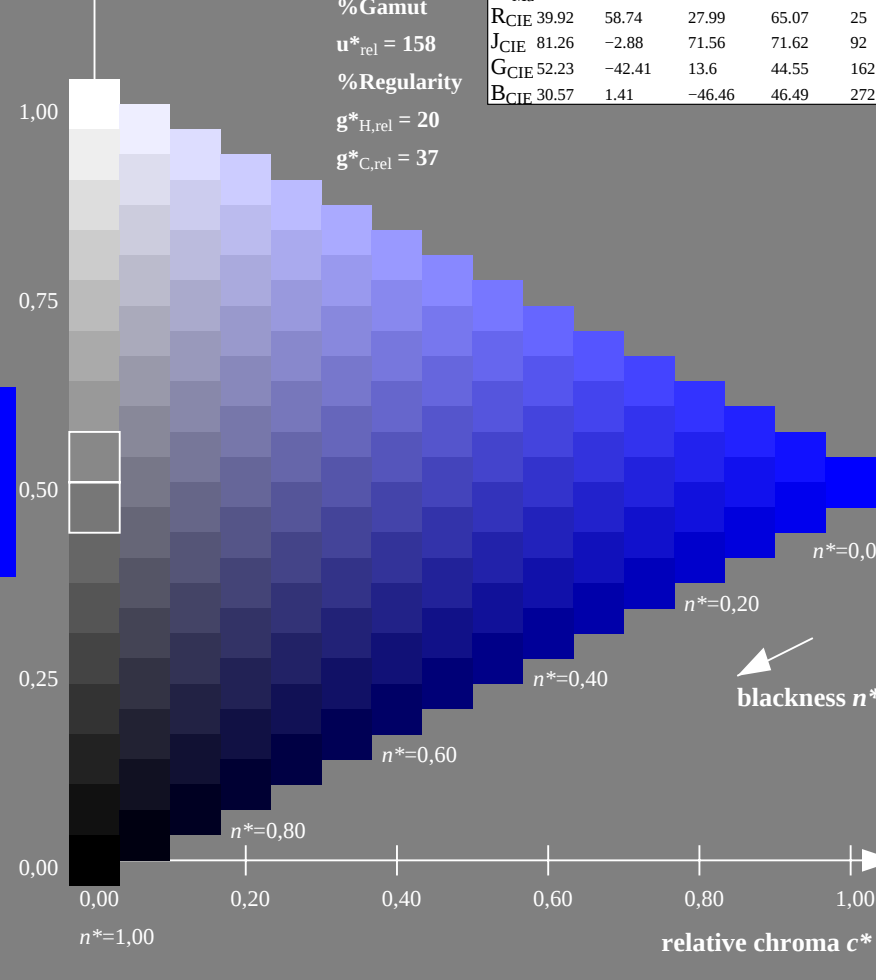

16 step scales for constant CIELAB hue 306/360 = 0.851 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue V; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{\Delta}$) $setcmyk$
output 130-4: $g_P=1.0$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 328/360 = 0.912$


lab^*tch and lab^*nch

D65: hue M

LCH*Ma: 57 111 328

ol v^* Ma: 1.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 328/360 = 0.912$


lab^*tch and lab^*nch

D65: hue M

LCH*Ma: 57 111 328

ol v^* Ma: 1.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

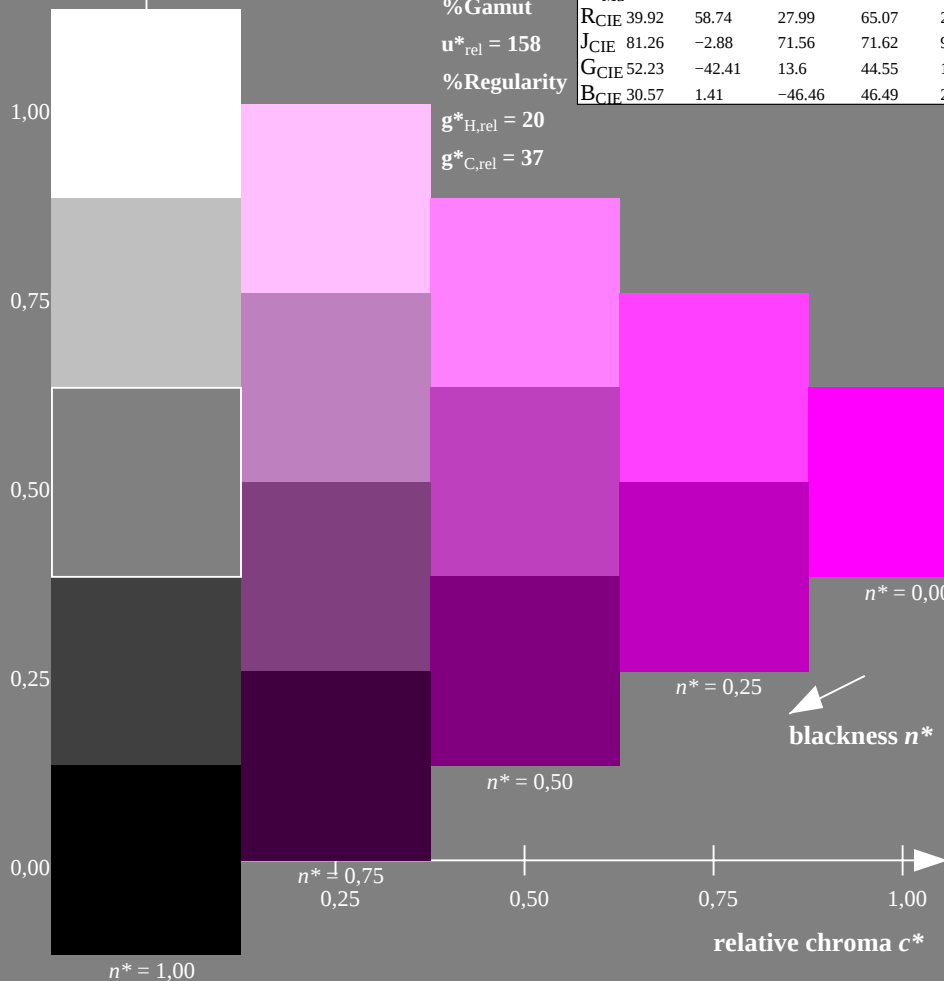

OE730-7N-130-5: 5 step scales for constant CIELAB hue 328/360 = 0.912 (left)

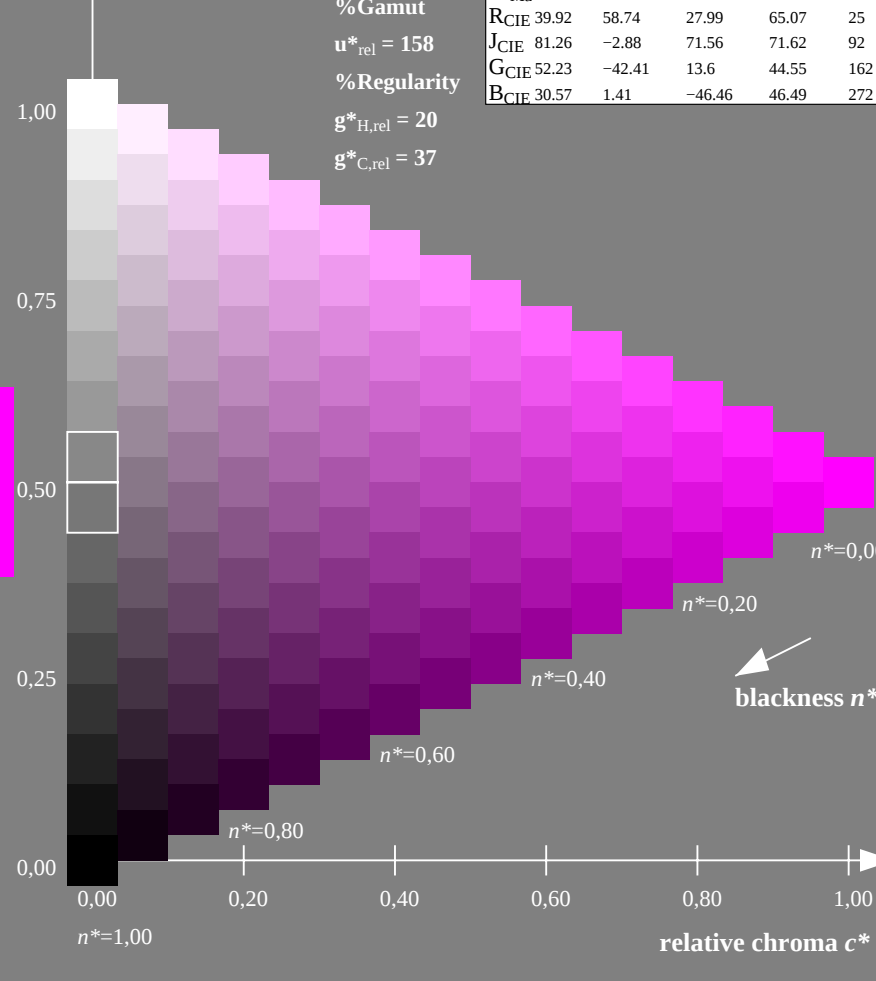

16 step scales for constant CIELAB hue 328/360 = 0.912 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue M; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{\Delta}$) $setcmyk$
output 130-5: $g_P=1.0$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 25/360 = 0.071$


lab^*tch and lab^*nch

D65: hue R

LCH*Ma: 52 89 25

ol v^* Ma: 1.0 0.0 0.21

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 25/360 = 0.071$


lab^*tch and lab^*nch

D65: hue R

LCH*Ma: 52 89 25

ol v^* Ma: 1.0 0.0 0.21

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

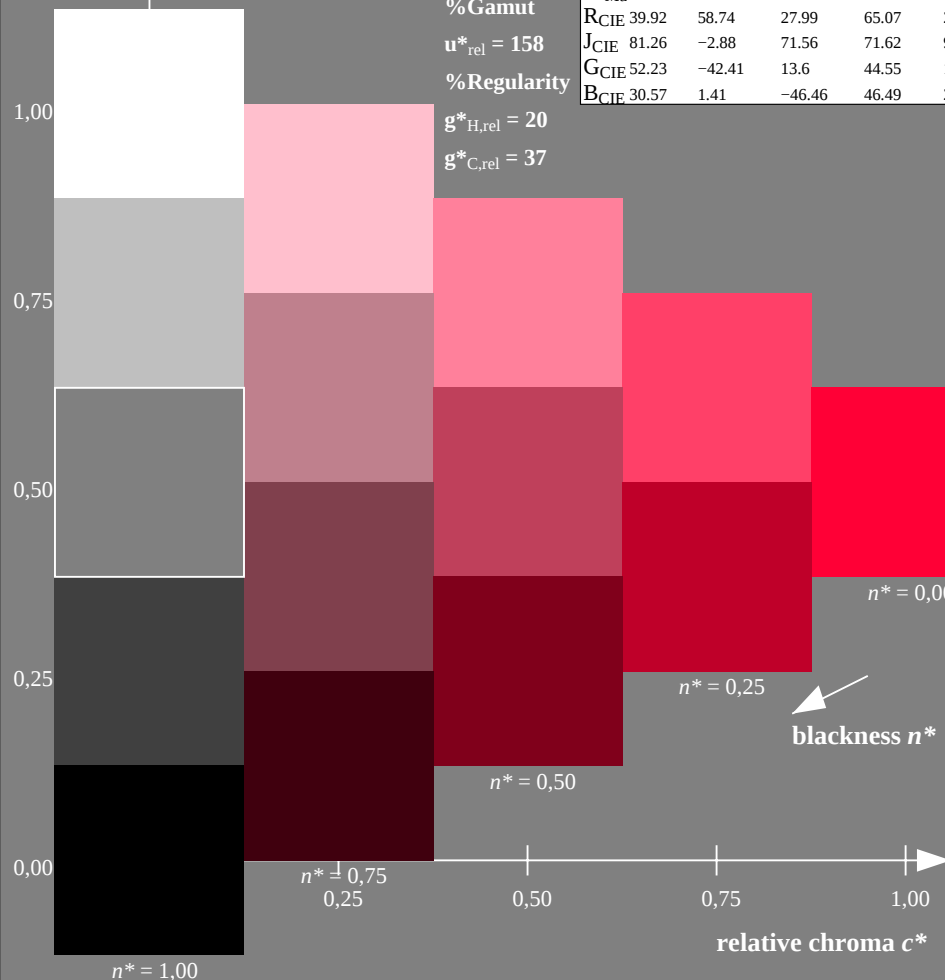

OE730-7N-130-6: 5 step scales for constant CIELAB hue 25/360 = 0.071 (left)

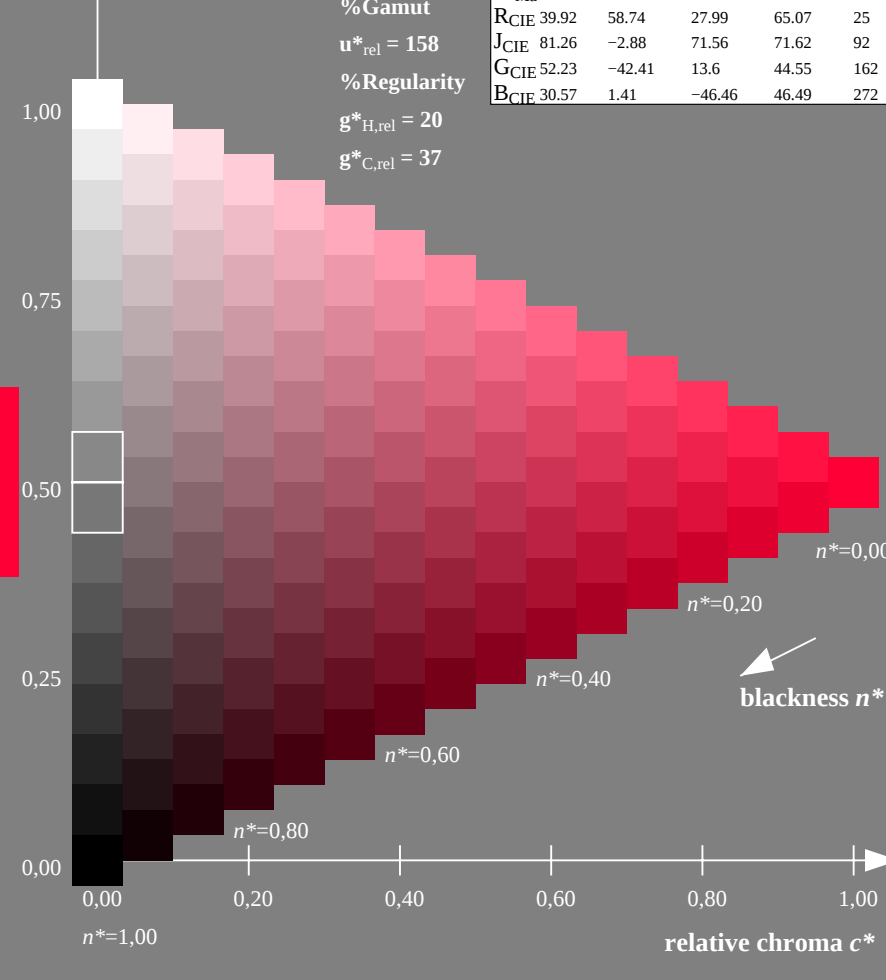

16 step scales for constant CIELAB hue 25/360 = 0.071 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue R; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 130-6: $g_P=1.0$; $g_N=1.0$

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 92/360 = 0.256$


lab^*tch and lab^*nch

D65: hue J

LCH*Ma: 85 86 92

olv*Ma: 1.0 0.82 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 92/360 = 0.256$


lab^*tch and lab^*nch

D65: hue J

LCH*Ma: 85 86 92

olv*Ma: 1.0 0.82 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

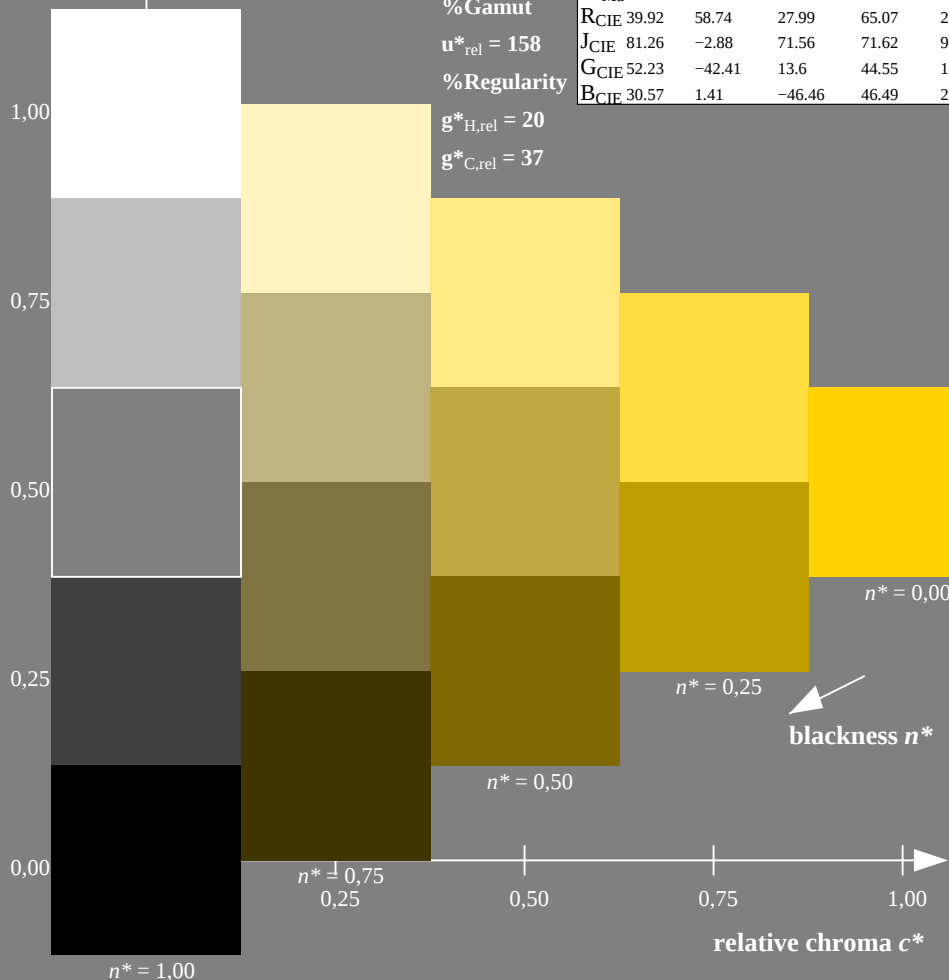

OE730-7N-130-7: 5 step scales for constant CIELAB hue 92/360 = 0.256 (left)

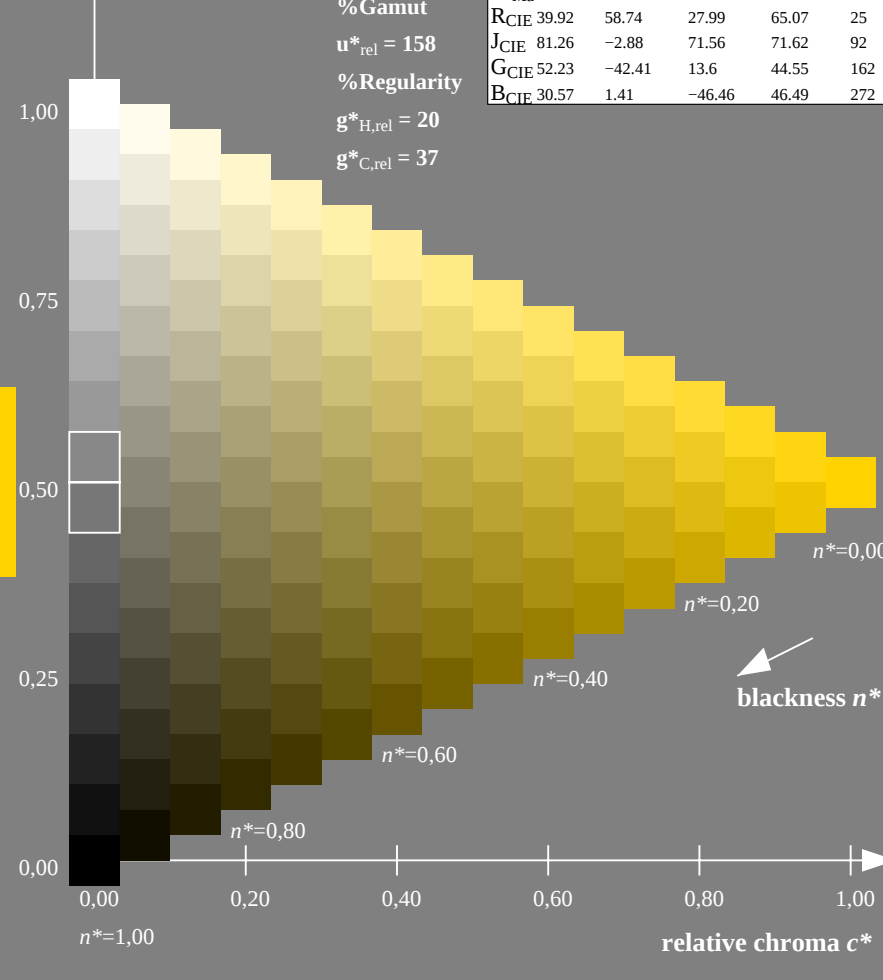

16 step scales for constant CIELAB hue 92/360 = 0.256 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue J; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 130-7: $g_P=1.0$; $g_N=1.0$

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 162/360 = 0.451$


lab^*tch and lab^*nch

D65: hue G

LCH*Ma: 86 62 162

ol v^* Ma: 0.0 1.0 0.65

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 162/360 = 0.451$


lab^*tch and lab^*nch

D65: hue G

LCH*Ma: 86 62 162

ol v^* Ma: 0.0 1.0 0.65

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

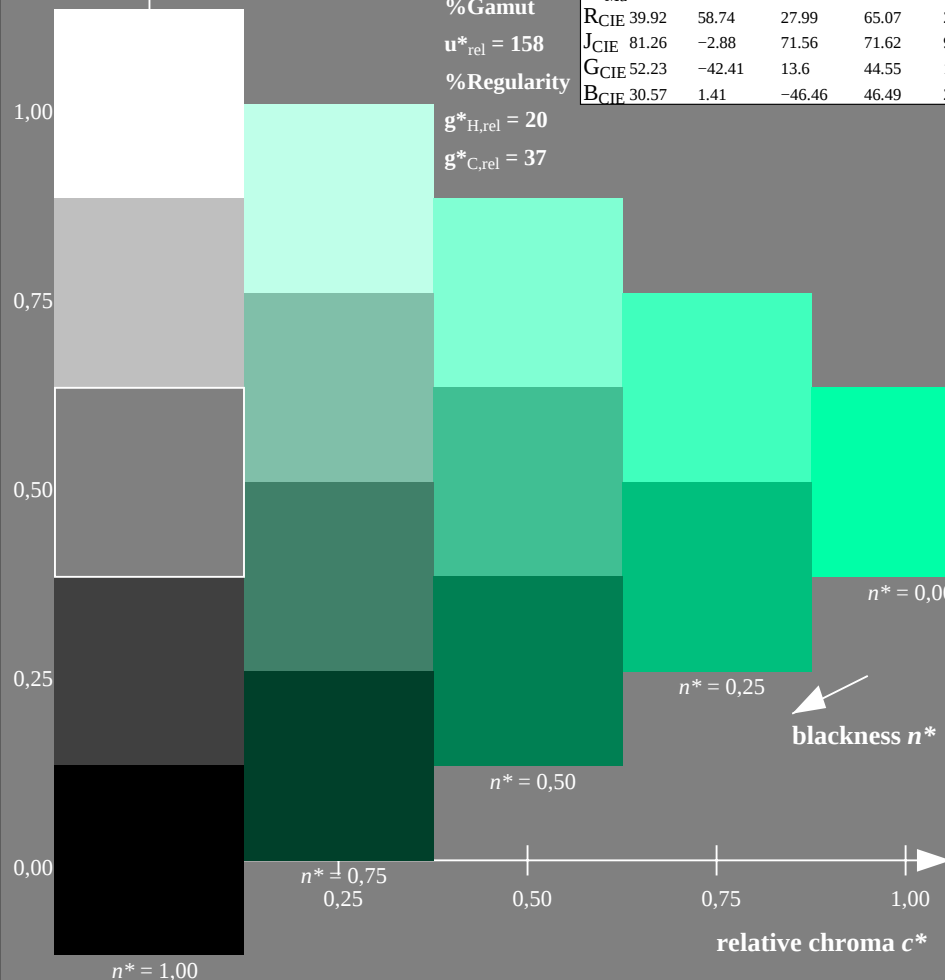

OE730-7N-130-8: 5 step scales for constant CIELAB hue 162/360 = 0.451 (left)

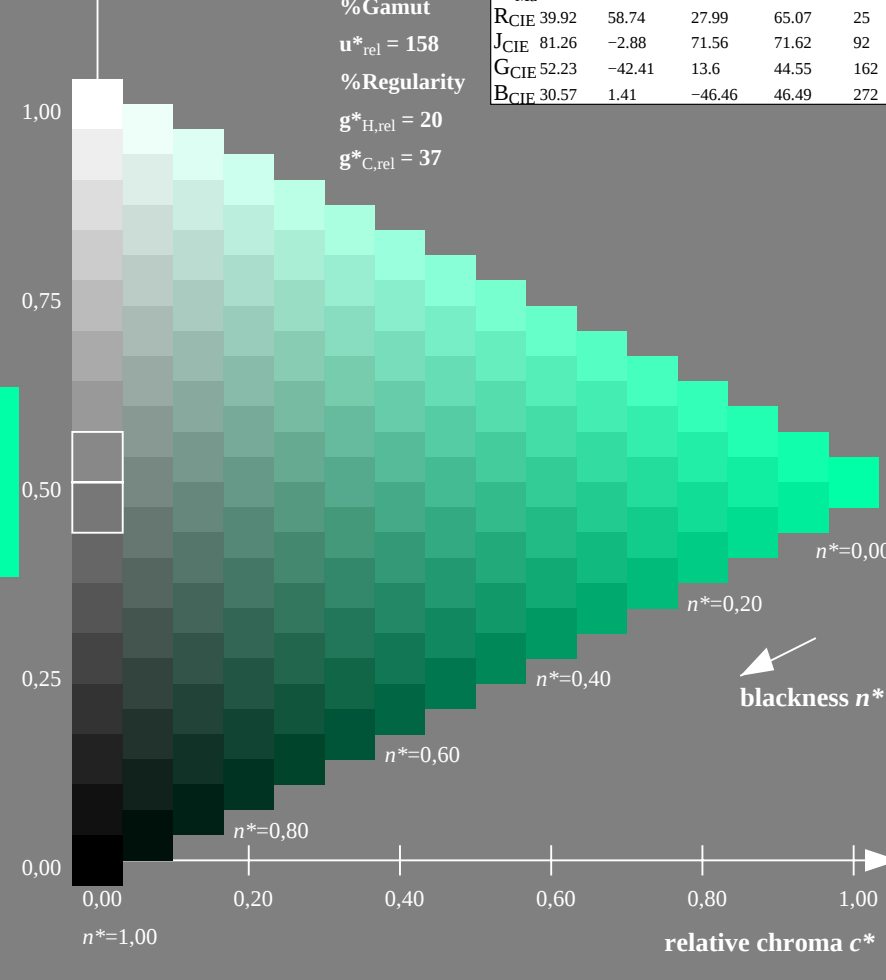

16 step scales for constant CIELAB hue 162/360 = 0.451 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue G; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 130-8: $g_P=1.0$; $g_N=1.0$

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 272/360 = 0.755$


lab^*tch and lab^*nch

D65: hue B

LCH*Ma: 65 49 272

ol v^* Ma: 0.0 0.61 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 272/360 = 0.755$


lab^*tch and lab^*nch

D65: hue B

LCH*Ma: 65 49 272

ol v^* Ma: 0.0 0.61 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

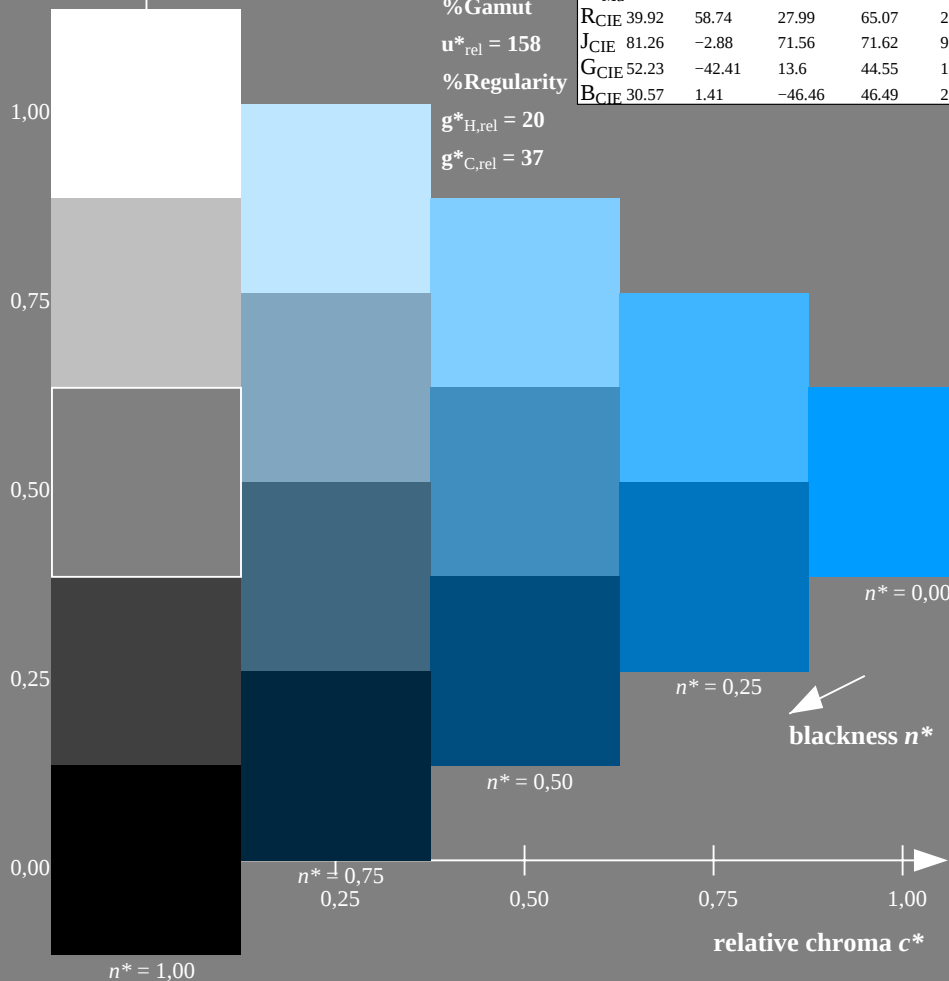

OE730-7N-130-9: 5 step scales for constant CIELAB hue 272/360 = 0.755 (left)

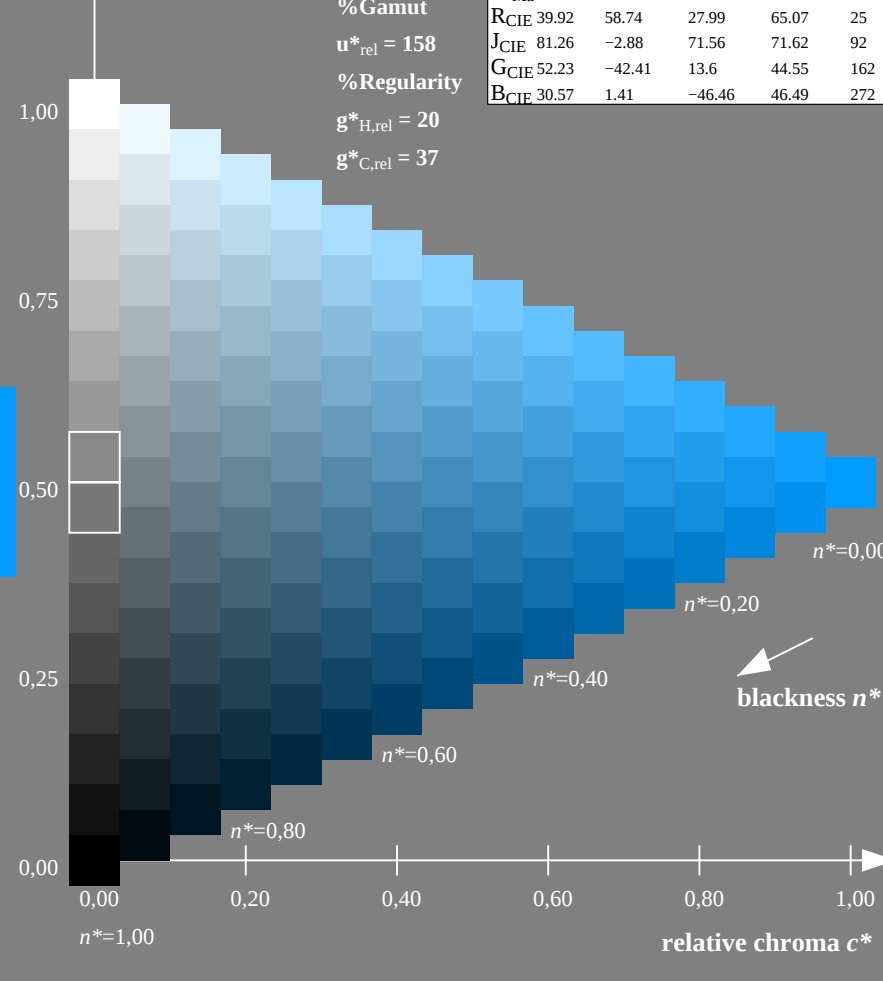


16 step scales for constant CIELAB hue 272/360 = 0.755 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue B; 1MR, DH
Discrimination of 5 and 16 step colour scales


input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 130-9: $g_P=1.0$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB


TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta



See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB




<http://130.149.60.45/~farbmetrik/OE73/OE73L0NA.TXT> /PS; linearized output, Page 11/12
 F: Output Linearization (OL) data OE73/OE73L0NA.TXT /PS in File (F)




TUB registration: 20110801-OE73/OE73L0NA.TXT /PS
 application for output of displays: monitor systems or data projector systems

TUB material: code=rh4ta



Discriminability of 5 step colour series (Yes/No decision)

Layout example: three 5 step colour series

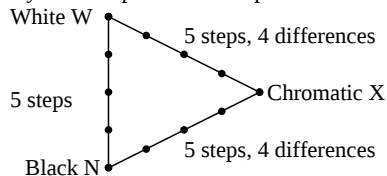

There are three basic colours on each page:
 Black N, White W and Chromatic X.
 Ten pages include 10 hue planes
 X = OYLCVM and RJGB.
 There are at maximum 12 distinguishable steps.

All steps of the three series N-W, W-X and X-N should be distinguishable on all pages.

Are the three 5step series distinguishable on all pages? underline: Yes/No

only in case of No: Are the three 5 step series on Page x of 10 pages distinguishable?

Underline Yes/No and give in case of No the number of distinguishable steps?

- Page 1: Yes/No, if No ../12 step differences are distinguishable of O = Orange Red
 Page 2: Yes/No, if No ../12 step differences are distinguishable of Y = Yellow
 Page 3: Yes/No, if No ../12 step differences are distinguishable of L = Leaf green
 Page 4: Yes/No, if No ../12 step differences are distinguishable of C = Cyan blue
 Page 5: Yes/No, if No ../12 step differences are distinguishable of V = Violett blue
 Page 6: Yes/No, if No ../12 step differences are distinguishable of M = Magenta Red
 Page 7: Yes/No, if No ../12 step differences are distinguishable of R = Elementary Red
 Page 8: Yes/No, if No ../12 step differences are distinguishable of J = Elementary yellow
 Page 9: Yes/No, if No ../12 step differences are distinguishable of G = Elementary Green
 Page 10: Yes/No, if No ../12 step differences are distinguishable of B = Elementary blue

Sum: ../10 Yes-Pages and ../120 step differences are distinguishable

Part 1

OE730-3N-130-10

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE73/OE73L0NP.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE73/OE73L0NA.PS> or underline Yes/No

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline monitor/data projector/printer

Device model, driver and version:.....

Device output with PDF/PS-file: underline PDF/PS-file

For device output with PDF-file OE73L0NP.PDF:

- either PDF-file transfer "download, copy" to PDF device.....
 or with computer system interpretation by "Display-PDF":.....
 or with software e. g. Adobe-Reader/-Acrobat and version:.....
 or with software e. g. Ghostscript and version:.....

For device output with PS-file OE73L0NA.PS:

- either PS-file transfer "download, copy" to PS device.....
 or with computer system interpretation by "Display-PS":.....
 or with software e. g. Ghostscript and version:.....
 or with software e. g. Mac-Yap and version:.....

Special remarks:Special remarks, e. g. output of Landscape (L)

.....

Part 3

OE730-7N-130-10




OE73: Form A for test chart 2 according to DIN 33872-2; 1MR, DHinput: *cmy0* (->*cmy0***1*) *setcmyk*
 Discrimination of colour scales (Yes/No decision)
 output 130-10: *g_P*=1.0; *g_N*=1.0



Discriminability of 16 step colour series (Yes/No decision)

Layout example: three 16 step colour series

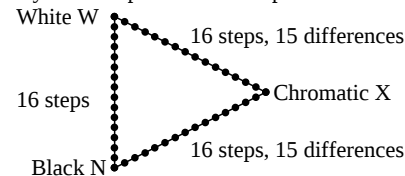

There are three basic colours on each page:
 Black N, White W and Chromatic X.
 Ten pages include 10 hue planes
 X = OYLCVM and RJGB.
 There are at maximum 45 distinguishable steps.

All steps of the three series N-W, W-X and X-N should be distinguishable on all pages.

Are the three 16step series distinguishable on all pages? underline: Yes/No

only in case of No: Are the three 16 step series on Page x of 10 pages distinguishable?

Underline Yes/No and give in case of No the number of distinguishable steps?

- Page 1: Yes/No, if No ../45 step differences are distinguishable of O = Orange Red
 Page 2: Yes/No, if No ../45 step differences are distinguishable of Y = Yellow
 Page 3: Yes/No, if No ../45 step differences are distinguishable of L = Leaf green
 Page 4: Yes/No, if No ../45 step differences are distinguishable of C = Cyan blue
 Page 5: Yes/No, if No ../45 step differences are distinguishable of V = Violett blue
 Page 6: Yes/No, if No ../45 step differences are distinguishable of M = Magenta Red
 Page 7: Yes/No, if No ../45 step differences are distinguishable of R = Elementary Red
 Page 8: Yes/No, if No ../45 step differences are distinguishable of J = Elementary yellow
 Page 9: Yes/No, if No ../45 step differences are distinguishable of G = Elementary Green
 Page 10: Yes/No, if No ../45 step differences are distinguishable of B = Elementary blue

Sum: ../10 Yes-Pages and ../450 step differences are distinguishable

Part 2

OE731-3N-130-10

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test:

- either according to DIN 6160:1996 with Anomaloskop of Nagel
 or with test charts using colour points according to Ishihara
 or tested with, please specify:

underline Yes/No

underline Yes/unknown

underline Yes/unknown

underline Yes/unknown

For visual evaluation of the display (monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky)

underline Yes/No

PDF file: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PDF>

underline Yes/No

PS file: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PS>

underline Yes/No

Picture A7-130-2: **contrast range:** (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)

compare standard print output according to ISO/IEC 15775 with range F:0 underline range

Remark: In daylighted offices the contrast range is in many cases:

on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF-File: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PDF>

picture A7-130-2

underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PS>

picture A7-130-2

or underline Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry:

underline Yes/No

If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T

Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer
 of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF

underline Yes/No

If No, please describe other method:

Part 4


OE731-7N-130-10



See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

i	LAB*ref			l*out			LAB*out			LAB*out/c-ref			ΔE^*
1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
2	6.36	0.0	0.0	0.07	6.36	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
3	12.72	0.0	0.0	0.13	12.72	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
4	19.08	0.0	0.0	0.2	19.08	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
5	25.44	0.0	0.0	0.27	25.44	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
6	31.8	0.0	0.0	0.33	31.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
7	38.16	0.0	0.0	0.4	38.16	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
8	44.52	0.0	0.0	0.47	44.52	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
9	50.89	0.0	0.0	0.53	50.89	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
10	57.25	0.0	0.0	0.6	57.25	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
11	63.61	0.0	0.0	0.67	63.61	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
12	69.97	0.0	0.0	0.73	69.97	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
13	76.33	0.0	0.0	0.8	76.33	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
14	82.69	0.0	0.0	0.87	82.69	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
15	89.05	0.0	0.0	0.93	89.05	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
16	95.41	0.0	0.0	1.0	95.41	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
17	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
18	23.85	0.0	0.0	0.25	23.85	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
19	47.71	0.0	0.0	0.5	47.71	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
20	71.56	0.0	0.0	0.75	71.56	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
21	95.41	0.0	0.0	1.0	95.41	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
Mean lightness difference (16 steps)													$\Delta E^*_{\text{CIELAB}} = 0.0$
Mean lightness difference (5 steps)													$\Delta E^*_{\text{CIELAB}} = 0.0$
Mean colour reproduction index:													$R^*_{ab,m} = 100$

OE730-3N-130-11: File: Measure unknown; Device: Device unknown; Date: Date unknown

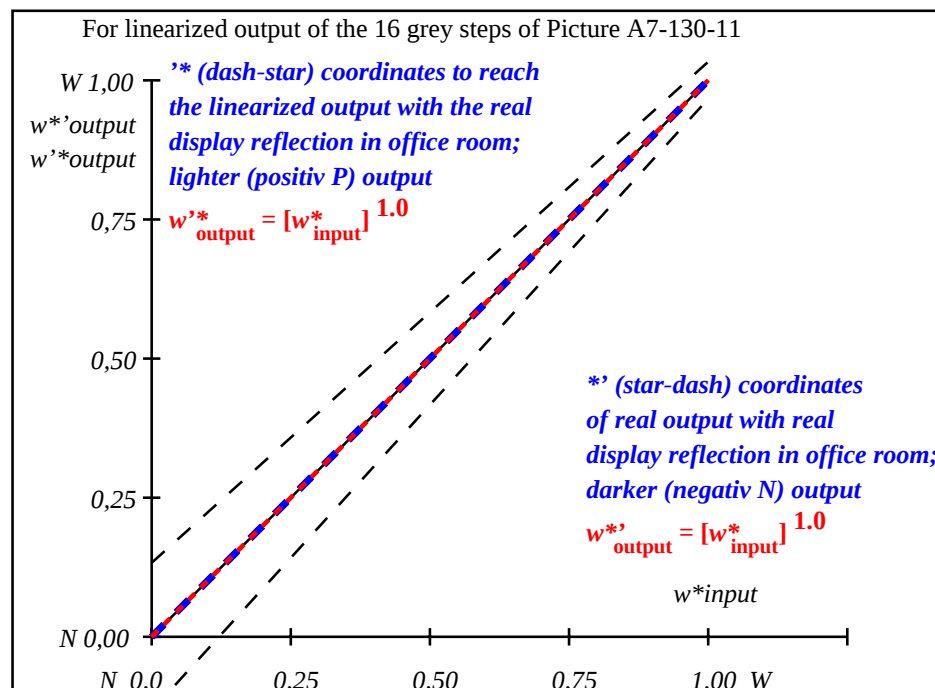

OE731-3N-130-11: File: Measure unknown; Device: Device unknown; Date: Date unknown

L^*/Y_{intended} (absolute)	0.0/0.0	6.4/0.7	12.7/1.5	19.1/2.8	25.4/4.6	31.8/7.0	38.2/10.2	44.5/14.2	50.9/19.2	57.2/25.2	63.6/32.3	70.0/40.7	76.3/50.4	82.7/61.6	89.0/74.3	95.4/88.6
$w^* w^* w^*$ setrgb $g_P=1.0$																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*_{\text{CIELAB},r}$ (relative)																
w^*_{intended}	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
w^*_{out}	0.0	0.067	0.133	0.2	0.267	0.333	0.4	0.467	0.533	0.6	0.667	0.733	0.8	0.867	0.933	1.0

OE730-7N, Picture A7-130-11: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*$ setrgbcolor

OE73: In-output relation according to ISO 9241-306; 1MR, DH
Viewing Y contrast $Y_W:Y_N=88,9:0,31$; Y_N range 0,0 to <0,46

input: $cmy0$ ($\rightarrow cmy0^*_d$) setcmyk
output 130-11: $g_P=1.0$; $g_N=1.0$

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 40/360 = 0.111$


lab^*tch and lab^*nch

D65: hue O

LCH*Ma: 51 100 40

olv*Ma: 1.0 0.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 40/360 = 0.111$


lab^*tch and lab^*nch

D65: hue O

LCH*Ma: 51 100 40

olv*Ma: 1.0 0.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

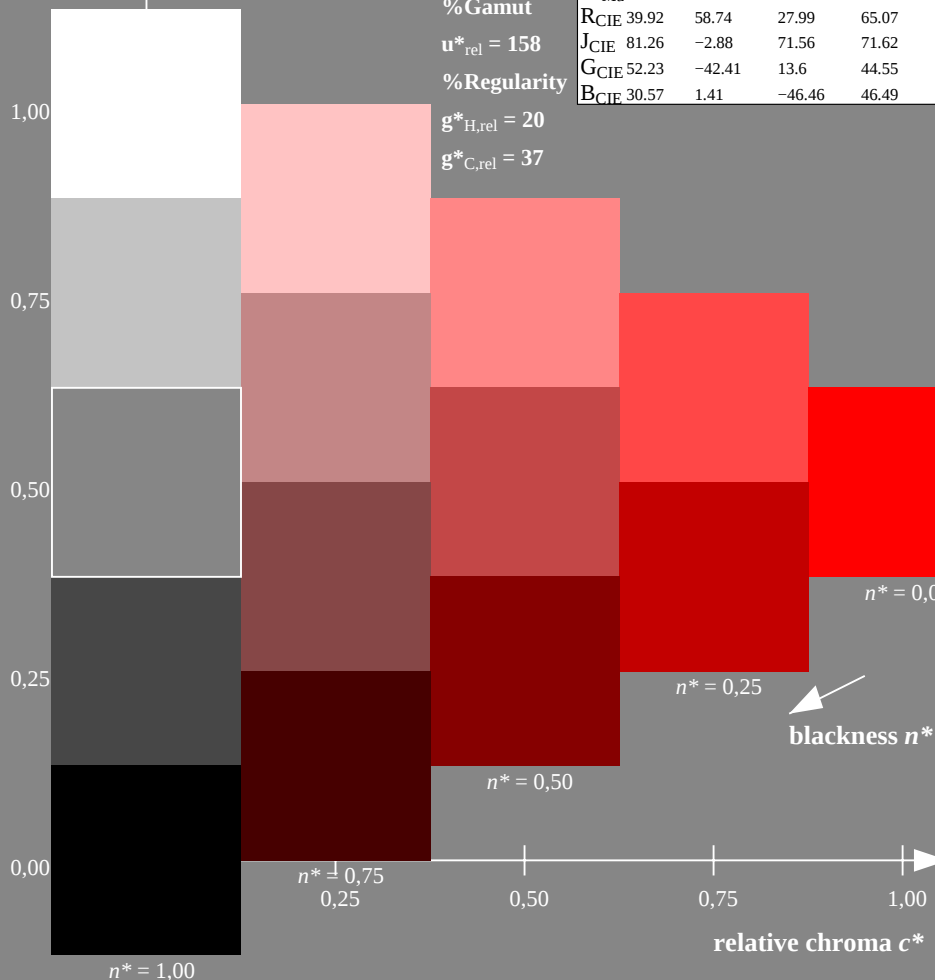

OE730-7N-130-0: 5 step scales for constant CIELAB hue 40/360 = 0.111 (left)

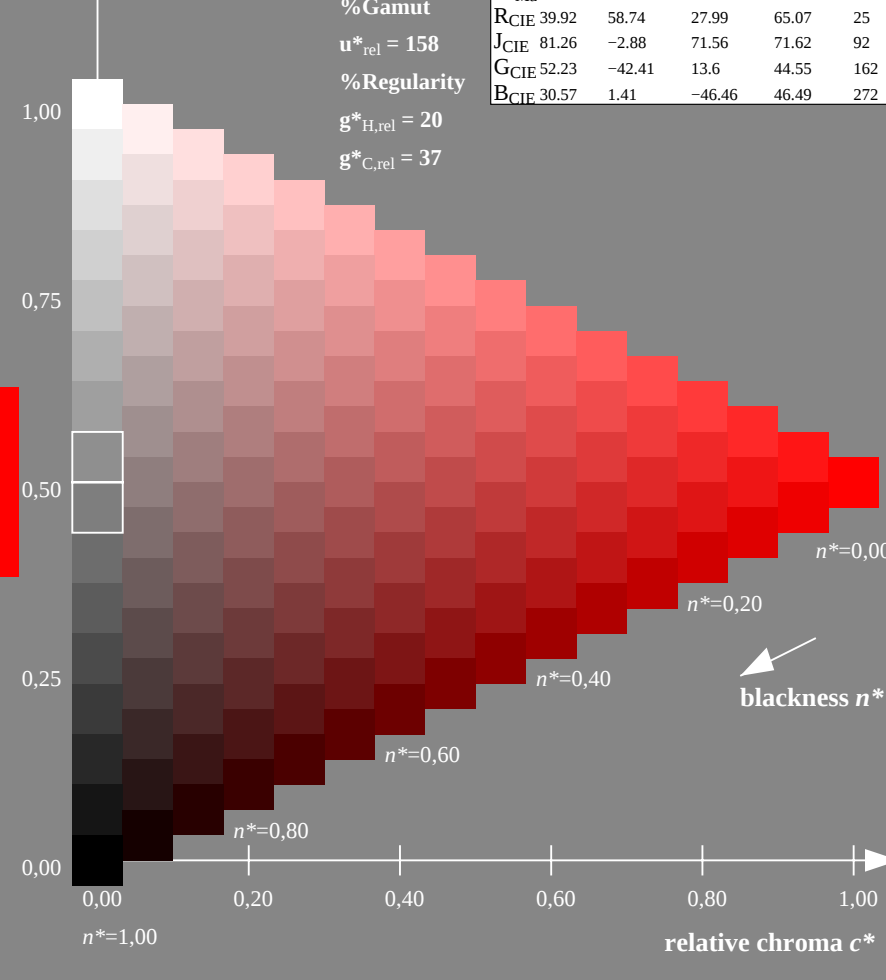

16 step scales for constant CIELAB hue 40/360 = 0.111 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue O; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{\Delta}$) $setcmyk$
output 131-0: $g_P=0.92$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 103/360 = 0.286$


lab^*tch and lab^*nch

D65: hue Y

LCH*Ma: 93 93 103

olv*Ma: 1.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 103/360 = 0.286$


lab^*tch and lab^*nch

D65: hue Y

LCH*Ma: 93 93 103

olv*Ma: 1.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

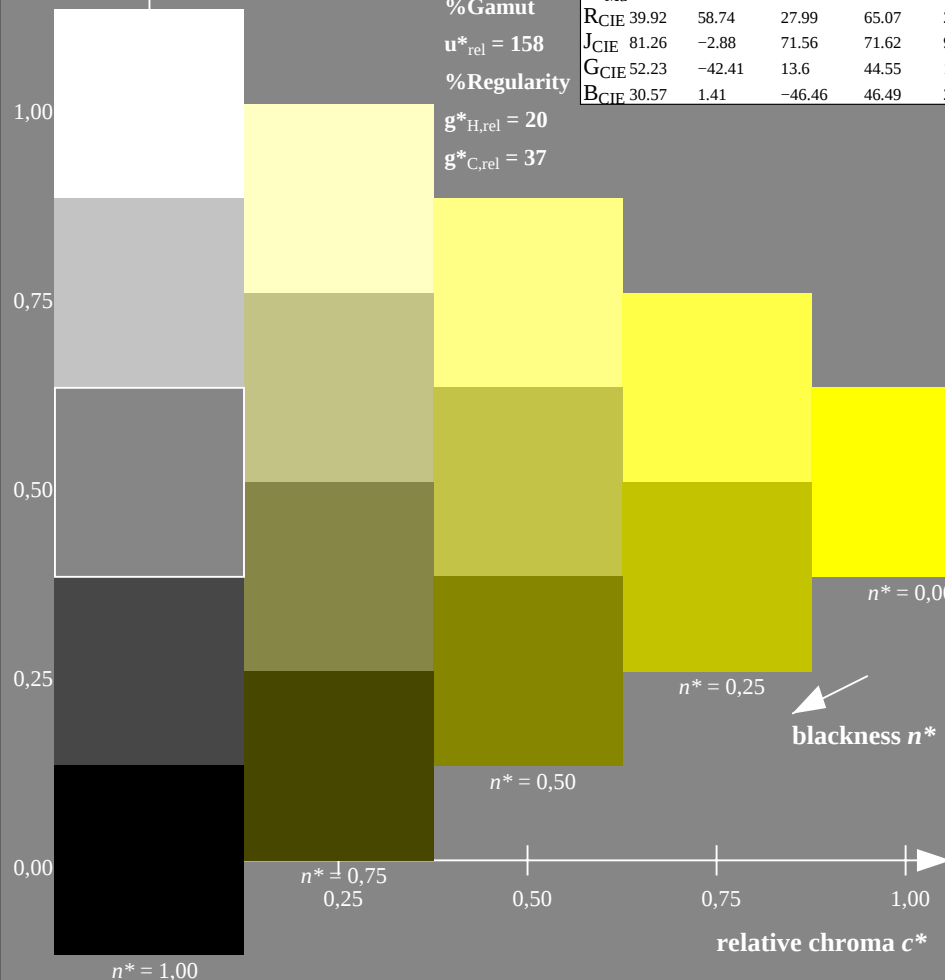

OE730-7N-130-1: 5 step scales for constant CIELAB hue 103/360 = 0.286 (left)

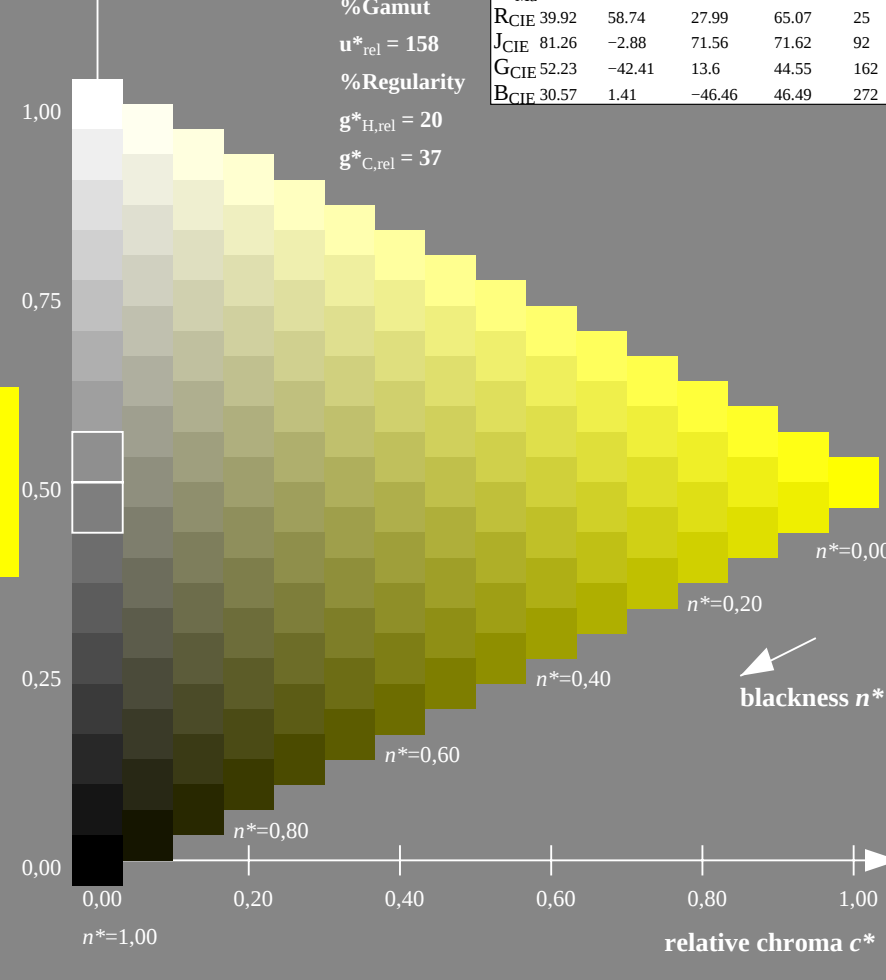

16 step scales for constant CIELAB hue 103/360 = 0.286 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue Y; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{\Delta}$) $setcmyk$
output 131-1: $g_P=0.92$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
TUB material: code=th4ta
application for output of displays: monitor systems or data projector systems

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 136/360 = 0.378$


lab^*tch and lab^*nch

D65: hue L

LCH*Ma: 84 115 136

ol v^* Ma: 0.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 136/360 = 0.378$


lab^*tch and lab^*nch

D65: hue L

LCH*Ma: 84 115 136

ol v^* Ma: 0.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

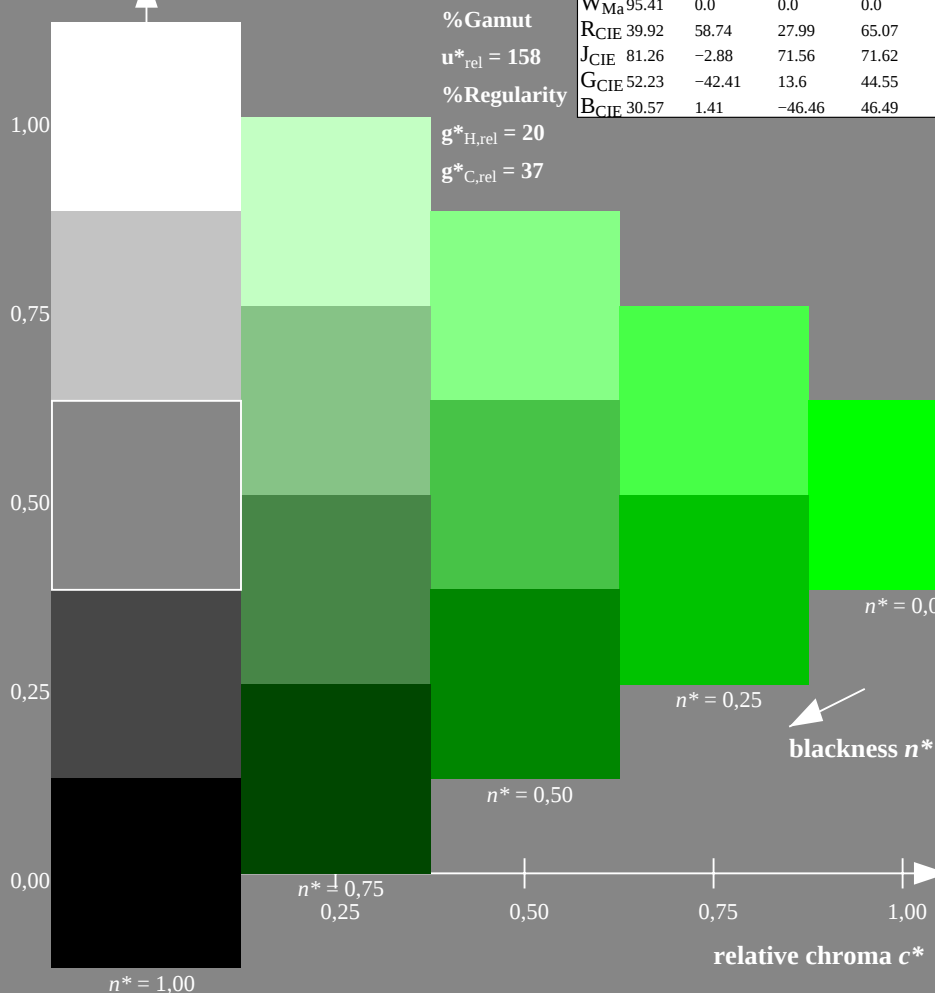

OE730-7N-130-2: 5 step scales for constant CIELAB hue 136/360 = 0.378 (left)

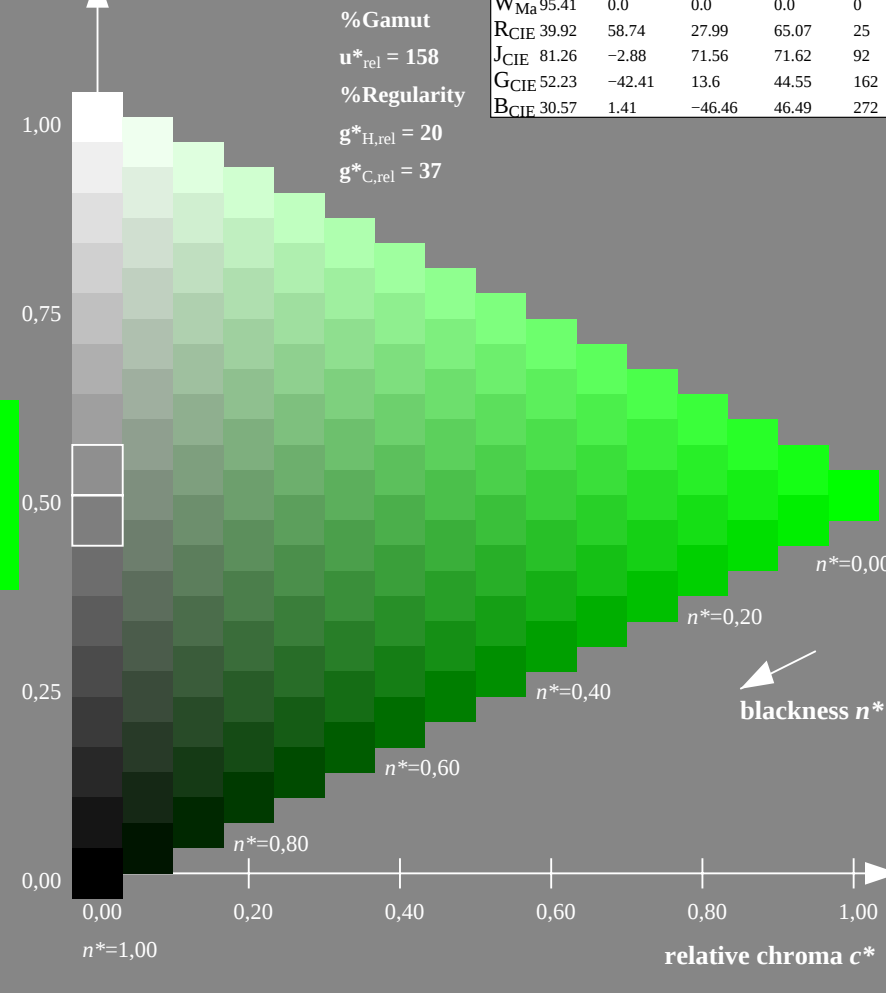

16 step scales for constant CIELAB hue 136/360 = 0.378 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue L; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{d}$) $setcmyk$
output 131-2: $g_P=0.92$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 196/360 = 0.545$


lab^*tch and lab^*nch

D65: hue C

LCH*Ma: 87 48 196

olv*Ma: 0.0 1.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 196/360 = 0.545$


lab^*tch and lab^*nch

D65: hue C

LCH*Ma: 87 48 196

olv*Ma: 0.0 1.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

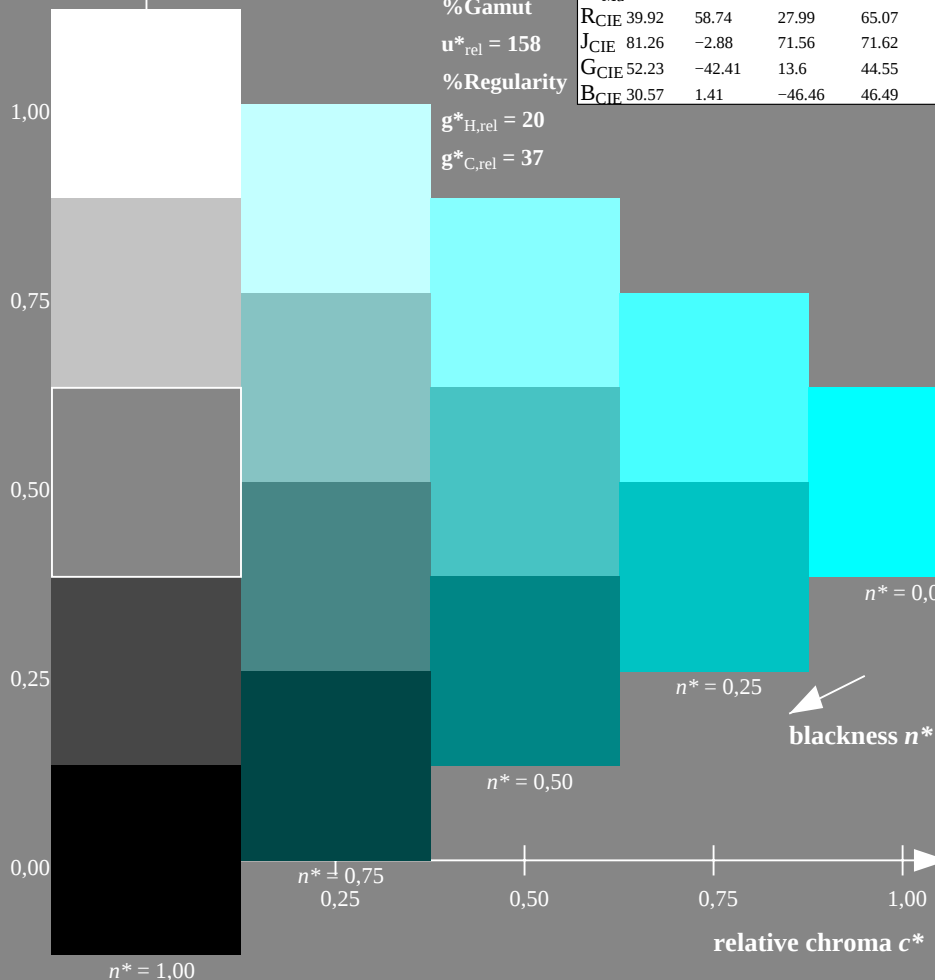

OE730-7N-130-3: 5 step scales for constant CIELAB hue 196/360 = 0.545 (left)

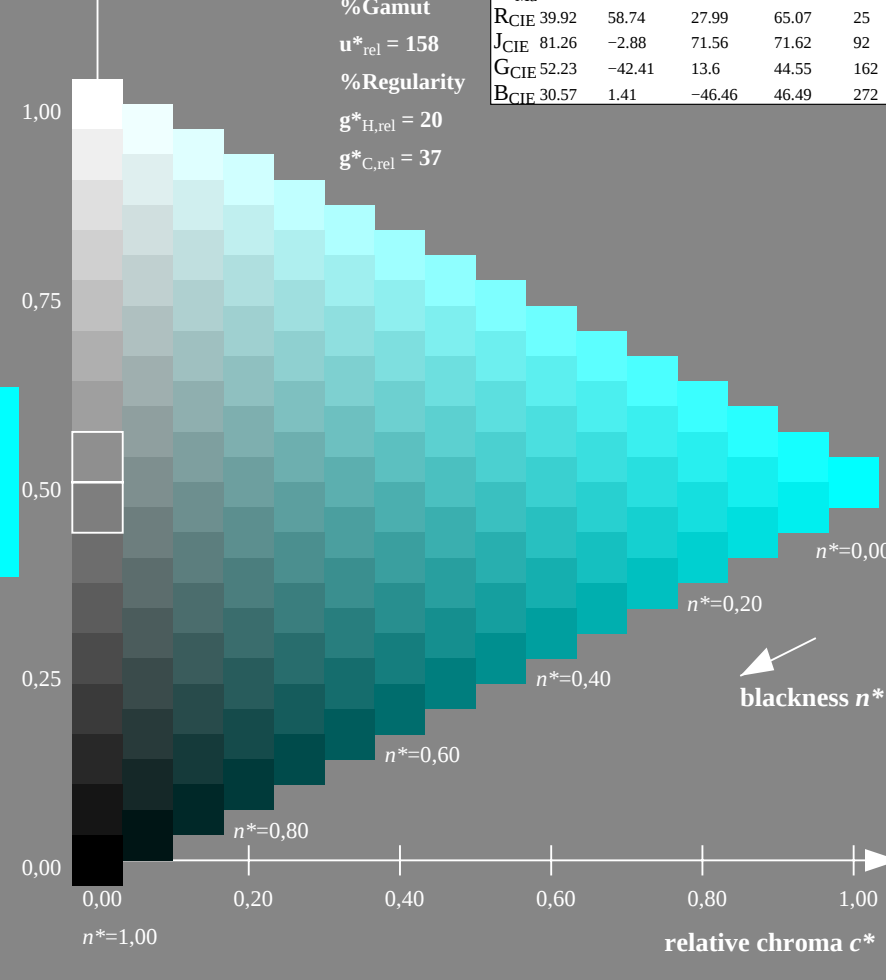

16 step scales for constant CIELAB hue 196/360 = 0.545 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue C; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{\Delta}$) $setcmyk$
output 131-3: $g_P=0.92$; $g_N=1.0$

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 306/360 = 0.851$


lab^*tch and lab^*nch

D65: hue V

LCH*Ma: 30 129 306

ol v^* Ma: 0.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 306/360 = 0.851$


lab^*tch and lab^*nch

D65: hue V

LCH*Ma: 30 129 306

ol v^* Ma: 0.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

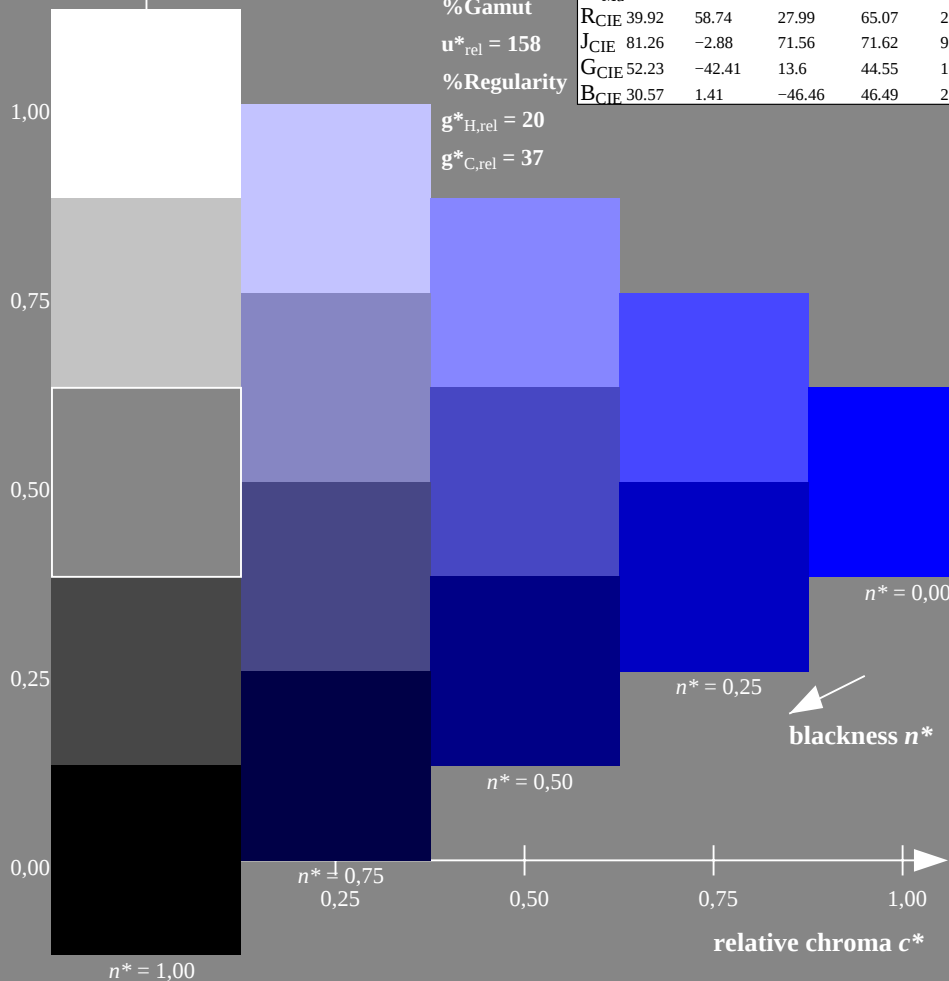

OE730-7N-130-4: 5 step scales for constant CIELAB hue 306/360 = 0.851 (left)

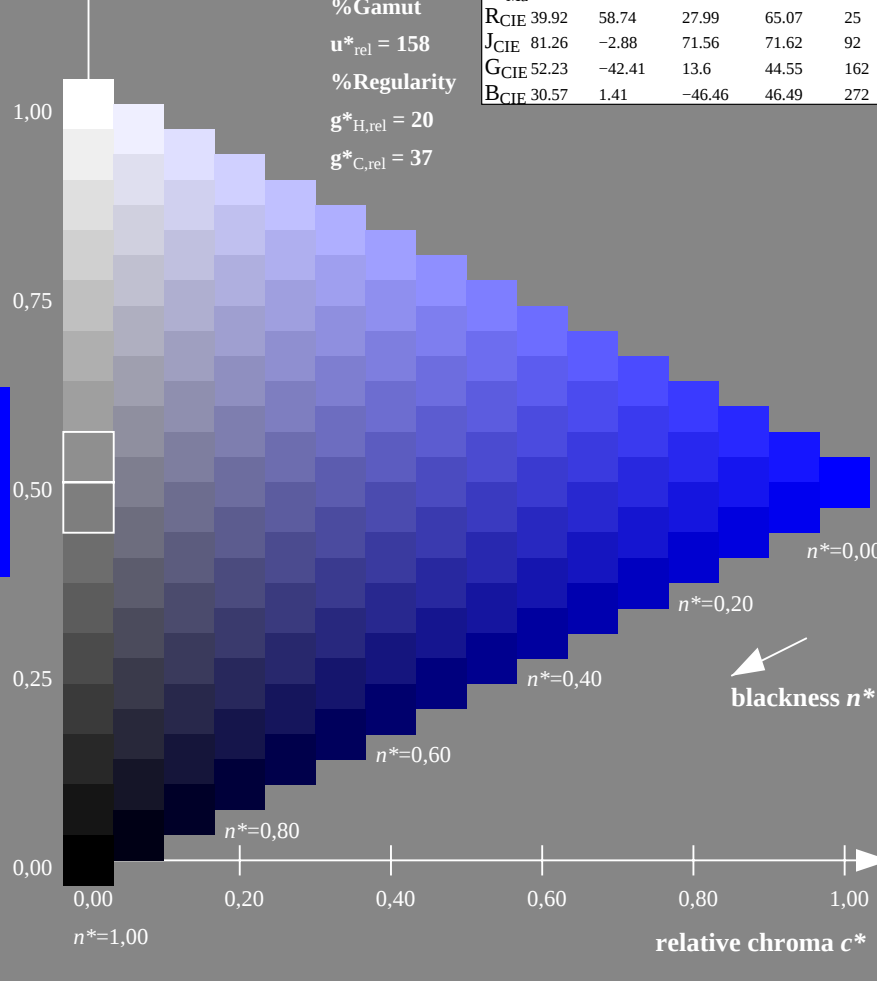

16 step scales for constant CIELAB hue 306/360 = 0.851 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue V; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{\Delta}$) $setcmyk$
output 131-4: $g_P=0.92$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 328/360 = 0.912$


lab^*tch and lab^*nch

D65: hue M

LCH*Ma: 57 111 328

ol v^* Ma: 1.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 328/360 = 0.912$


lab^*tch and lab^*nch

D65: hue M

LCH*Ma: 57 111 328

ol v^* Ma: 1.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

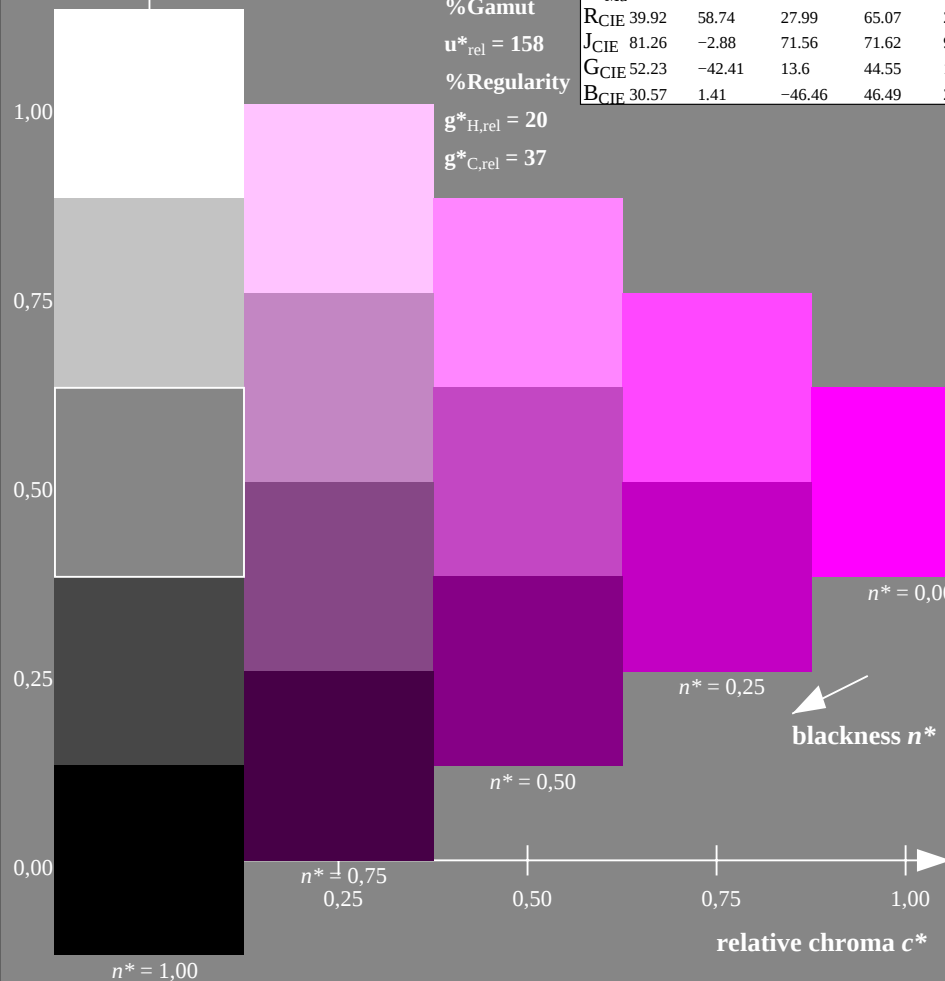

OE730-7N-130-5: 5 step scales for constant CIELAB hue 328/360 = 0.912 (left)

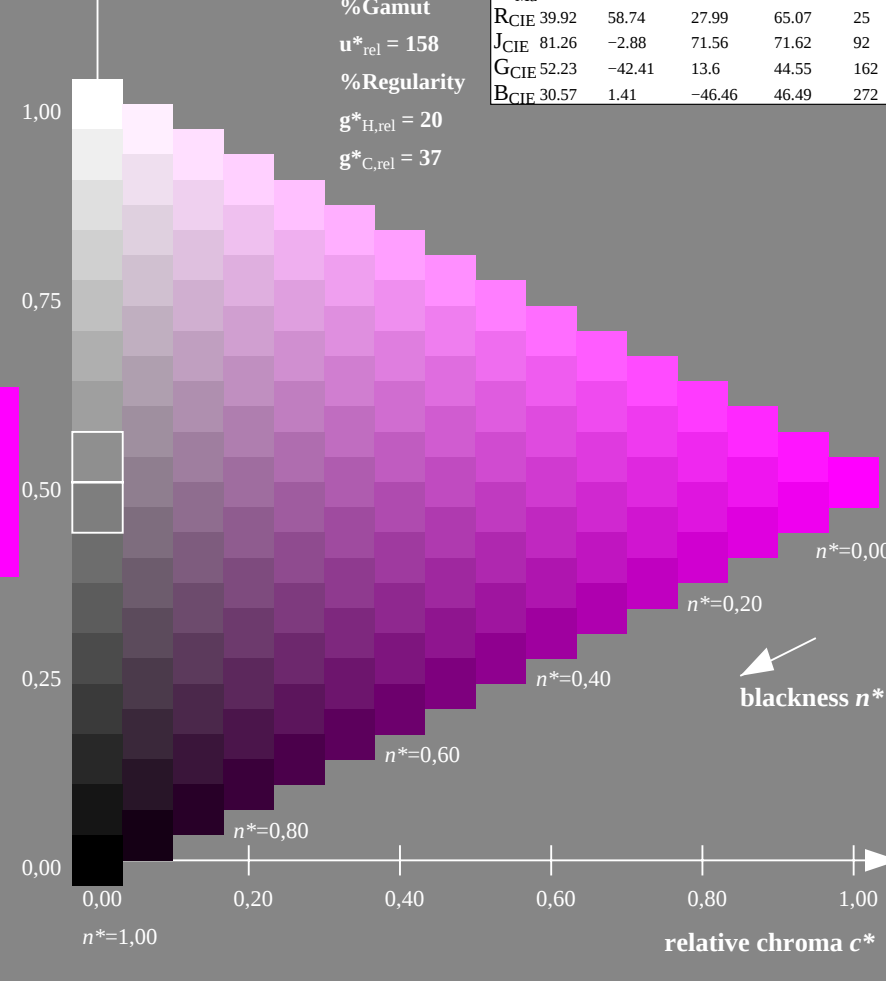

16 step scales for constant CIELAB hue 328/360 = 0.912 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue M; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{\Delta}$) $setcmyk$
output 131-5: $g_P=0.92$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 25/360 = 0.071$


lab^*tch and lab^*nch

D65: hue R

LCH*Ma: 52 89 25

ol v^* Ma: 1.0 0.0 0.21

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 25/360 = 0.071$


lab^*tch and lab^*nch

D65: hue R

LCH*Ma: 52 89 25

ol v^* Ma: 1.0 0.0 0.21

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

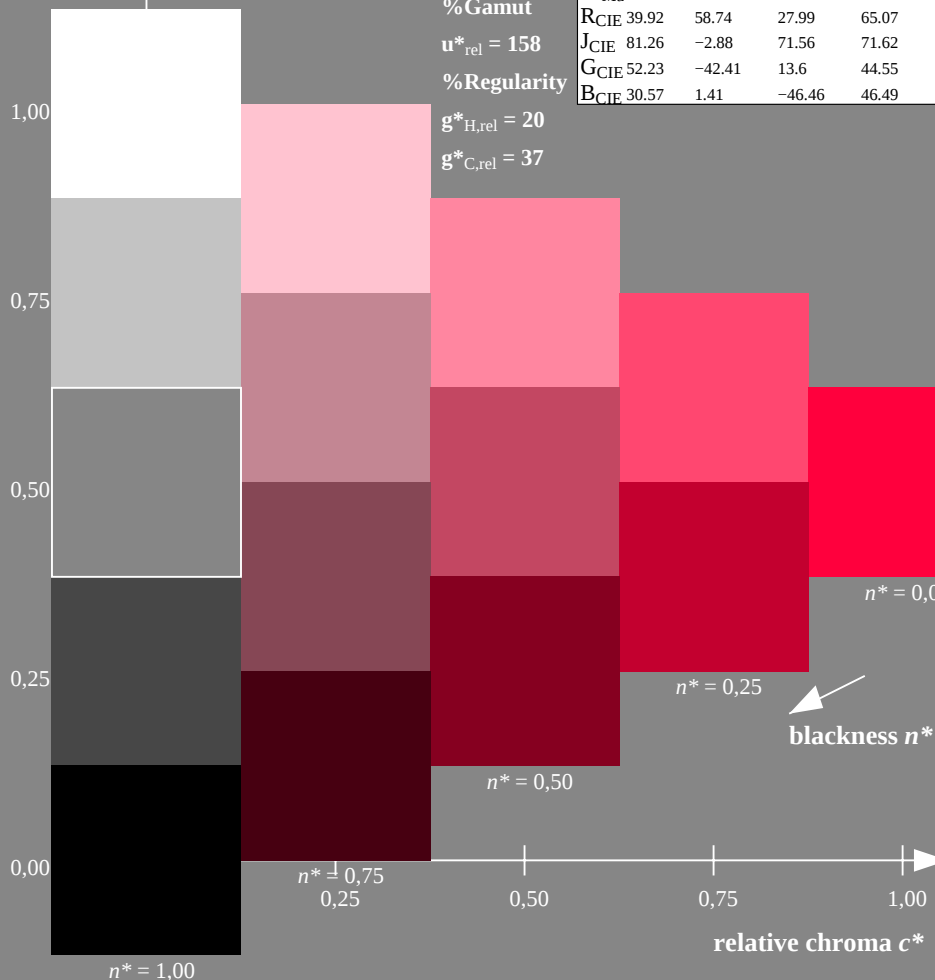

OE730-7N-130-6: 5 step scales for constant CIELAB hue 25/360 = 0.071 (left)

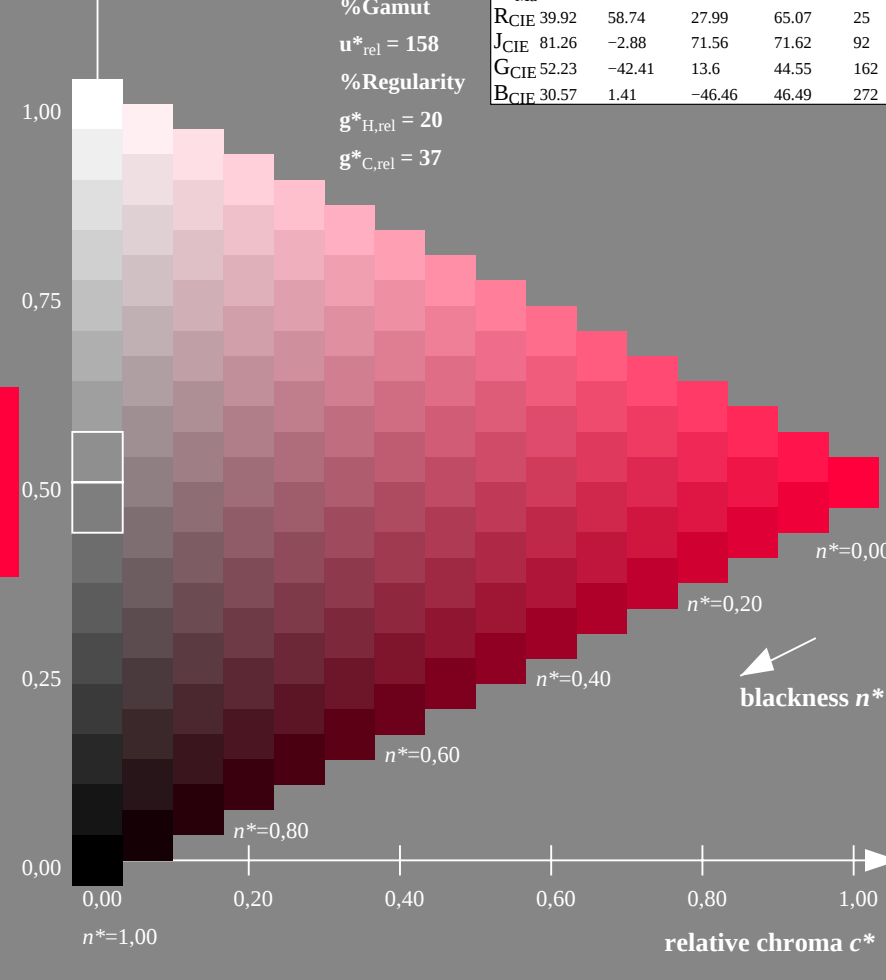

16 step scales for constant CIELAB hue 25/360 = 0.071 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue R; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 131-6: $g_P=0.92$; $g_N=1.0$

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 92/360 = 0.256$


lab^*tch and lab^*nch

D65: hue J

LCH*Ma: 85 86 92

olv*Ma: 1.0 0.82 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 92/360 = 0.256$


lab^*tch and lab^*nch

D65: hue J

LCH*Ma: 85 86 92

olv*Ma: 1.0 0.82 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

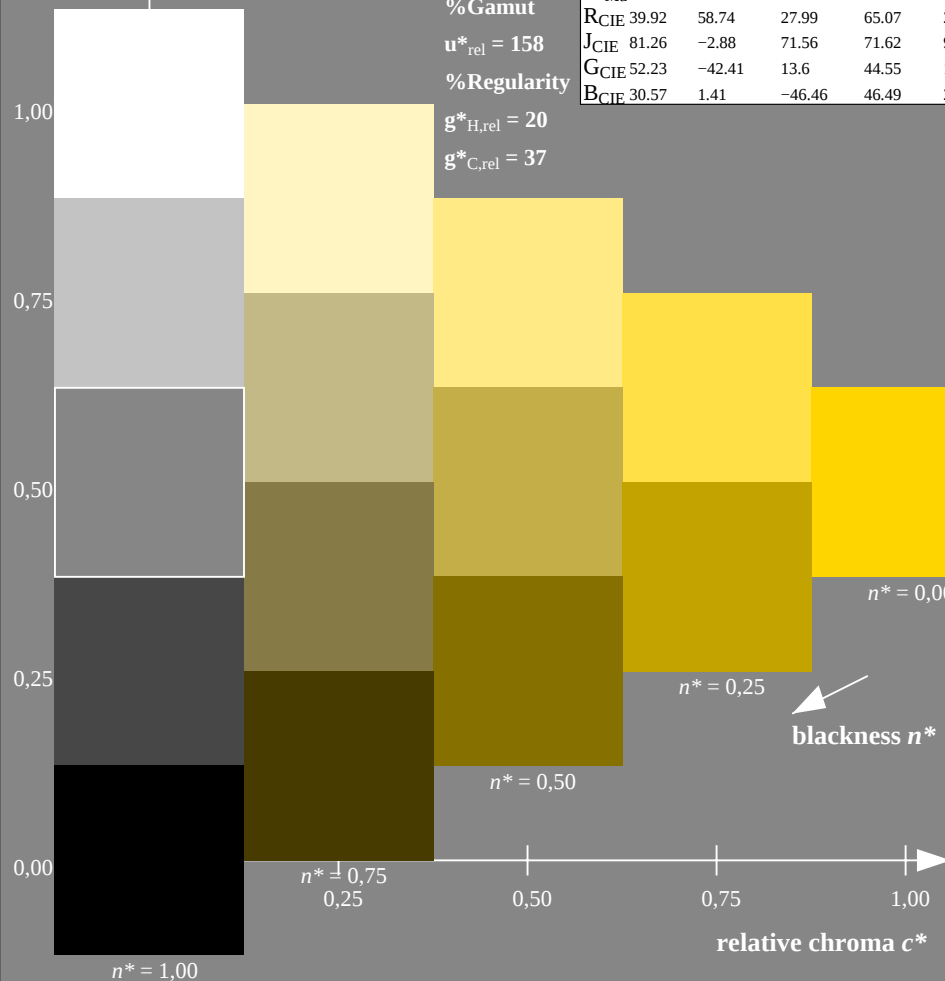

OE730-7N-130-7: 5 step scales for constant CIELAB hue 92/360 = 0.256 (left)

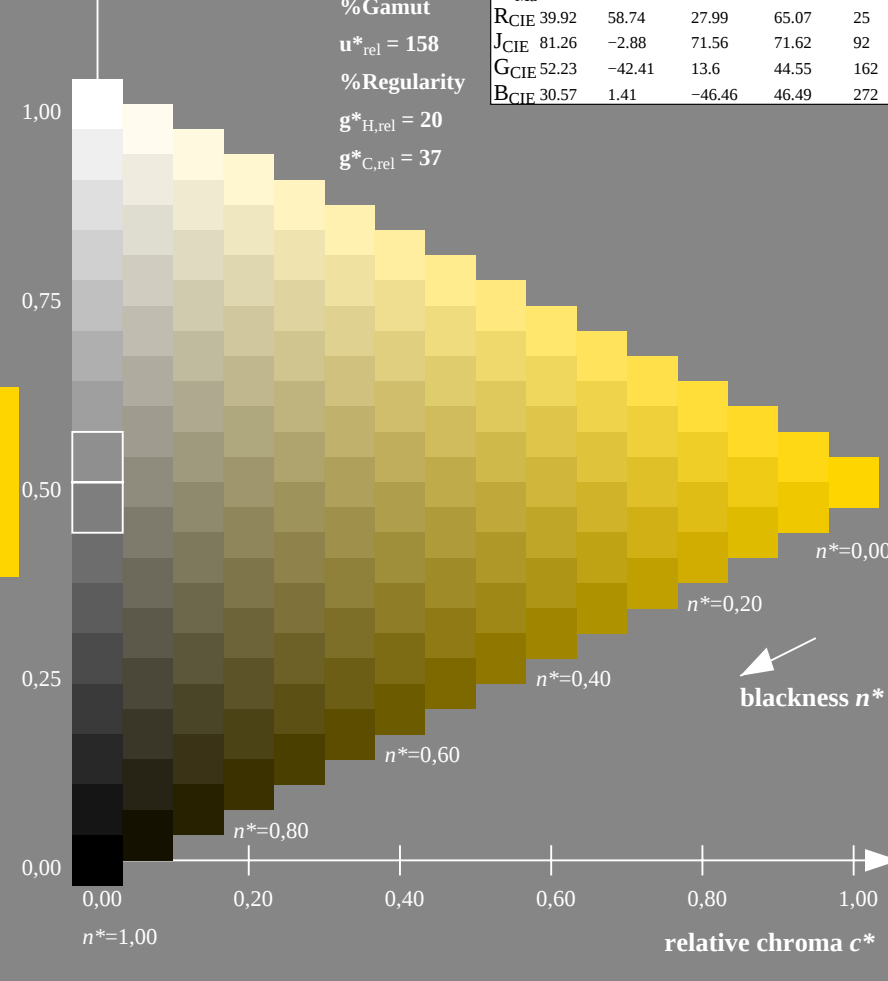

16 step scales for constant CIELAB hue 92/360 = 0.256 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue J; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 131-7: $g_P=0.92$; $g_N=1.0$

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 162/360 = 0.451$


lab^*tch and lab^*nch

D65: hue G

LCH*Ma: 86 62 162

ol v^* Ma: 0.0 1.0 0.65

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 162/360 = 0.451$


lab^*tch and lab^*nch

D65: hue G

LCH*Ma: 86 62 162

ol v^* Ma: 0.0 1.0 0.65

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

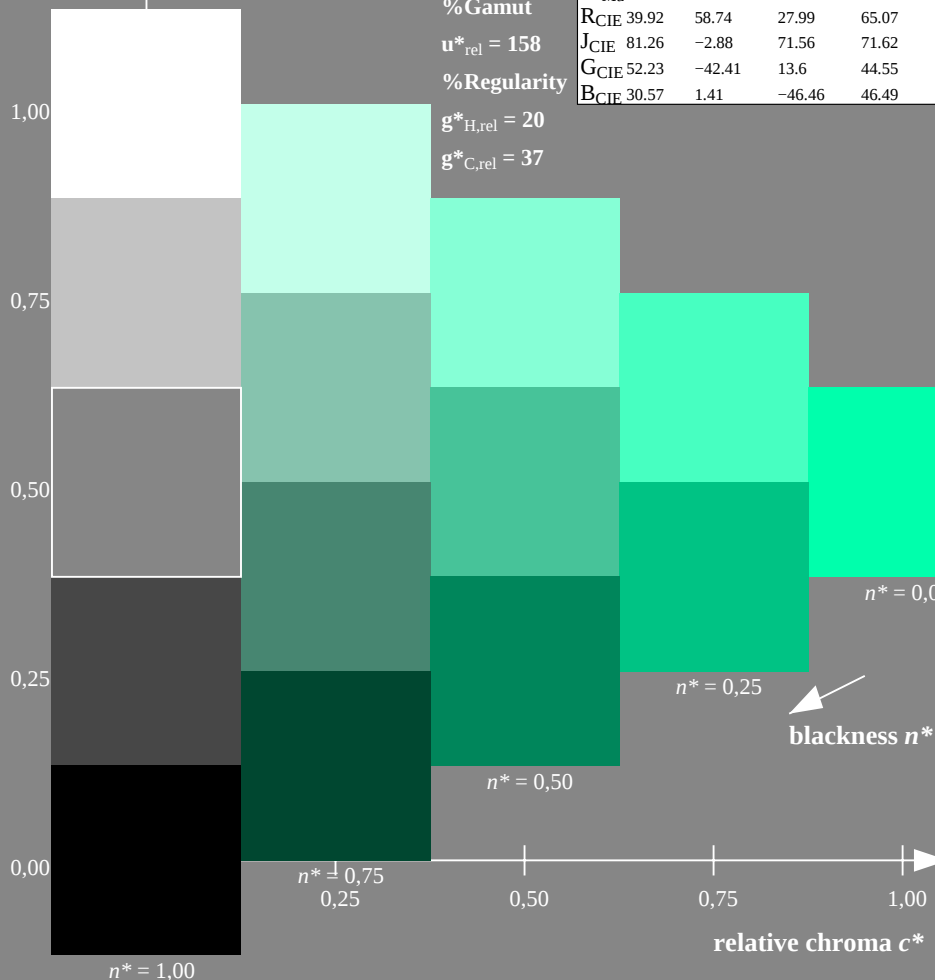

OE730-7N-130-8: 5 step scales for constant CIELAB hue 162/360 = 0.451 (left)

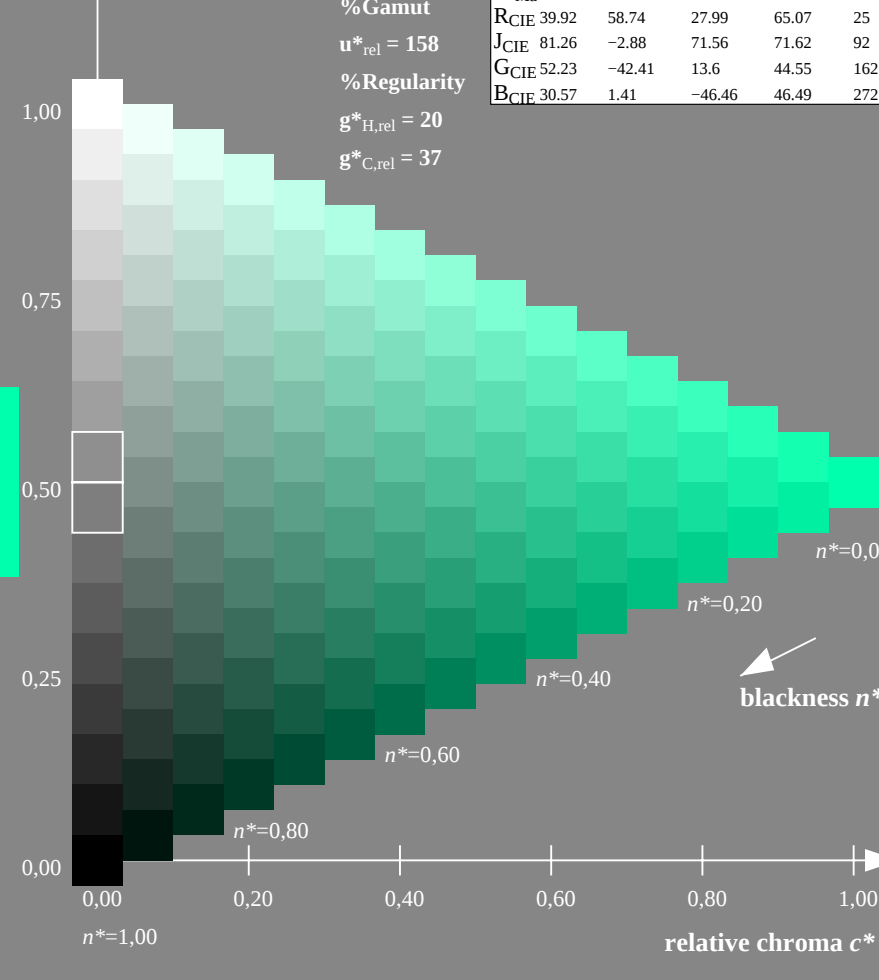

16 step scales for constant CIELAB hue 162/360 = 0.451 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue G; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 131-8: $g_P=0.92$; $g_N=1.0$

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 272/360 = 0.755$


lab^*tch and lab^*nch

D65: hue B

LCH*Ma: 65 49 272

ol v^* Ma: 0.0 0.61 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 272/360 = 0.755$


lab^*tch and lab^*nch

D65: hue B

LCH*Ma: 65 49 272

ol v^* Ma: 0.0 0.61 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

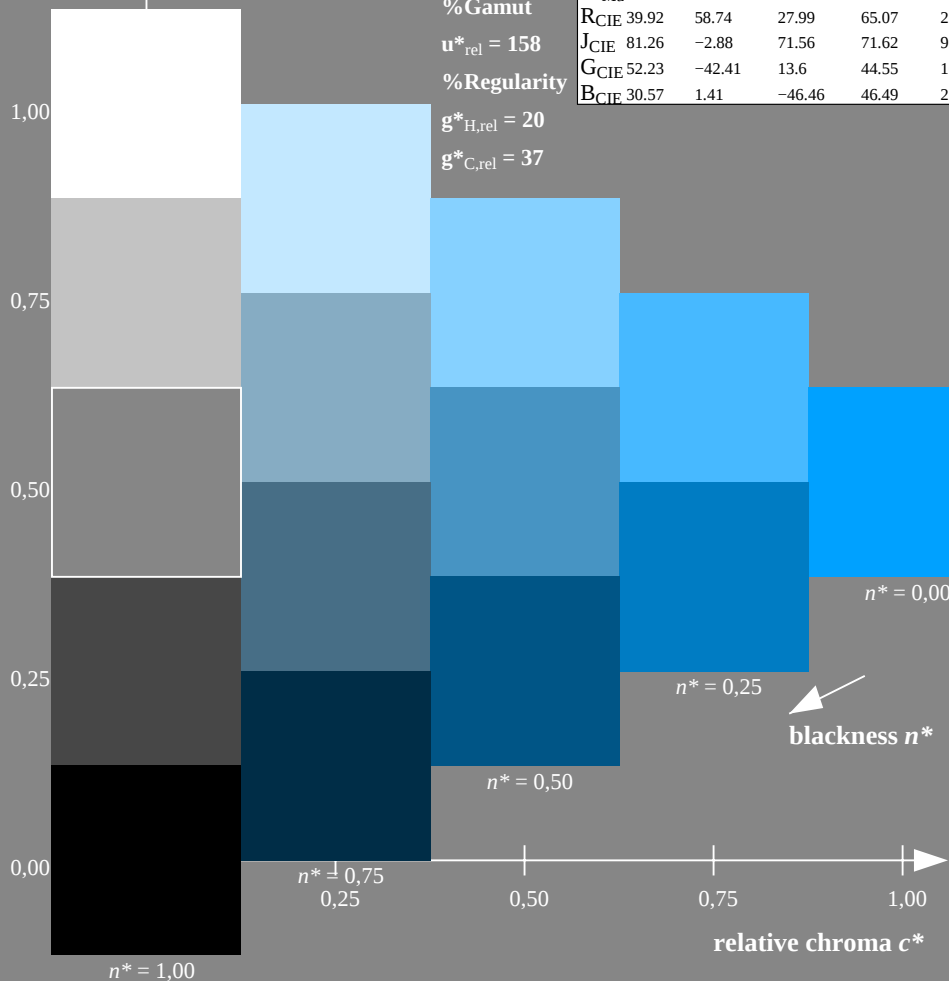

OE730-7N-130-9: 5 step scales for constant CIELAB hue 272/360 = 0.755 (left)

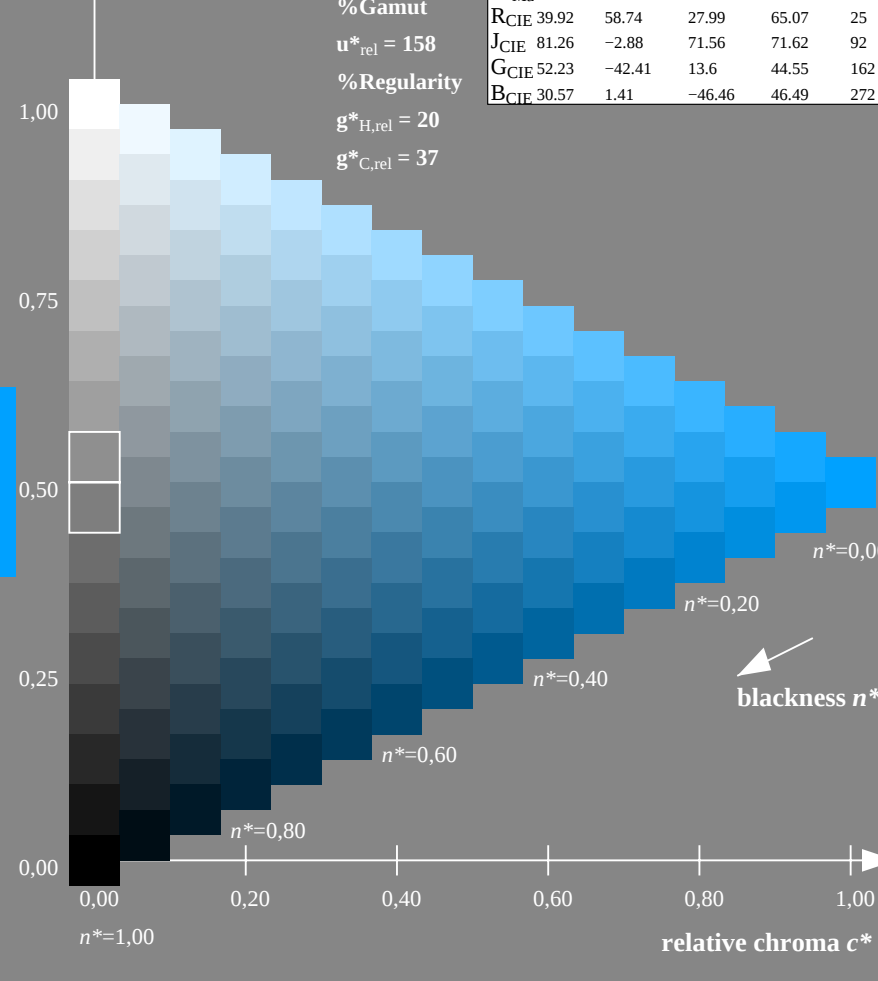


16 step scales for constant CIELAB hue 272/360 = 0.755 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue B; 1MR, DH
Discrimination of 5 and 16 step colour scales


input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 131-9: $g_P=0.92$; $g_N=1.0$

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems


TUB material: code=th4ta



See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB




<http://130.149.60.45/~farbmetrik/OE73/OE73L0NA.TXT> /PS; linearized output, Page 11/12
 F: Output Linearization (OL) data OE73/OE73L0NA.TXT /PS in File (F)




TUB registration: 20110801-OE73/OE73L0NA.TXT /PS
 application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta



Discriminability of 5 step colour series (Yes/No decision)

Layout example: three 5 step colour series



There are three basic colours on each page:
 Black N, White W and Chromatic X.
 Ten pages include 10 hue planes
 X = OYLCVM and RJGB.
 There are at maximum 12 distinguishable steps.

All steps of the three series N-W, W-X and X-N should be distinguishable on **all** pages.

Are the three 5step series distinguishable on all pages? underline: Yes/No

only in case of No: Are the three 5 step series on Page x of 10 pages distinguishable?

Underline Yes/No and give in case of No the number of distinguishable steps?

- Page 1: Yes/No, if No ../12 step differences are distinguishable of O = Orange Red
 Page 2: Yes/No, if No ../12 step differences are distinguishable of Y = Yellow
 Page 3: Yes/No, if No ../12 step differences are distinguishable of L = Leaf green
 Page 4: Yes/No, if No ../12 step differences are distinguishable of C = Cyan blue
 Page 5: Yes/No, if No ../12 step differences are distinguishable of V = Violett blue
 Page 6: Yes/No, if No ../12 step differences are distinguishable of M = Magenta Red
 Page 7: Yes/No, if No ../12 step differences are distinguishable of R = Elementary Red
 Page 8: Yes/No, if No ../12 step differences are distinguishable of J = Elementary yellow
 Page 9: Yes/No, if No ../12 step differences are distinguishable of G = Elementary Green
 Page 10: Yes/No, if No ../12 step differences are distinguishable of B = Elementary blue

Sum: ../10 Yes-Pages and ../120 step differences are distinguishable

Part 1

OE730-3N-131-10

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE73/OE73L0NP.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE73/OE73L0NA.PS> or underline Yes/No

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline monitor/data projector/printer

Device model, driver and version:.....

Device output with PDF/PS-file: underline PDF/PS-file

For device output with PDF-file OE73L0NP.PDF:

- either PDF-file transfer "download, copy" to PDF device.....
 or with computer system interpretation by "Display-PDF":.....
 or with software e. g. Adobe-Reader/-Acrobat and version:.....
 or with software e. g. Ghostscript and version:.....

For device output with PS-file OE73L0NA.PS:

- either PS-file transfer "download, copy" to PS device.....
 or with computer system interpretation by "Display-PS":.....
 or with software e. g. Ghostscript and version:.....
 or with software e. g. Mac-Yap and version:.....

Special remarks:Special remarks, e. g. output of Landscape (L)

.....

Part 3

OE730-7N-131-10




OE73: Form A for test chart 2 according to DIN 33872-2; 1MR, DHinput: *cmy0* (->*cmy0***g*) *setcmyk*
 Discrimination of colour scales (Yes/No decision)
 output 131-10: *g_P*=0.92; *g_N*=1.0



Discriminability of 16 step colour series (Yes/No decision)

Layout example: three 16 step colour series

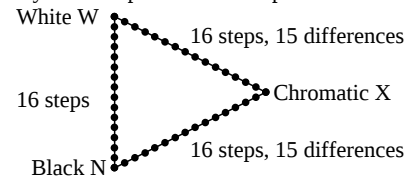

There are three basic colours on each page:
 Black N, White W and Chromatic X.
 Ten pages include 10 hue planes
 X = OYLCVM and RJGB.
 There are at maximum 45 distinguishable steps.

All steps of the three series N-W, W-X and X-N should be distinguishable on **all** pages.

Are the three 16step series distinguishable on all pages? underline: Yes/No

only in case of No: Are the three 16 step series on Page x of 10 pages distinguishable?

Underline Yes/No and give in case of No the number of distinguishable steps?

- Page 1: Yes/No, if No ../45 step differences are distinguishable of O = Orange Red
 Page 2: Yes/No, if No ../45 step differences are distinguishable of Y = Yellow
 Page 3: Yes/No, if No ../45 step differences are distinguishable of L = Leaf green
 Page 4: Yes/No, if No ../45 step differences are distinguishable of C = Cyan blue
 Page 5: Yes/No, if No ../45 step differences are distinguishable of V = Violett blue
 Page 6: Yes/No, if No ../45 step differences are distinguishable of M = Magenta Red
 Page 7: Yes/No, if No ../45 step differences are distinguishable of R = Elementary Red
 Page 8: Yes/No, if No ../45 step differences are distinguishable of J = Elementary yellow
 Page 9: Yes/No, if No ../45 step differences are distinguishable of G = Elementary Green
 Page 10: Yes/No, if No ../45 step differences are distinguishable of B = Elementary blue

Sum: ../10 Yes-Pages and ../450 step differences are distinguishable

Part 2

OE731-3N-131-10

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test:

- either according to DIN 6160:1996 with Anomaloskop of Nagel
 or with test charts using colour points according to Ishihara
 or tested with, please specify:

underline Yes/No

underline Yes/unknown

underline Yes/unknown

underline Yes/unknown

For visual evaluation of the display (monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky)

underline Yes/No

PDF file: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PDF>

underline Yes/No

PS file: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PS>

underline Yes/No

Picture A7-131-2: contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)

compare standard print output according to ISO/IEC 15775 with range F:0 underline range

Remark: In daylighted offices the contrast range is in many cases:
 on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF-File: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PDF>

picture A7-131-2

underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PS>

picture A7-131-2

or underline Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry:

underline Yes/No

If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T

Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer
 of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF

underline Yes/No

If No, please describe other method:

Part 4


OE731-7N-131-10



See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE*
1	5.69 0.0 0.0	0.0 0.0 0.0	5.69 0.0 0.0	0.0 0.0 0.0	0.01
2	11.67 0.0 0.0	0.08 13.02 0.0	0.0 0.0 0.0	1.35 0.0 0.0	1.35
3	17.65 0.0 0.0	0.16 19.6 0.0	0.0 0.0 0.0	1.95 0.0 0.0	1.95
4	23.63 0.0 0.0	0.23 25.94 0.0	0.0 0.0 0.0	2.3 0.0 0.0	2.3
5	29.62 0.0 0.0	0.29 32.11 0.0	0.0 0.0 0.0	2.49 0.0 0.0	2.49
6	35.6 0.0 0.0	0.36 38.17 0.0	0.0 0.0 0.0	2.57 0.0 0.0	2.57
7	41.58 0.0 0.0	0.43 44.13 0.0	0.0 0.0 0.0	2.55 0.0 0.0	2.55
8	47.56 0.0 0.0	0.49 50.02 0.0	0.0 0.0 0.0	2.46 0.0 0.0	2.46
9	53.54 0.0 0.0	0.56 55.85 0.0	0.0 0.0 0.0	2.31 0.0 0.0	2.31
10	59.52 0.0 0.0	0.62 61.62 0.0	0.0 0.0 0.0	2.1 0.0 0.0	2.1
11	65.5 0.0 0.0	0.69 67.35 0.0	0.0 0.0 0.0	1.85 0.0 0.0	1.85
12	71.48 0.0 0.0	0.75 73.03 0.0	0.0 0.0 0.0	1.55 0.0 0.0	1.55
13	77.47 0.0 0.0	0.81 78.68 0.0	0.0 0.0 0.0	1.21 0.0 0.0	1.21
14	83.45 0.0 0.0	0.88 84.29 0.0	0.0 0.0 0.0	0.84 0.0 0.0	0.84
15	89.43 0.0 0.0	0.94 89.86 0.0	0.0 0.0 0.0	0.43 0.0 0.0	0.43
16	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
17	5.69 0.0 0.0	0.0 0.0 0.0	5.69 0.0 0.0	0.0 0.0 0.0	0.01
18	28.12 0.0 0.0	0.28 30.58 0.0	0.0 0.0 0.0	2.46 0.0 0.0	2.46
19	50.55 0.0 0.0	0.53 52.94 0.0	0.0 0.0 0.0	2.39 0.0 0.0	2.39
20	72.98 0.0 0.0	0.77 74.45 0.0	0.0 0.0 0.0	1.47 0.0 0.0	1.47
21	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
Mean lightness difference (16 steps)					ΔE* _{CIELAB} = 1.6
Mean lightness difference (5 steps)					ΔL* _{CIELAB} = 1.3
Mean colour reproduction index:					R* _{ab,m} = 93

OE730-3N-131-11: File: Measure unknown; Device: Device unknown; Date: Date unknown

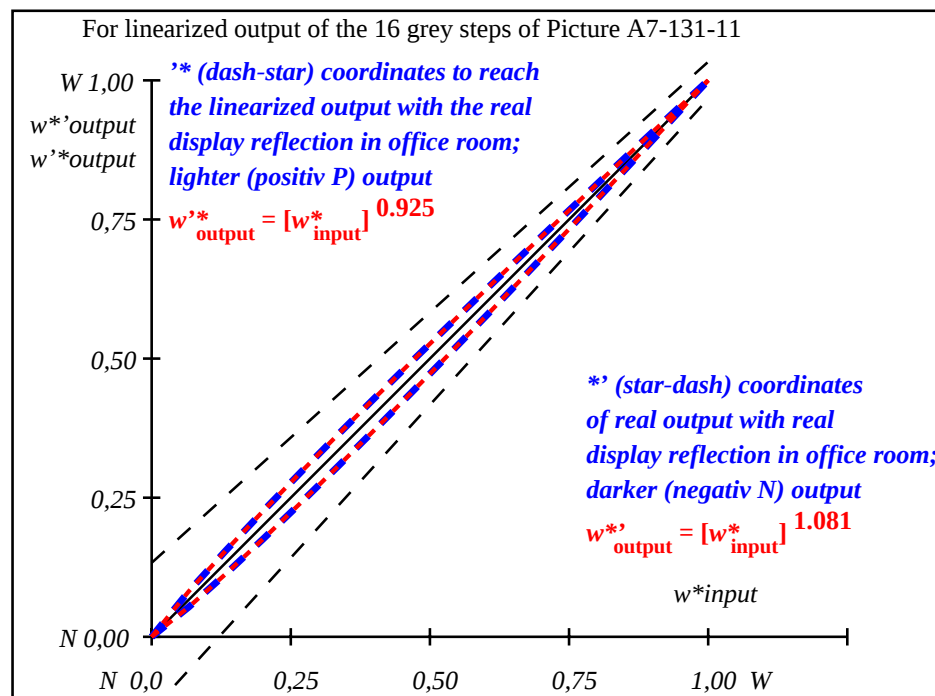

OE731-3N-131-11: File: Measure unknown; Device: Device unknown; Date: Date unknown

L^*/Y_{intended} (absolute)	5.7/0.6	11.7/1.4	17.7/2.4	23.6/4.0	29.6/6.1	35.6/8.8	41.6/12.2	47.6/16.5	53.5/21.5	59.5/27.6	65.5/34.7	71.5/42.9	77.5/52.3	83.4/63.0	89.4/75.1	95.4/88.6
$w^* w^* w^*$ setrgb																
$g_P=0.92$																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*$ CIELAB, r (relative)																
w^*_{intended}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0,0	0,082	0,155	0,226	0,295	0,362	0,428	0,494	0,559	0,623	0,688	0,75	0,814	0,876	0,938	1,0

OE730-7N, Picture A7-131-11: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*$ setrgbcolor

OE73: In-output relation according to ISO 9241-306; 1MR, DH
Viewing Y contrast $Y_W:Y_N=88,9:0,62$; Y_N range 0,46 to <0,93

input: $cmy0$ (-> $cmy0^*_d$) setcmyk
output 131-11: $g_P=0.92$; $g_N=1.0$

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 40/360 = 0.111$


lab^*tch and lab^*nch

D65: hue O

LCH*Ma: 51 100 40

olv*Ma: 1.0 0.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 40/360 = 0.111$


lab^*tch and lab^*nch

D65: hue O

LCH*Ma: 51 100 40

olv*Ma: 1.0 0.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

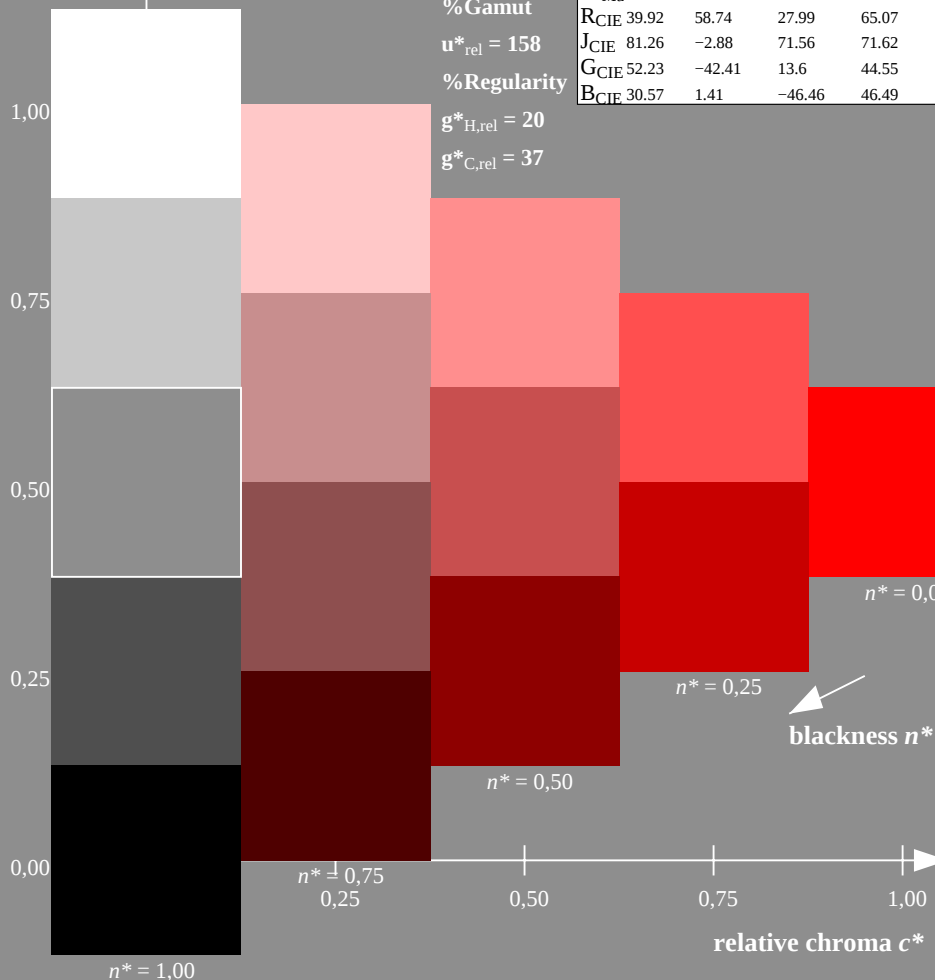

OE730-7N-130-0: 5 step scales for constant CIELAB hue 40/360 = 0.111 (left)

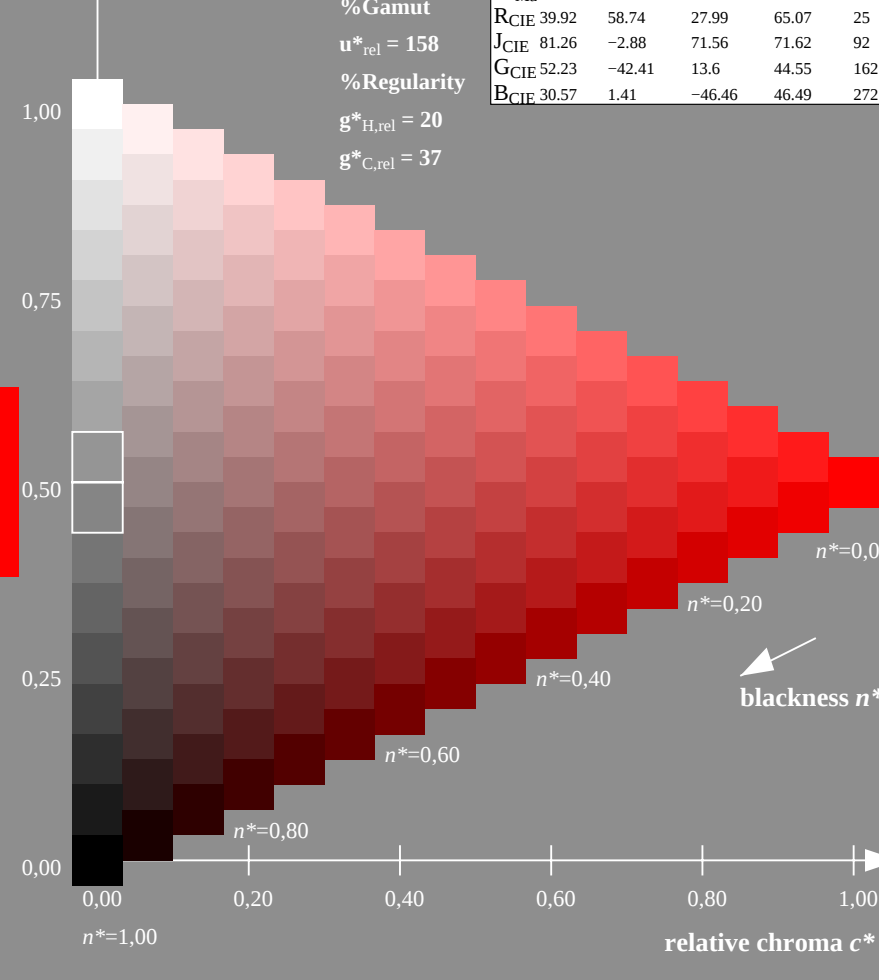

16 step scales for constant CIELAB hue 40/360 = 0.111 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue O; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{d}$) $setcmyk$
output 132-0: $g_P=0.85$; $g_N=1.0$

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 103/360 = 0.286$


lab^*tch and lab^*nch

D65: hue Y

LCH*Ma: 93 93 103

ol v^* Ma: 1.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 103/360 = 0.286$


lab^*tch and lab^*nch

D65: hue Y

LCH*Ma: 93 93 103

ol v^* Ma: 1.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

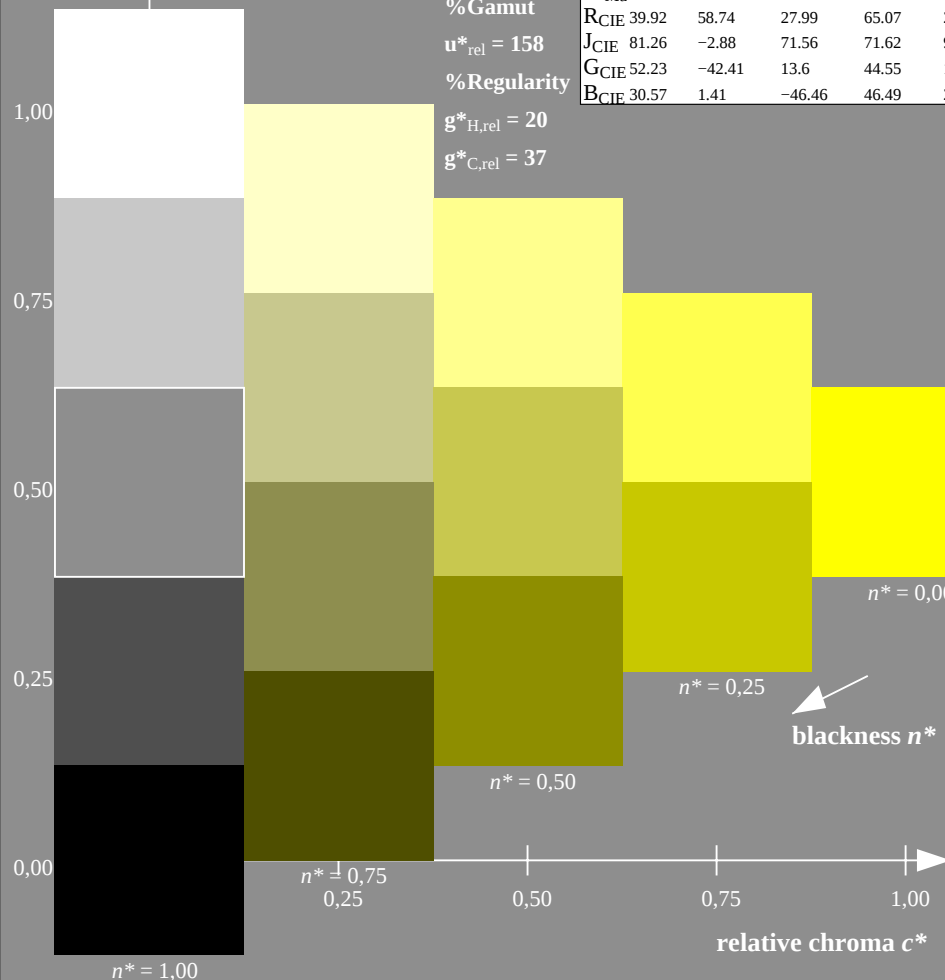

OE730-7N-130-1: 5 step scales for constant CIELAB hue 103/360 = 0.286 (left)

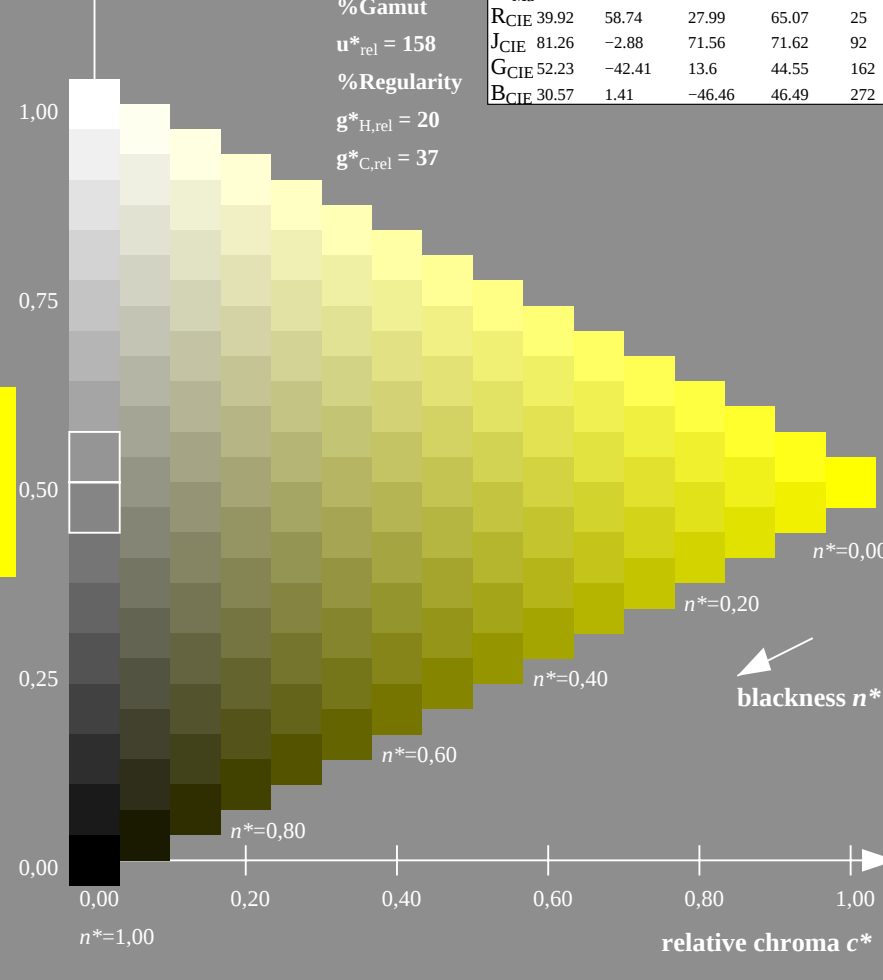

16 step scales for constant CIELAB hue 103/360 = 0.286 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue Y; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{\Delta}$) $setcmyk$
output 132-1: $g_P=0.85$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 136/360 = 0.378$


lab^*tch and lab^*nch

D65: hue L

LCH*Ma: 84 115 136

ol v^* Ma: 0.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 136/360 = 0.378$


lab^*tch and lab^*nch

D65: hue L

LCH*Ma: 84 115 136

ol v^* Ma: 0.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

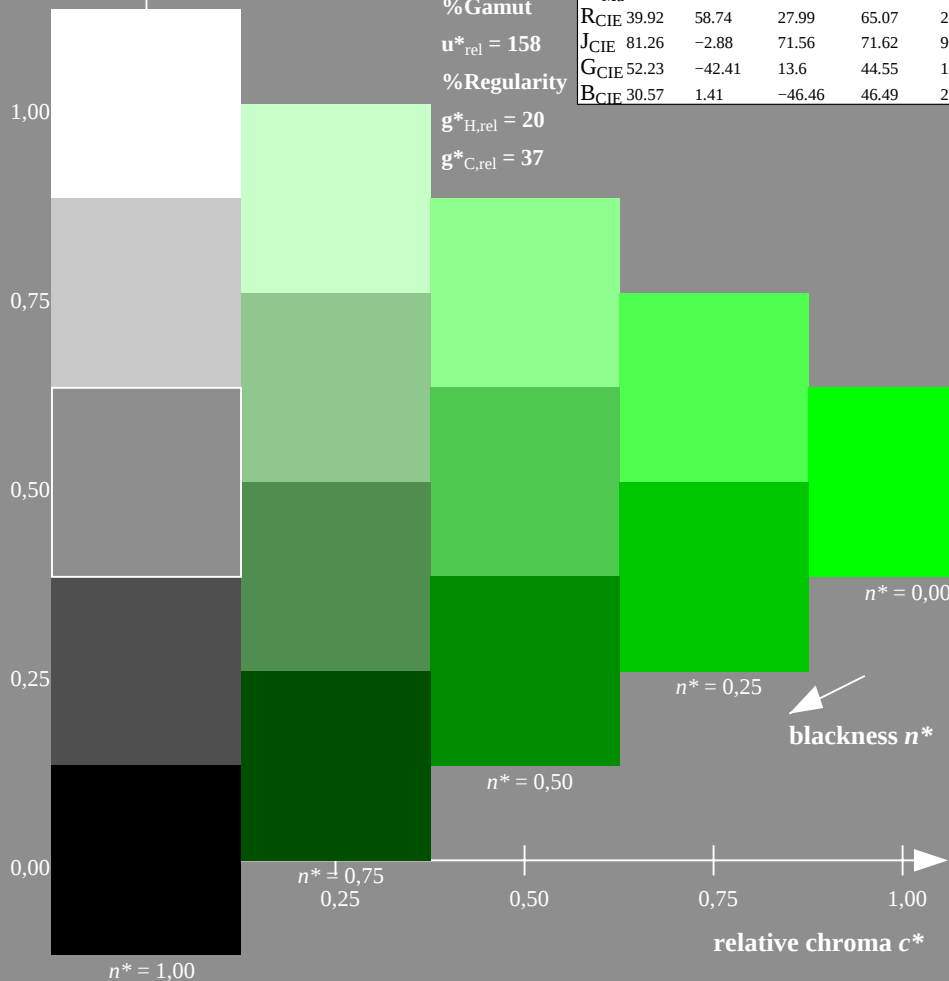

OE730-7N-130-2: 5 step scales for constant CIE LAB hue 136/360 = 0.378 (left)

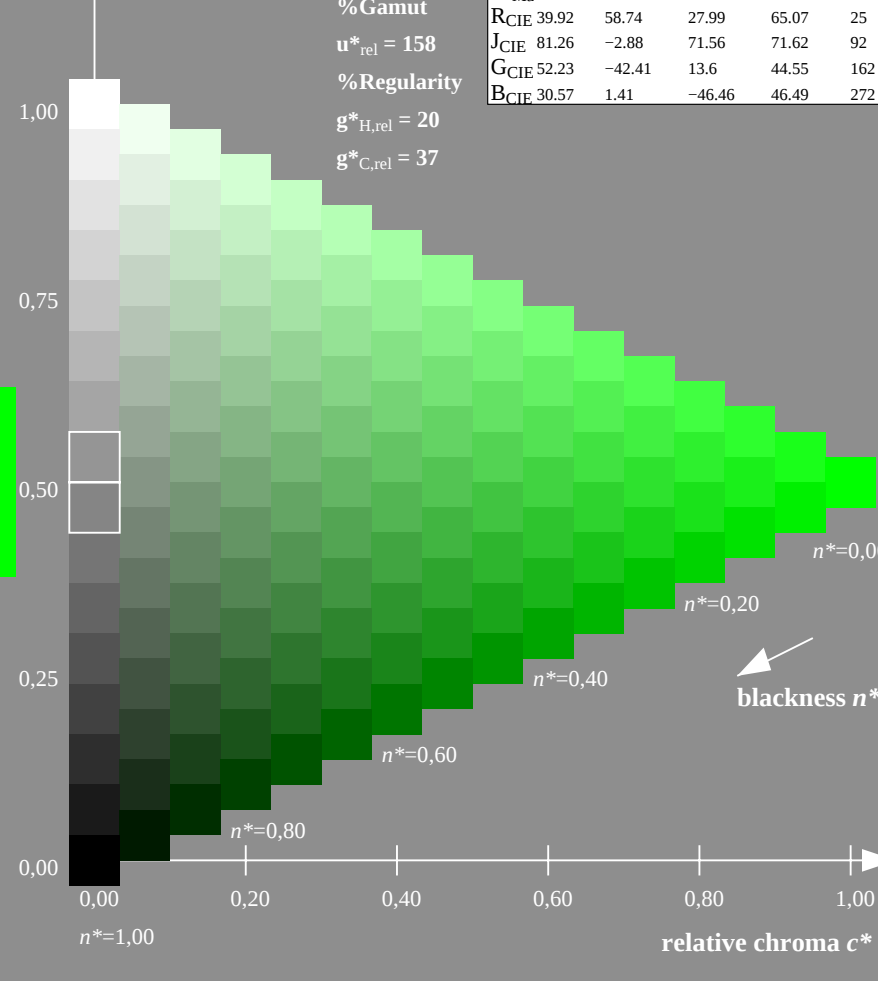

16 step scales for constant CIE LAB hue 136/360 = 0.378 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue L; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{d}$) $setcmyk$
output 132-2: $g_P=0.85$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 196/360 = 0.545$


lab^*tch and lab^*nch

D65: hue C

LCH*Ma: 87 48 196

ol v^* Ma: 0.0 1.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 196/360 = 0.545$


lab^*tch and lab^*nch

D65: hue C

LCH*Ma: 87 48 196

ol v^* Ma: 0.0 1.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

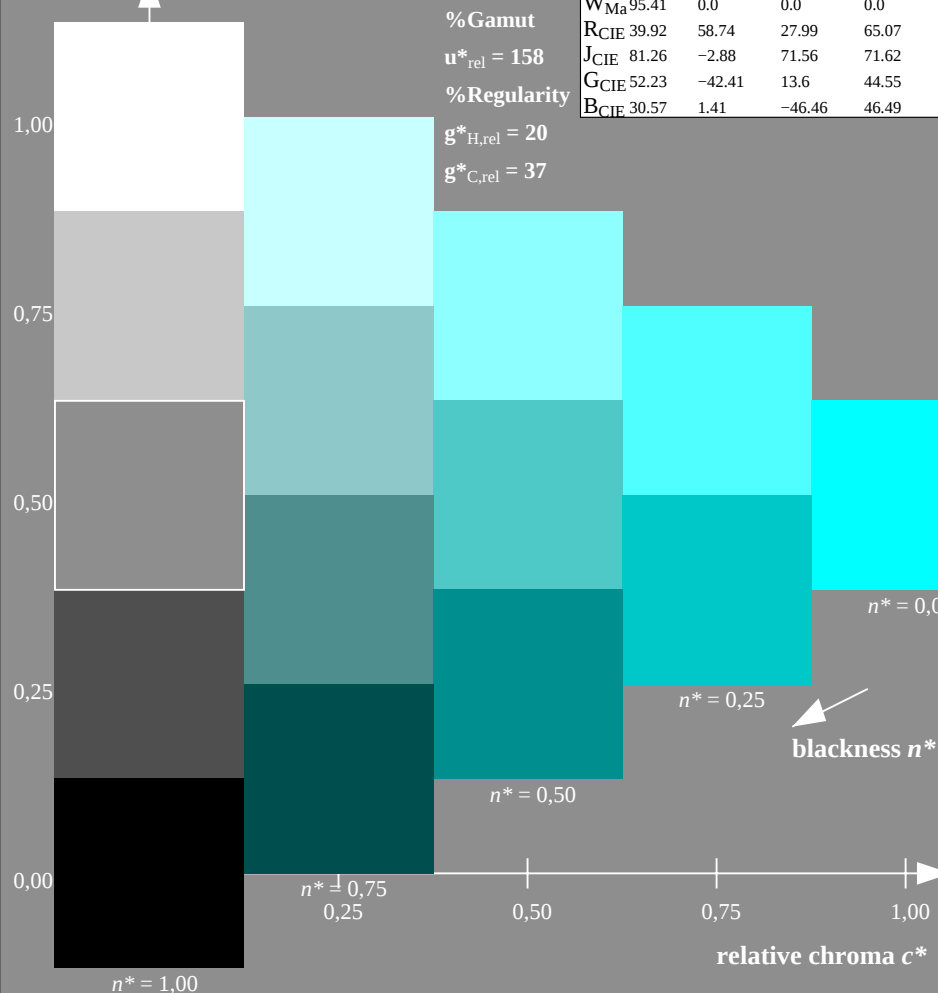

OE730-7N-130-3: 5 step scales for constant CIELAB hue 196/360 = 0.545 (left)

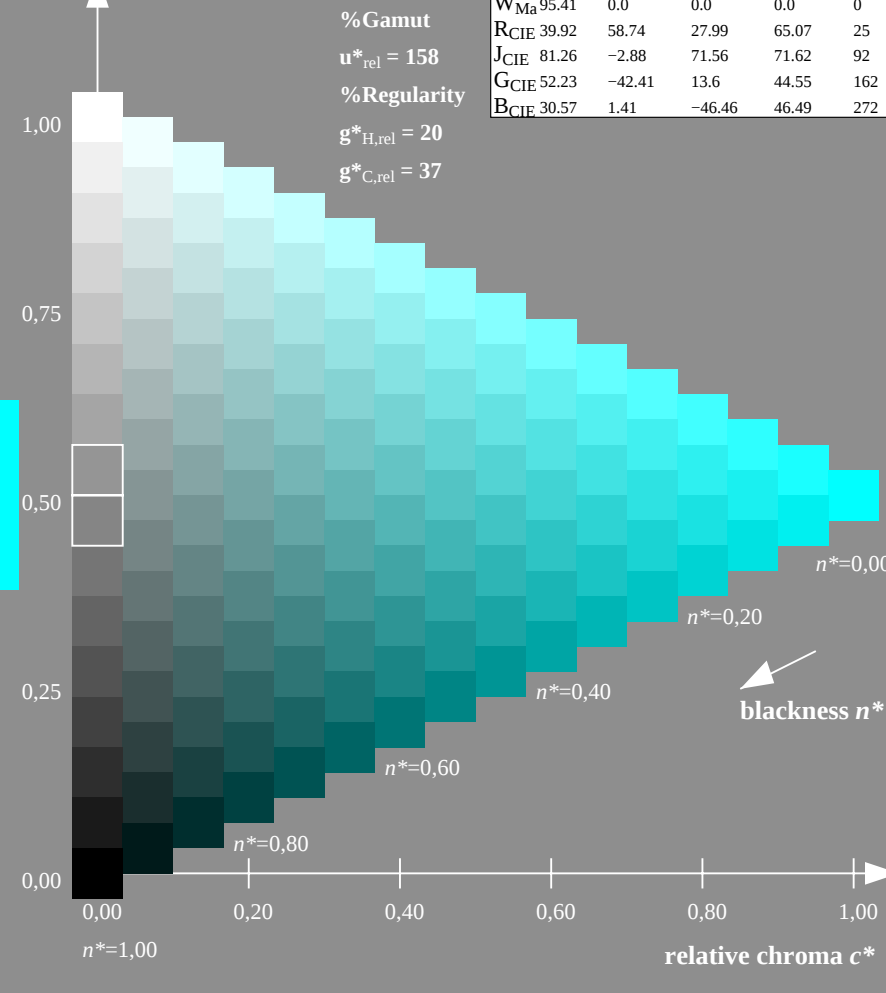

16 step scales for constant CIELAB hue 196/360 = 0.545 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue C; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{\Delta}$) $setcmyk$
output 132-3: $g_P=0.85$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 306/360 = 0.851$


lab^*tch and lab^*nch

D65: hue V

LCH*Ma: 30 129 306

ol v^* Ma: 0.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data					
	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 306/360 = 0.851$


lab^*tch and lab^*nch

D65: hue V

LCH*Ma: 30 129 306

ol v^* Ma: 0.0 0.0 1.0

triangle lightness t^*



%Gamut


$u^*_{rel} = 158$

%Regularity


$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data					
	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

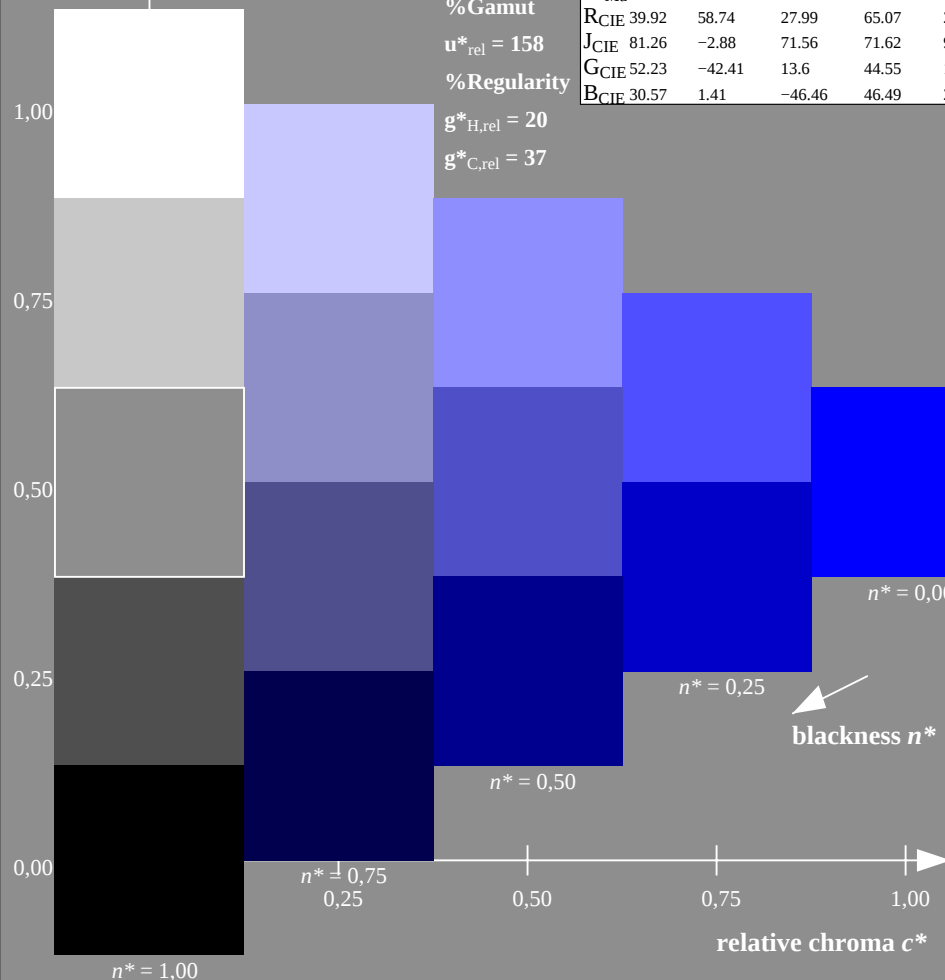

OE730-7N-130-4: 5 step scales for constant CIELAB hue 306/360 = 0.851 (left)

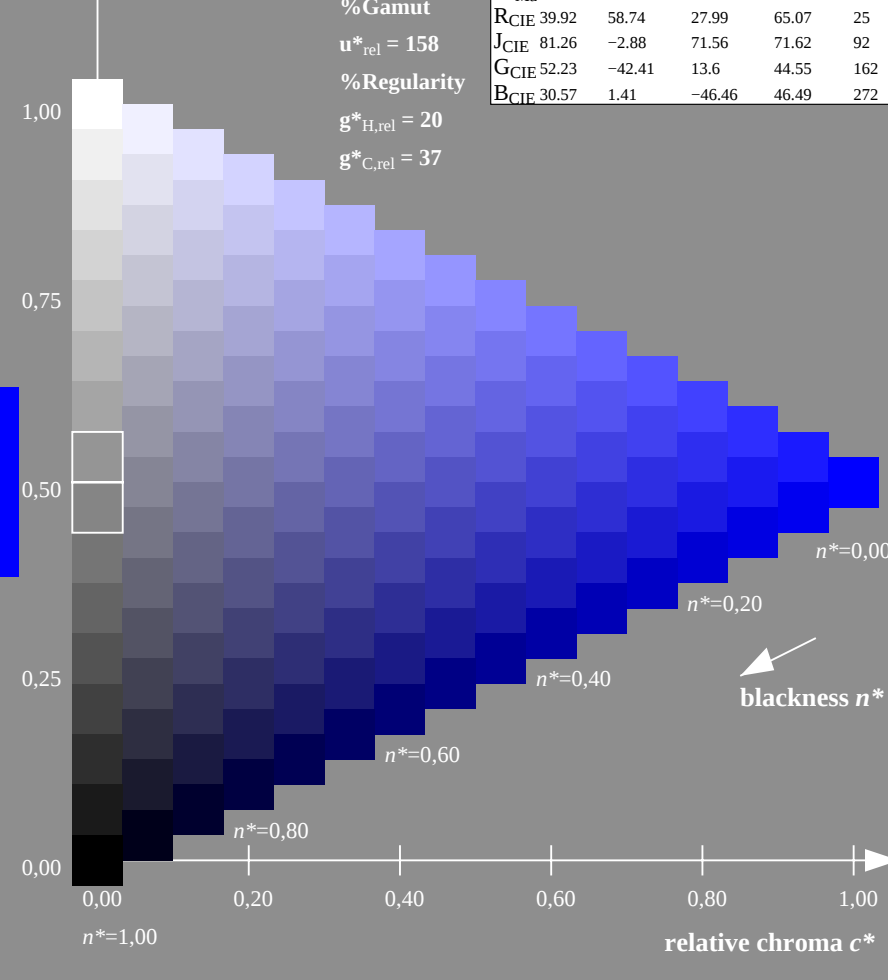

16 step scales for constant CIELAB hue 306/360 = 0.851 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue V; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{\Delta}$) $setcmyk$
output 132-4: $g_P=0.85$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 328/360 = 0.912$


lab^*tch and lab^*nch

D65: hue M

LCH*Ma: 57 111 328

ol v^* Ma: 1.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data					
	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 328/360 = 0.912$


lab^*tch and lab^*nch

D65: hue M

LCH*Ma: 57 111 328

ol v^* Ma: 1.0 0.0 1.0

triangle lightness t^*



%Gamut


$u^*_{rel} = 158$

%Regularity


$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data					
	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

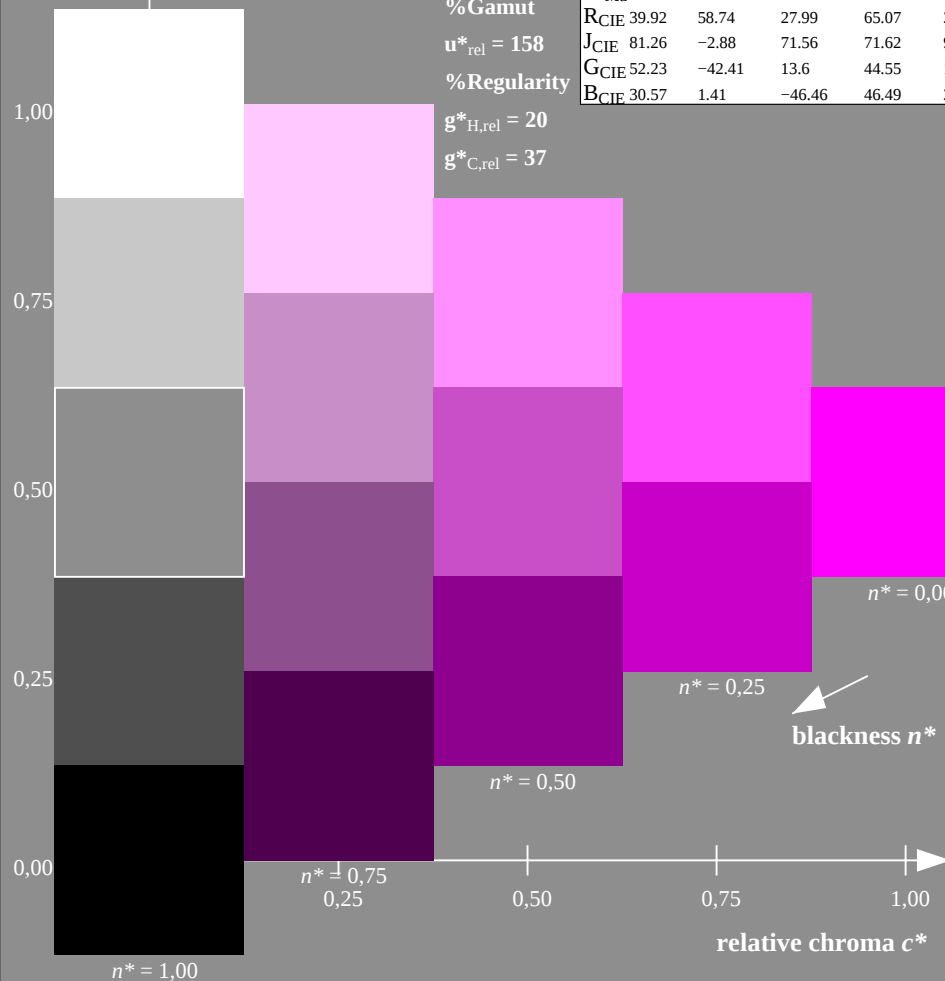

OE730-7N-130-5: 5 step scales for constant CIELAB hue 328/360 = 0.912 (left)

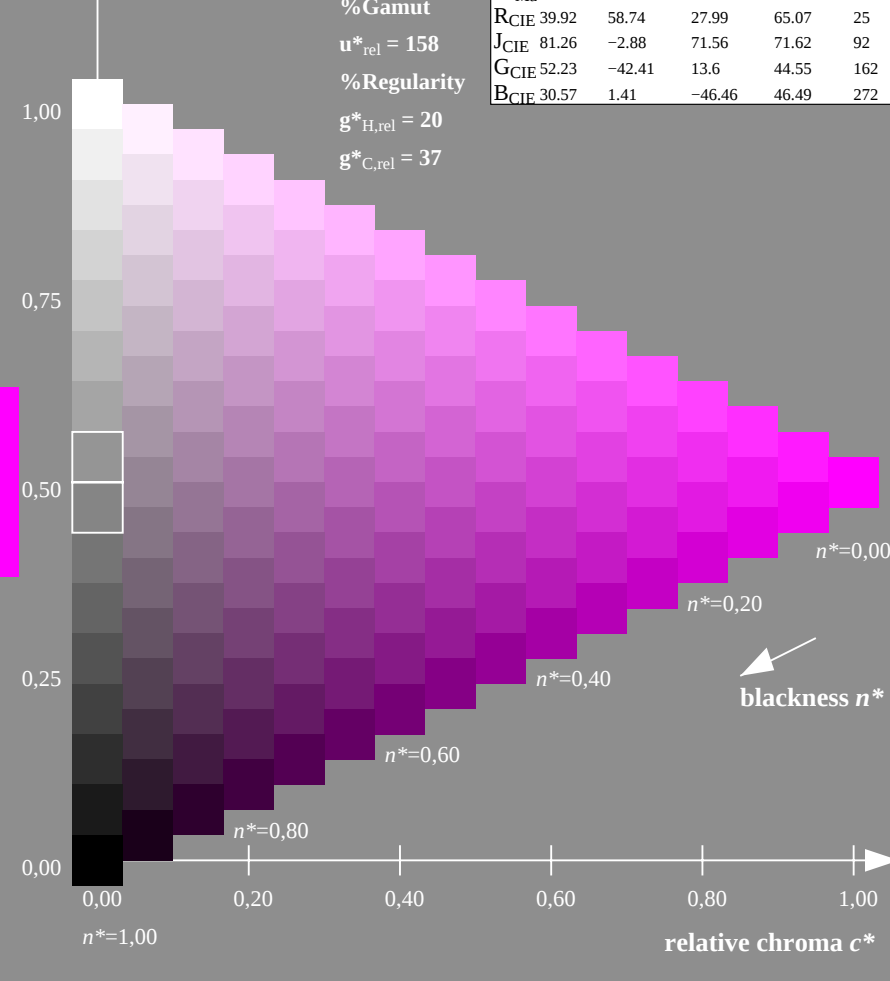

16 step scales for constant CIELAB hue 328/360 = 0.912 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue M; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{\Delta}$) $setcmyk$
output 132-5: $g_P=0.85$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 25/360 = 0.071$


lab^*tch and lab^*nch

D65: hue R

LCH*Ma: 52 89 25

ol v^* Ma: 1.0 0.0 0.21

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 25/360 = 0.071$


lab^*tch and lab^*nch

D65: hue R

LCH*Ma: 52 89 25

ol v^* Ma: 1.0 0.0 0.21

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

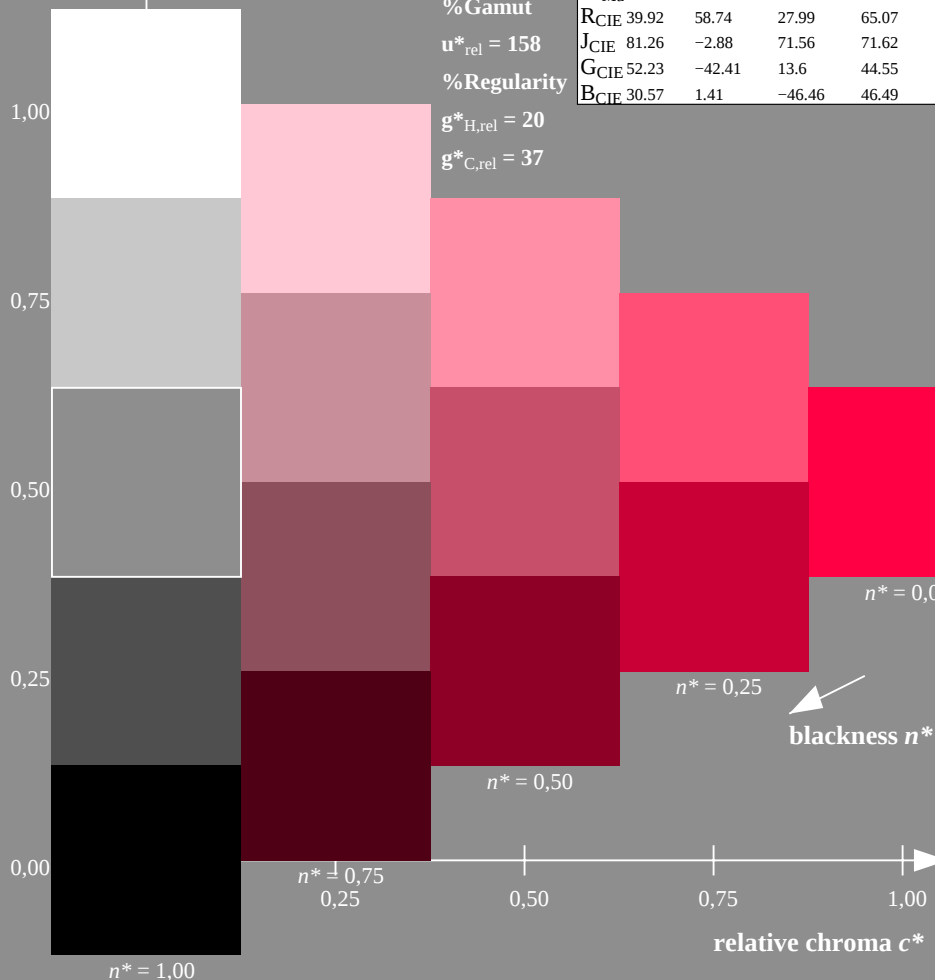

OE730-7N-130-6: 5 step scales for constant CIELAB hue 25/360 = 0.071 (left)

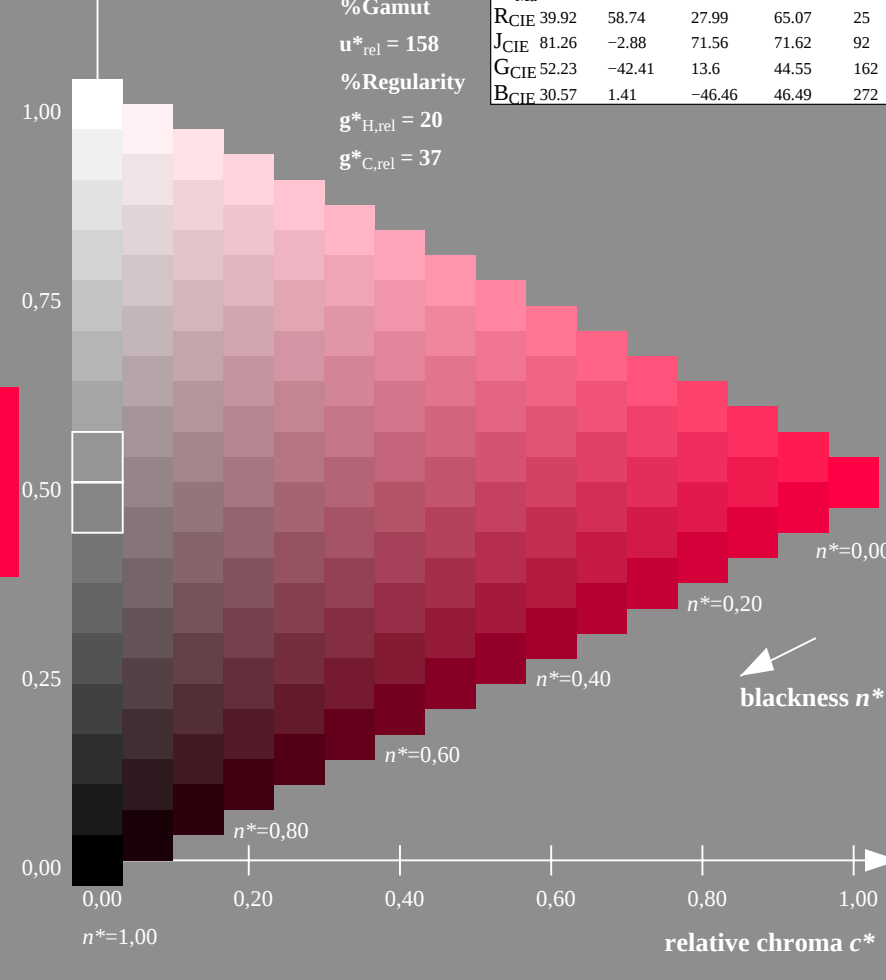

16 step scales for constant CIELAB hue 25/360 = 0.071 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue R; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 132-6: $g_P=0.85$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 92/360 = 0.256$


lab^*tch and lab^*nch

D65: hue J

LCH*Ma: 85 86 92

olv*Ma: 1.0 0.82 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 92/360 = 0.256$


lab^*tch and lab^*nch

D65: hue J

LCH*Ma: 85 86 92

olv*Ma: 1.0 0.82 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

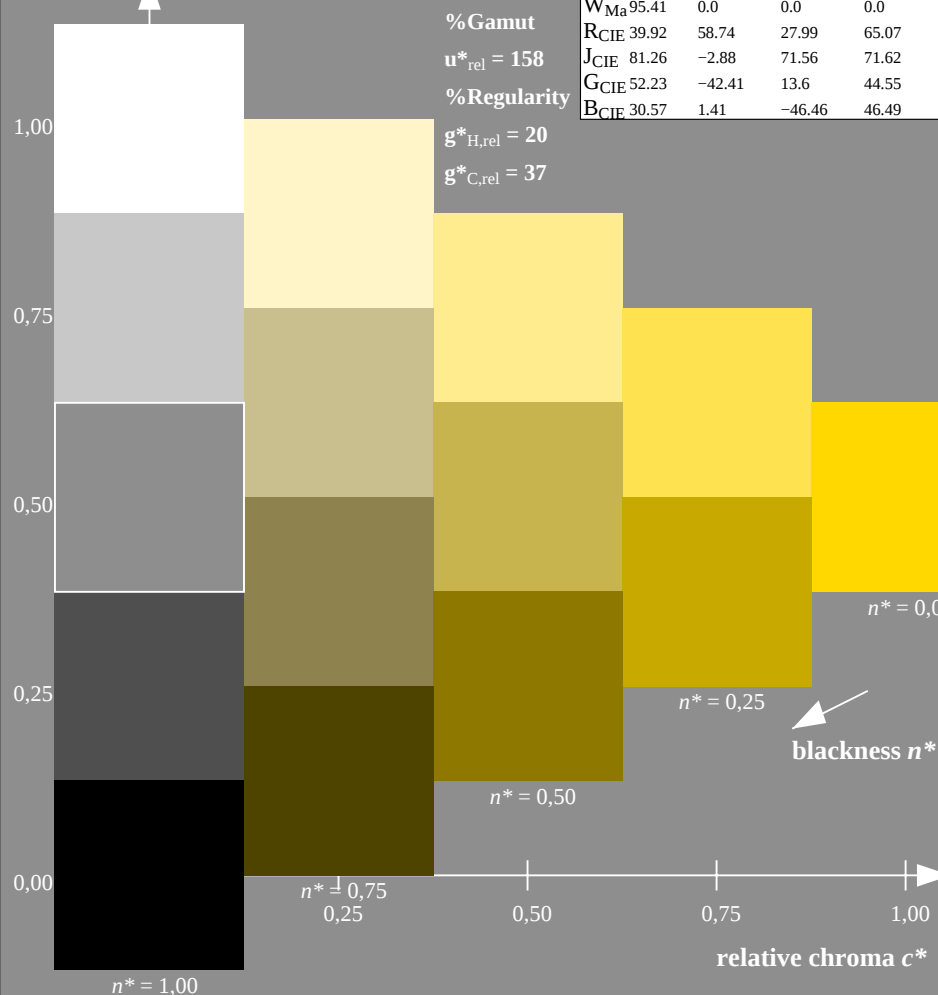

OE730-7N-130-7: 5 step scales for constant CIELAB hue 92/360 = 0.256 (left)

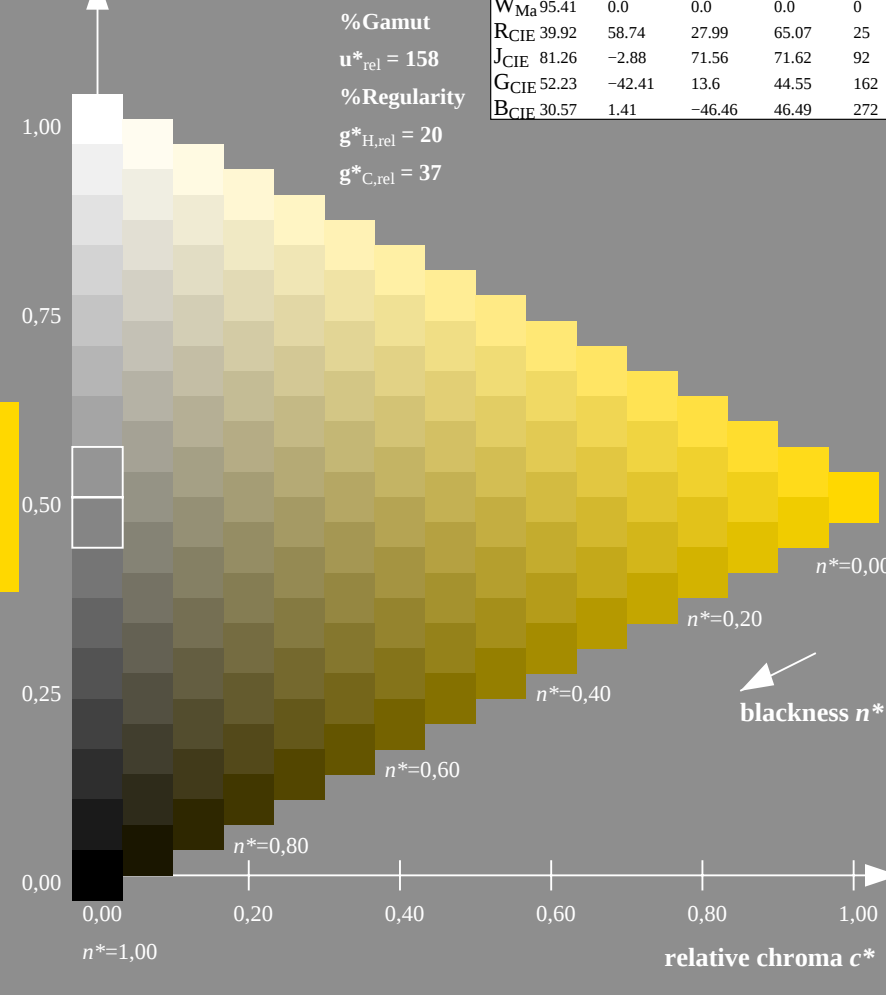

16 step scales for constant CIELAB hue 92/360 = 0.256 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue J; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 132-7: $g_P=0.85$; $g_N=1.0$

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 162/360 = 0.451$


lab^*tch and lab^*nch

D65: hue G

LCH*Ma: 86 62 162

ol v^* Ma: 0.0 1.0 0.65

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 162/360 = 0.451$


lab^*tch and lab^*nch

D65: hue G

LCH*Ma: 86 62 162

ol v^* Ma: 0.0 1.0 0.65

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

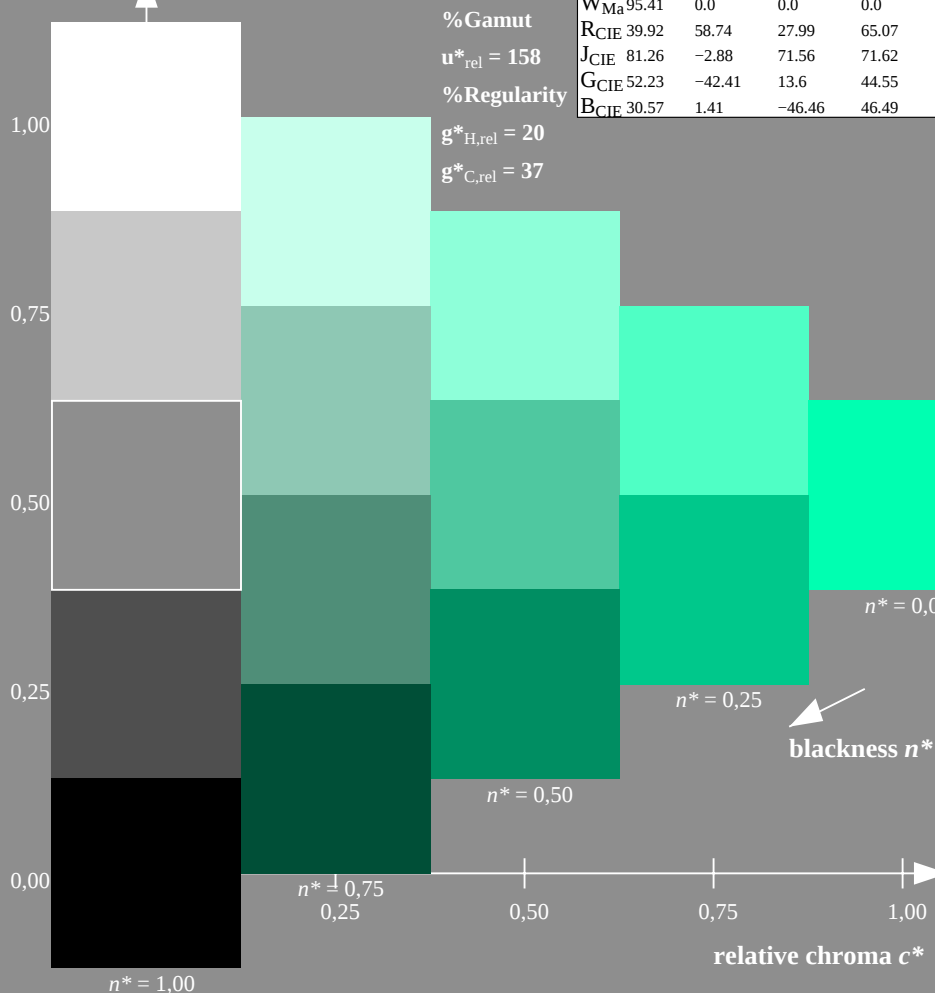

OE730-7N-130-8: 5 step scales for constant CIELAB hue 162/360 = 0.451 (left)

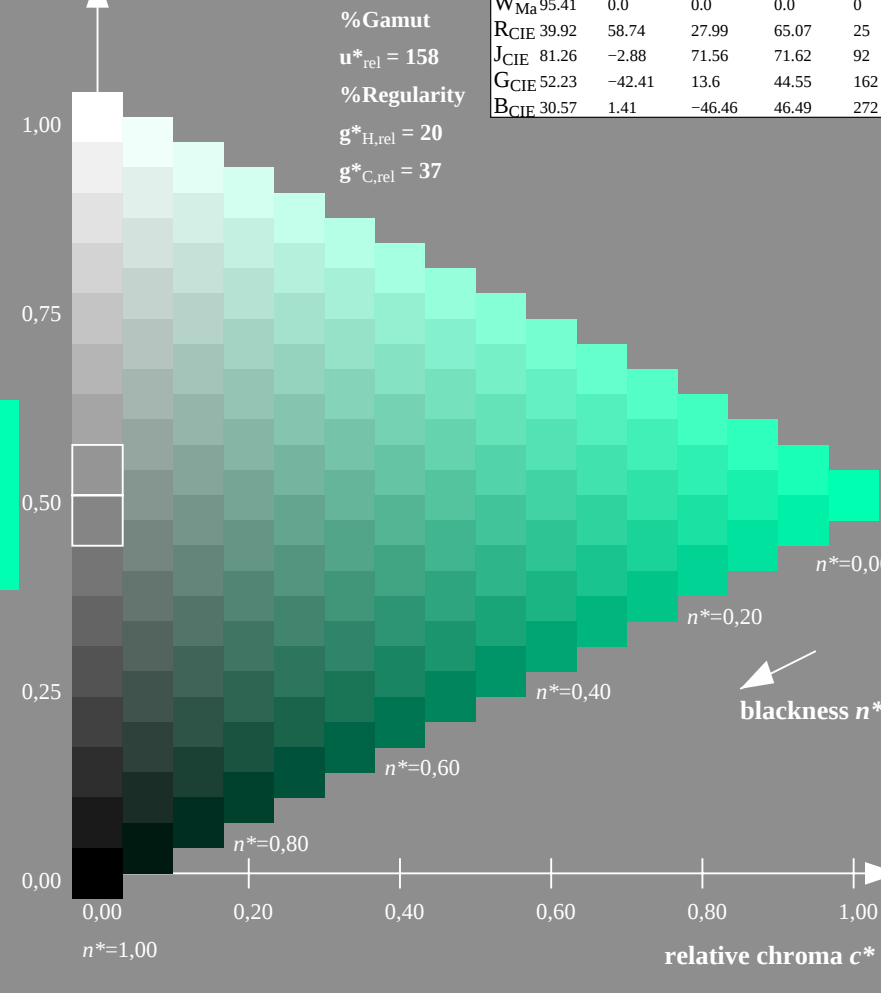

16 step scales for constant CIELAB hue 162/360 = 0.451 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue G; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 132-8: $g_P=0.85$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 272/360 = 0.755$


lab^*tch and lab^*nch

D65: hue B

LCH*Ma: 65 49 272

ol v^* Ma: 0.0 0.61 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 272/360 = 0.755$


lab^*tch and lab^*nch

D65: hue B

LCH*Ma: 65 49 272

ol v^* Ma: 0.0 0.61 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

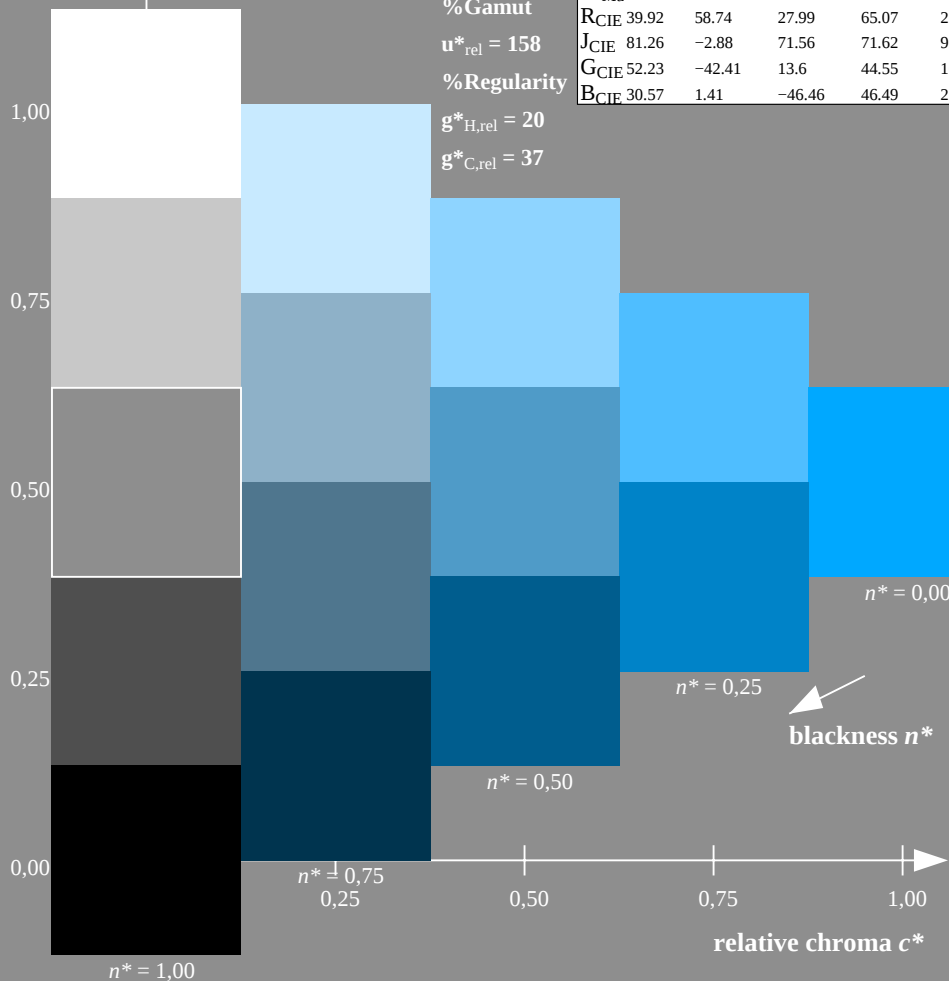

OE730-7N-130-9: 5 step scales for constant CIE LAB hue 272/360 = 0.755 (left)

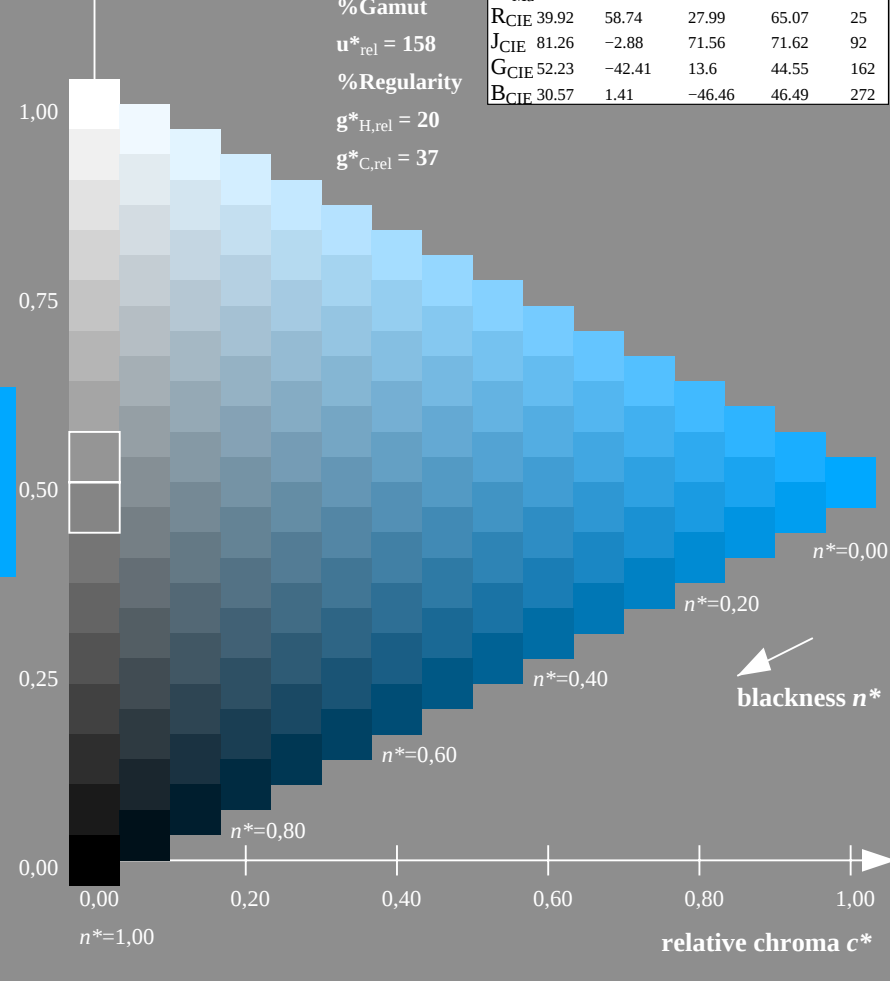


16 step scales for constant CIE LAB hue 272/360 = 0.755 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue B; 1MR, DH
Discrimination of 5 and 16 step colour scales


input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 132-9: $g_P=0.85$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB


TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta



See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB



<http://130.149.60.45/~farbmetrik/OE73/OE73L0NA.TXT> /PS; linearized output, Page 11/12
 F: Output Linearization (OL) data OE73/OE73L0NA.TXT /PS in File (F)




TUB registration: 20110801-OE73/OE73L0NA.TXT /PS
 application for output of displays: monitor systems or data projector systems

TUB material: code=rh4ta



Discriminability of 5 step colour series (Yes/No decision)

Layout example: three 5 step colour series



There are three basic colours on each page:
 Black N, White W and Chromatic X.
 Ten pages include 10 hue planes
 X = OYLCVM and RJGB.
 There are at maximum 12 distinguishable steps.

All steps of the three series N-W, W-X and X-N should be distinguishable on **all** pages.

Are the three 5step series distinguishable on all pages? underline: Yes/No

only in case of No: Are the three 5 step series on Page x of 10 pages distinguishable?

Underline Yes/No and give in case of No the number of distinguishable steps?

- Page 1: Yes/No, if No ../12 step differences are distinguishable of O = Orange Red
 Page 2: Yes/No, if No ../12 step differences are distinguishable of Y = Yellow
 Page 3: Yes/No, if No ../12 step differences are distinguishable of L = Leaf green
 Page 4: Yes/No, if No ../12 step differences are distinguishable of C = Cyan blue
 Page 5: Yes/No, if No ../12 step differences are distinguishable of V = Violett blue
 Page 6: Yes/No, if No ../12 step differences are distinguishable of M = Magenta Red
 Page 7: Yes/No, if No ../12 step differences are distinguishable of R = Elementary Red
 Page 8: Yes/No, if No ../12 step differences are distinguishable of J = Elementary yellow
 Page 9: Yes/No, if No ../12 step differences are distinguishable of G = Elementary Green
 Page 10: Yes/No, if No ../12 step differences are distinguishable of B = Elementary blue

Sum: ../10 Yes-Pages and ../120 step differences are distinguishable

Part 1

OE730-3N-132-10

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE73/OE73L0NP.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE73/OE73L0NA.PS> or underline Yes/No

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline monitor/data projector/printer

Device model, driver and version:.....

Device output with PDF/PS-file: underline PDF/PS-file

For device output with PDF-file OE73L0NP.PDF:

- either PDF-file transfer "download, copy" to PDF device.....
 or with computer system interpretation by "Display-PDF":.....
 or with software e. g. Adobe-Reader/-Acrobat and version:.....
 or with software e. g. Ghostscript and version:.....

For device output with PS-file OE73L0NA.PS:

- either PS-file transfer "download, copy" to PS device.....
 or with computer system interpretation by "Display-PS":.....
 or with software e. g. Ghostscript and version:.....
 or with software e. g. Mac-Yap and version:.....

Special remarks:Special remarks, e. g. output of Landscape (L)

.....

Part 3

OE730-7N-132-10




OE73: Form A for test chart 2 according to DIN 33872-2; 1MR, DHinput: *cmy0* (->*cmy0***g*) *setcmyk*
 Discrimination of colour scales (Yes/No decision)
 output 132-10: *g_P*=0.85; *g_N*=1.0



Discriminability of 16 step colour series (Yes/No decision)

Layout example: three 16 step colour series

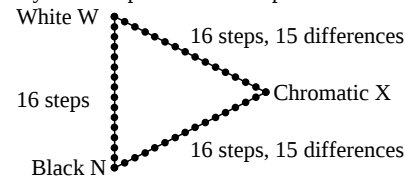

There are three basic colours on each page:
 Black N, White W and Chromatic X.
 Ten pages include 10 hue planes
 X = OYLCVM and RJGB.
 There are at maximum 45 distinguishable steps.

All steps of the three series N-W, W-X and X-N should be distinguishable on **all** pages.

Are the three 16step series distinguishable on all pages? underline: Yes/No

only in case of No: Are the three 16 step series on Page x of 10 pages distinguishable?

Underline Yes/No and give in case of No the number of distinguishable steps?

- Page 1: Yes/No, if No ../45 step differences are distinguishable of O = Orange Red
 Page 2: Yes/No, if No ../45 step differences are distinguishable of Y = Yellow
 Page 3: Yes/No, if No ../45 step differences are distinguishable of L = Leaf green
 Page 4: Yes/No, if No ../45 step differences are distinguishable of C = Cyan blue
 Page 5: Yes/No, if No ../45 step differences are distinguishable of V = Violett blue
 Page 6: Yes/No, if No ../45 step differences are distinguishable of M = Magenta Red
 Page 7: Yes/No, if No ../45 step differences are distinguishable of R = Elementary Red
 Page 8: Yes/No, if No ../45 step differences are distinguishable of J = Elementary yellow
 Page 9: Yes/No, if No ../45 step differences are distinguishable of G = Elementary Green
 Page 10: Yes/No, if No ../45 step differences are distinguishable of B = Elementary blue

Sum: ../10 Yes-Pages and ../450 step differences are distinguishable

Part 2

OE731-3N-132-10

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test:

- either according to DIN 6160:1996 with Anomaloskop of Nagel
 or with test charts using colour points according to Ishihara
 or tested with, please specify:

underline Yes/No

underline Yes/unknown

underline Yes/unknown

underline Yes/unknown

For visual evaluation of the display (monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky)

underline Yes/No

PDF file: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PDF>

underline Yes/No

PS file: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PS>

underline Yes/No

Picture A7-132-2: contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)

compare standard print output according to ISO/IEC 15775 with range F:0 underline range

Remark: In daylighted offices the contrast range is in many cases:

on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF-File: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PDF>

picture A7-132-2

underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PS>

picture A7-132-2

or underline Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry:

underline Yes/No

If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T

Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer

of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF

underline Yes/No

If No, please describe other method:

Part 4


OE731-7N-132-10



See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE*
1	10.99 0.0 0.0	0.0 10.99 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
2	16.62 0.0 0.0	0.1 19.44 0.0	0.0 0.0 0.0	2.82 0.0 0.0	2.82
3	22.25 0.0 0.0	0.18 26.22 0.0	0.0 0.0 0.0	3.97 0.0 0.0	3.97
4	27.88 0.0 0.0	0.25 32.49 0.0	0.0 0.0 0.0	4.61 0.0 0.0	4.61
5	33.5 0.0 0.0	0.33 38.44 0.0	0.0 0.0 0.0	4.94 0.0 0.0	4.94
6	39.13 0.0 0.0	0.39 44.17 0.0	0.0 0.0 0.0	5.04 0.0 0.0	5.04
7	44.76 0.0 0.0	0.46 49.73 0.0	0.0 0.0 0.0	4.98 0.0 0.0	4.98
8	50.39 0.0 0.0	0.52 55.16 0.0	0.0 0.0 0.0	4.77 0.0 0.0	4.77
9	56.02 0.0 0.0	0.59 60.47 0.0	0.0 0.0 0.0	4.45 0.0 0.0	4.45
10	61.64 0.0 0.0	0.65 65.68 0.0	0.0 0.0 0.0	4.03 0.0 0.0	4.03
11	67.27 0.0 0.0	0.71 70.8 0.0	0.0 0.0 0.0	3.53 0.0 0.0	3.53
12	72.9 0.0 0.0	0.77 75.85 0.0	0.0 0.0 0.0	2.95 0.0 0.0	2.95
13	78.53 0.0 0.0	0.83 80.83 0.0	0.0 0.0 0.0	2.3 0.0 0.0	2.3
14	84.15 0.0 0.0	0.89 85.74 0.0	0.0 0.0 0.0	1.59 0.0 0.0	1.59
15	89.78 0.0 0.0	0.94 90.6 0.0	0.0 0.0 0.0	0.82 0.0 0.0	0.82
16	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
17	10.99 0.0 0.0	0.0 10.99 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
18	32.1 0.0 0.0	0.31 36.98 0.0	0.0 0.0 0.0	4.88 0.0 0.0	4.88
19	53.2 0.0 0.0	0.55 57.83 0.0	0.0 0.0 0.0	4.62 0.0 0.0	4.62
20	74.31 0.0 0.0	0.78 77.1 0.0	0.0 0.0 0.0	2.79 0.0 0.0	2.79
21	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
Mean lightness difference (16 steps)					ΔE* _{CIELAB} = 3.2
Mean lightness difference (5 steps)					ΔL* _{CIELAB} = 2.5
Mean colour reproduction index:					R* _{ab,m} = 86

OE730-3N-132-11: File: Measure unknown; Device: Device unknown; Date: Date unknown

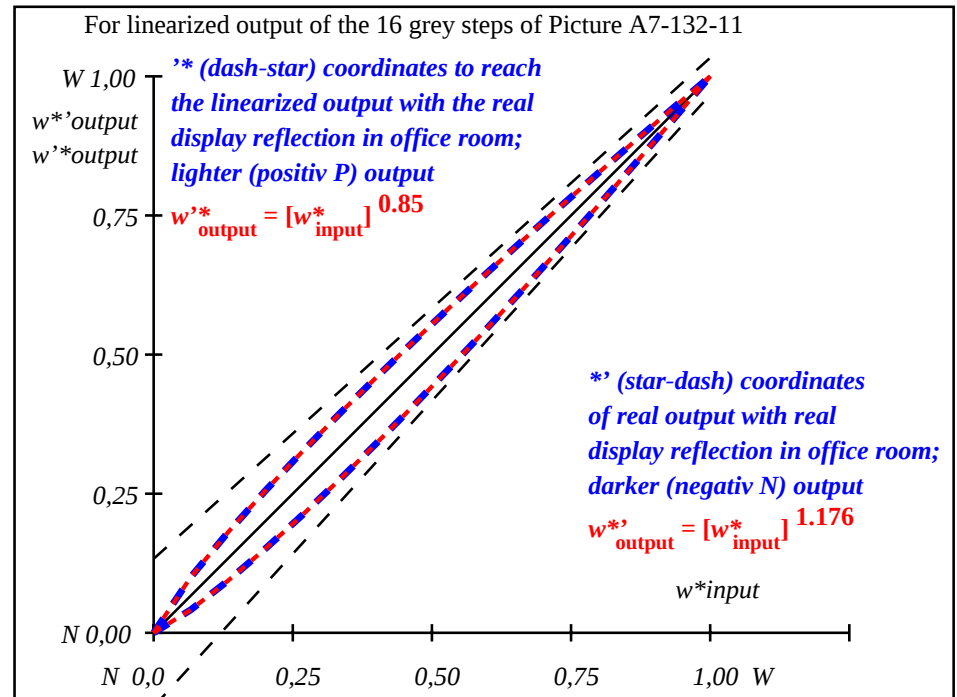

OE731-3N-132-11: File: Measure unknown; Device: Device unknown; Date: Date unknown

L^*/Y_{intended} (absolute)	11.0/1.3	16.6/2.2	22.2/3.6	27.9/5.4	33.5/7.8	39.1/10.7	44.8/14.4	50.4/18.7	56.0/23.9	61.6/30.0	67.3/37.0	72.9/45.0	78.5/54.1	84.2/64.4	89.8/75.8	95.4/88.6
$w^* w^* w^*$ setrgb																
$g_P=0.85$																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{\text{CIELAB}, r}$ (relative)																
w^*_{intended}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0.0	0.1	0.18	0.255	0.325	0.393	0.459	0.524	0.586	0.648	0.709	0.768	0.827	0.886	0.943	1.0

OE730-7N, Picture A7-132-11: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*$ setrgbcolor

OE73: In-output relation according to ISO 9241-306; 1MR, DH
Viewing Y contrast $Y_W:Y_N=88,9:1,25$; Y_N range 0,93 to <1,87

input: $cmy0$ (-> $cmy0^*_d$) setcmyk
output 132-11: $g_P=0.85$; $g_N=1.0$

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 40/360 = 0.111$


lab^*tch and lab^*nch

D65: hue O

LCH*Ma: 51 100 40

ol*Ma: 1.0 0.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 40/360 = 0.111$


lab^*tch and lab^*nch

D65: hue O

LCH*Ma: 51 100 40

ol*Ma: 1.0 0.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

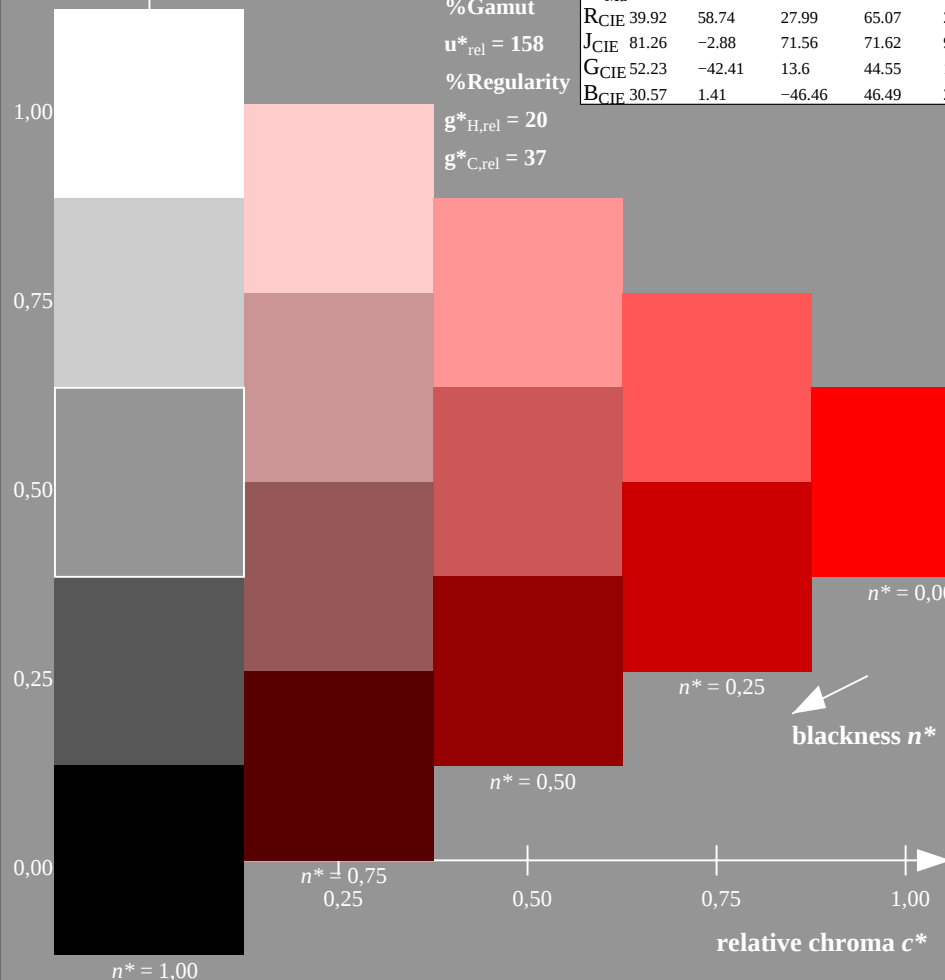

OE730-7N-130-0: 5 step scales for constant CIELAB hue 40/360 = 0.111 (left)

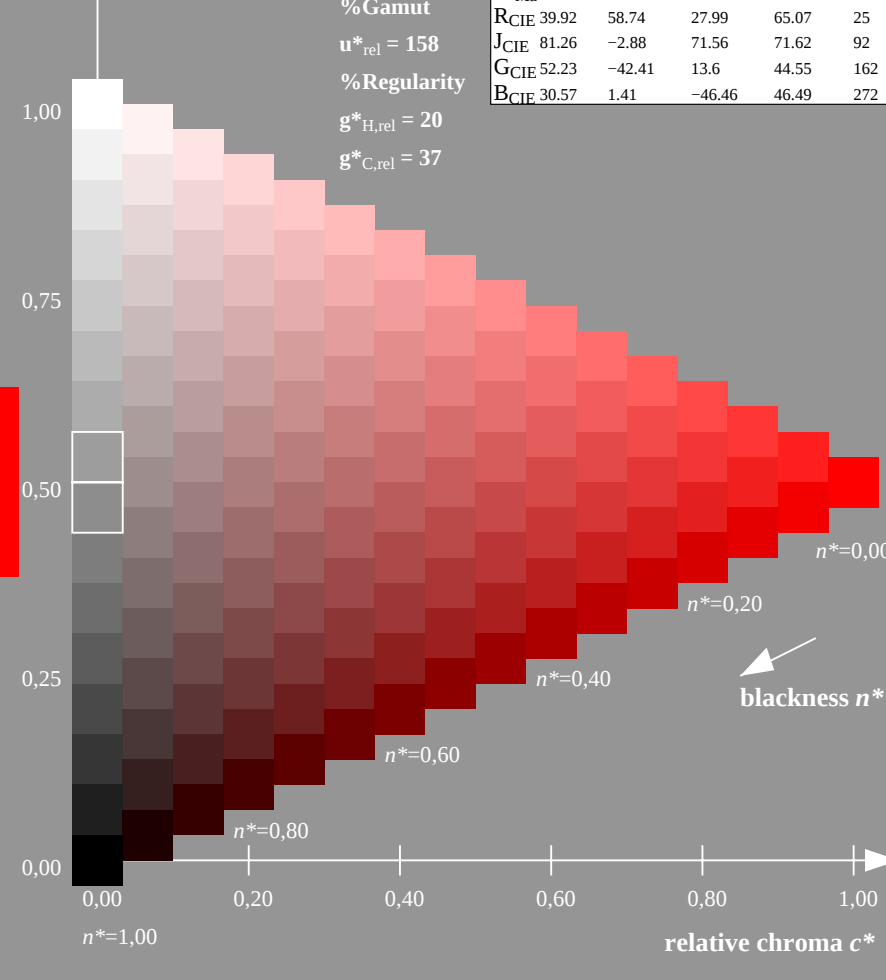

16 step scales for constant CIELAB hue 40/360 = 0.111 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue O; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_d$) $setcmyk$
output 133-0: $g_P=0.77$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 103/360 = 0.286$


lab^*tch and lab^*nch

D65: hue Y

LCH*Ma: 93 93 103

olv*Ma: 1.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 103/360 = 0.286$


lab^*tch and lab^*nch

D65: hue Y

LCH*Ma: 93 93 103

olv*Ma: 1.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

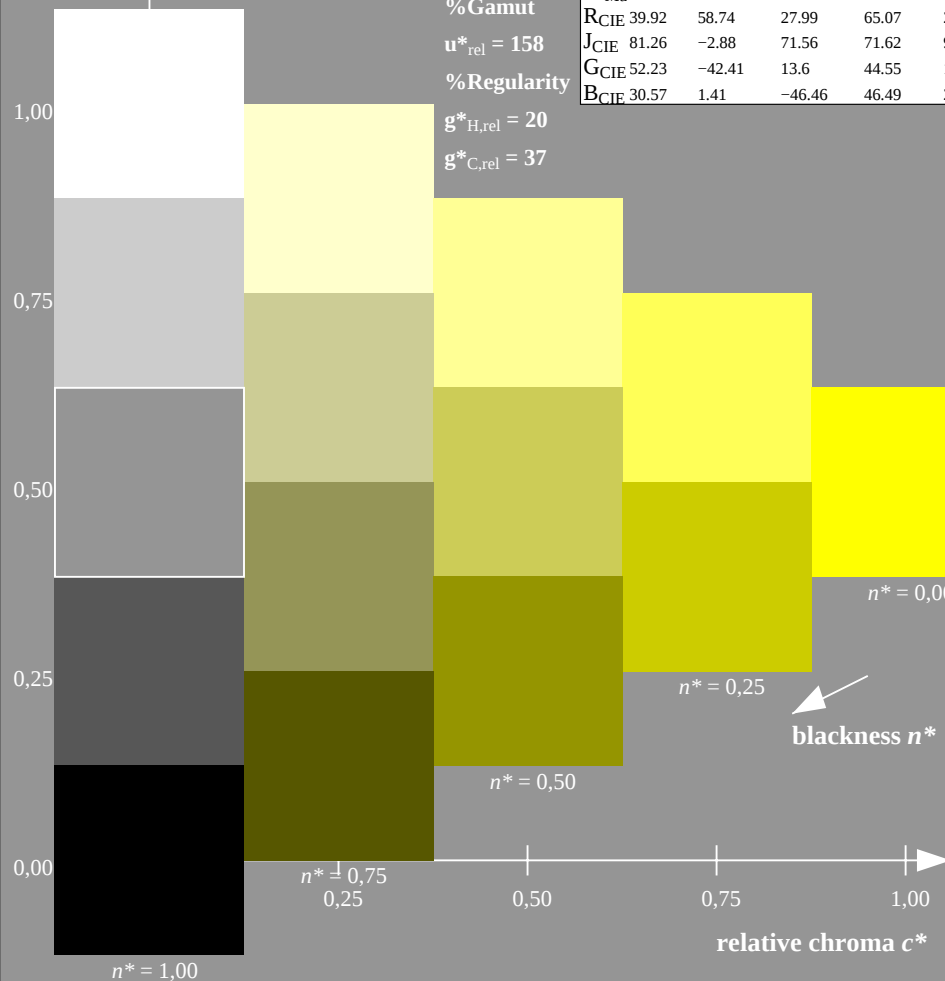

OE730-7N-130-1: 5 step scales for constant CIELAB hue 103/360 = 0.286 (left)

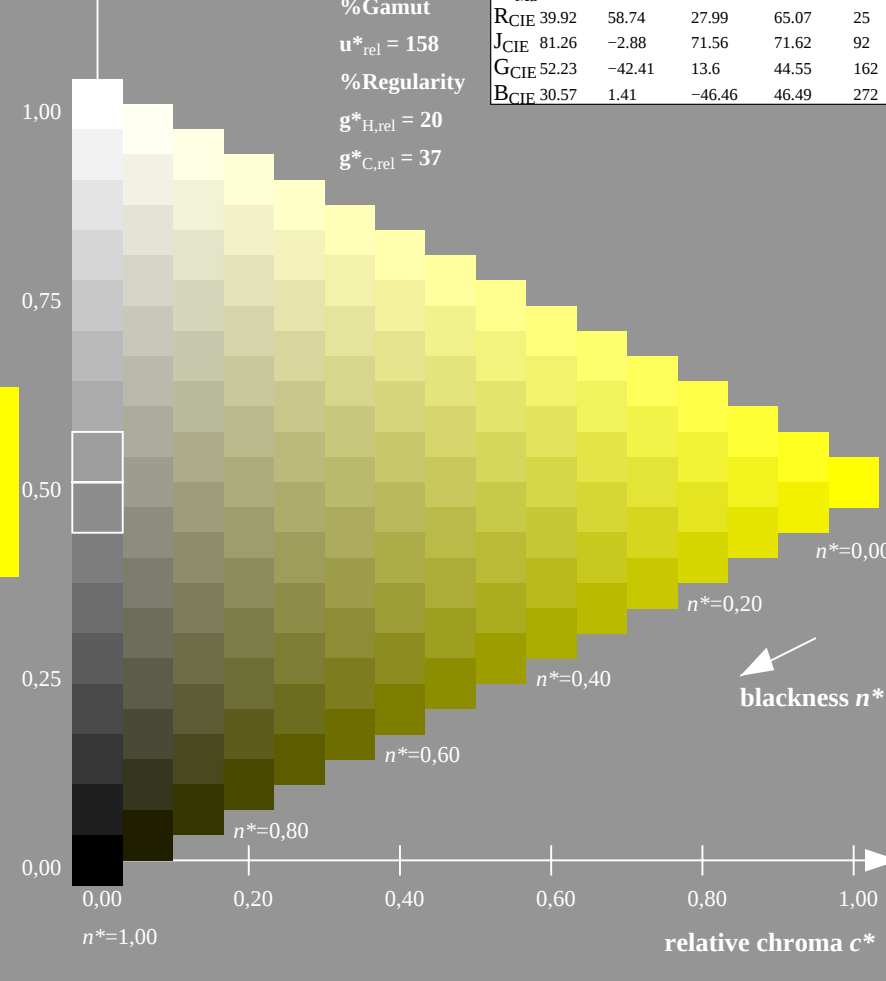

16 step scales for constant CIELAB hue 103/360 = 0.286 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue Y; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{\Delta}$) $setcmyk$
output 133-1: $g_P=0.77$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 136/360 = 0.378$


lab^*tch and lab^*nch

D65: hue L

LCH*Ma: 84 115 136

ol v^* Ma: 0.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 136/360 = 0.378$


lab^*tch and lab^*nch

D65: hue L

LCH*Ma: 84 115 136

ol v^* Ma: 0.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

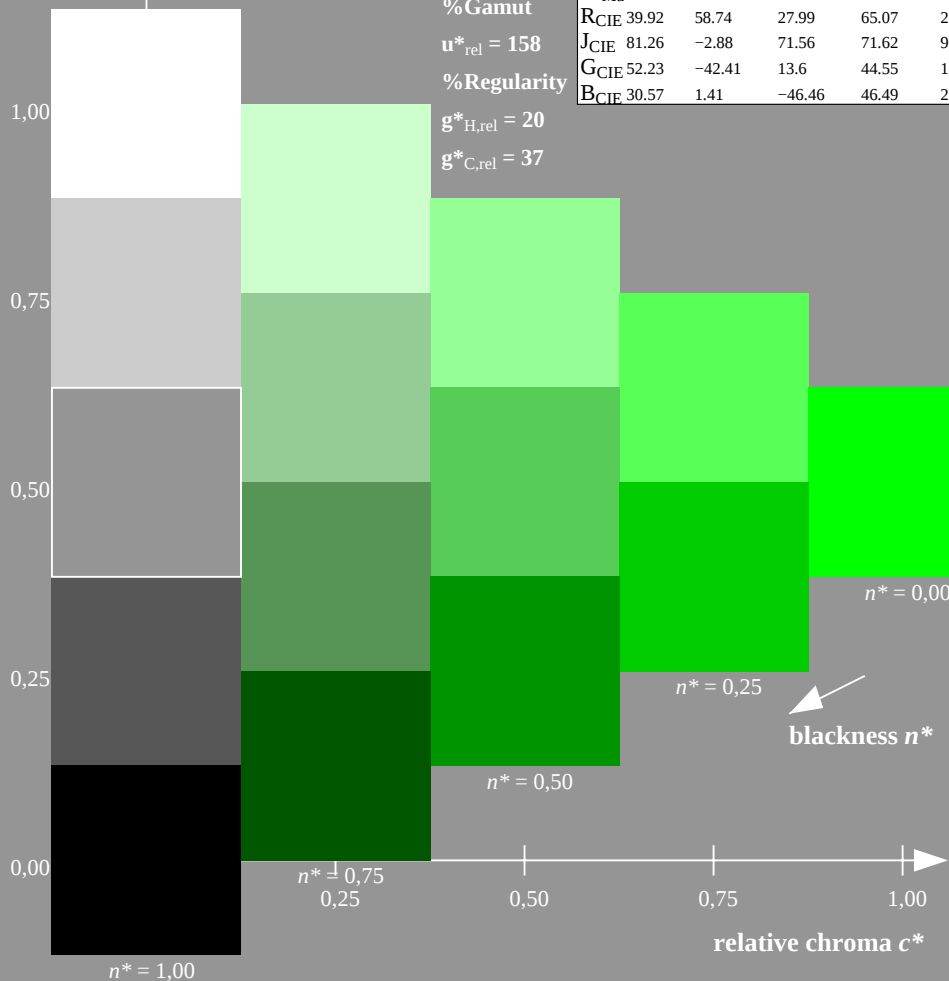

OE730-7N-130-2: 5 step scales for constant CIELAB hue 136/360 = 0.378 (left)

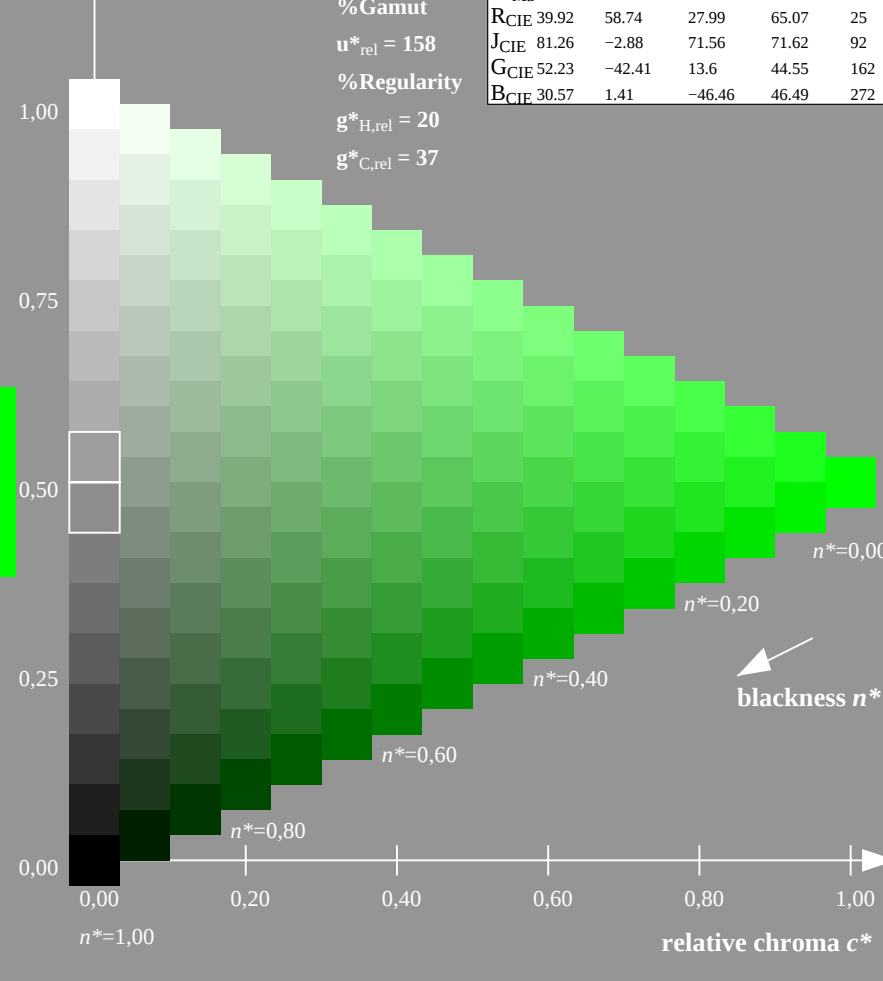

16 step scales for constant CIELAB hue 136/360 = 0.378 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue L; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{\Delta}$) $setcmyk$
output 133-2: $g_P=0.77$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 196/360 = 0.545$


lab^*tch and lab^*nch

D65: hue C

LCH*Ma: 87 48 196

olv*Ma: 0.0 1.0 1.0

triangle lightness t^*



TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272


%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

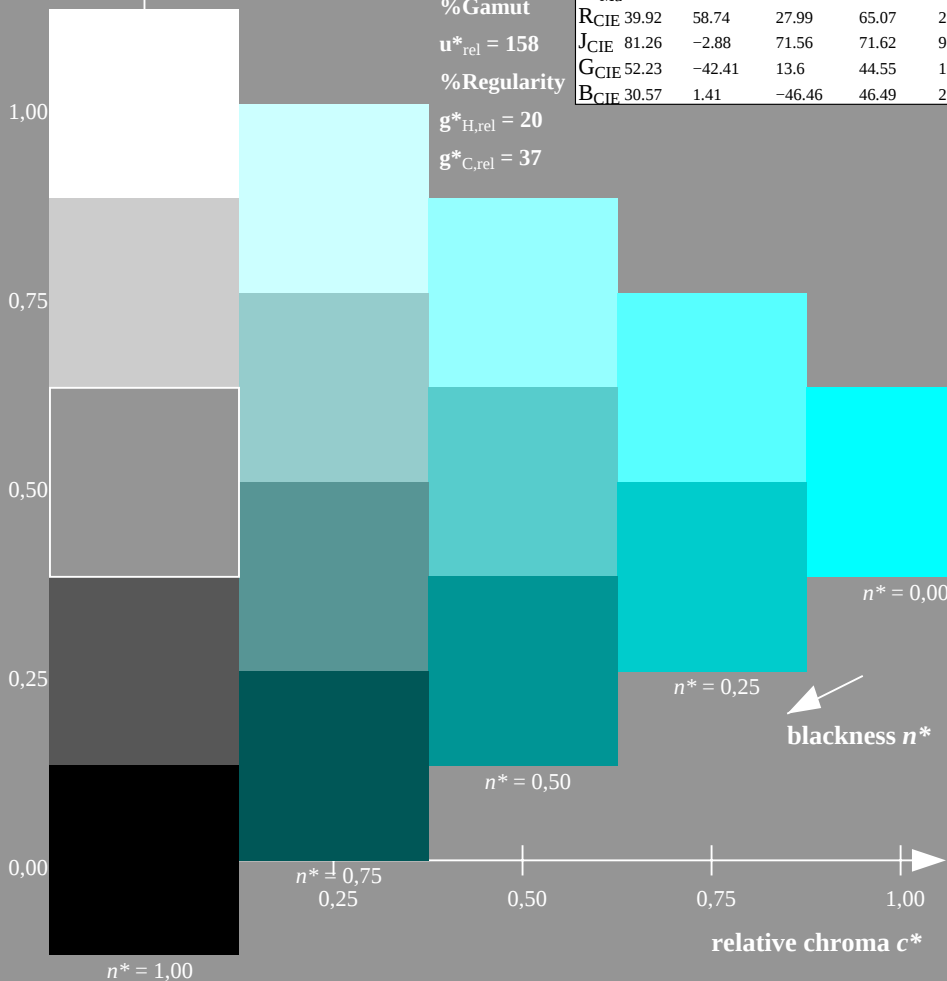

OE730-7N-130-3: 5 step scales for constant CIELAB hue 196/360 = 0.545 (left)

OE73: Test chart 2 according to DIN 33872-2, Hue C; 1MR, DH
Discrimination of 5 and 16 step colour scales

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 196/360 = 0.545$


lab^*tch and lab^*nch

D65: hue C

LCH*Ma: 87 48 196

olv*Ma: 0.0 1.0 1.0

triangle lightness t^*



TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272


%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

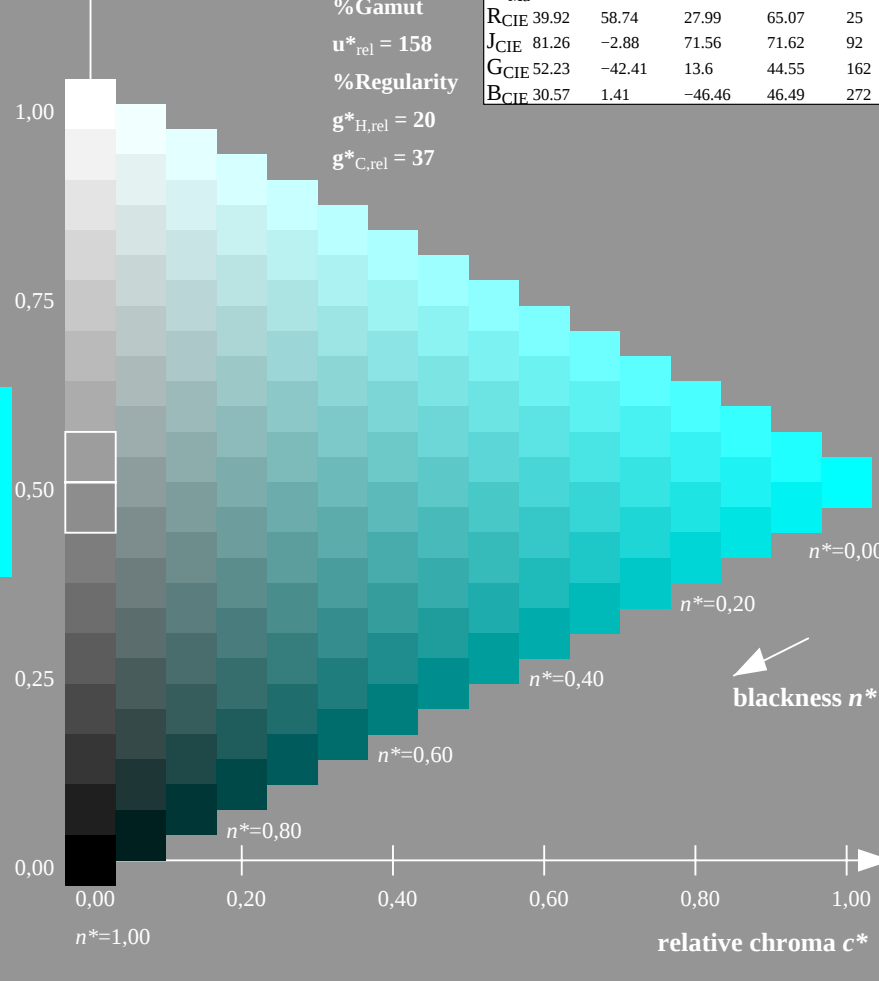

16 step scales for constant CIELAB hue 196/360 = 0.545 (right)

input: $cmy0$ ($\rightarrow cmy0^*_{d}$) $setcmyk$
output 133-3: $g_P=0.77$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
TUB material: code=th4ta
application for output of displays: monitor systems or data projector systems

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 306/360 = 0.851$


lab^*tch and lab^*nch

D65: hue V

LCH*Ma: 30 129 306

ol v^* Ma: 0.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 306/360 = 0.851$


lab^*tch and lab^*nch

D65: hue V

LCH*Ma: 30 129 306

ol v^* Ma: 0.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

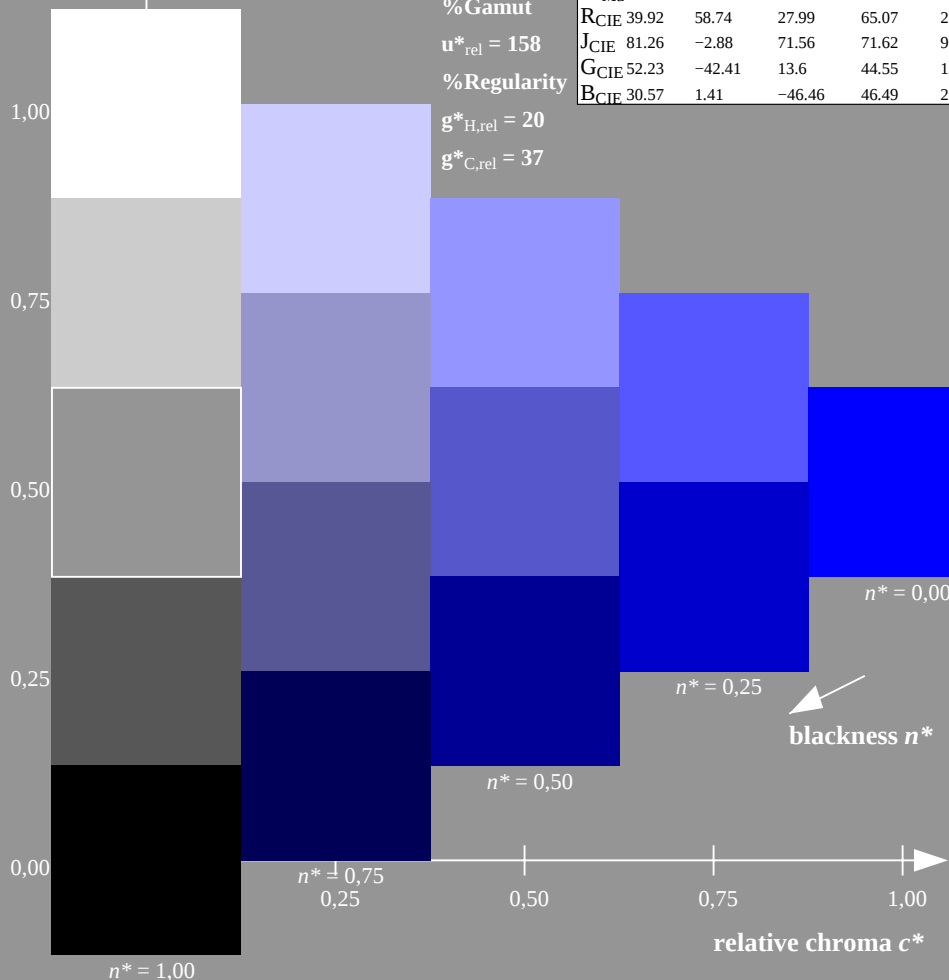

OE730-7N-130-4: 5 step scales for constant CIELAB hue 306/360 = 0.851 (left)

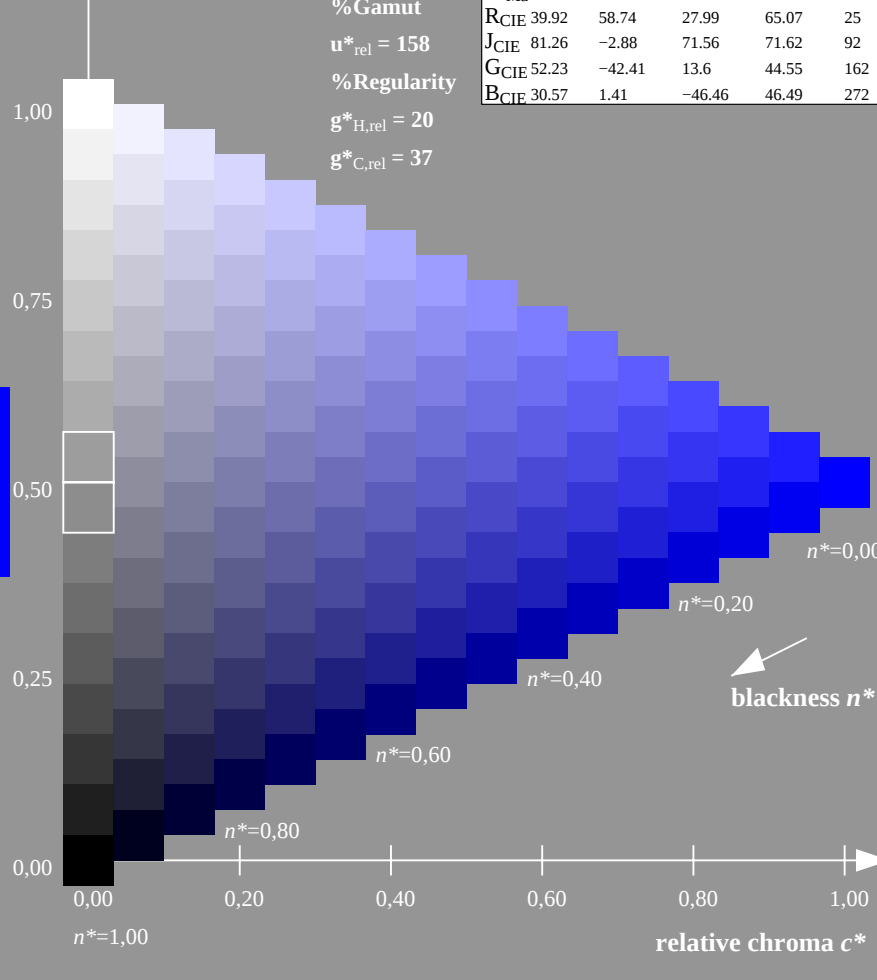

16 step scales for constant CIELAB hue 306/360 = 0.851 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue V; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{\Delta}$) $setcmyk$
output 133-4: $g_P=0.77$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 328/360 = 0.912$


lab^*tch and lab^*nch

D65: hue M

LCH*Ma: 57 111 328

ol v^* Ma: 1.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 328/360 = 0.912$


lab^*tch and lab^*nch

D65: hue M

LCH*Ma: 57 111 328

ol v^* Ma: 1.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

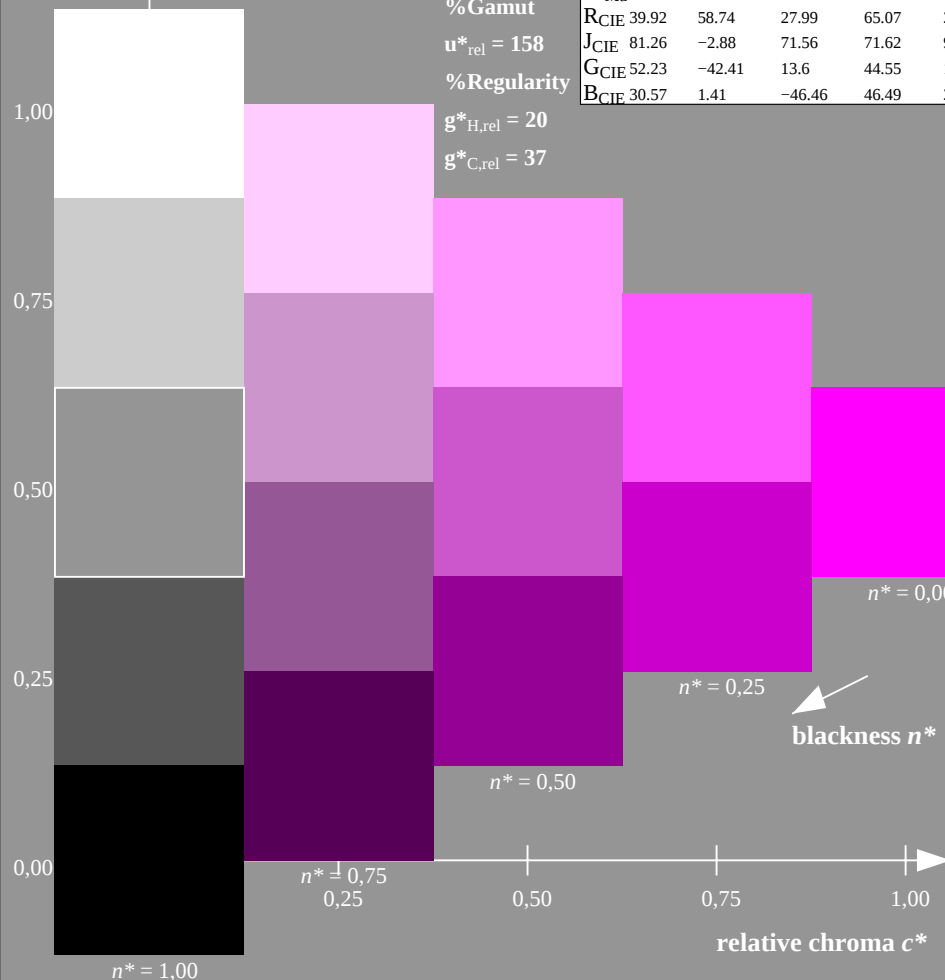

OE730-7N-130-5: 5 step scales for constant CIELAB hue 328/360 = 0.912 (left)

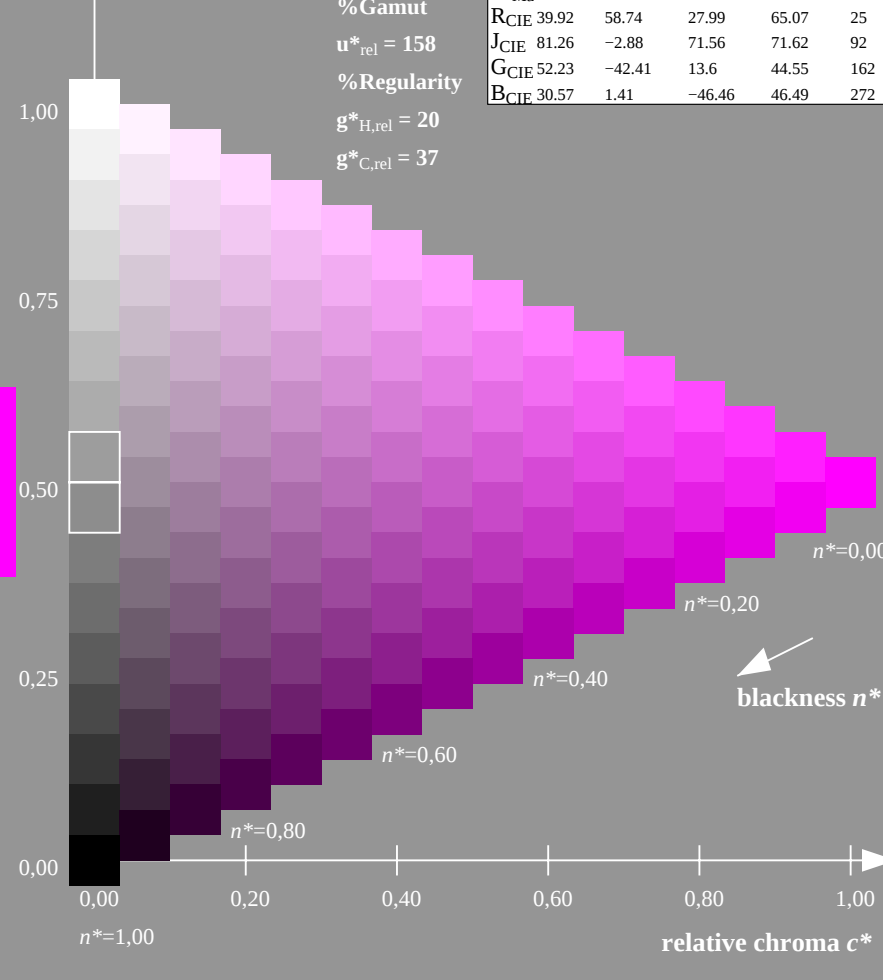

16 step scales for constant CIELAB hue 328/360 = 0.912 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue M; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{\Delta}$) $setcmyk$
output 133-5: $g_P=0.77$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 25/360 = 0.071$


lab^*tch and lab^*nch

D65: hue R

LCH*Ma: 52 89 25

ol*Ma: 1.0 0.0 0.21

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 25/360 = 0.071$


lab^*tch and lab^*nch

D65: hue R

LCH*Ma: 52 89 25

ol*Ma: 1.0 0.0 0.21

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

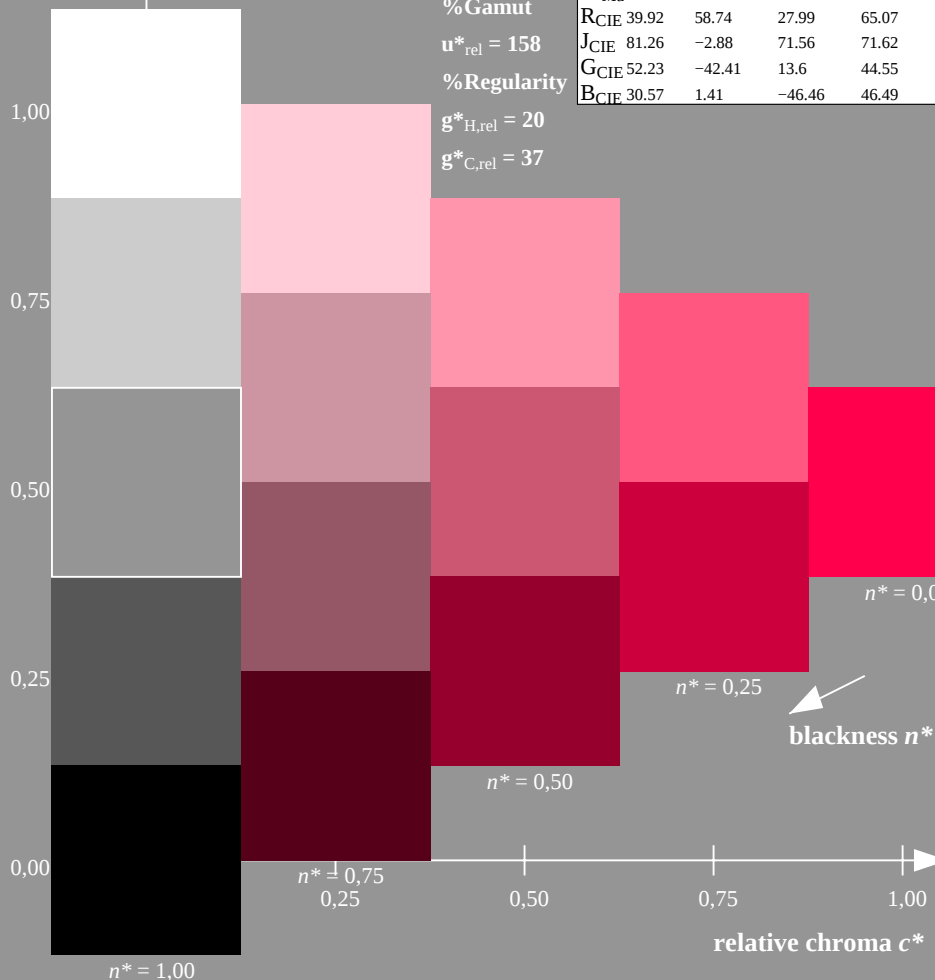

OE730-7N-130-6: 5 step scales for constant CIELAB hue 25/360 = 0.071 (left)

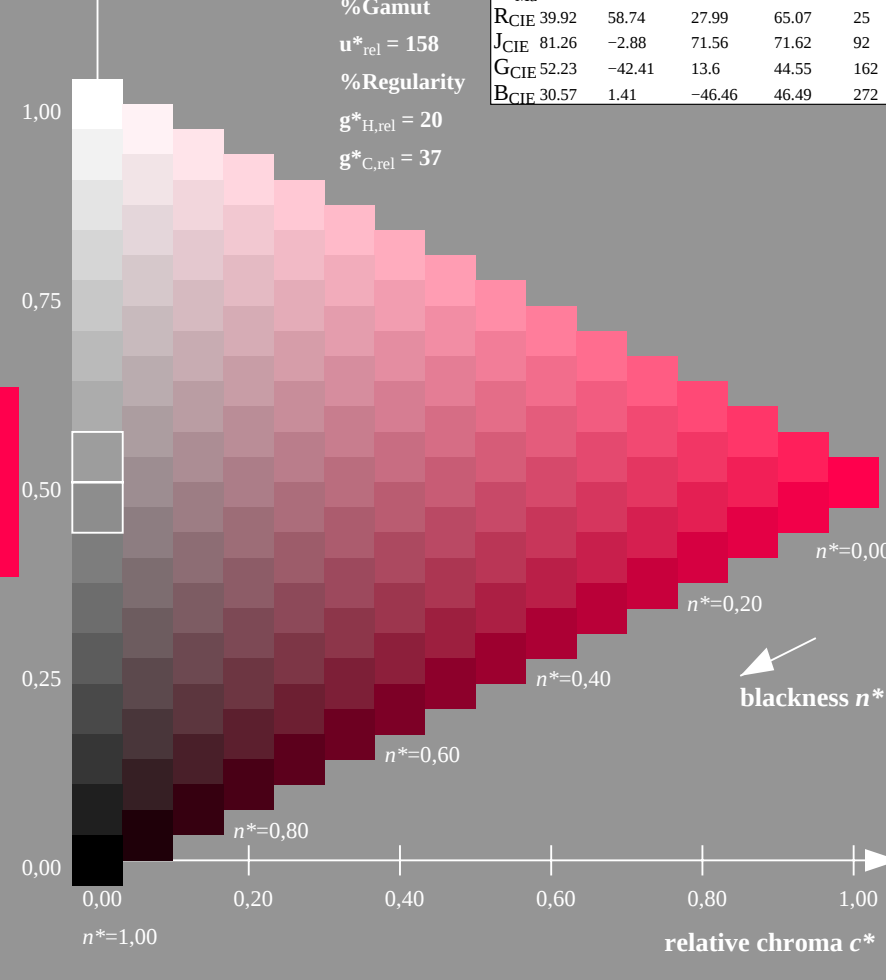

16 step scales for constant CIELAB hue 25/360 = 0.071 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue R; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 133-6: $g_P=0.77$; $g_N=1.0$

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 92/360 = 0.256$


lab^*tch and lab^*nch

D65: hue J

LCH*Ma: 85 86 92

olv*Ma: 1.0 0.82 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 92/360 = 0.256$


lab^*tch and lab^*nch

D65: hue J

LCH*Ma: 85 86 92

olv*Ma: 1.0 0.82 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

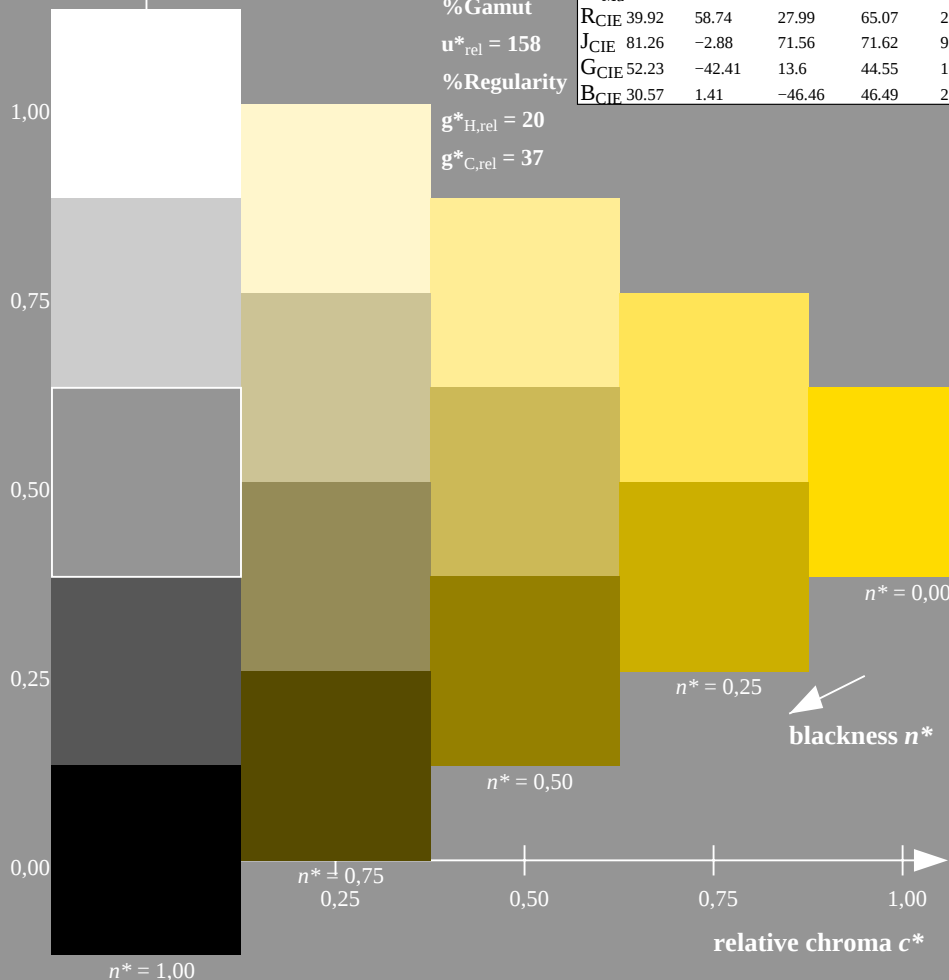

OE730-7N-130-7: 5 step scales for constant CIELAB hue 92/360 = 0.256 (left)

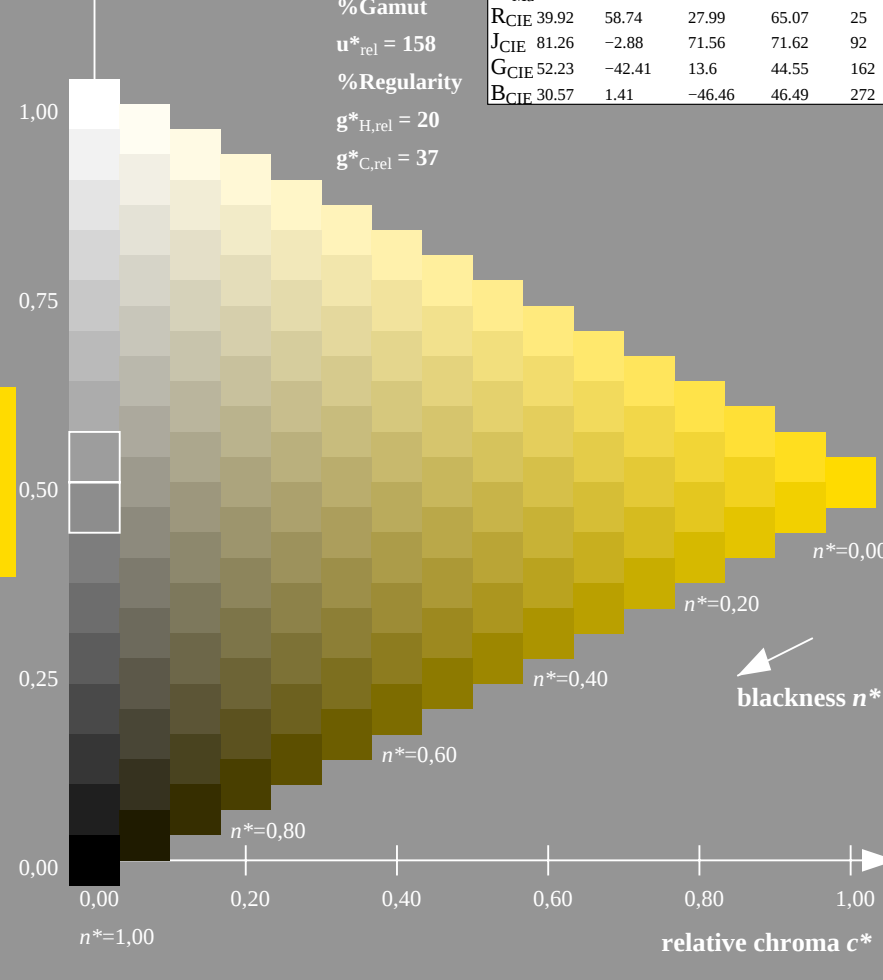

16 step scales for constant CIELAB hue 92/360 = 0.256 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue J; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 133-7: $g_P=0.77$; $g_N=1.0$

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 162/360 = 0.451$


lab^*tch and lab^*nch

D65: hue G

LCH*Ma: 86 62 162

ol v^* Ma: 0.0 1.0 0.65

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 162/360 = 0.451$


lab^*tch and lab^*nch

D65: hue G

LCH*Ma: 86 62 162

ol v^* Ma: 0.0 1.0 0.65

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

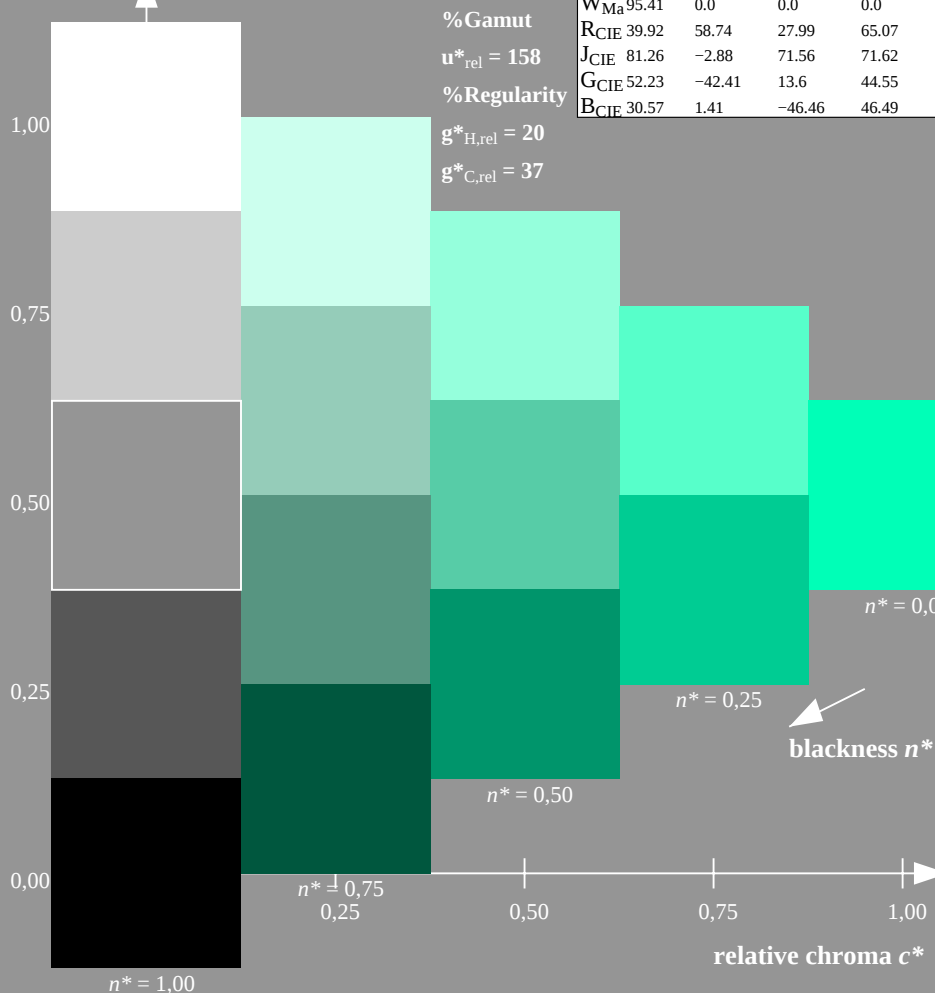

OE730-7N-130-8: 5 step scales for constant CIELAB hue 162/360 = 0.451 (left)

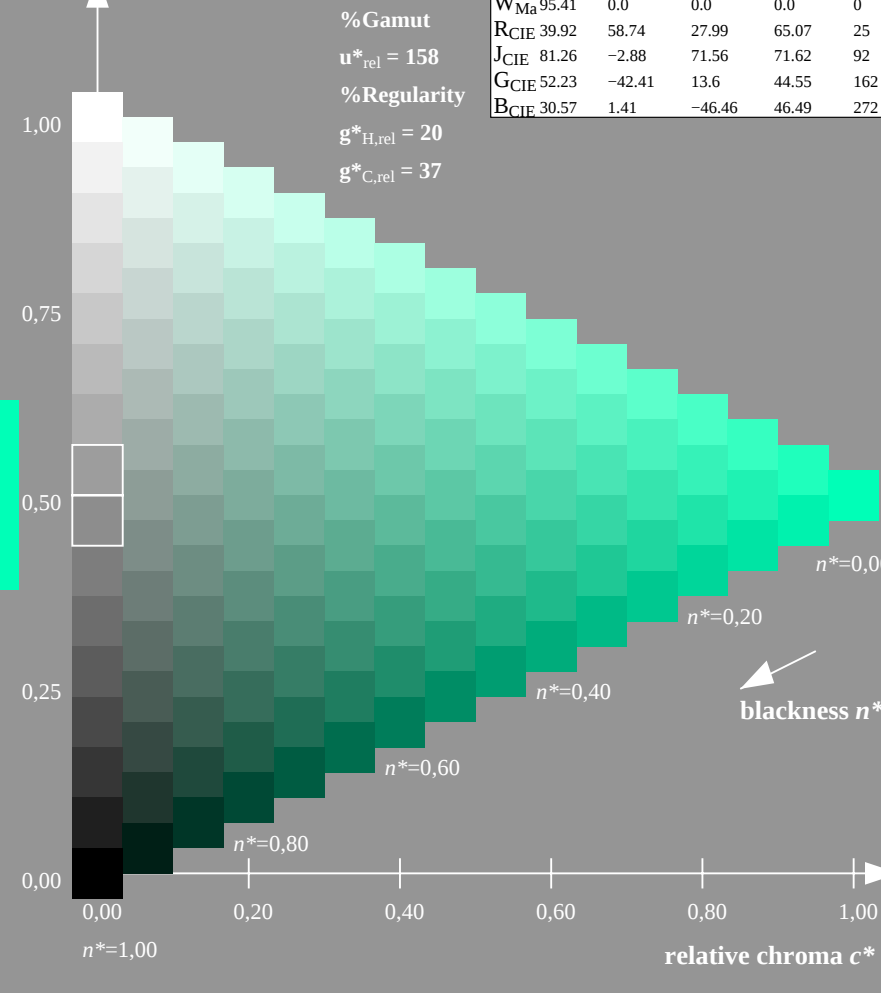

16 step scales for constant CIELAB hue 162/360 = 0.451 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue G; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 133-8: $g_P=0.77$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 272/360 = 0.755$


lab^*tch and lab^*nch

D65: hue B

LCH*Ma: 65 49 272

ol v^* Ma: 0.0 0.61 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 272/360 = 0.755$


lab^*tch and lab^*nch

D65: hue B

LCH*Ma: 65 49 272

ol v^* Ma: 0.0 0.61 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

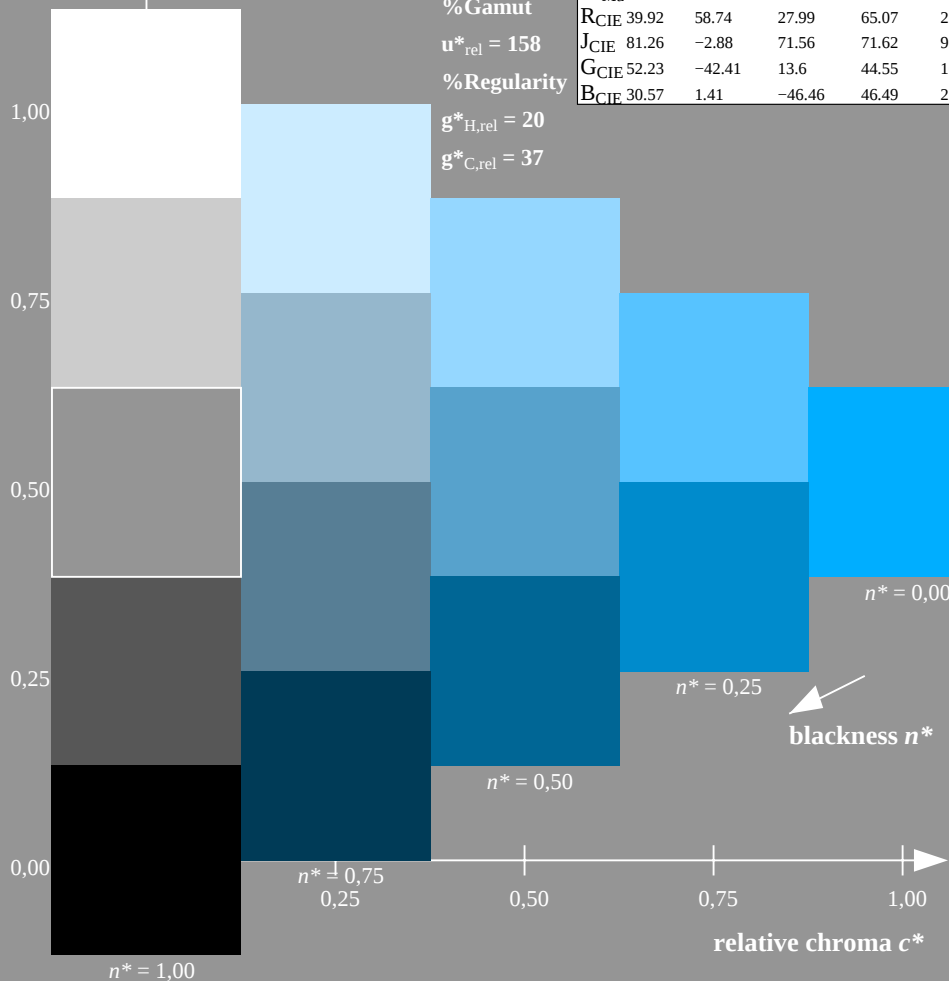

OE730-7N-130-9: 5 step scales for constant CIELAB hue 272/360 = 0.755 (left)

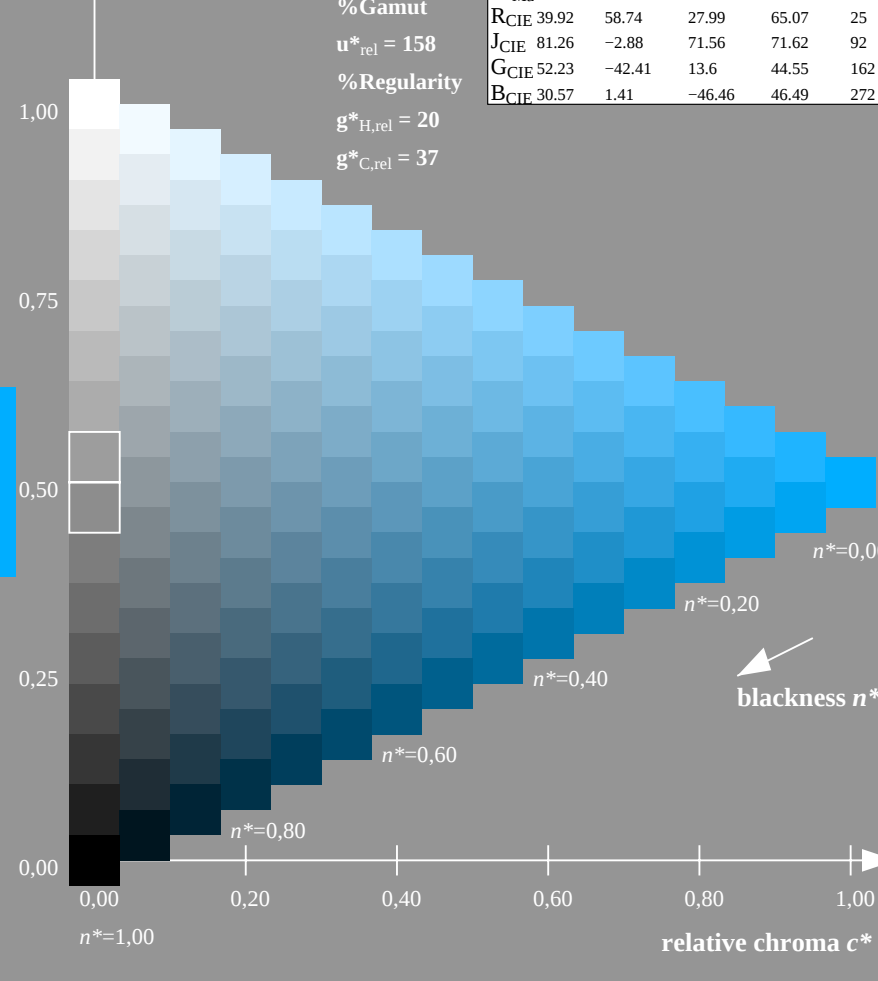

16 step scales for constant CIELAB hue 272/360 = 0.755 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue B; 1MR, DH
Discrimination of 5 and 16 step colour scales


input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 133-9: $g_P=0.77$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Discriminability of 5 step colour series (Yes/No decision)

Layout example: three 5 step colour series

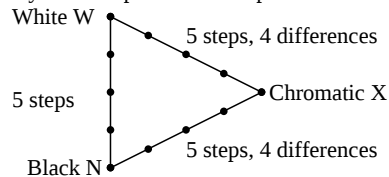

There are three basic colours on each page:
Black N, White W and Chromatic X.
Ten pages include 10 hue planes
X = OYLCVM and RJGB.
There are at maximum 12 distinguishable steps.

All steps of the three series N-W, W-X and X-N should be distinguishable on all pages.

Are the three 5step series distinguishable on all pages? underline: Yes/No

only in case of No: Are the three 5 step series on Page x of 10 pages distinguishable?

Underline Yes/No and give in case of No the number of distinguishable steps?

- Page 1: Yes/No, if No ../12 step differences are distinguishable of O = Orange Red
Page 2: Yes/No, if No ../12 step differences are distinguishable of Y = Yellow
Page 3: Yes/No, if No ../12 step differences are distinguishable of L = Leaf green
Page 4: Yes/No, if No ../12 step differences are distinguishable of C = Cyan blue
Page 5: Yes/No, if No ../12 step differences are distinguishable of V = Violett blue
Page 6: Yes/No, if No ../12 step differences are distinguishable of M = Magenta Red
Page 7: Yes/No, if No ../12 step differences are distinguishable of R = Elementary Red
Page 8: Yes/No, if No ../12 step differences are distinguishable of J = Elementary yellow
Page 9: Yes/No, if No ../12 step differences are distinguishable of G = Elementary Green
Page 10: Yes/No, if No ../12 step differences are distinguishable of B = Elementary blue

Sum: ../10 Yes-Pages and ../120 step differences are distinguishable

Part 1

OE730-3N-133-10

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE73/OE73L0NP.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE73/OE73L0NA.PS> or underline Yes/No

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline monitor/data projector/printer

Device model, driver and version:.....

Device output with PDF/PS-file: underline PDF/PS-file

For device output with PDF-file OE73L0NP.PDF:

- either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file OE73L0NA.PS:

- either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks: Special remarks, e. g. output of Landscape (L)

.....
.....
.....


Part 3

OE730-7N-133-10

OE73: Form A for test chart 2 according to DIN 33872-2; 1MR, DHinput: *cmy0* (->*cmy0***g*) *setcmyk*
Discrimination of colour scales (Yes/No decision) output 133-10: *g_P*=0.77; *g_N*=1.0

Discriminability of 16 step colour series (Yes/No decision)

Layout example: three 16 step colour series

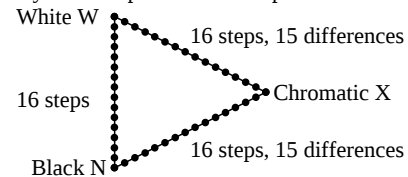

There are three basic colours on each page:
Black N, White W and Chromatic X.
Ten pages include 10 hue planes
X = OYLCVM and RJGB.
There are at maximum 45 distinguishable steps.

All steps of the three series N-W, W-X and X-N should be distinguishable on all pages.

Are the three 16step series distinguishable on all pages? underline: Yes/No

only in case of No: Are the three 16 step series on Page x of 10 pages distinguishable?

Underline Yes/No and give in case of No the number of distinguishable steps?

- Page 1: Yes/No, if No ../45 step differences are distinguishable of O = Orange Red
Page 2: Yes/No, if No ../45 step differences are distinguishable of Y = Yellow
Page 3: Yes/No, if No ../45 step differences are distinguishable of L = Leaf green
Page 4: Yes/No, if No ../45 step differences are distinguishable of C = Cyan blue
Page 5: Yes/No, if No ../45 step differences are distinguishable of V = Violett blue
Page 6: Yes/No, if No ../45 step differences are distinguishable of M = Magenta Red
Page 7: Yes/No, if No ../45 step differences are distinguishable of R = Elementary Red
Page 8: Yes/No, if No ../45 step differences are distinguishable of J = Elementary yellow
Page 9: Yes/No, if No ../45 step differences are distinguishable of G = Elementary Green
Page 10: Yes/No, if No ../45 step differences are distinguishable of B = Elementary blue

Sum: ../10 Yes-Pages and ../450 step differences are distinguishable

Part 2

OE731-3N-133-10

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test:

- either according to DIN 6160:1996 with Anomaloskop of Nagel
or with test charts using colour points according to Ishihara
or tested with, please specify:

underline Yes/No

underline Yes/unknown

underline Yes/unknown

underline Yes/unknown

For visual evaluation of the display (monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky)

underline Yes/No

PDF file: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PDF>

underline Yes/No

PS file: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PS>

underline Yes/No

Picture A7-133-2: contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)

compare standard print output according to ISO/IEC 15775 with range F:0

underline range

Remark: In daylighted offices the contrast range is in many cases:

on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF-File: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PDF>

picture A7-133-2

underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PS>

picture A7-133-2

or underline Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry:

underline Yes/No

If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T

Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer

of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF

underline Yes/No

If No, please describe other method:


Part 4

OE731-7N-133-10

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*
1	18.01 0.0 0.0	0.0 18.01 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
2	23.17 0.0 0.0	0.12 27.5 0.0	0.0 0.0 0.0	4.33 0.0 0.0	4.33
3	28.33 0.0 0.0	0.21 34.25 0.0	0.0 0.0 0.0	5.92 0.0 0.0	5.92
4	33.49 0.0 0.0	0.29 40.24 0.0	0.0 0.0 0.0	6.76 0.0 0.0	6.76
5	38.65 0.0 0.0	0.36 45.8 0.0	0.0 0.0 0.0	7.15 0.0 0.0	7.15
6	43.81 0.0 0.0	0.43 51.04 0.0	0.0 0.0 0.0	7.23 0.0 0.0	7.23
7	48.97 0.0 0.0	0.49 56.06 0.0	0.0 0.0 0.0	7.09 0.0 0.0	7.09
8	54.13 0.0 0.0	0.55 60.89 0.0	0.0 0.0 0.0	6.76 0.0 0.0	6.76
9	59.29 0.0 0.0	0.61 65.56 0.0	0.0 0.0 0.0	6.27 0.0 0.0	6.27
10	64.45 0.0 0.0	0.67 70.11 0.0	0.0 0.0 0.0	5.66 0.0 0.0	5.66
11	69.61 0.0 0.0	0.73 74.54 0.0	0.0 0.0 0.0	4.93 0.0 0.0	4.93
12	74.77 0.0 0.0	0.79 78.87 0.0	0.0 0.0 0.0	4.1 0.0 0.0	4.1
13	79.93 0.0 0.0	0.84 83.12 0.0	0.0 0.0 0.0	3.19 0.0 0.0	3.19
14	85.09 0.0 0.0	0.9 87.28 0.0	0.0 0.0 0.0	2.19 0.0 0.0	2.2
15	90.25 0.0 0.0	0.95 91.38 0.0	0.0 0.0 0.0	1.13 0.0 0.0	1.13
16	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
17	18.01 0.0 0.0	0.0 18.01 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
18	37.36 0.0 0.0	0.34 44.44 0.0	0.0 0.0 0.0	7.08 0.0 0.0	7.08
19	56.71 0.0 0.0	0.58 63.24 0.0	0.0 0.0 0.0	6.53 0.0 0.0	6.53
20	76.06 0.0 0.0	0.8 79.94 0.0	0.0 0.0 0.0	3.88 0.0 0.0	3.88
21	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
Mean lightness difference (16 steps)					$\Delta E^*_{\text{CIELAB}} = 4.5$
Mean lightness difference (5 steps)					$\Delta L^*_{\text{CIELAB}} = 3.5$
Mean colour reproduction index:					$R^*_{\text{ab,m}} = 80$

OE730-3N-133-11: File: Measure unknown; Device: Device unknown; Date: Date unknown

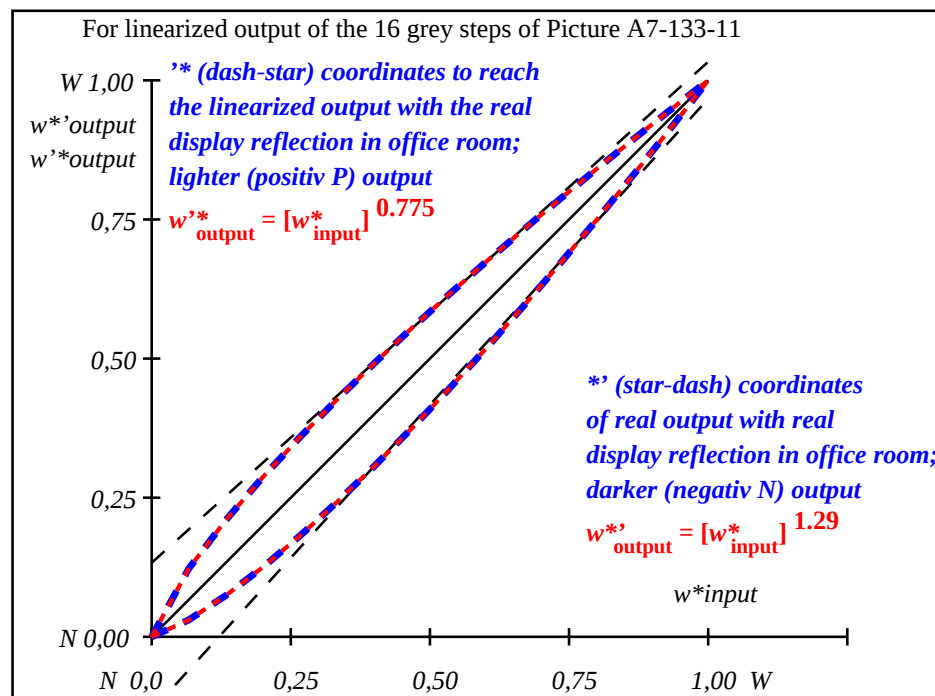

OE731-3N-133-11: File: Measure unknown; Device: Device unknown; Date: Date unknown

L^*/Y_{intended} (absolute)	18.0/2.5	23.2/3.8	28.3/5.6	33.5/7.8	38.6/10.5	43.8/13.7	49.0/17.6	54.1/22.1	59.3/27.3	64.4/33.4	69.6/40.2	74.8/47.9	79.9/56.6	85.1/66.2	90.2/76.8	95.4/88.6
$w^*w^*w^*$ setrgb $g_P=0.78$ No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*_{\text{CIELAB},r}$ (relative)																
w^*_{intended}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0.0	0.123	0.209	0.287	0.359	0.426	0.492	0.554	0.614	0.673	0.731	0.786	0.841	0.895	0.948	1.0

OE730-7N, Picture A7-133-11: 16 visual equidistant L^* -grey steps; PS operator: $w^*w^*w^*$ setrgbcolor

OE73: In-output relation according to ISO 9241-306; 1MR, DH
Viewing Y contrast $Y_W:Y_N=88,9:2,5$; Y_N range 1,87 to <3,75

input: cmy0 ($\rightarrow \text{cmy0}^*_d$) setcmyk
output 133-11: $g_P=0.77$; $g_N=1.0$

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 40/360 = 0.111$


lab^*tch and lab^*nch

D65: hue O

LCH*Ma: 51 100 40

olv*Ma: 1.0 0.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 40/360 = 0.111$


lab^*tch and lab^*nch

D65: hue O

LCH*Ma: 51 100 40

olv*Ma: 1.0 0.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

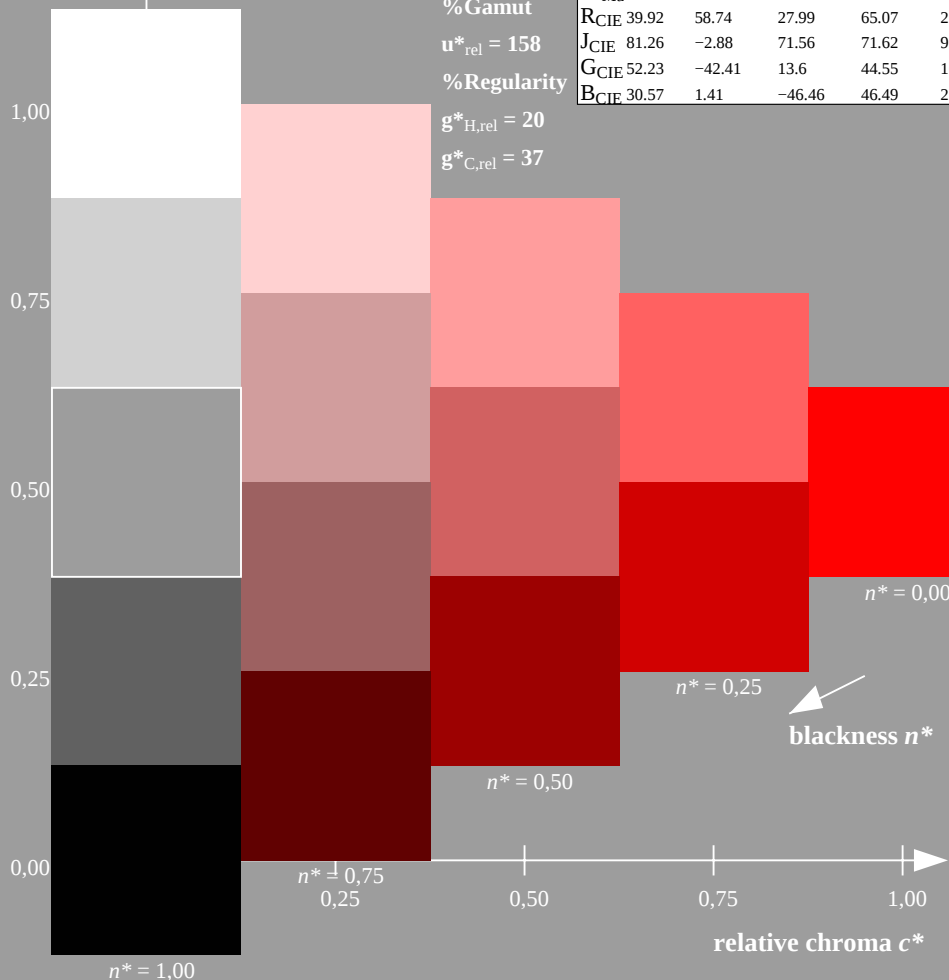

OE730-7N-130-0: 5 step scales for constant CIELAB hue 40/360 = 0.111 (left)

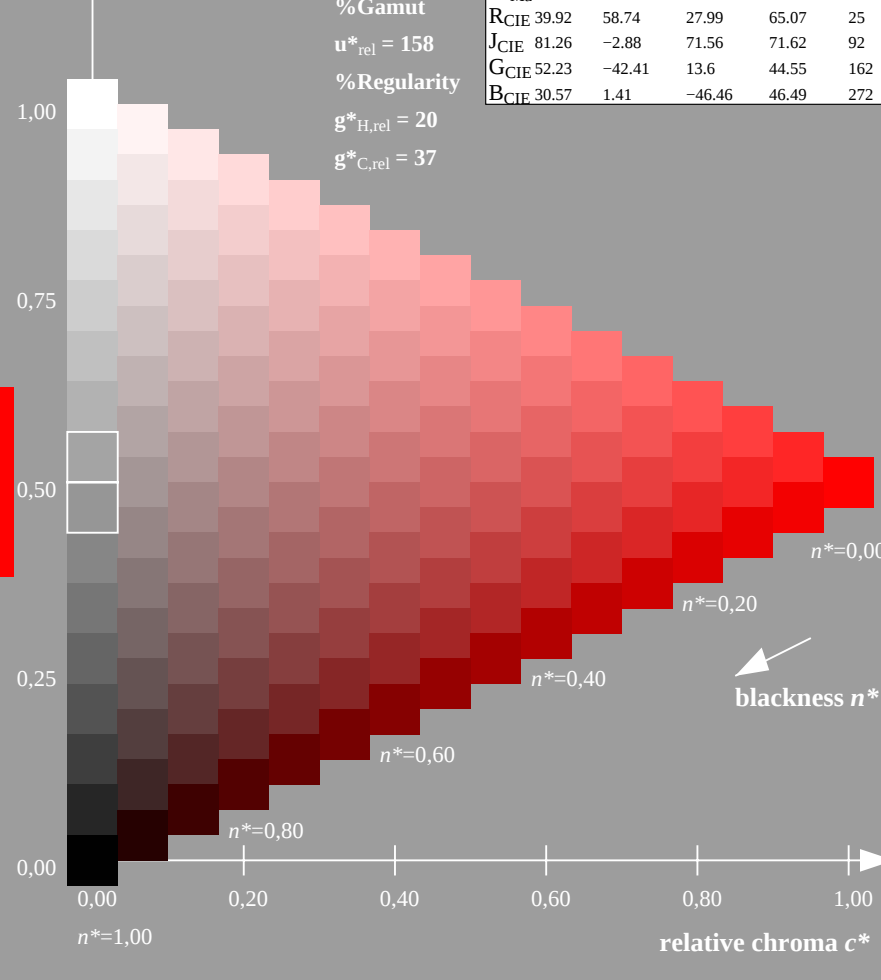

16 step scales for constant CIELAB hue 40/360 = 0.111 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue O; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_d$) $setcmyk$
output 134-0: $g_P=0.7$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 103/360 = 0.286$


lab^*tch and lab^*nch

D65: hue Y

LCH*Ma: 93 93 103

ol v^* Ma: 1.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 103/360 = 0.286$


lab^*tch and lab^*nch

D65: hue Y

LCH*Ma: 93 93 103

ol v^* Ma: 1.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

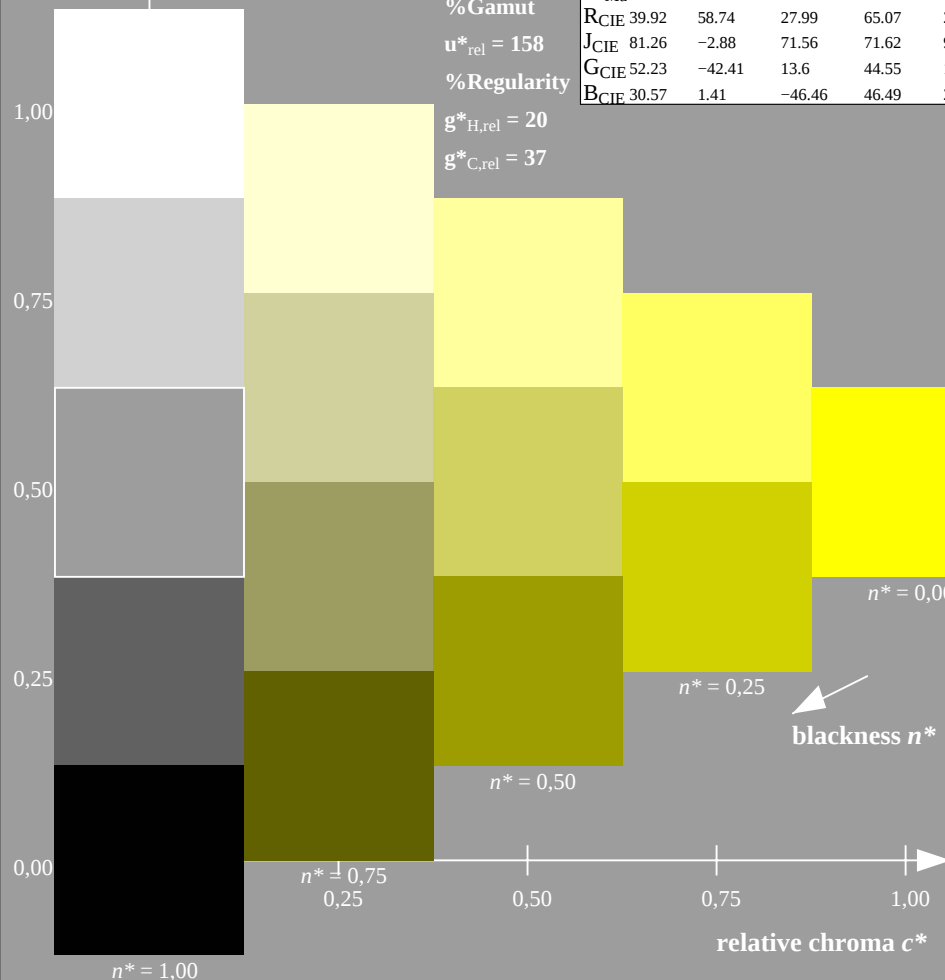

OE730-7N-130-1: 5 step scales for constant CIELAB hue 103/360 = 0.286 (left)

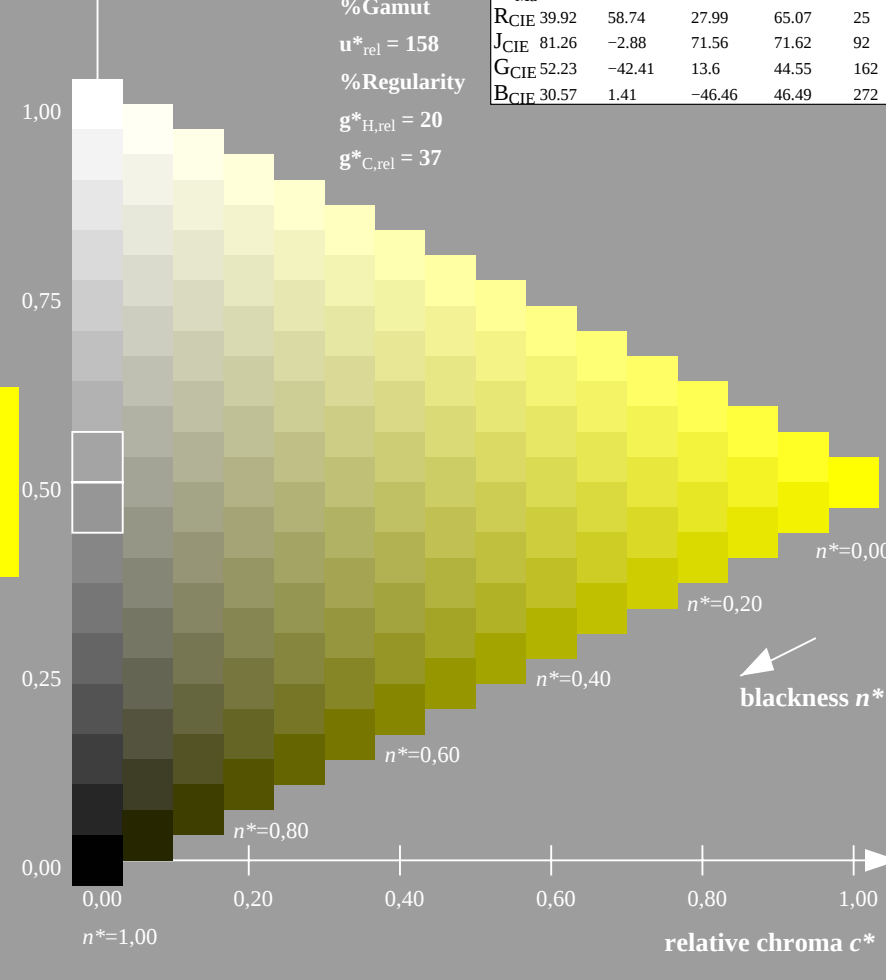

16 step scales for constant CIELAB hue 103/360 = 0.286 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue Y; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_d$) $setcmyk$
output 134-1: $g_P=0.7$; $g_N=1.0$

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 136/360 = 0.378$


lab^*tch and lab^*nch

D65: hue L

LCH*Ma: 84 115 136

ol v^* Ma: 0.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 136/360 = 0.378$


lab^*tch and lab^*nch

D65: hue L

LCH*Ma: 84 115 136

ol v^* Ma: 0.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

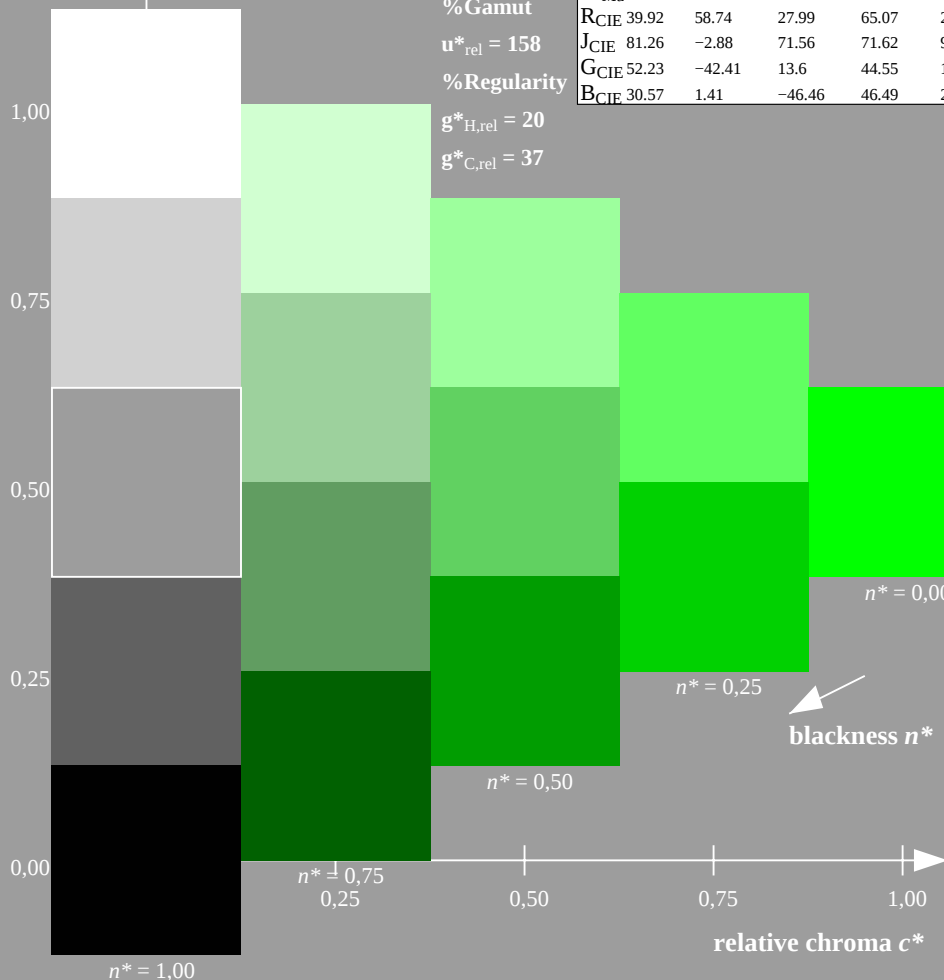

OE730-7N-130-2: 5 step scales for constant CIELAB hue 136/360 = 0.378 (left)

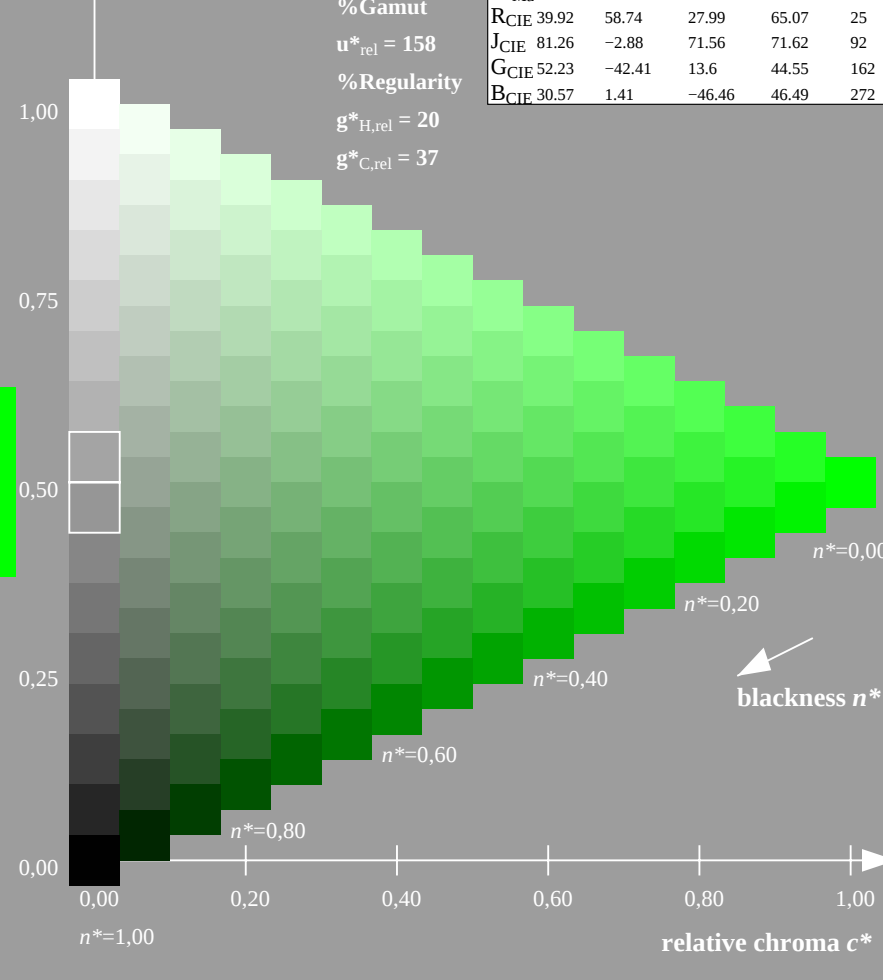

16 step scales for constant CIELAB hue 136/360 = 0.378 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue L; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_d$) $setcmyk$
output 134-2: $g_P=0.7$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=rha4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 196/360 = 0.545$


lab^*tch and lab^*nch

D65: hue C

LCH*Ma: 87 48 196

ol v^* Ma: 0.0 1.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 196/360 = 0.545$


lab^*tch and lab^*nch

D65: hue C

LCH*Ma: 87 48 196

ol v^* Ma: 0.0 1.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

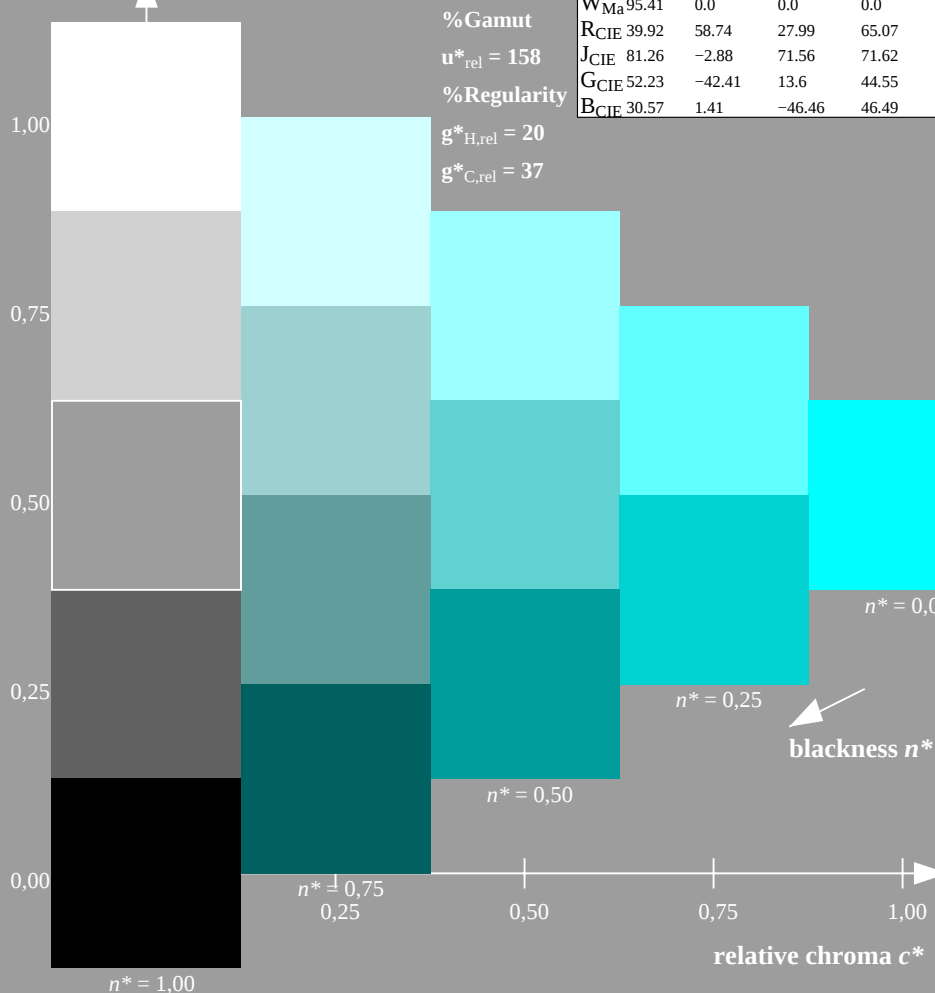

OE730-7N-130-3: 5 step scales for constant CIELAB hue 196/360 = 0.545 (left)

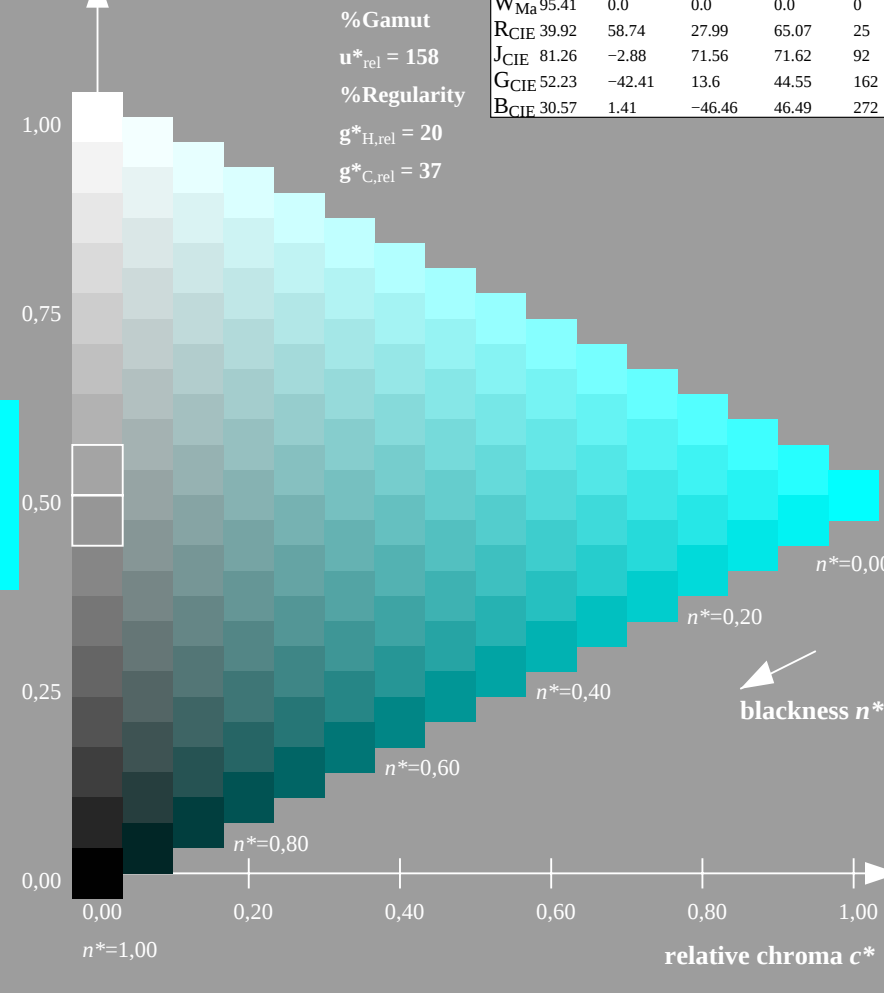

16 step scales for constant CIELAB hue 196/360 = 0.545 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue C; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{\Delta}$) $setcmyk$
output 134-3: $g_P=0.7$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 306/360 = 0.851$


lab^*tch and lab^*nch

D65: hue V

LCH*Ma: 30 129 306

ol v^* Ma: 0.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 306/360 = 0.851$


lab^*tch and lab^*nch

D65: hue V

LCH*Ma: 30 129 306

ol v^* Ma: 0.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

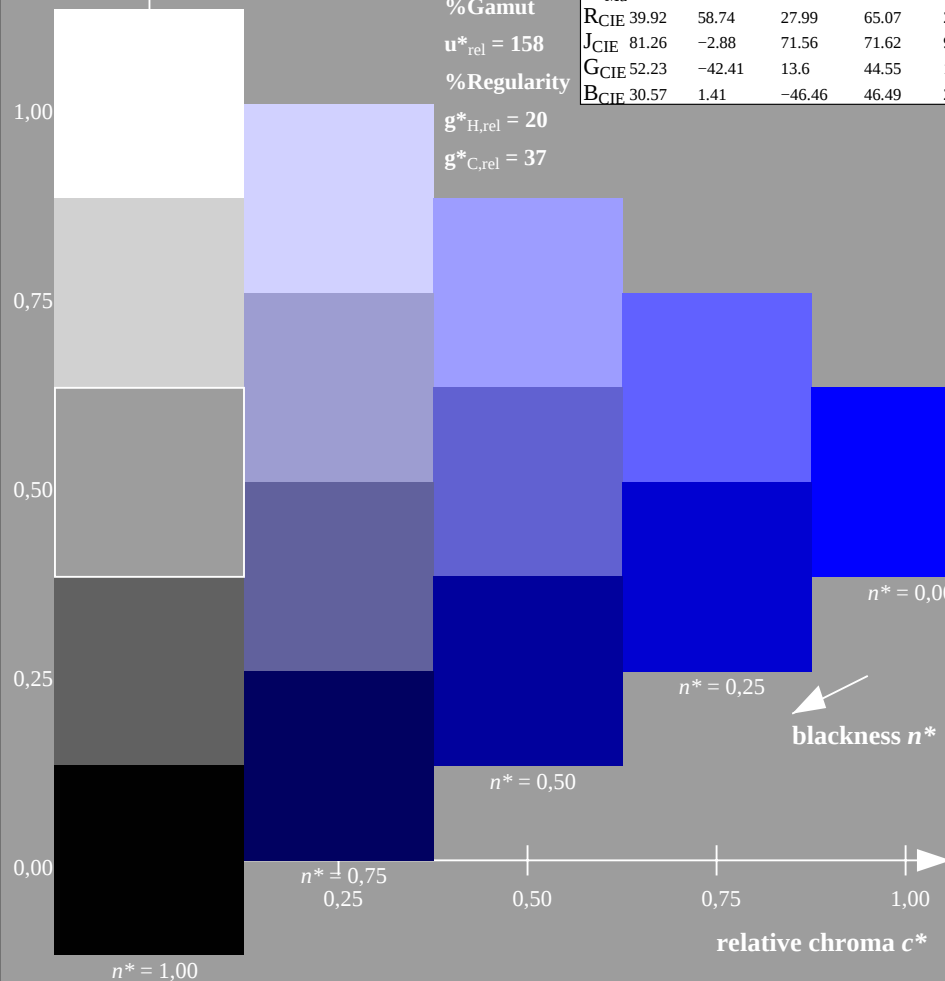

OE730-7N-130-4: 5 step scales for constant CIELAB hue 306/360 = 0.851 (left)

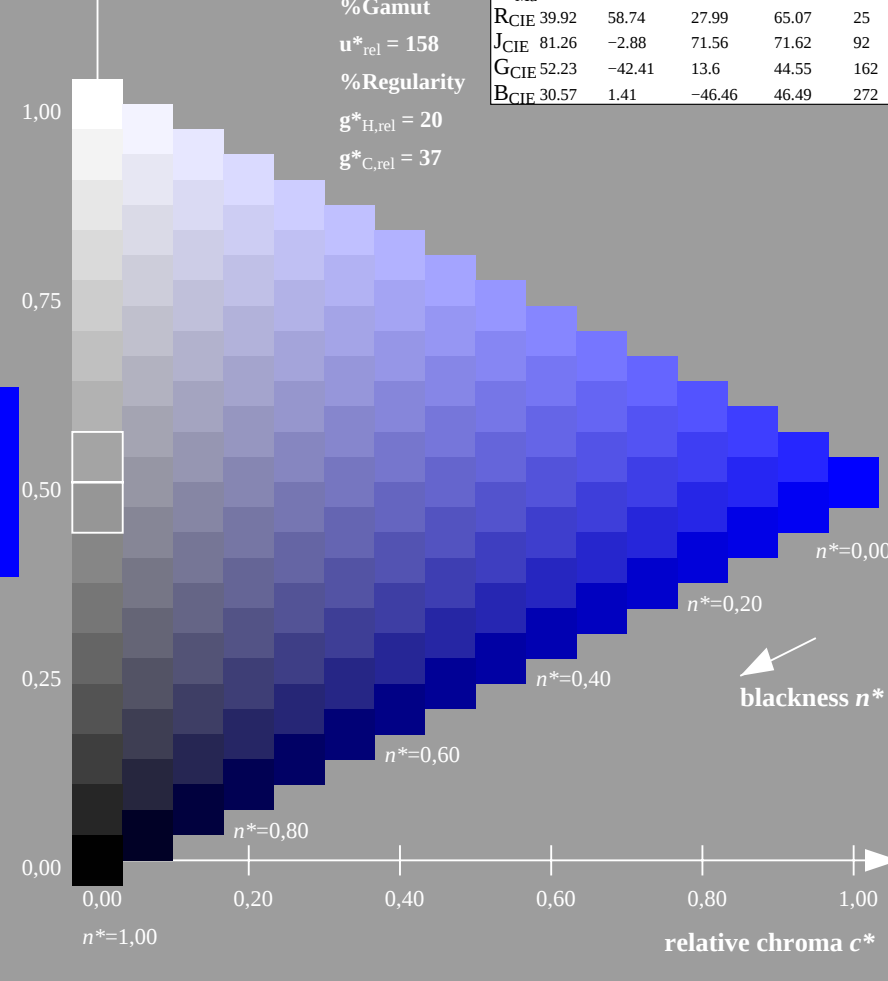

16 step scales for constant CIELAB hue 306/360 = 0.851 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue V; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_d$) $setcmyk$
output 134-4: $g_P=0.7$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 328/360 = 0.912$


lab^*tch and lab^*nch

D65: hue M

LCH*Ma: 57 111 328

ol v^* Ma: 1.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data					
	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 328/360 = 0.912$


lab^*tch and lab^*nch

D65: hue M

LCH*Ma: 57 111 328

ol v^* Ma: 1.0 0.0 1.0

triangle lightness t^*



%Gamut


$u^*_{rel} = 158$

%Regularity


$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data					
	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

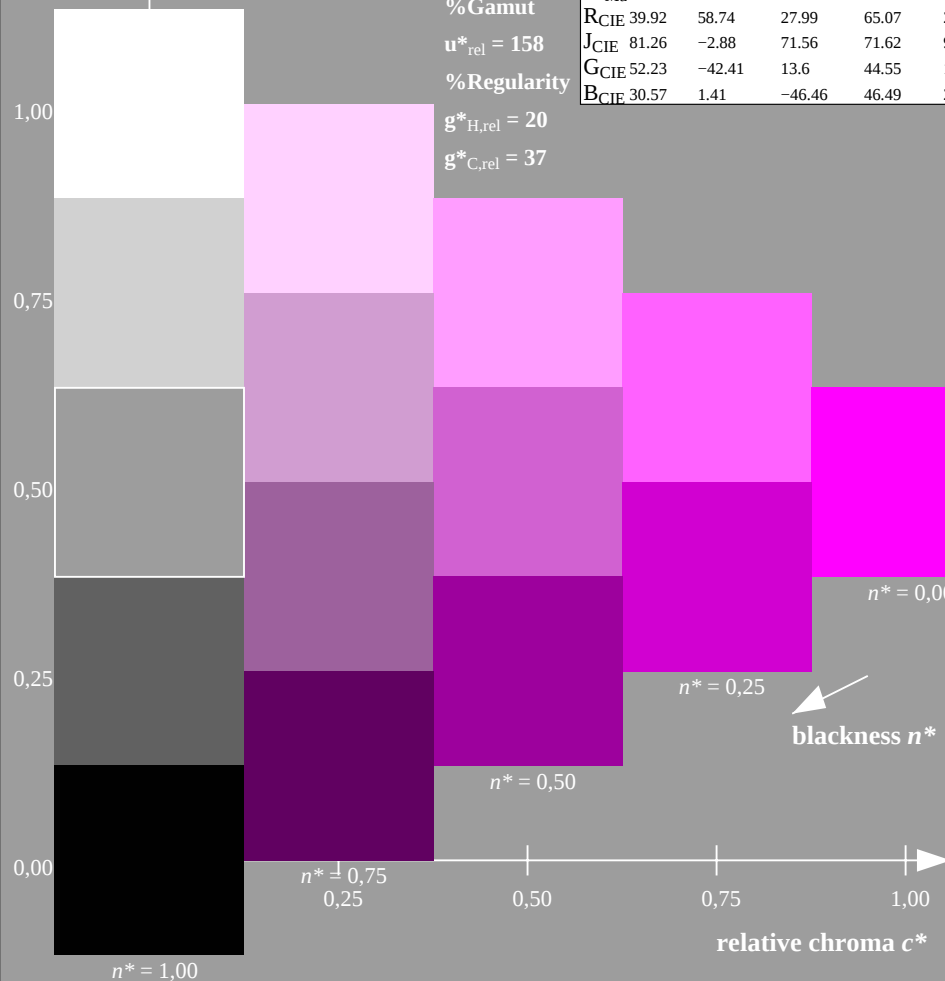

OE730-7N-130-5: 5 step scales for constant CIE LAB hue 328/360 = 0.912 (left)

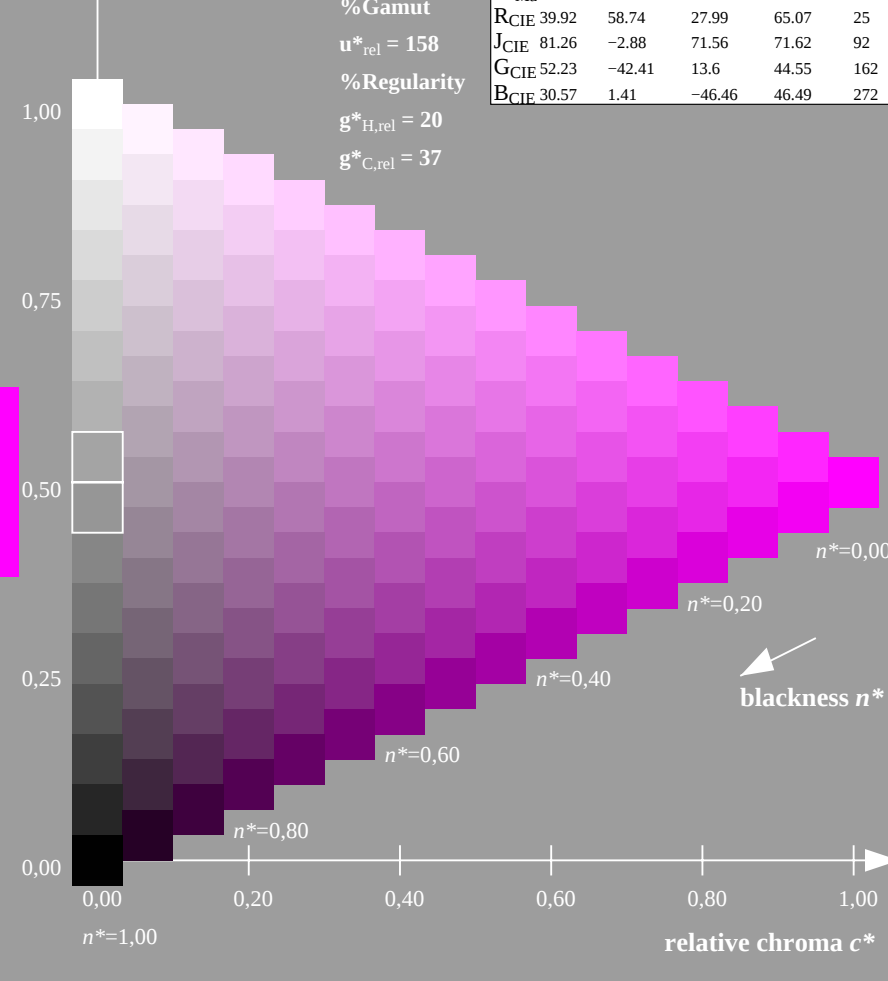

16 step scales for constant CIE LAB hue 328/360 = 0.912 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue M; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{\Delta}$) $setcmyk$
output 134-5: $g_P=0.7$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 25/360 = 0.071$


lab^*tch and lab^*nch

D65: hue R

LCH*Ma: 52 89 25

ol*Ma: 1.0 0.0 0.21

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 25/360 = 0.071$


lab^*tch and lab^*nch

D65: hue R

LCH*Ma: 52 89 25

ol*Ma: 1.0 0.0 0.21

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

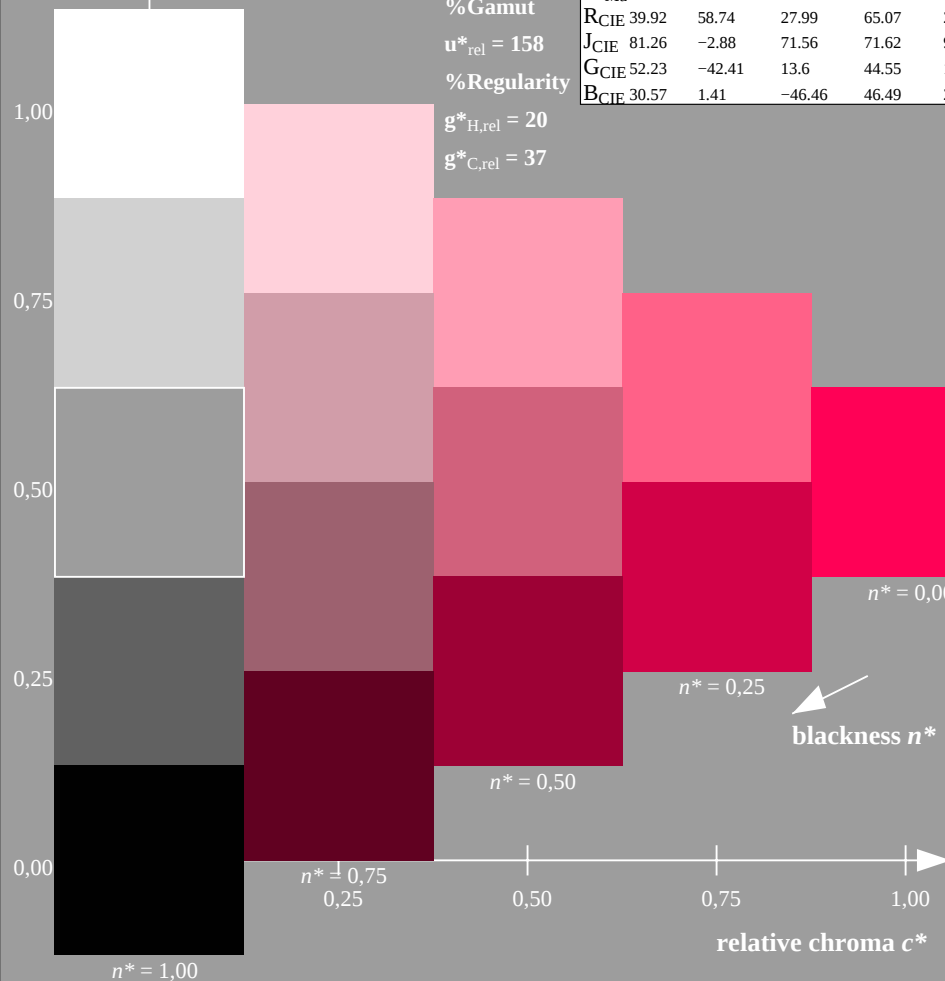

OE730-7N-130-6: 5 step scales for constant CIELAB hue 25/360 = 0.071 (left)

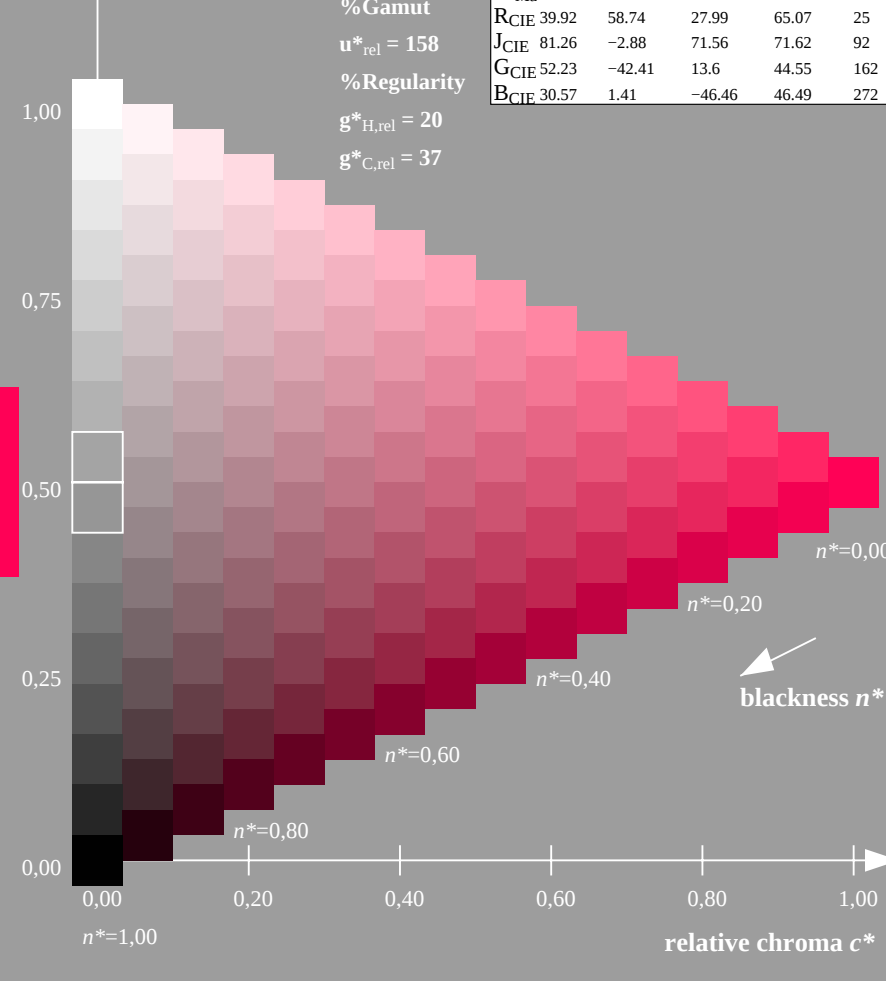

16 step scales for constant CIELAB hue 25/360 = 0.071 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue R; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 134-6: $g_P=0.7$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 92/360 = 0.256$


lab^*tch and lab^*nch

D65: hue J

LCH*Ma: 85 86 92

olv*Ma: 1.0 0.82 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 92/360 = 0.256$


lab^*tch and lab^*nch

D65: hue J

LCH*Ma: 85 86 92

olv*Ma: 1.0 0.82 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

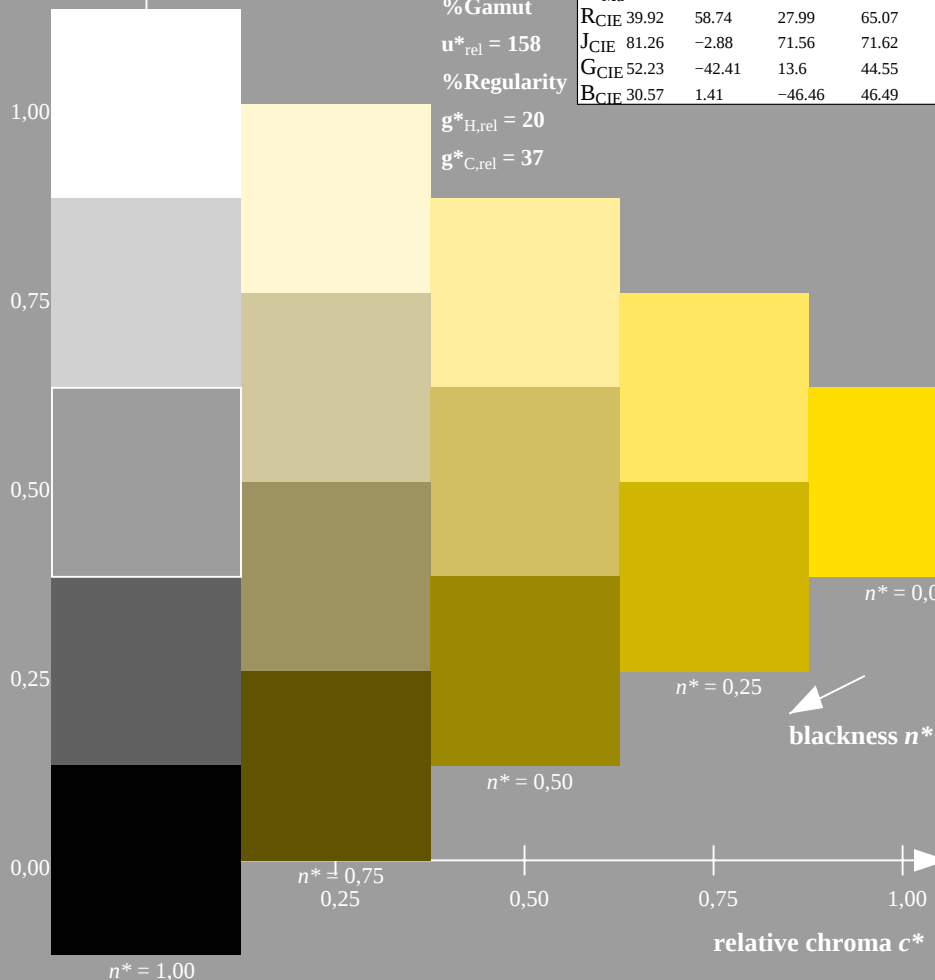

OE730-7N-130-7: 5 step scales for constant CIELAB hue 92/360 = 0.256 (left)

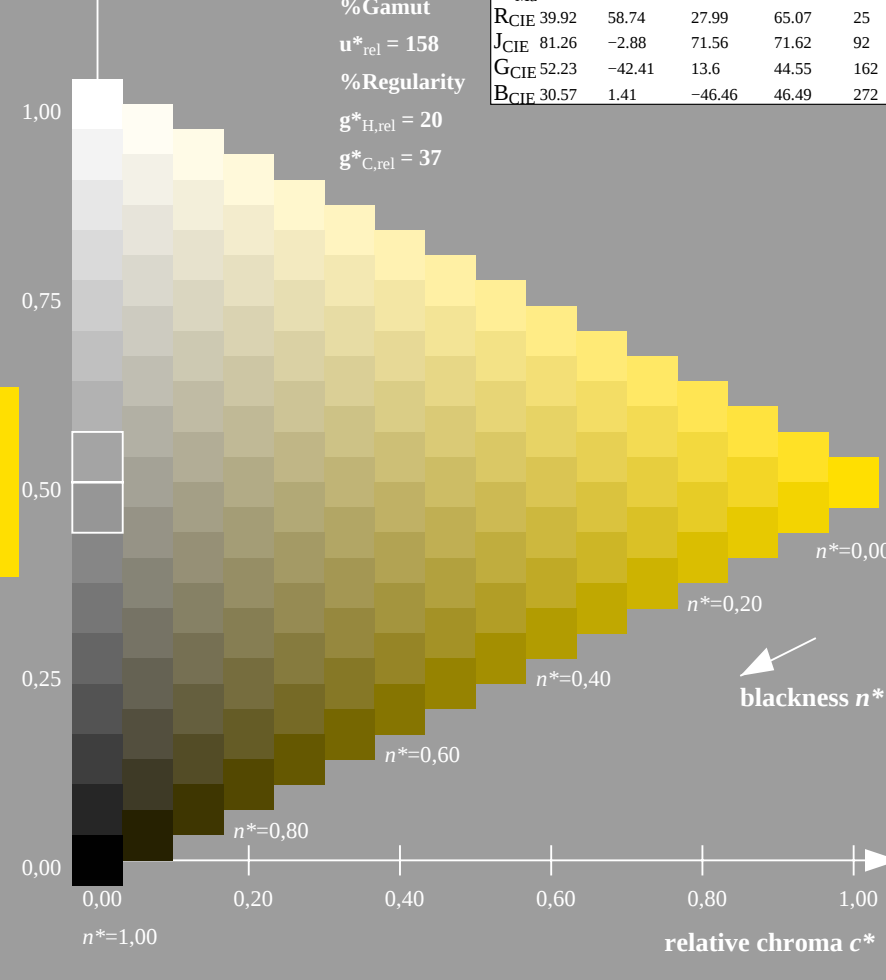

16 step scales for constant CIELAB hue 92/360 = 0.256 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue J; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 134-7: $g_P=0.7$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 162/360 = 0.451$


lab^*tch and lab^*nch

D65: hue G

LCH*Ma: 86 62 162

ol v^* Ma: 0.0 1.0 0.65

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 162/360 = 0.451$


lab^*tch and lab^*nch

D65: hue G

LCH*Ma: 86 62 162

ol v^* Ma: 0.0 1.0 0.65

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

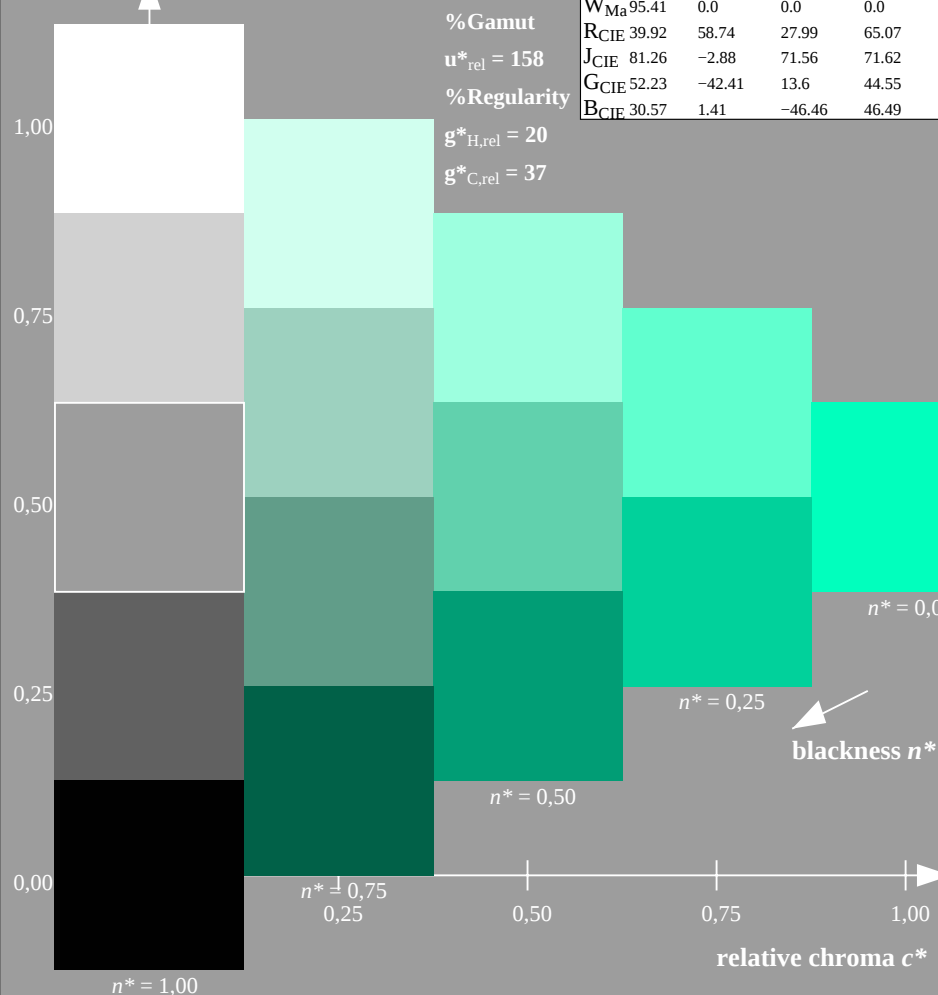

OE730-7N-130-8: 5 step scales for constant CIELAB hue 162/360 = 0.451 (left)

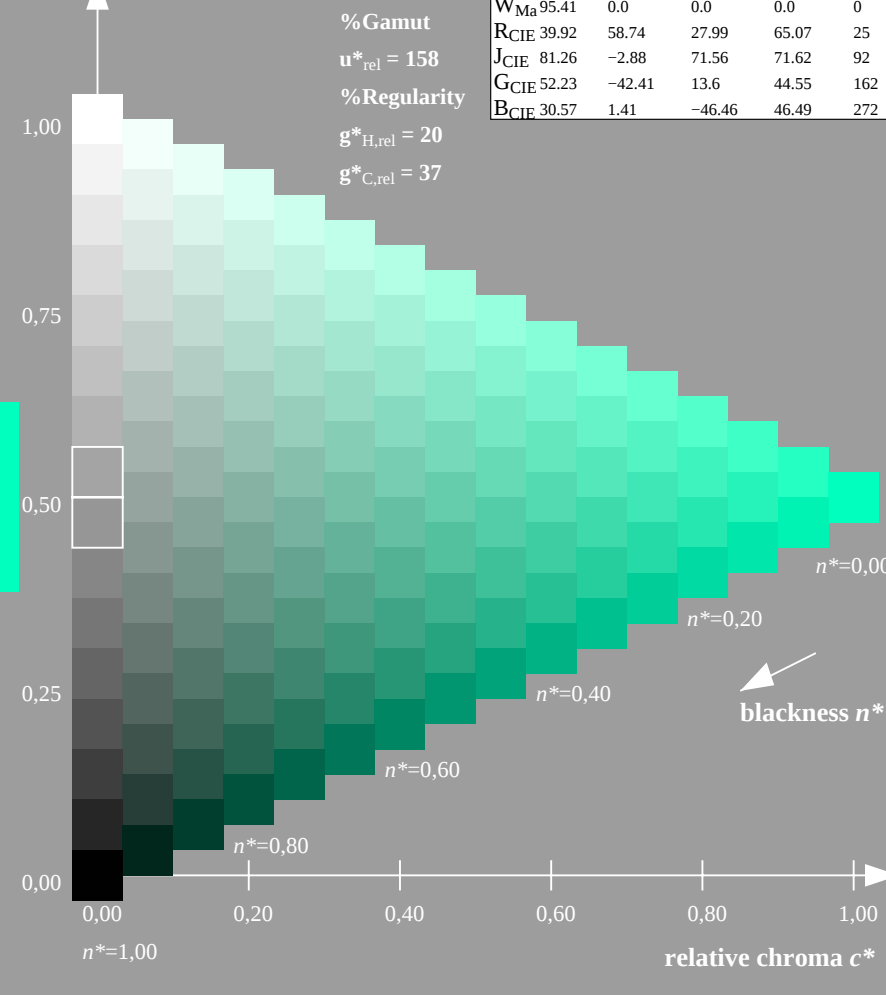

16 step scales for constant CIELAB hue 162/360 = 0.451 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue G; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 134-8: $g_P=0.7$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 272/360 = 0.755$


lab^*tch and lab^*nch

D65: hue B

LCH*Ma: 65 49 272

ol v^* Ma: 0.0 0.61 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 272/360 = 0.755$


lab^*tch and lab^*nch

D65: hue B

LCH*Ma: 65 49 272

ol v^* Ma: 0.0 0.61 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

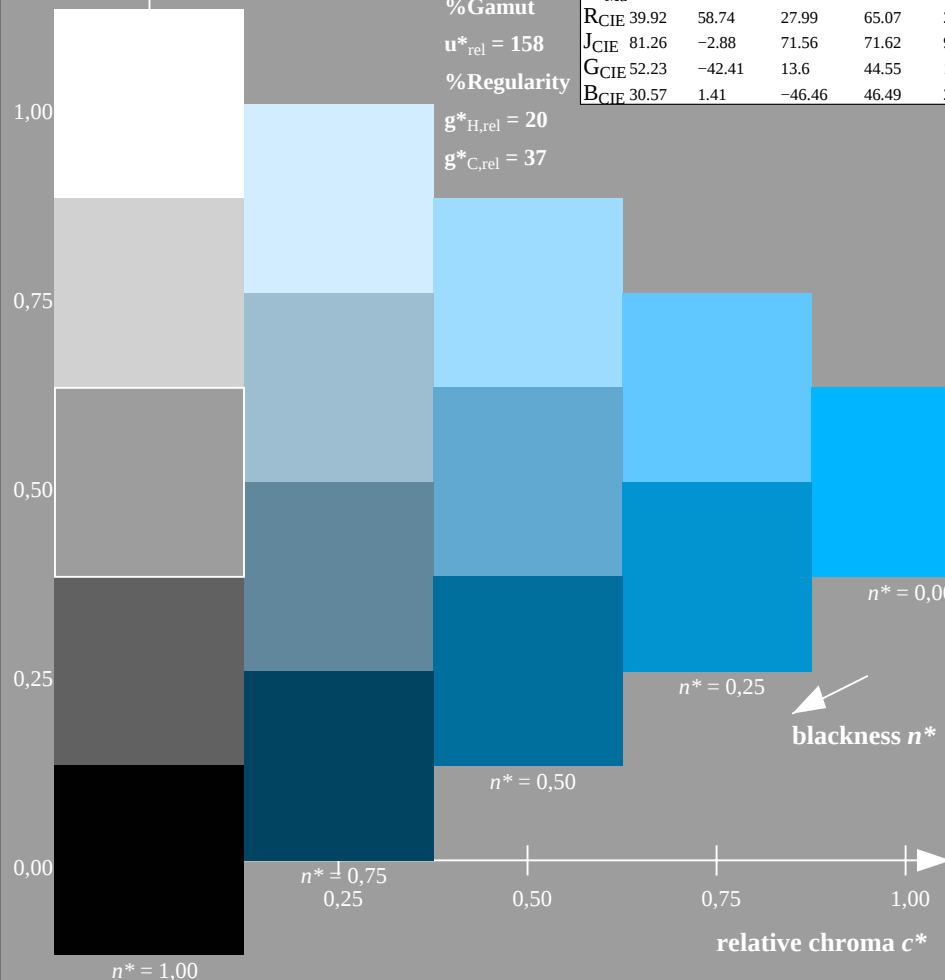

OE730-7N-130-9: 5 step scales for constant CIELAB hue 272/360 = 0.755 (left)

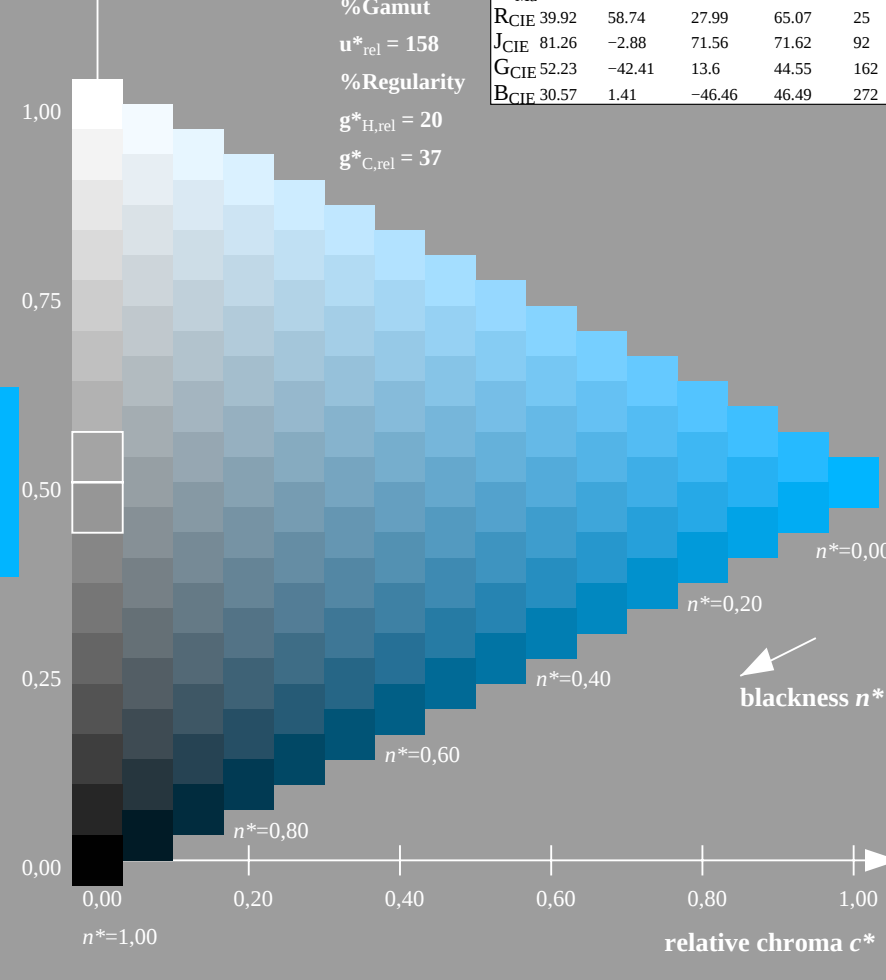

16 step scales for constant CIELAB hue 272/360 = 0.755 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue B; 1MR, DH
Discrimination of 5 and 16 step colour scales


input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 134-9: $g_P=0.7$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
TUB material: code=th4ta
application for output of displays: monitor systems or data projector systems

Discriminability of 5 step colour series (Yes/No decision)

Layout example: three 5 step colour series

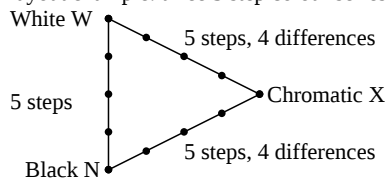

There are three basic colours on each page:
Black N, White W and Chromatic X.
Ten pages include 10 hue planes
X = OYLCVM and RJGB.
There are at maximum 12 distinguishable steps.

All steps of the three series N-W, W-X and X-N should be distinguishable on all pages.

Are the three 5step series distinguishable on all pages? underline: Yes/No

only in case of No: Are the three 5 step series on Page x of 10 pages distinguishable?

Underline Yes/No and give in case of No the number of distinguishable steps?

- Page 1: Yes/No, if No ../12 step differences are distinguishable of O = Orange Red
Page 2: Yes/No, if No ../12 step differences are distinguishable of Y = Yellow
Page 3: Yes/No, if No ../12 step differences are distinguishable of L = Leaf green
Page 4: Yes/No, if No ../12 step differences are distinguishable of C = Cyan blue
Page 5: Yes/No, if No ../12 step differences are distinguishable of V = Violett blue
Page 6: Yes/No, if No ../12 step differences are distinguishable of M = Magenta Red
Page 7: Yes/No, if No ../12 step differences are distinguishable of R = Elementary Red
Page 8: Yes/No, if No ../12 step differences are distinguishable of J = Elementary yellow
Page 9: Yes/No, if No ../12 step differences are distinguishable of G = Elementary Green
Page 10: Yes/No, if No ../12 step differences are distinguishable of B = Elementary blue

Sum: ../10 Yes-Pages and ../120 step differences are distinguishable

Part 1

OE730-3N-134-10

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE73/OE73L0NP.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE73/OE73L0NA.PS> or underline Yes/No

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline monitor/data projector/printer

Device model, driver and version:.....

Device output with PDF/PS-file: underline PDF/PS-file

For device output with PDF-file OE73L0NP.PDF:

- either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file OE73L0NA.PS:

- either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks: Special remarks, e. g. output of Landscape (L)

.....
.....
.....


Part 3

OE730-7N-134-10

OE73: Form A for test chart 2 according to DIN 33872-2; 1MR, DHinput: *cmy0* (->*cmy0***1*) *setcmyk*
Discrimination of colour scales (Yes/No decision) output 134-10: *g_P*=0.7; *g_N*=1.0

Discriminability of 16 step colour series (Yes/No decision)

Layout example: three 16 step colour series

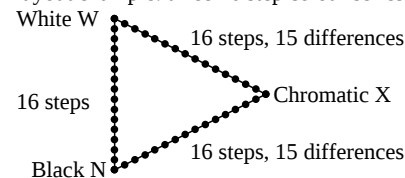

There are three basic colours on each page:
Black N, White W and Chromatic X.
Ten pages include 10 hue planes
X = OYLCVM and RJGB.
There are at maximum 45 distinguishable steps.

All steps of the three series N-W, W-X and X-N should be distinguishable on all pages.

Are the three 16step series distinguishable on all pages? underline: Yes/No

only in case of No: Are the three 16 step series on Page x of 10 pages distinguishable?

Underline Yes/No and give in case of No the number of distinguishable steps?

- Page 1: Yes/No, if No ../45 step differences are distinguishable of O = Orange Red
Page 2: Yes/No, if No ../45 step differences are distinguishable of Y = Yellow
Page 3: Yes/No, if No ../45 step differences are distinguishable of L = Leaf green
Page 4: Yes/No, if No ../45 step differences are distinguishable of C = Cyan blue
Page 5: Yes/No, if No ../45 step differences are distinguishable of V = Violett blue
Page 6: Yes/No, if No ../45 step differences are distinguishable of M = Magenta Red
Page 7: Yes/No, if No ../45 step differences are distinguishable of R = Elementary Red
Page 8: Yes/No, if No ../45 step differences are distinguishable of J = Elementary yellow
Page 9: Yes/No, if No ../45 step differences are distinguishable of G = Elementary Green
Page 10: Yes/No, if No ../45 step differences are distinguishable of B = Elementary blue

Sum: ../10 Yes-Pages and ../450 step differences are distinguishable

Part 2

OE731-3N-134-10

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test:

- either according to DIN 6160:1996 with Anomaloskop of Nagel
or with test charts using colour points according to Ishihara
or tested with, please specify:

underline Yes/No

underline Yes/unknown

underline Yes/unknown

underline Yes/unknown

For visual evaluation of the display (monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky)

underline Yes/No

PDF file: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PDF>

underline Yes/No

PS file: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PS>

underline Yes/No

Picture A7-134-2: contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)

compare standard print output according to ISO/IEC 15775 with range F:0

underline range

Remark: In daylighted offices the contrast range is in many cases:

on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF-File: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PDF>

picture A7-134-2

underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PS>

picture A7-134-2

or underline Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry:

underline Yes/No

If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T

Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer
of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF

underline Yes/No

If No, please describe other method:

Part 4

OE731-7N-134-10

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*
1	26.85 0.0 0.0	0.0 26.85 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
2	31.42 0.0 0.0	0.15 37.15 0.0	0.0 0.0 0.0	5.73 0.0 0.0	5.73
3	35.99 0.0 0.0	0.24 43.58 0.0	0.0 0.0 0.0	7.59 0.0 0.0	7.59
4	40.56 0.0 0.0	0.32 49.07 0.0	0.0 0.0 0.0	8.51 0.0 0.0	8.51
5	45.13 0.0 0.0	0.4 54.03 0.0	0.0 0.0 0.0	8.9 0.0 0.0	8.9
6	49.7 0.0 0.0	0.46 58.62 0.0	0.0 0.0 0.0	8.92 0.0 0.0	8.92
7	54.27 0.0 0.0	0.53 62.95 0.0	0.0 0.0 0.0	8.68 0.0 0.0	8.68
8	58.84 0.0 0.0	0.59 67.06 0.0	0.0 0.0 0.0	8.22 0.0 0.0	8.22
9	63.41 0.0 0.0	0.64 71.0 0.0	0.0 0.0 0.0	7.59 0.0 0.0	7.59
10	67.99 0.0 0.0	0.7 74.8 0.0	0.0 0.0 0.0	6.81 0.0 0.0	6.81
11	72.56 0.0 0.0	0.75 78.47 0.0	0.0 0.0 0.0	5.91 0.0 0.0	5.91
12	77.13 0.0 0.0	0.8 82.03 0.0	0.0 0.0 0.0	4.9 0.0 0.0	4.9
13	81.7 0.0 0.0	0.86 85.5 0.0	0.0 0.0 0.0	3.8 0.0 0.0	3.8
14	86.27 0.0 0.0	0.9 88.87 0.0	0.0 0.0 0.0	2.61 0.0 0.0	2.61
15	90.84 0.0 0.0	0.95 92.18 0.0	0.0 0.0 0.0	1.34 0.0 0.0	1.34
16	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
17	26.85 0.0 0.0	0.0 26.85 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
18	43.99 0.0 0.0	0.38 52.83 0.0	0.0 0.0 0.0	8.84 0.0 0.0	8.84
19	61.13 0.0 0.0	0.62 69.05 0.0	0.0 0.0 0.0	7.92 0.0 0.0	7.92
20	78.27 0.0 0.0	0.82 82.9 0.0	0.0 0.0 0.0	4.64 0.0 0.0	4.64
21	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps) $\Delta E^*_{\text{CIELAB}} = 5.6$

Mean lightness difference (5 steps) $\Delta L^*_{\text{CIELAB}} = 4.3$

Mean colour reproduction index: $R^*_{ab,m} = 76$

OE730-3N-134-11: File: Measure unknown; Device: Device unknown; Date: Date unknown

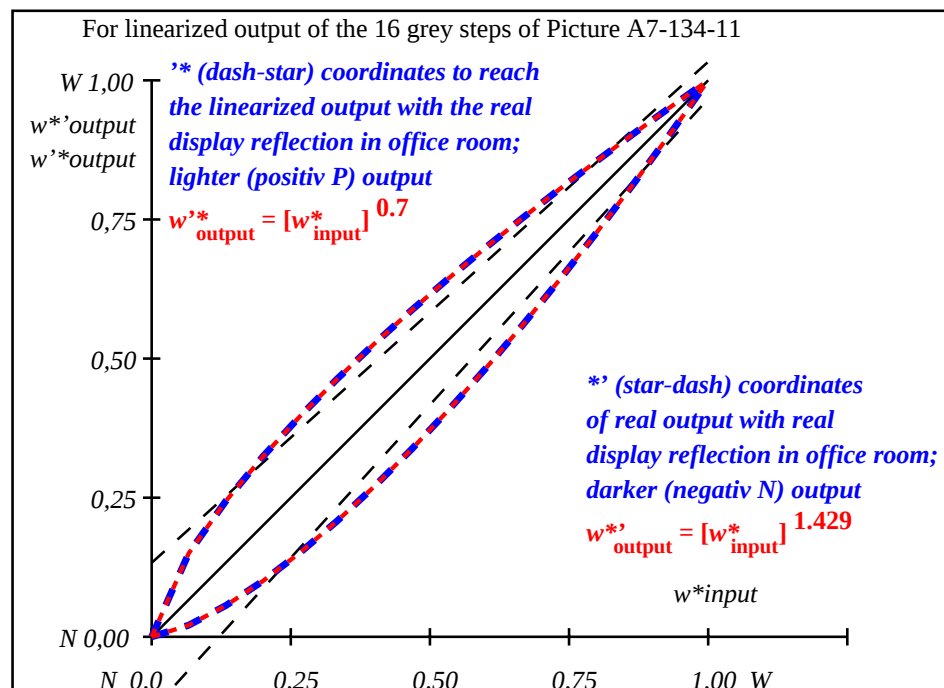

OE731-3N-134-11: File: Measure unknown; Device: Device unknown; Date: Date unknown

L^*/Y_{intended} (absolute)	26.8/5.0	31.4/6.8	36.0/9.0	40.6/11.6	45.1/14.6	49.7/18.2	54.3/22.2	58.8/26.9	63.4/32.1	68.0/38.0	72.6/44.5	77.1/51.7	81.7/59.7	86.3/68.5	90.8/78.1	95.4/88.6
$w^* w^* w^*$ setrgb $g_P=0.7$ No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*_{\text{CIELAB},r}$ (relative)	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
w^*_{intended}	0.0	0.151	0.244	0.324	0.397	0.463	0.527	0.587	0.644	0.699	0.753	0.805	0.855	0.905	0.953	1.0

OE730-7N, Picture A7-134-11: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^* \text{setrgbcolor}$

OE73: In-output relation according to ISO 9241-306; 1MR, DH
Viewing Y contrast $Y_W:Y_N=88,9:5$; Y_N range 3,75 to <7,5

input: cmy0 ($\rightarrow \text{cmy0}^*_{\text{d}}$) setcmyk
output 134-11: $g_P=0.7$; $g_N=1.0$

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 40/360 = 0.111$


lab^*tch and lab^*nch

D65: hue O

LCH*Ma: 51 100 40

olv*Ma: 1.0 0.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 40/360 = 0.111$


lab^*tch and lab^*nch

D65: hue O

LCH*Ma: 51 100 40

olv*Ma: 1.0 0.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

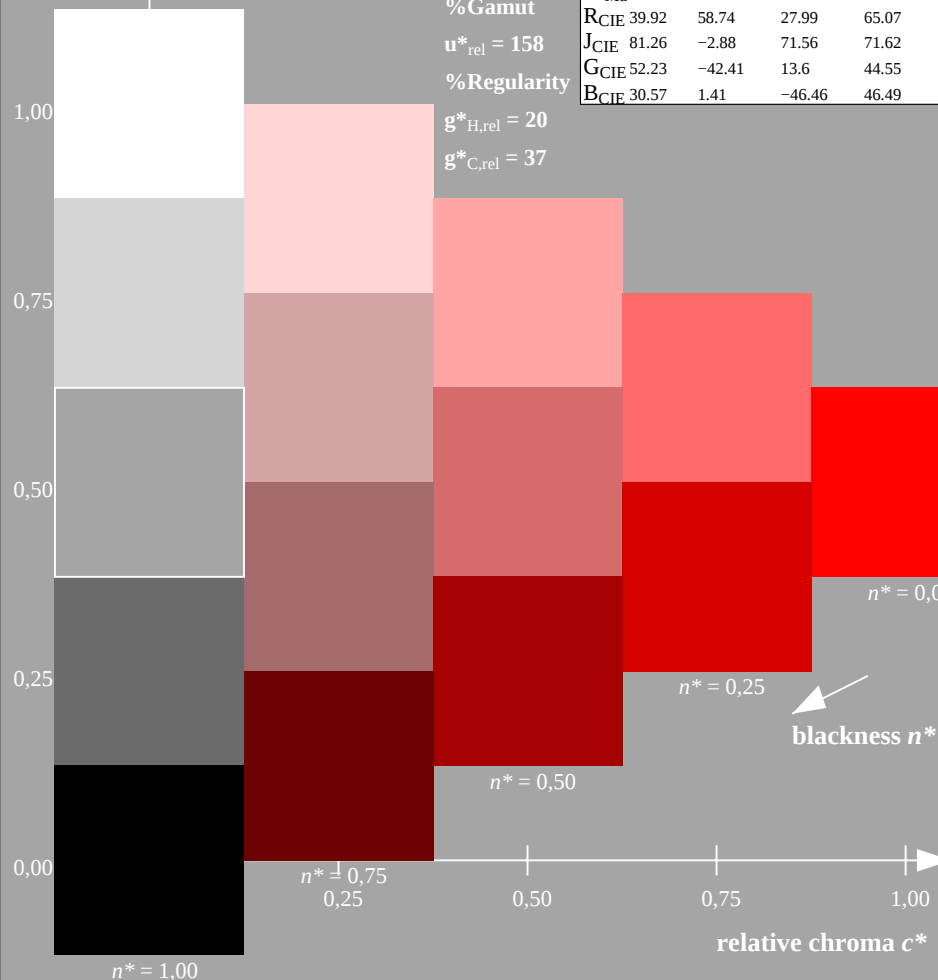

OE730-7N-130-0: 5 step scales for constant CIELAB hue 40/360 = 0.111 (left)

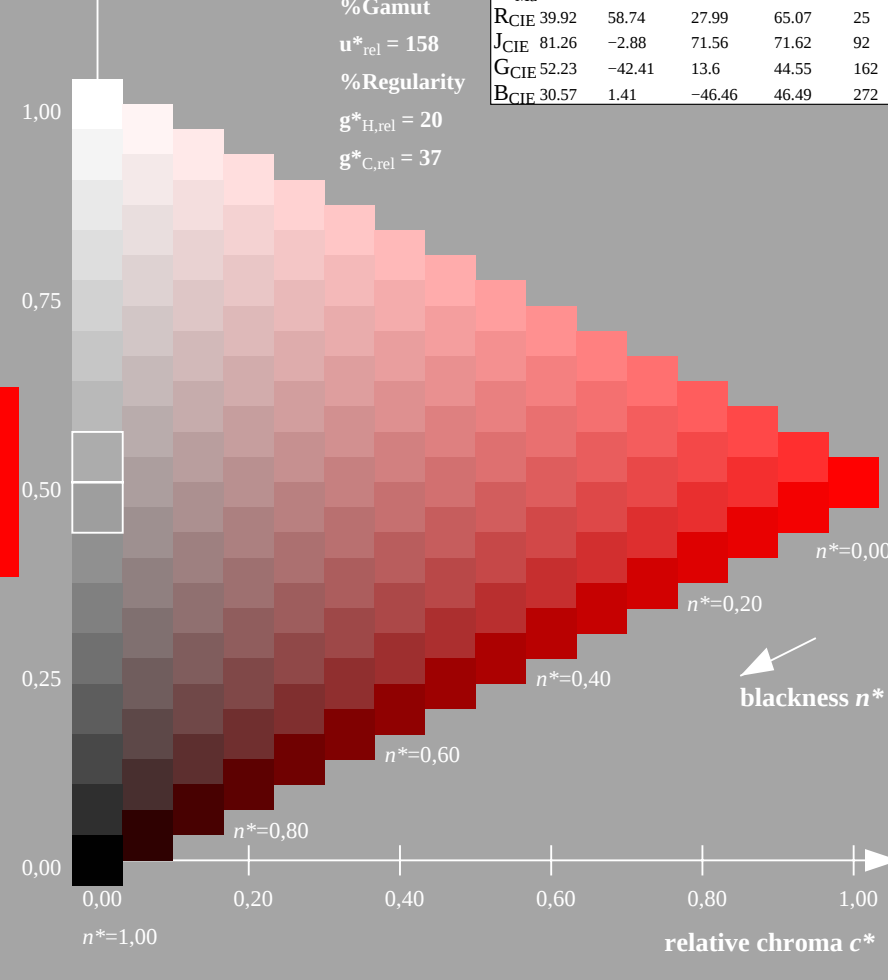

16 step scales for constant CIELAB hue 40/360 = 0.111 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue O; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{d}$) $setcmyk$
output 135-0: $g_P=0.62$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 103/360 = 0.286$


lab^*tch and lab^*nch

D65: hue Y

LCH*Ma: 93 93 103

olv*Ma: 1.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 103/360 = 0.286$


lab^*tch and lab^*nch

D65: hue Y

LCH*Ma: 93 93 103

olv*Ma: 1.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

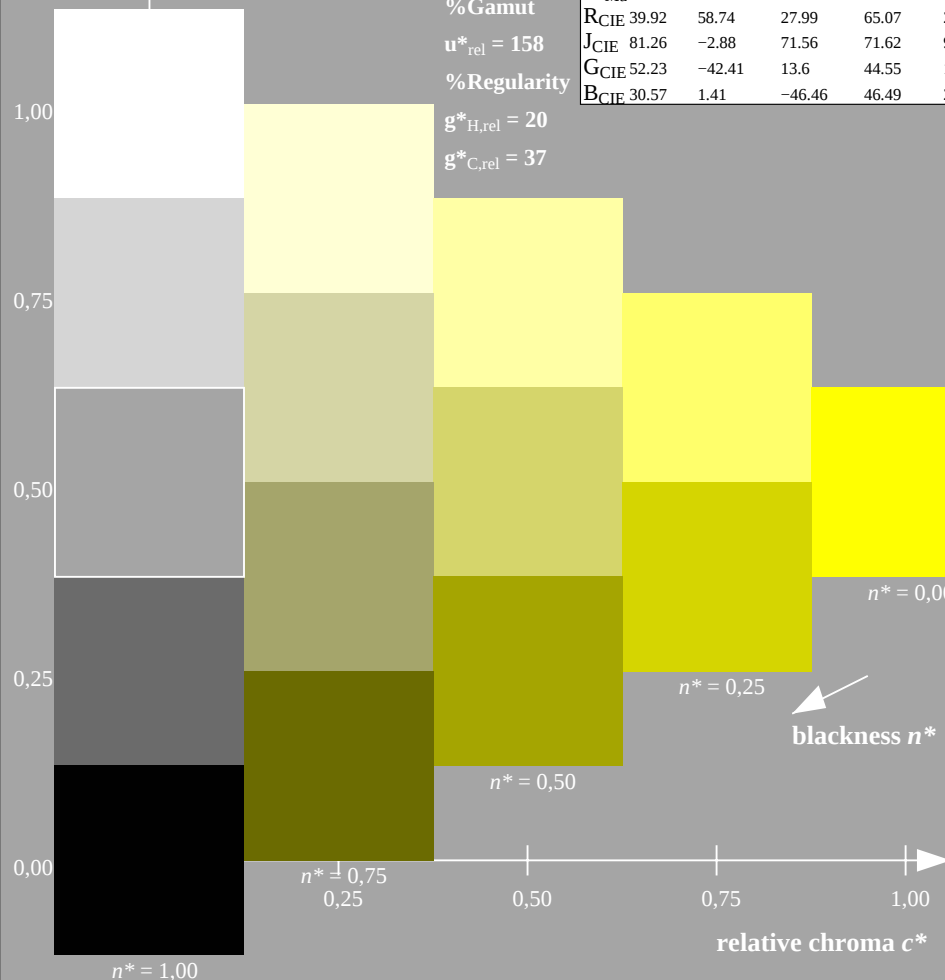

OE730-7N-130-1: 5 step scales for constant CIELAB hue 103/360 = 0.286 (left)

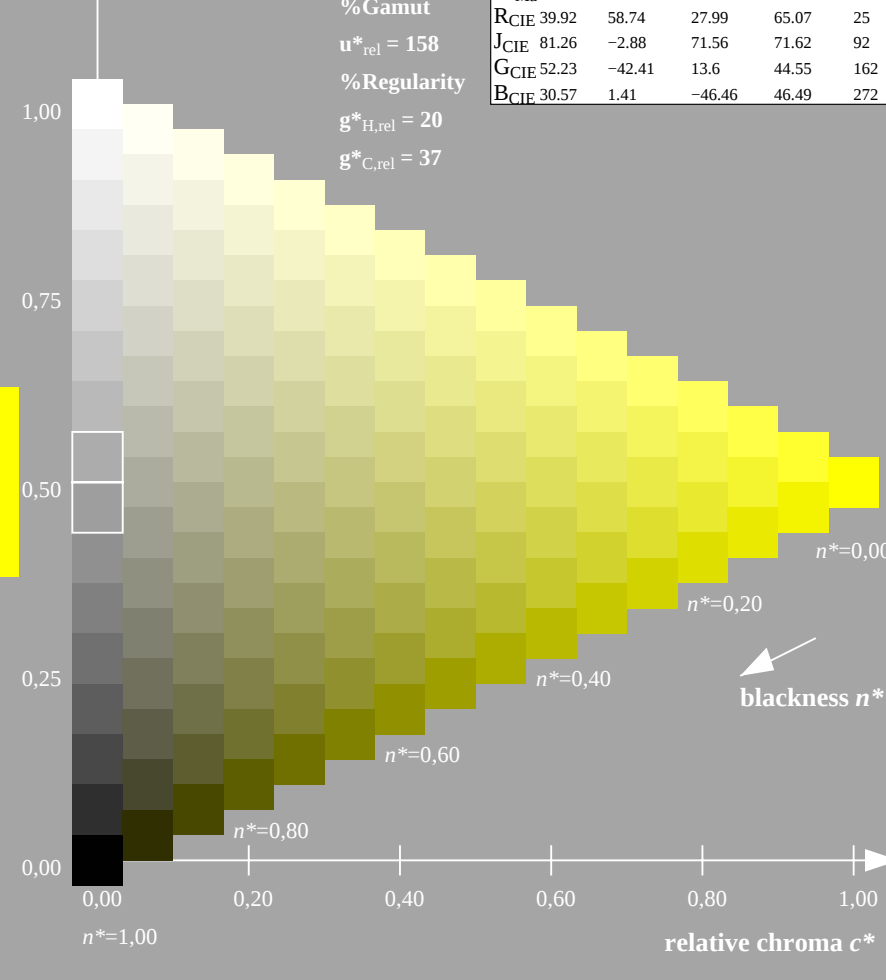

16 step scales for constant CIELAB hue 103/360 = 0.286 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue Y; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_d$) $setcmyk$
output 135-1: $g_P=0.62$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 136/360 = 0.378$


lab^*tch and lab^*nch

D65: hue L

LCH*Ma: 84 115 136

olv*Ma: 0.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 136/360 = 0.378$


lab^*tch and lab^*nch

D65: hue L

LCH*Ma: 84 115 136

olv*Ma: 0.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

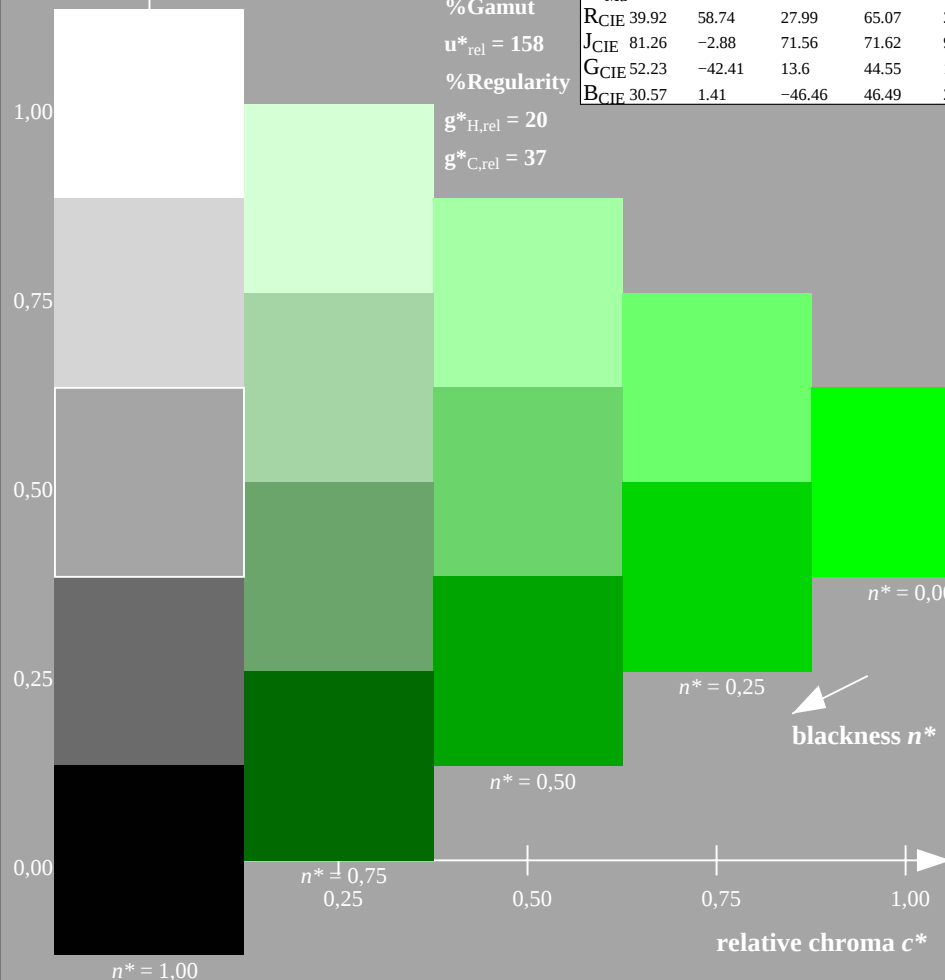

OE730-7N-130-2: 5 step scales for constant CIELAB hue 136/360 = 0.378 (left)

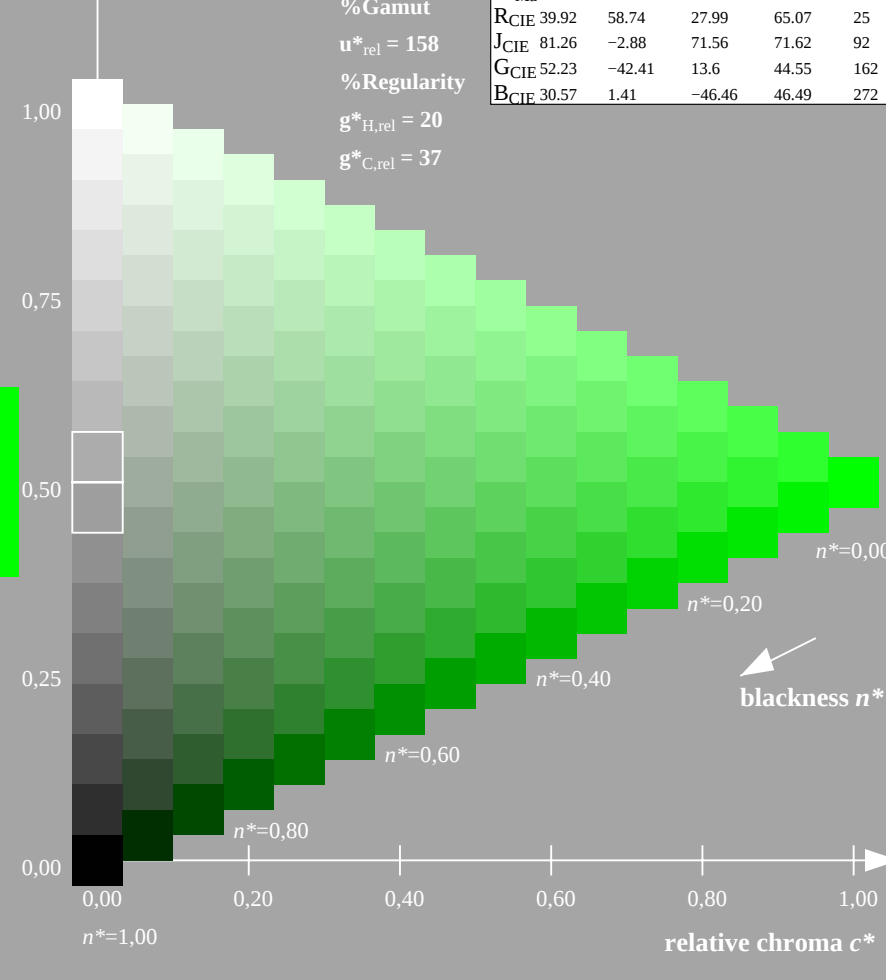

16 step scales for constant CIELAB hue 136/360 = 0.378 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue L; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{d}$) $setcmyk$
output 135-2: $g_P=0.62$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 196/360 = 0.545$


lab^*tch and lab^*nch

D65: hue C

LCH*Ma: 87 48 196

olv*Ma: 0.0 1.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 196/360 = 0.545$


lab^*tch and lab^*nch

D65: hue C

LCH*Ma: 87 48 196

olv*Ma: 0.0 1.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

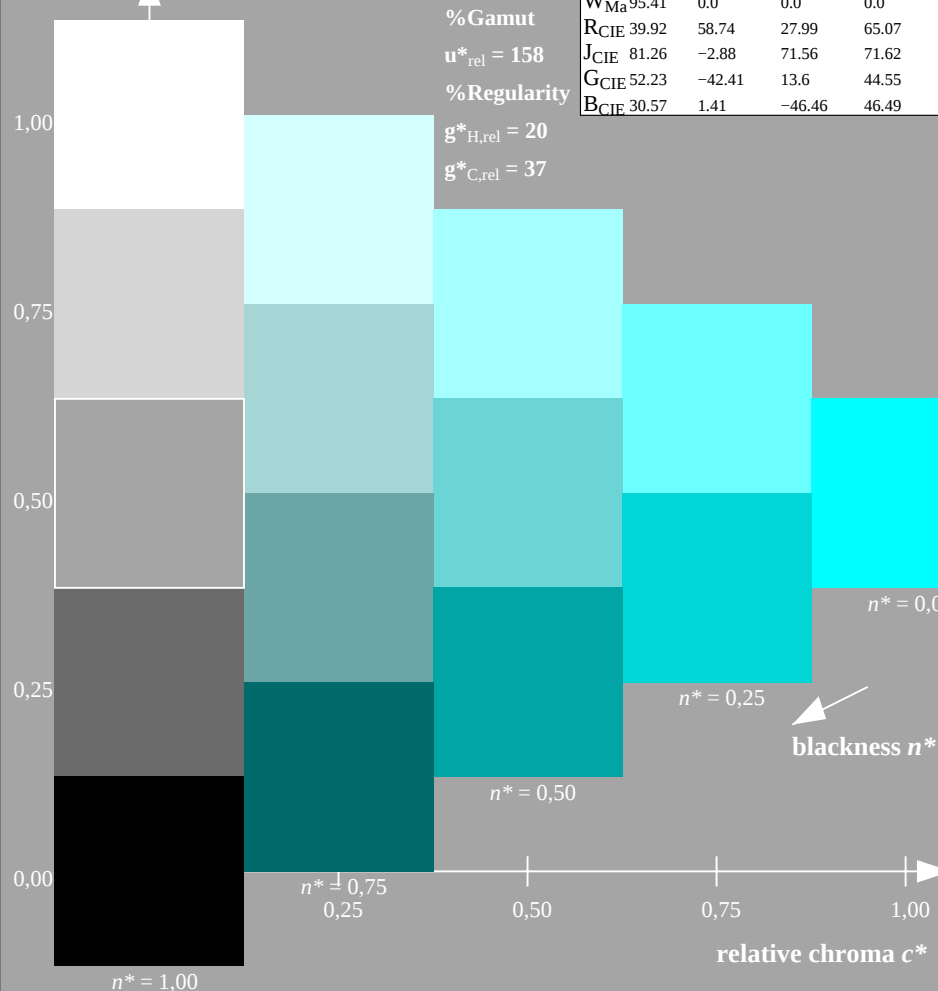

OE730-7N-130-3: 5 step scales for constant CIELAB hue 196/360 = 0.545 (left)

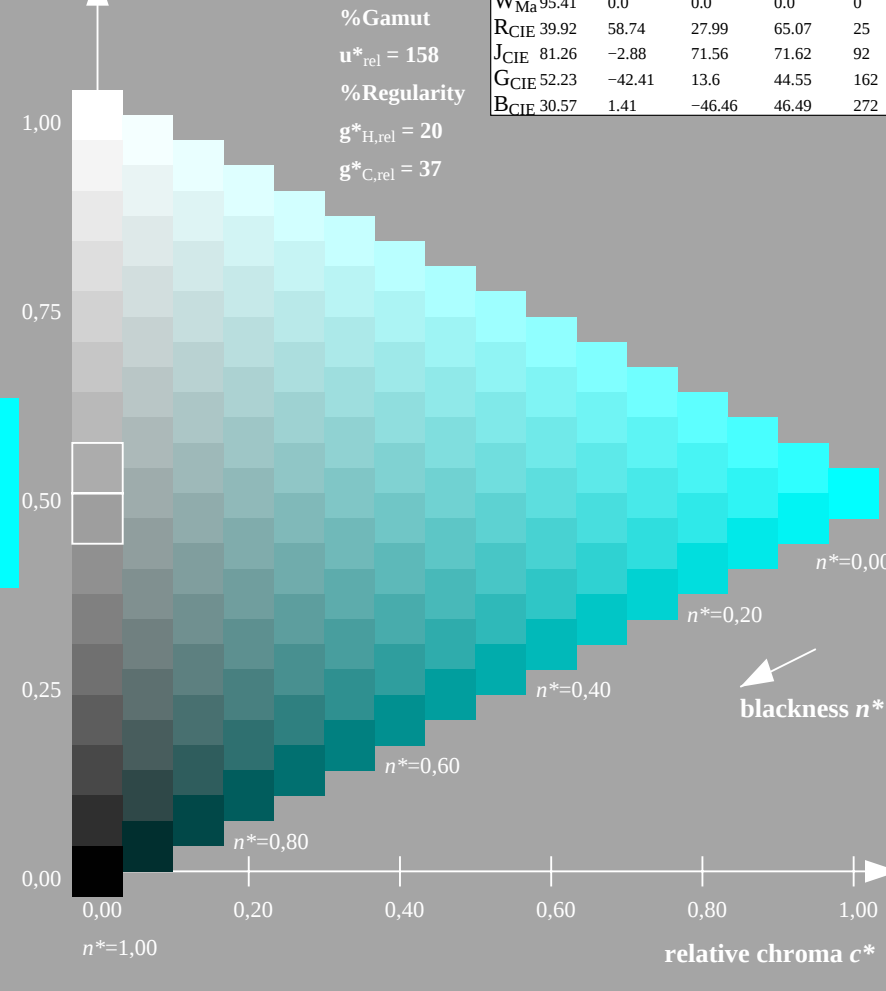

16 step scales for constant CIELAB hue 196/360 = 0.545 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue C; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{\Delta}$) $setcmyk$
output 135-3: $g_P=0.62$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 306/360 = 0.851$


lab^*tch and lab^*nch

D65: hue V

LCH*Ma: 30 129 306

olv*Ma: 0.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 306/360 = 0.851$


lab^*tch and lab^*nch

D65: hue V

LCH*Ma: 30 129 306

olv*Ma: 0.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

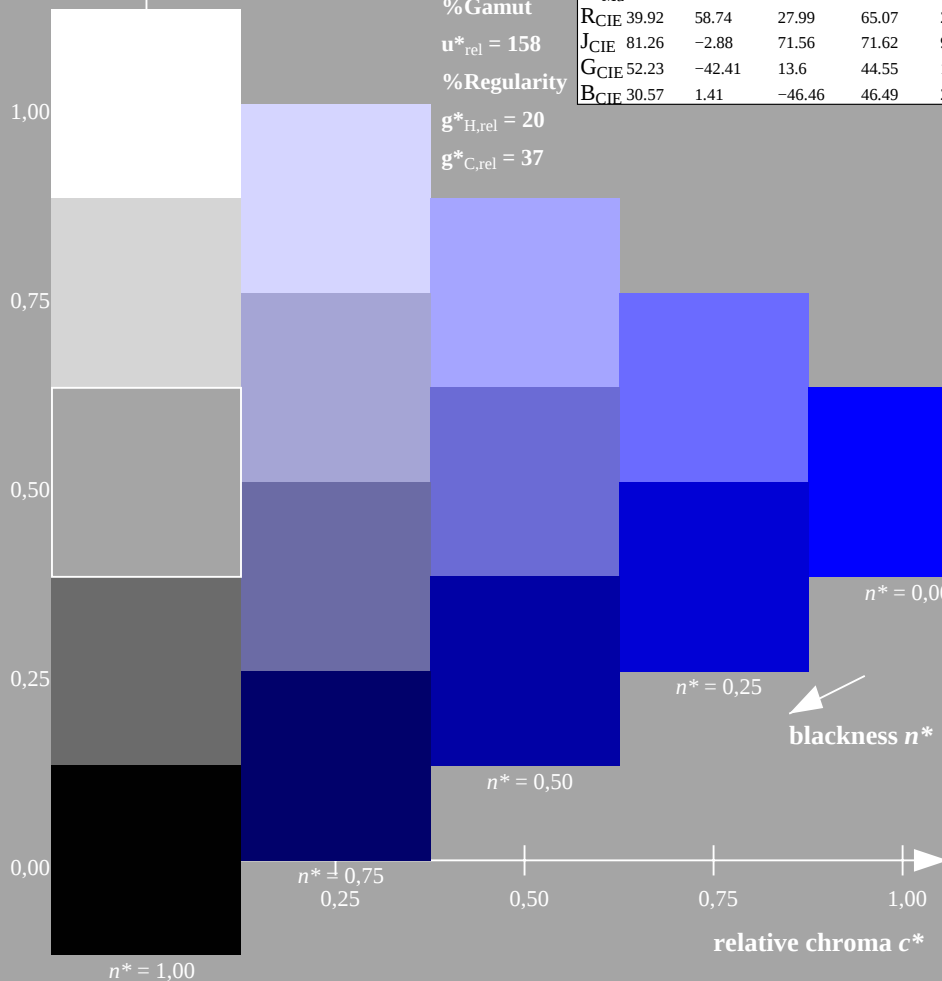

OE730-7N-130-4: 5 step scales for constant CIELAB hue 306/360 = 0.851 (left)

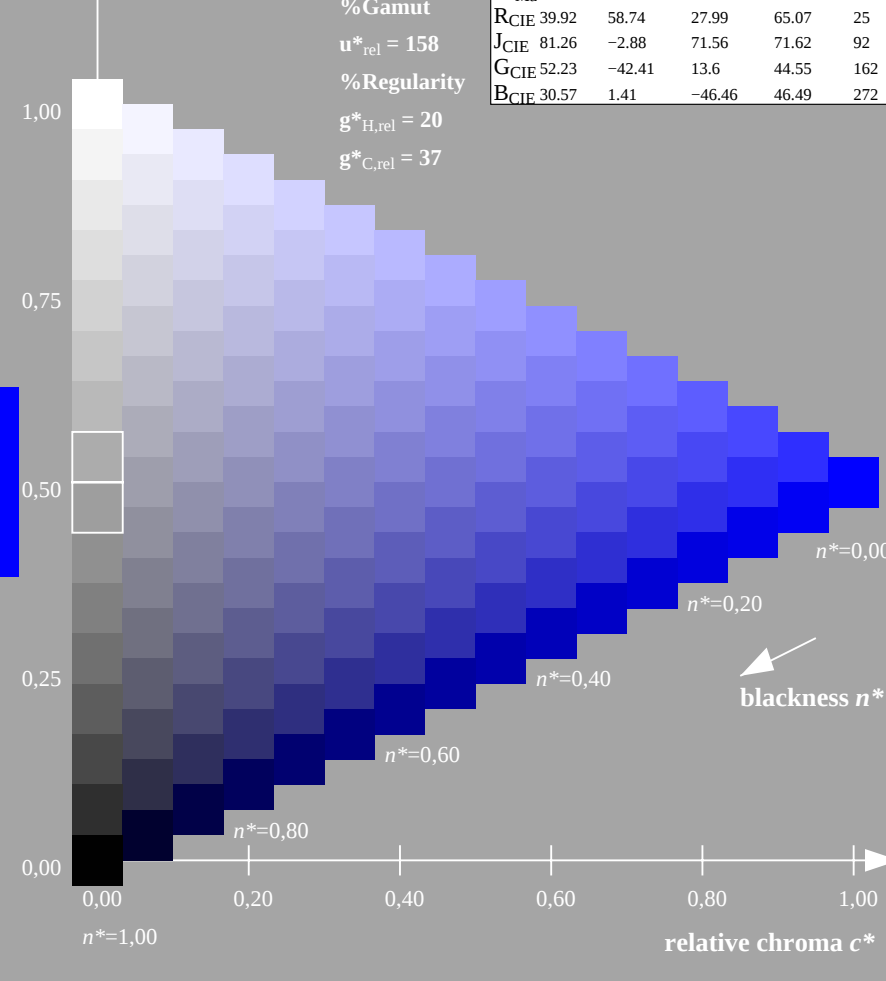

16 step scales for constant CIELAB hue 306/360 = 0.851 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue V; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_d$) $setcmyk$
output 135-4: $g_P=0.62$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 328/360 = 0.912$


lab^*tch and lab^*nch

D65: hue M

LCH*Ma: 57 111 328

ol v^* Ma: 1.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data					
	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 328/360 = 0.912$


lab^*tch and lab^*nch

D65: hue M

LCH*Ma: 57 111 328

ol v^* Ma: 1.0 0.0 1.0

triangle lightness t^*



%Gamut


$u^*_{rel} = 158$

%Regularity


$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data					
	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

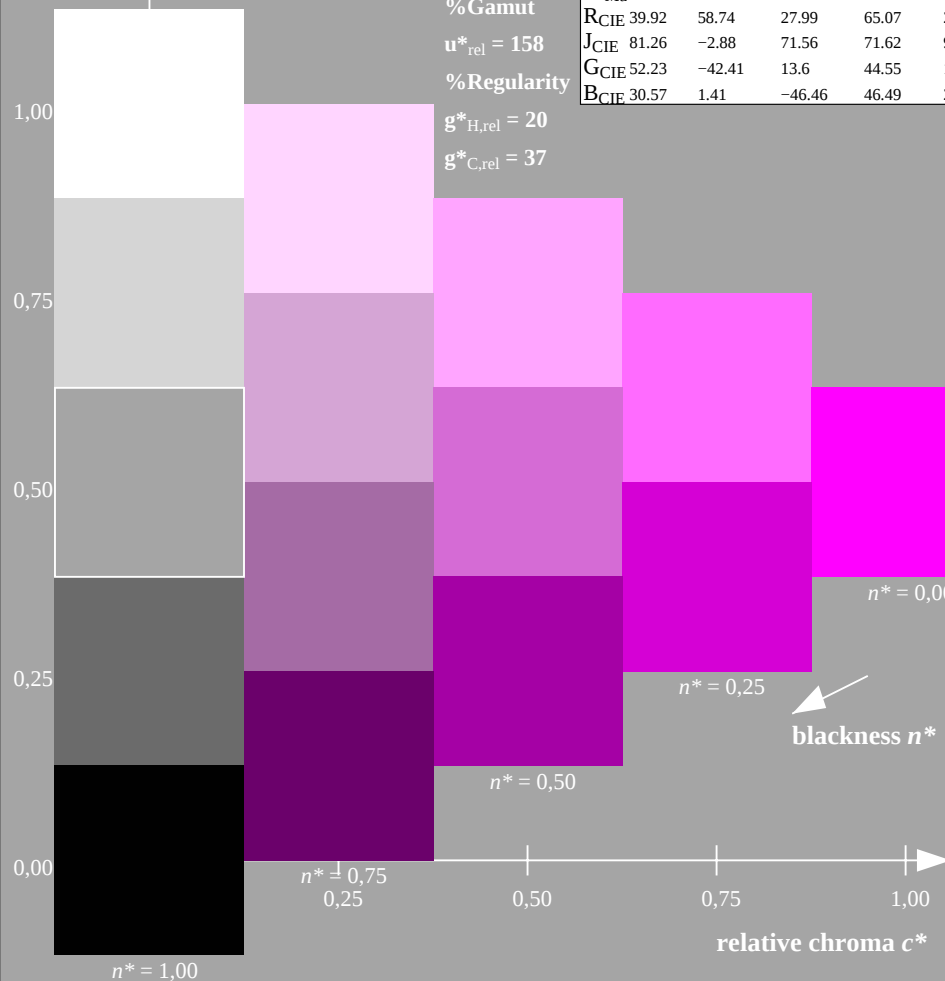

OE730-7N-130-5: 5 step scales for constant CIELAB hue 328/360 = 0.912 (left)

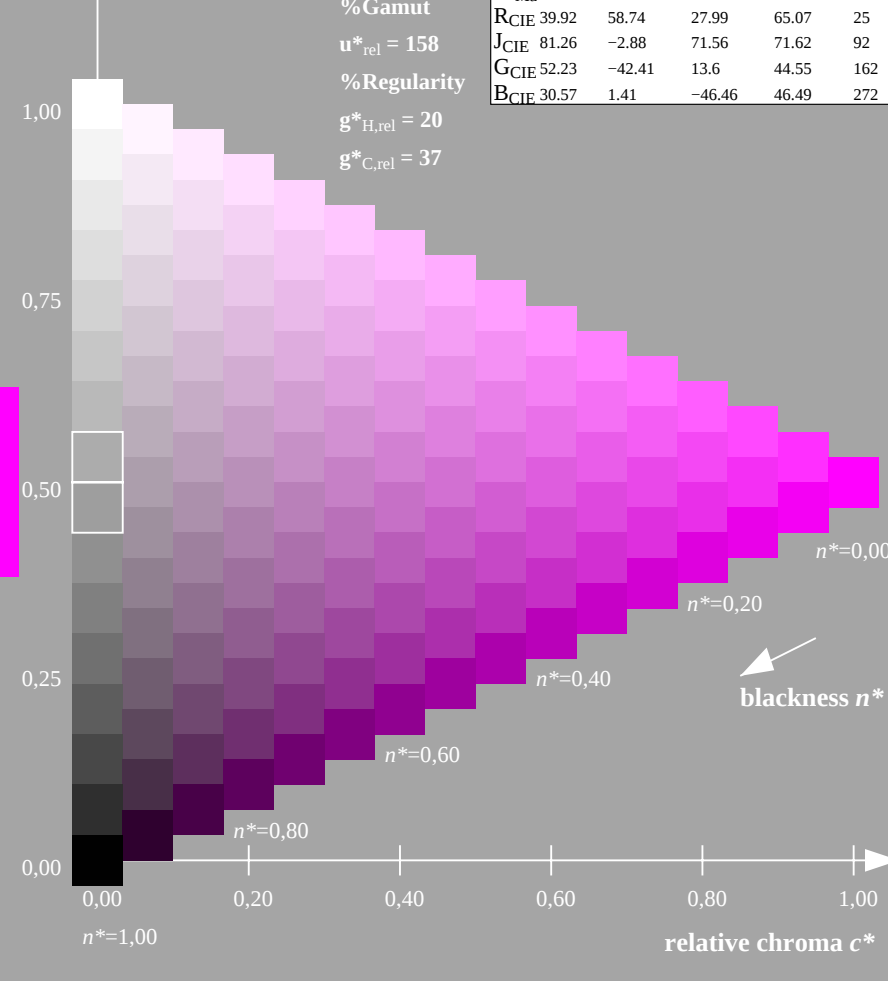

16 step scales for constant CIELAB hue 328/360 = 0.912 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue M; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{\Delta}$) $setcmyk$
output 135-5: $g_P=0.62$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 25/360 = 0.071$


lab^*tch and lab^*nch

D65: hue R

LCH*Ma: 52 89 25

olv*Ma: 1.0 0.0 0.21

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 25/360 = 0.071$


lab^*tch and lab^*nch

D65: hue R

LCH*Ma: 52 89 25

olv*Ma: 1.0 0.0 0.21

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

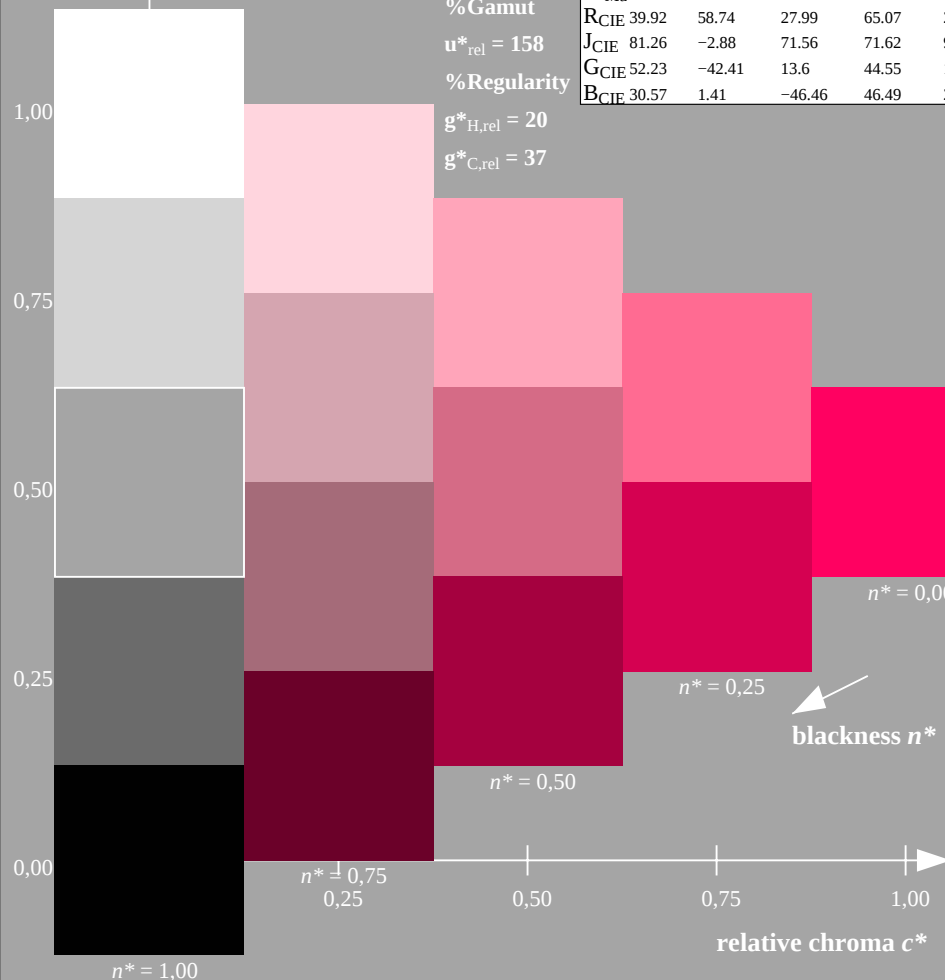

OE730-7N-130-6: 5 step scales for constant CIELAB hue 25/360 = 0.071 (left)

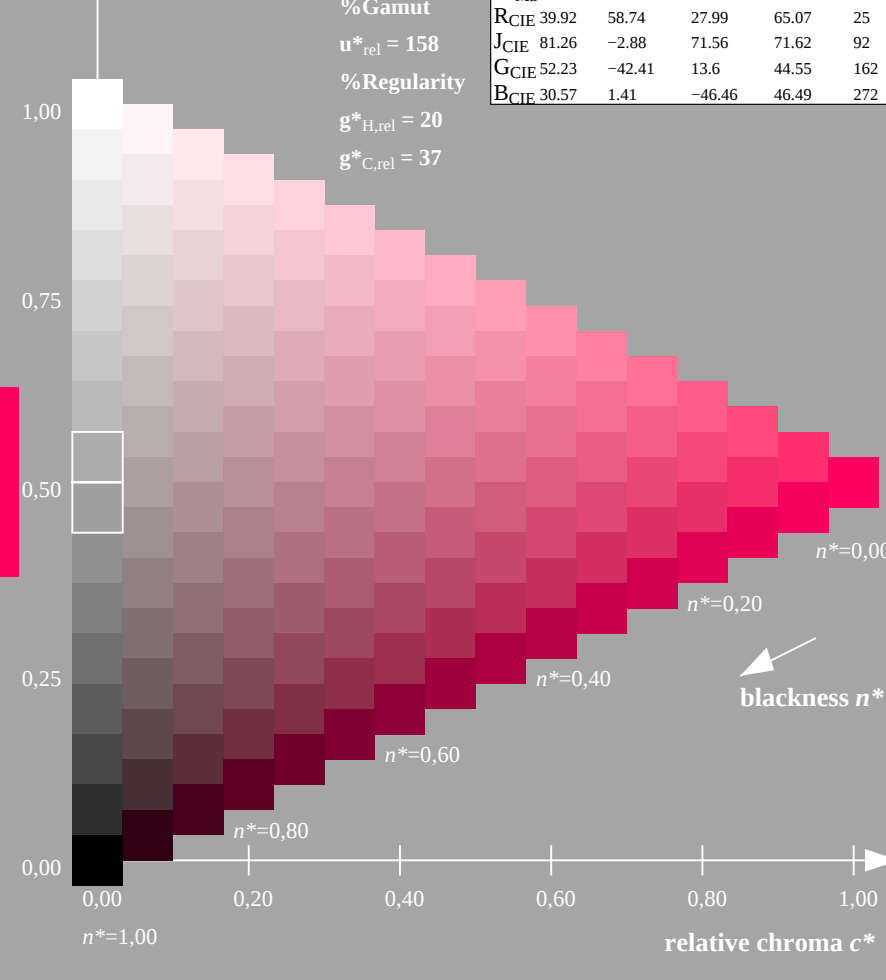

16 step scales for constant CIELAB hue 25/360 = 0.071 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue R; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 135-6: $g_P=0.62$; $g_N=1.0$

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 92/360 = 0.256$


lab^*tch and lab^*nch

D65: hue J

LCH*Ma: 85 86 92

ol v^* Ma: 1.0 0.82 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 92/360 = 0.256$


lab^*tch and lab^*nch

D65: hue J

LCH*Ma: 85 86 92

ol v^* Ma: 1.0 0.82 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

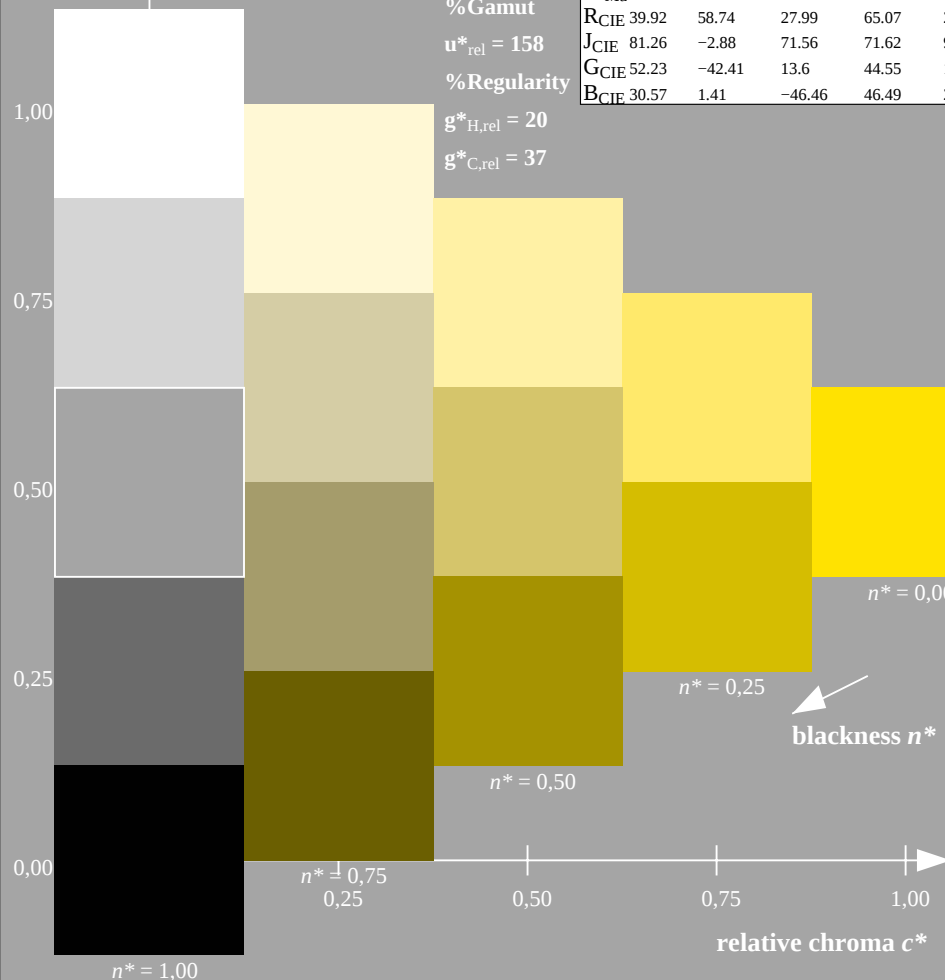

OE730-7N-130-7: 5 step scales for constant CIELAB hue 92/360 = 0.256 (left)

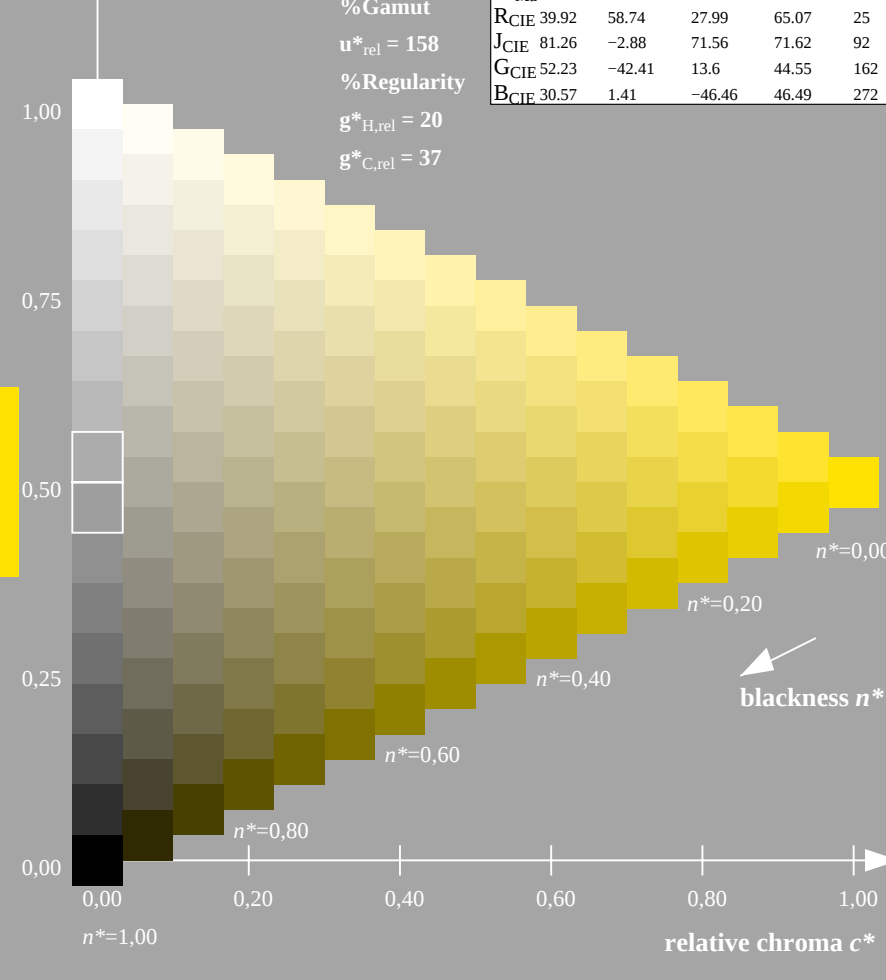

16 step scales for constant CIELAB hue 92/360 = 0.256 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue J; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 135-7: $g_P=0.62$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 162/360 = 0.451$


lab^*tch and lab^*nch

D65: hue G

LCH*Ma: 86 62 162

ol v^* Ma: 0.0 1.0 0.65

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 162/360 = 0.451$


lab^*tch and lab^*nch

D65: hue G

LCH*Ma: 86 62 162

ol v^* Ma: 0.0 1.0 0.65

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

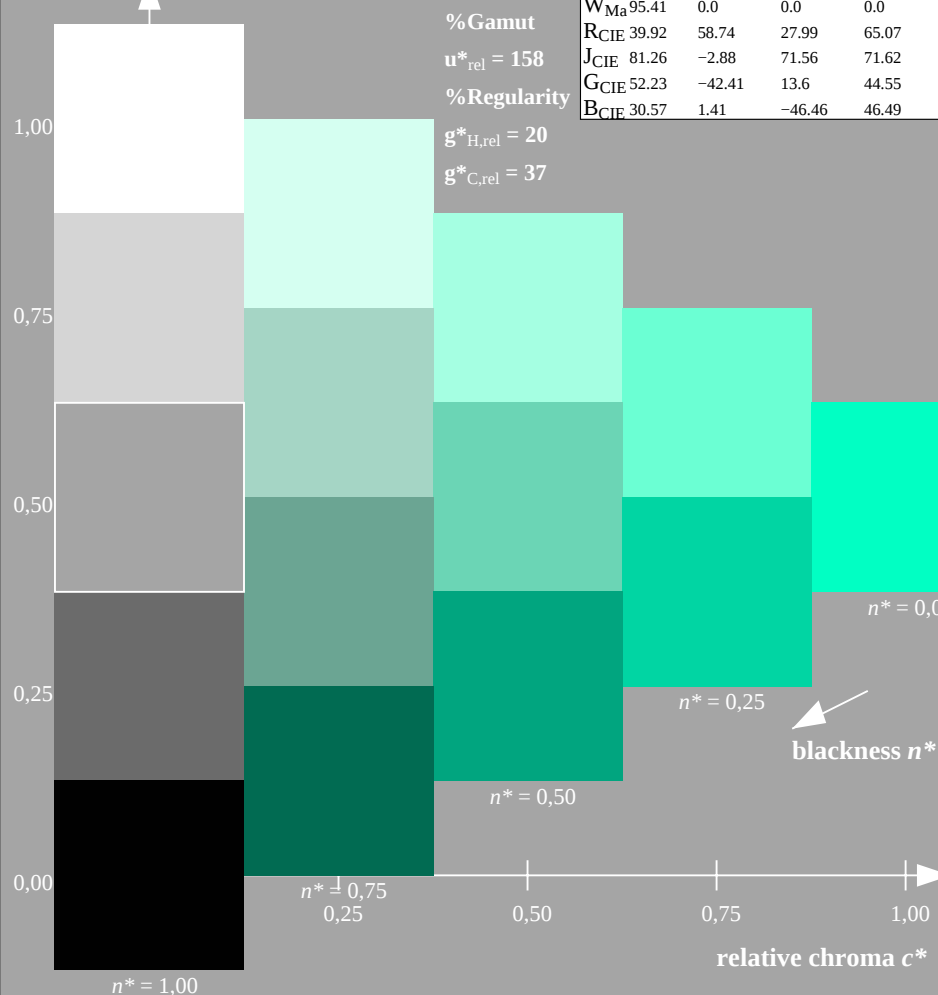

OE730-7N-130-8: 5 step scales for constant CIELAB hue 162/360 = 0.451 (left)

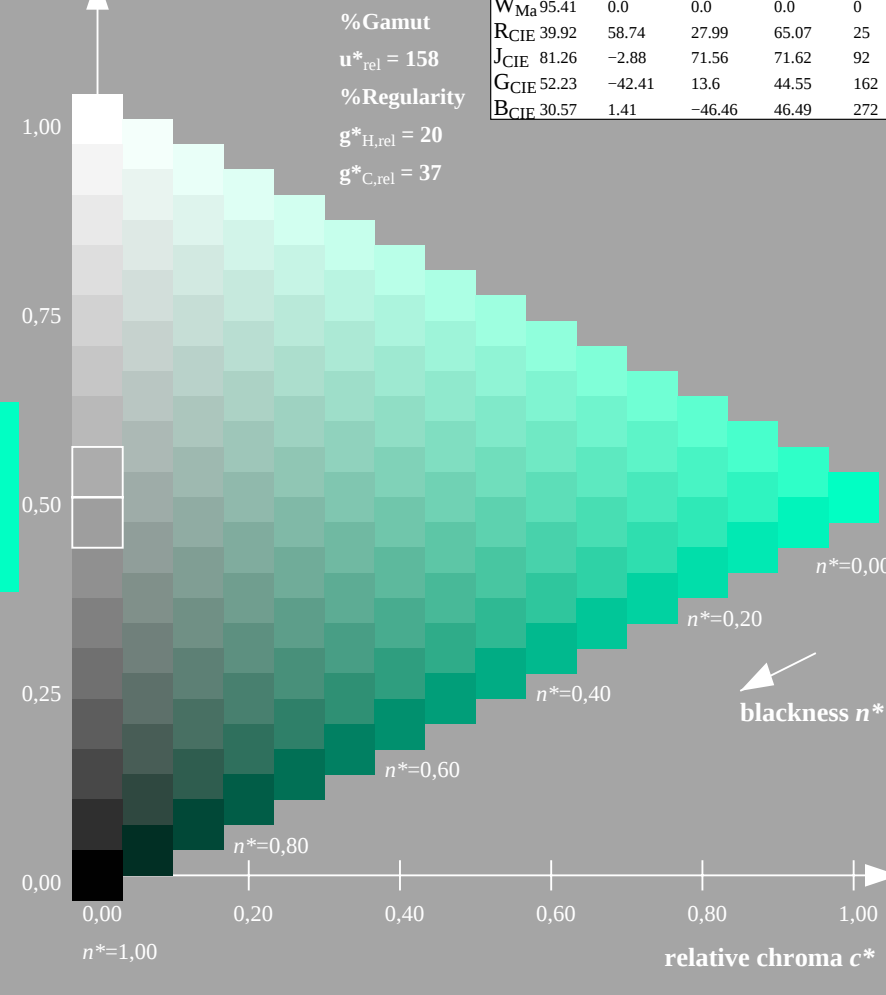

16 step scales for constant CIELAB hue 162/360 = 0.451 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue G; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 135-8: $g_P=0.62$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 272/360 = 0.755$


lab^*tch and lab^*nch

D65: hue B

LCH*Ma: 65 49 272

ol v^* Ma: 0.0 0.61 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 272/360 = 0.755$


lab^*tch and lab^*nch

D65: hue B

LCH*Ma: 65 49 272

ol v^* Ma: 0.0 0.61 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

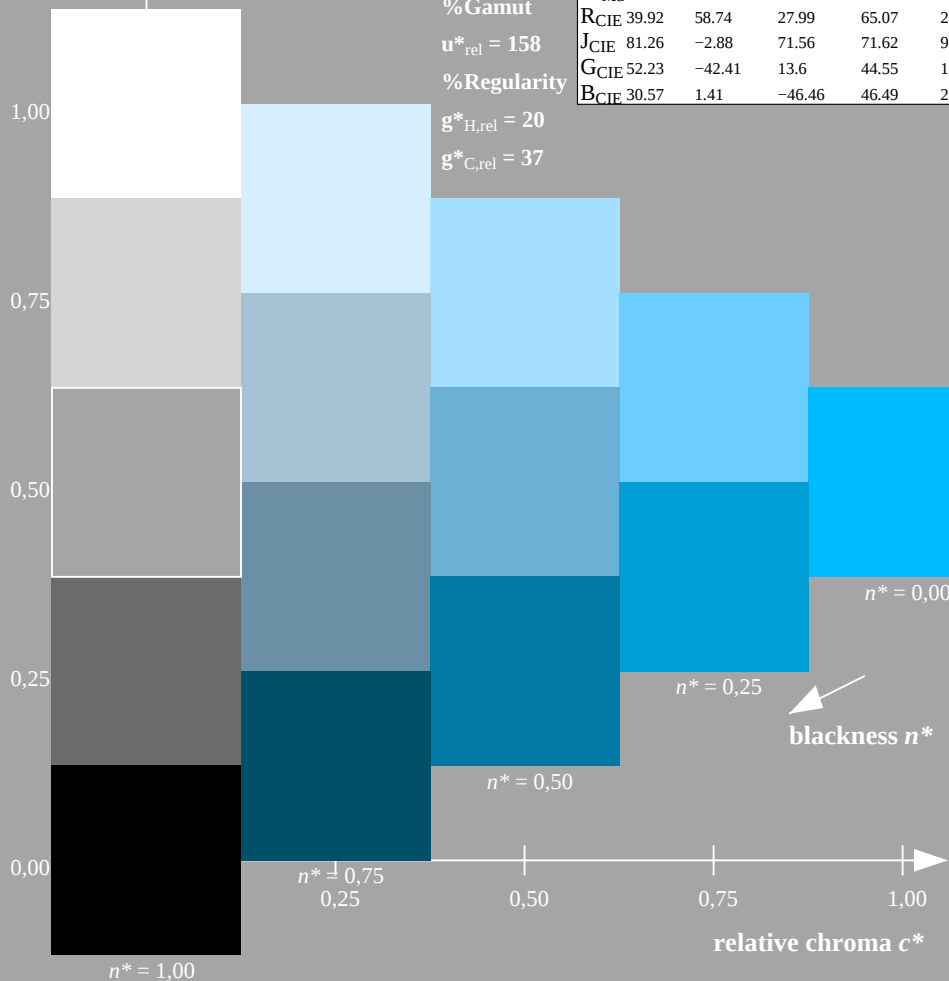

OE730-7N-130-9: 5 step scales for constant CIELAB hue 272/360 = 0.755 (left)

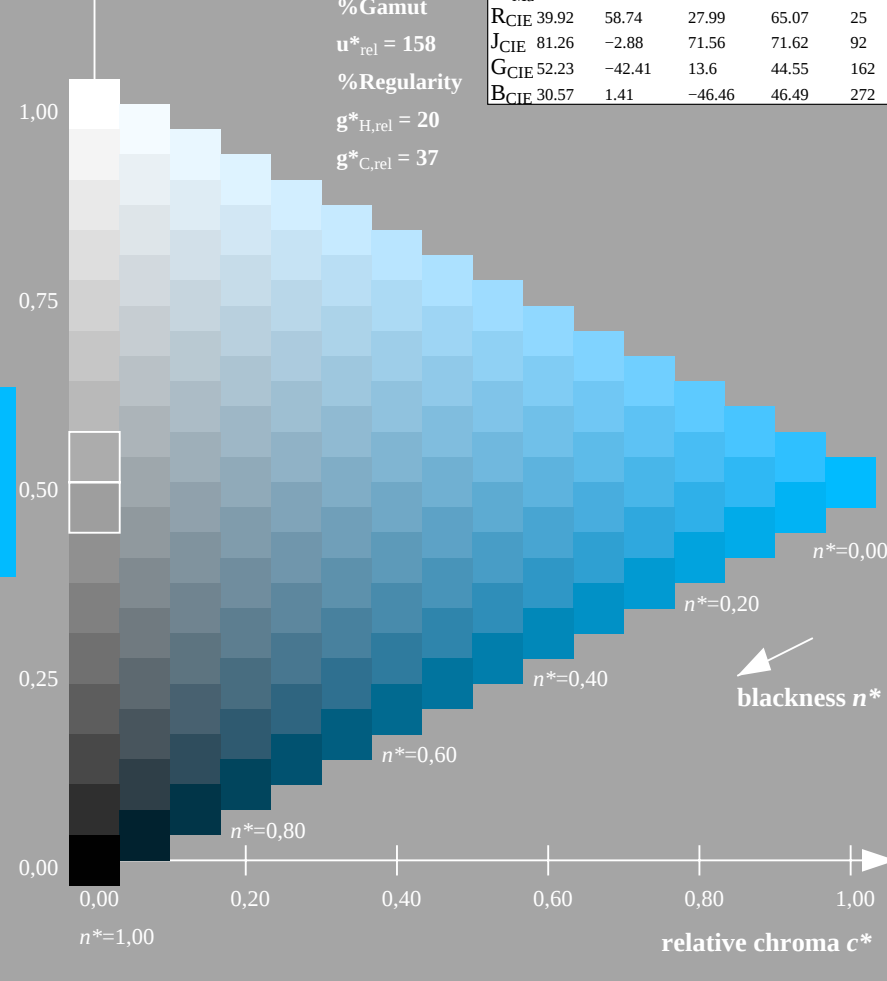

16 step scales for constant CIELAB hue 272/360 = 0.755 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue B; 1MR, DH
Discrimination of 5 and 16 step colour scales


input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 135-9: $g_P=0.62$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Discriminability of 5 step colour series (Yes/No decision)

Layout example: three 5 step colour series

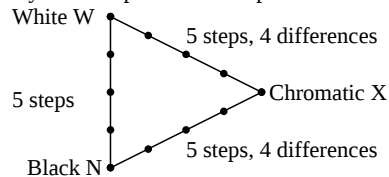

There are three basic colours on each page:
Black N, White W and Chromatic X.
Ten pages include 10 hue planes
X = OYLCVM and RJGB.
There are at maximum 12 distinguishable steps.

All steps of the three series N-W, W-X and X-N should be distinguishable on all pages.

Are the three 5step series distinguishable on all pages? underline: Yes/No

only in case of No: Are the three 5 step series on Page x of 10 pages distinguishable?

Underline Yes/No and give in case of No the number of distinguishable steps?

- Page 1: Yes/No, if No ../12 step differences are distinguishable of O = Orange Red
Page 2: Yes/No, if No ../12 step differences are distinguishable of Y = Yellow
Page 3: Yes/No, if No ../12 step differences are distinguishable of L = Leaf green
Page 4: Yes/No, if No ../12 step differences are distinguishable of C = Cyan blue
Page 5: Yes/No, if No ../12 step differences are distinguishable of V = Violett blue
Page 6: Yes/No, if No ../12 step differences are distinguishable of M = Magenta Red
Page 7: Yes/No, if No ../12 step differences are distinguishable of R = Elementary Red
Page 8: Yes/No, if No ../12 step differences are distinguishable of J = Elementary yellow
Page 9: Yes/No, if No ../12 step differences are distinguishable of G = Elementary Green
Page 10: Yes/No, if No ../12 step differences are distinguishable of B = Elementary blue

Sum: ../10 Yes-Pages and ../120 step differences are distinguishable

Part 1

OE730-3N-135-10

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE73/OE73L0NP.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE73/OE73L0NA.PS> or underline Yes/No

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline monitor/data projector/printer

Device model, driver and version:.....

Device output with PDF/PS-file: underline PDF/PS-file

For device output with PDF-file OE73L0NP.PDF:

- either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file OE73L0NA.PS:

- either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks: Special remarks, e. g. output of Landscape (L)


.....
.....
.....

Part 3

OE730-7N-135-10

Discriminability of 16 step colour series (Yes/No decision)

Layout example: three 16 step colour series

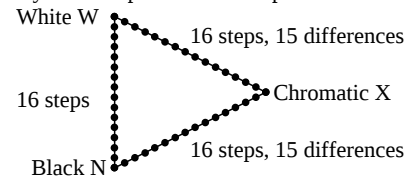

There are three basic colours on each page:
Black N, White W and Chromatic X.
Ten pages include 10 hue planes
X = OYLCVM and RJGB.
There are at maximum 45 distinguishable steps.

All steps of the three series N-W, W-X and X-N should be distinguishable on all pages.

Are the three 16step series distinguishable on all pages? underline: Yes/No

only in case of No: Are the three 16 step series on Page x of 10 pages distinguishable?

Underline Yes/No and give in case of No the number of distinguishable steps?

- Page 1: Yes/No, if No ../45 step differences are distinguishable of O = Orange Red
Page 2: Yes/No, if No ../45 step differences are distinguishable of Y = Yellow
Page 3: Yes/No, if No ../45 step differences are distinguishable of L = Leaf green
Page 4: Yes/No, if No ../45 step differences are distinguishable of C = Cyan blue
Page 5: Yes/No, if No ../45 step differences are distinguishable of V = Violett blue
Page 6: Yes/No, if No ../45 step differences are distinguishable of M = Magenta Red
Page 7: Yes/No, if No ../45 step differences are distinguishable of R = Elementary Red
Page 8: Yes/No, if No ../45 step differences are distinguishable of J = Elementary yellow
Page 9: Yes/No, if No ../45 step differences are distinguishable of G = Elementary Green
Page 10: Yes/No, if No ../45 step differences are distinguishable of B = Elementary blue

Sum: ../10 Yes-Pages and ../450 step differences are distinguishable

Part 2

OE731-3N-135-10

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test:

- either according to DIN 6160:1996 with Anomaloskop of Nagel
or with test charts using colour points according to Ishihara
or tested with, please specify:

underline Yes/No

underline Yes/unknown

underline Yes/unknown

underline Yes/unknown

For visual evaluation of the display (monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky)

underline Yes/No

PDF file: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PDF>

underline Yes/No

PS file: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PS>

underline Yes/No

Picture A7-135-2: contrast range: (>F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)

compare standard print output according to ISO/IEC 15775 with range F:0

underline range

Remark: In daylighted offices the contrast range is in many cases:

on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF-File: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PDF>

picture A7-135-2

underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PS>

picture A7-135-2

or underline Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry:

underline Yes/No

If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T

Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer
of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF

underline Yes/No

If No, please describe other method:

Part 4


OE731-7N-135-10

OE73: Form A for test chart 2 according to DIN 33872-2; 1MR, DHinput: *cmy0* (->*cmy0***g*) *setcmyk*
Discrimination of colour scales (Yes/No decision)
output 135-10: *g_P*=0.62; *g_N*=1.0

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

i	LAB*ref	l*out			LAB*out			LAB*out/c-ref			ΔE*	Start output S1
1	37.99	0.0	0.0	0.0	37.99	0.0	0.0	0.0	0.0	0.0	0.01	Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
2	41.81	0.0	0.0	0.18	48.55	0.0	0.0	6.74	0.0	0.0	6.74	
3	45.64	0.0	0.0	0.28	54.29	0.0	0.0	8.64	0.0	0.0	8.64	
4	49.47	0.0	0.0	0.37	58.99	0.0	0.0	9.52	0.0	0.0	9.52	
5	53.3	0.0	0.0	0.44	63.12	0.0	0.0	9.82	0.0	0.0	9.82	
6	57.13	0.0	0.0	0.5	66.89	0.0	0.0	9.76	0.0	0.0	9.76	
7	60.96	0.0	0.0	0.56	70.37	0.0	0.0	9.42	0.0	0.0	9.42	
8	64.78	0.0	0.0	0.62	73.65	0.0	0.0	8.87	0.0	0.0	8.87	
9	68.61	0.0	0.0	0.68	76.75	0.0	0.0	8.14	0.0	0.0	8.14	
10	72.44	0.0	0.0	0.73	79.71	0.0	0.0	7.27	0.0	0.0	7.27	
11	76.27	0.0	0.0	0.78	82.56	0.0	0.0	6.29	0.0	0.0	6.29	
12	80.1	0.0	0.0	0.82	85.29	0.0	0.0	5.19	0.0	0.0	5.19	
13	83.93	0.0	0.0	0.87	87.93	0.0	0.0	4.01	0.0	0.0	4.01	
14	87.75	0.0	0.0	0.91	90.5	0.0	0.0	2.74	0.0	0.0	2.74	
15	91.58	0.0	0.0	0.96	92.99	0.0	0.0	1.4	0.0	0.0	1.4	Mean lightness difference (16 steps)
16	95.41	0.0	0.0	1.0	95.41	0.0	0.0	0.0	0.0	0.0	0.01	ΔE*CIELAB = 6.1
17	37.99	0.0	0.0	0.0	37.99	0.0	0.0	0.0	0.0	0.0	0.01	
18	52.34	0.0	0.0	0.42	62.13	0.0	0.0	9.79	0.0	0.0	9.79	
19	66.7	0.0	0.0	0.65	75.22	0.0	0.0	8.52	0.0	0.0	8.52	
20	81.05	0.0	0.0	0.84	85.96	0.0	0.0	4.91	0.0	0.0	4.91	Mean lightness difference (5 steps)
21	95.41	0.0	0.0	1.0	95.41	0.0	0.0	0.0	0.0	0.0	0.01	ΔL*CIELAB = 4.6
Mean colour reproduction index:											R*ab,m = 73	

OE730-3N-135-11: File: Measure unknown; Device: Device unknown; Date: Date unknown

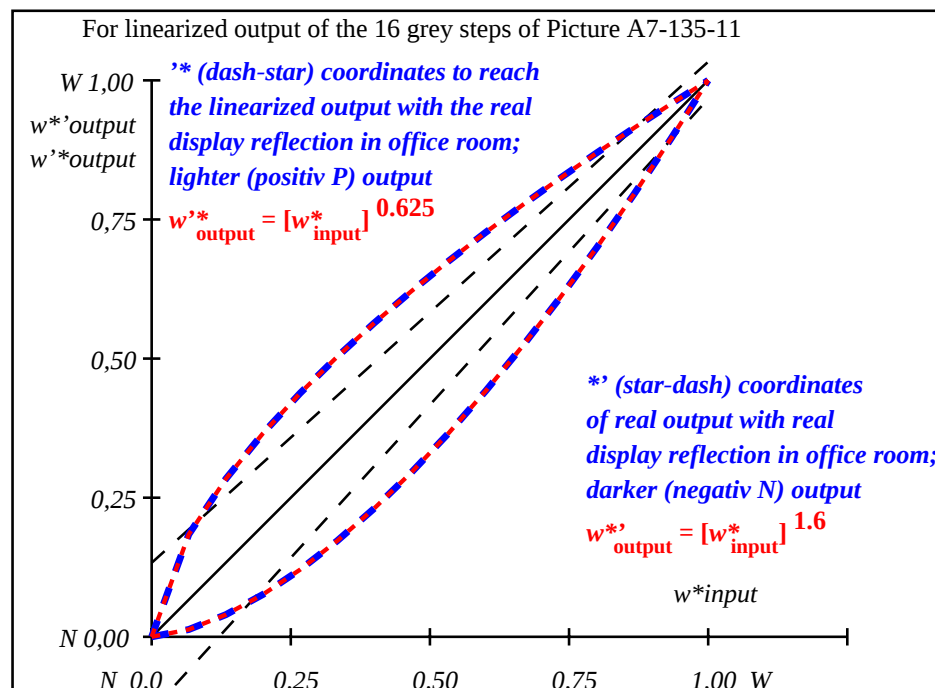

OE731-3N-135-11: File: Measure unknown; Device: Device unknown; Date: Date unknown

L^*/Y_{intended} (absolute)	38.0/10.1	41.8/12.4	45.6/15.0	49.5/18.0	53.3/21.3	57.1/25.1	61.0/29.2	64.8/33.8	68.6/38.8	72.4/44.3	76.3/50.3	80.1/56.9	83.9/63.9	87.8/71.6	91.6/79.8	95.4/88.6
$w^* w^* w^*$ setrgb $g_P=0.63$ No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*_{\text{CIELAB},r}$ (relative)	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
w^*_{intended} w^*_{out}	0.000 0.0	0.067 0.185	0.133 0.283	0.200 0.366	0.267 0.438	0.333 0.503	0.400 0.564	0.467 0.621	0.533 0.675	0.600 0.727	0.667 0.776	0.733 0.824	0.800 0.87	0.867 0.915	0.933 0.958	1.000 1.0

OE730-7N, Picture A7-135-11: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*$ setrgbcolor

OE73: In-output relation according to ISO 9241-306; 1MR, DH
Viewing Y contrast $Y_W:Y_N=88,9:10$; Y_N range 7,5 to <15

input: cmy0 ($\rightarrow \text{cmy0}^*_{\text{d}}$) setcmyk
output 135-11: $g_P=0.62$; $g_N=1.0$

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 40/360 = 0.111$


lab^*tch and lab^*nch

D65: hue O

LCH*Ma: 51 100 40

olv*Ma: 1.0 0.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 40/360 = 0.111$


lab^*tch and lab^*nch

D65: hue O

LCH*Ma: 51 100 40

olv*Ma: 1.0 0.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

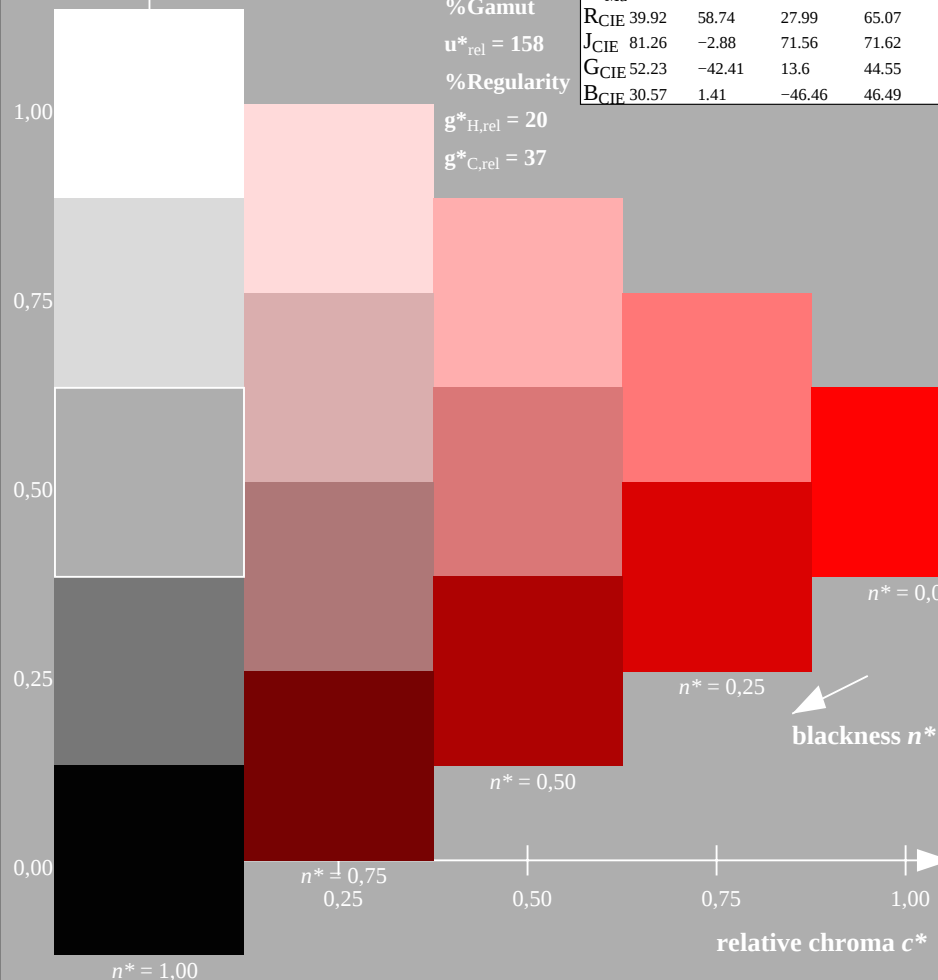

OE730-7N-130-0: 5 step scales for constant CIELAB hue 40/360 = 0.111 (left)

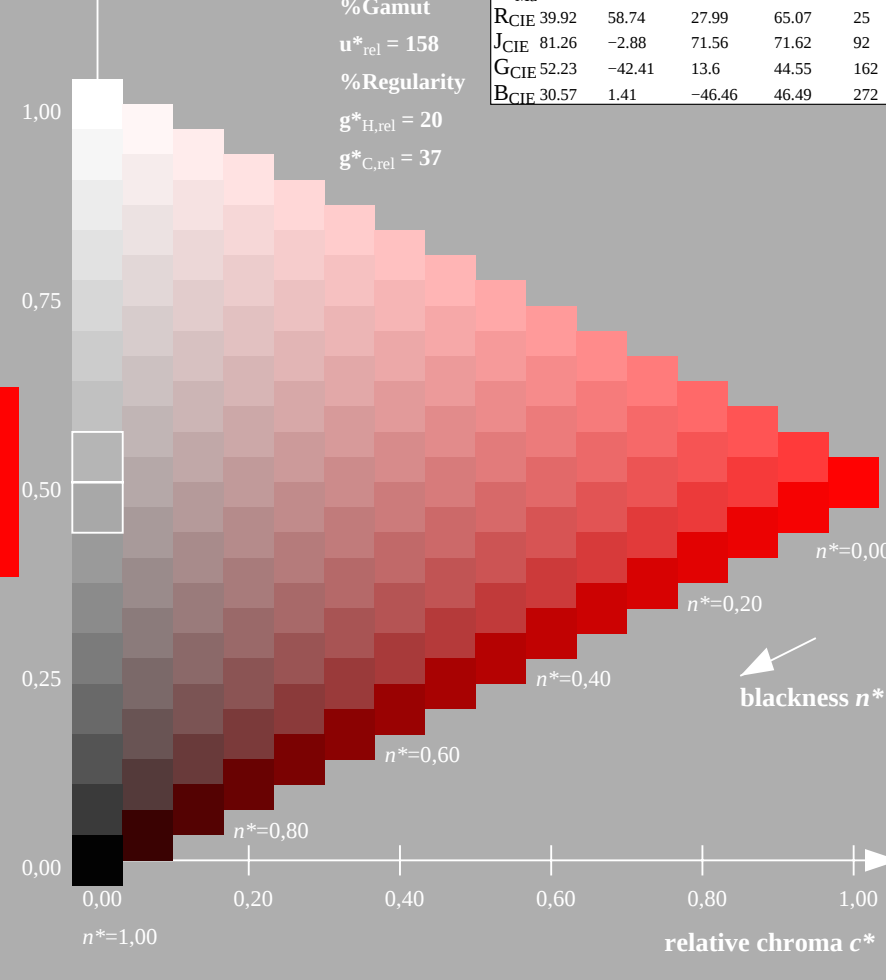

16 step scales for constant CIELAB hue 40/360 = 0.111 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue O; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{d}$) $setcmyk$
output 136-0: $g_P=0.55$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 103/360 = 0.286$


lab^*tch and lab^*nch

D65: hue Y

LCH*Ma: 93 93 103

olv*Ma: 1.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 103/360 = 0.286$


lab^*tch and lab^*nch

D65: hue Y

LCH*Ma: 93 93 103

olv*Ma: 1.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

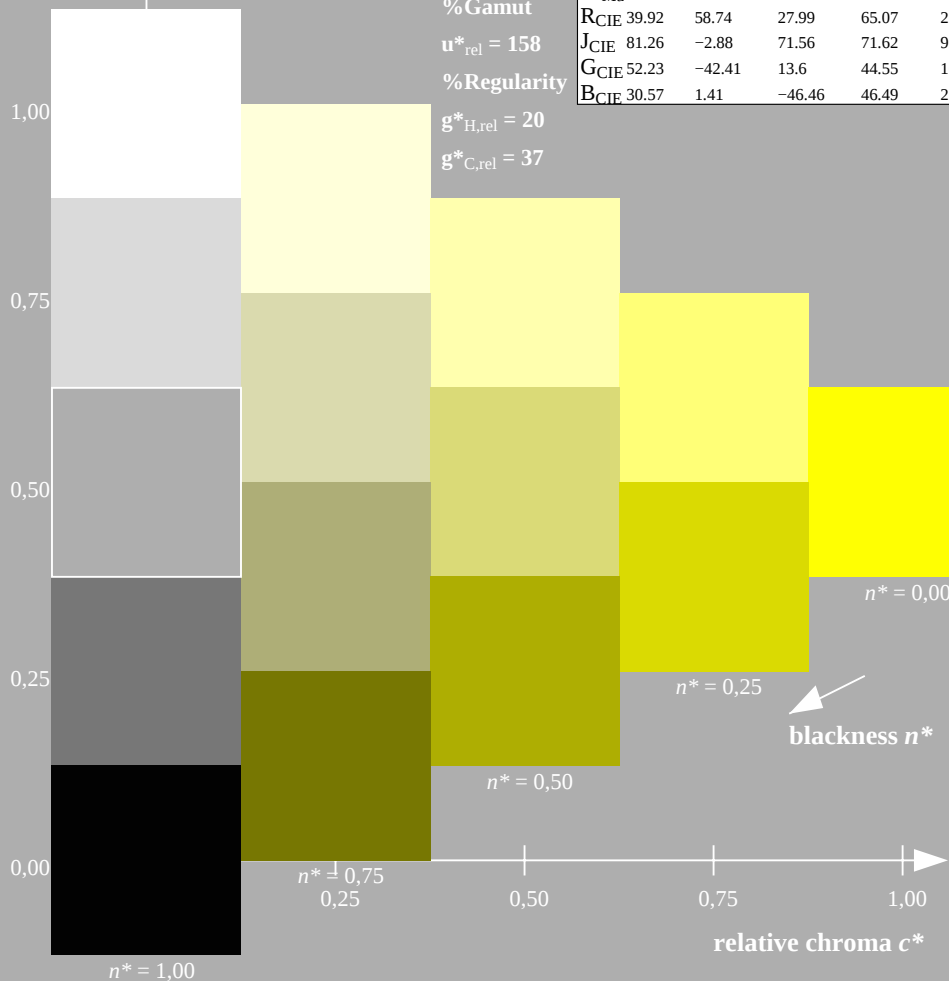

OE730-7N-130-1: 5 step scales for constant CIE LAB hue 103/360 = 0.286 (left)

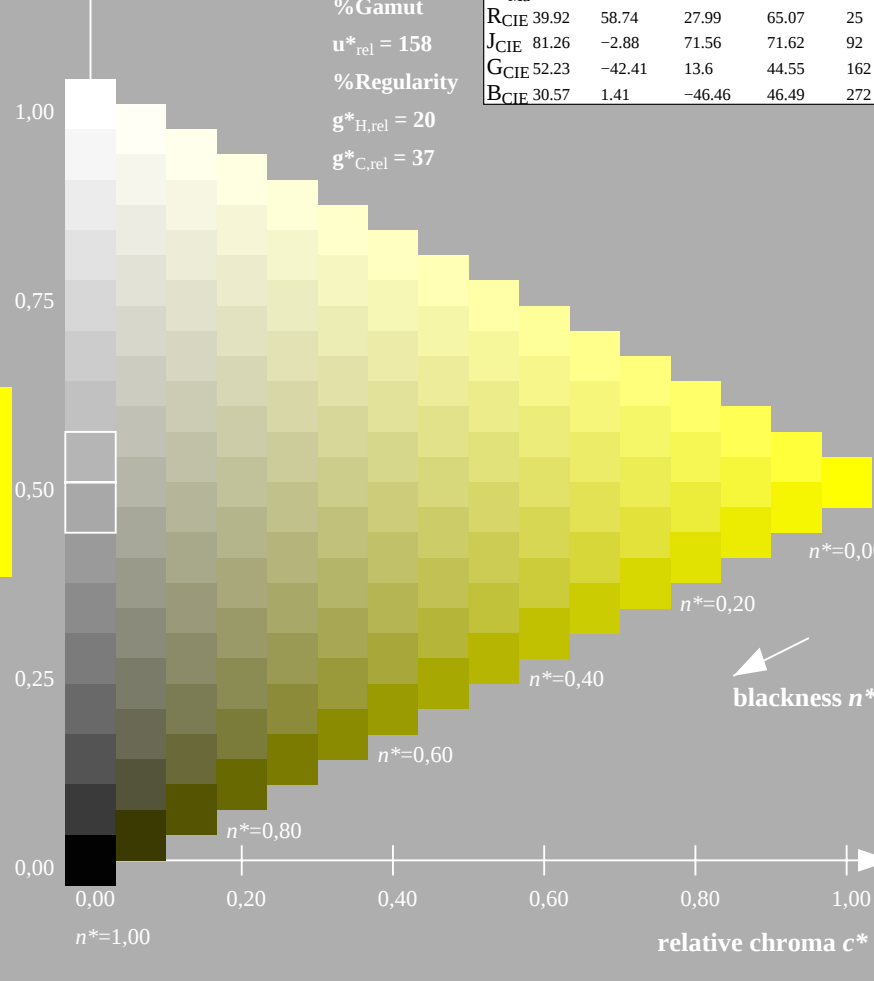

16 step scales for constant CIE LAB hue 103/360 = 0.286 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue Y; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_d$) $setcmyk$
output 136-1: $g_P=0.55$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 136/360 = 0.378$


lab^*tch and lab^*nch

D65: hue L

LCH*Ma: 84 115 136

ol v^* Ma: 0.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 136/360 = 0.378$


lab^*tch and lab^*nch

D65: hue L

LCH*Ma: 84 115 136

ol v^* Ma: 0.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

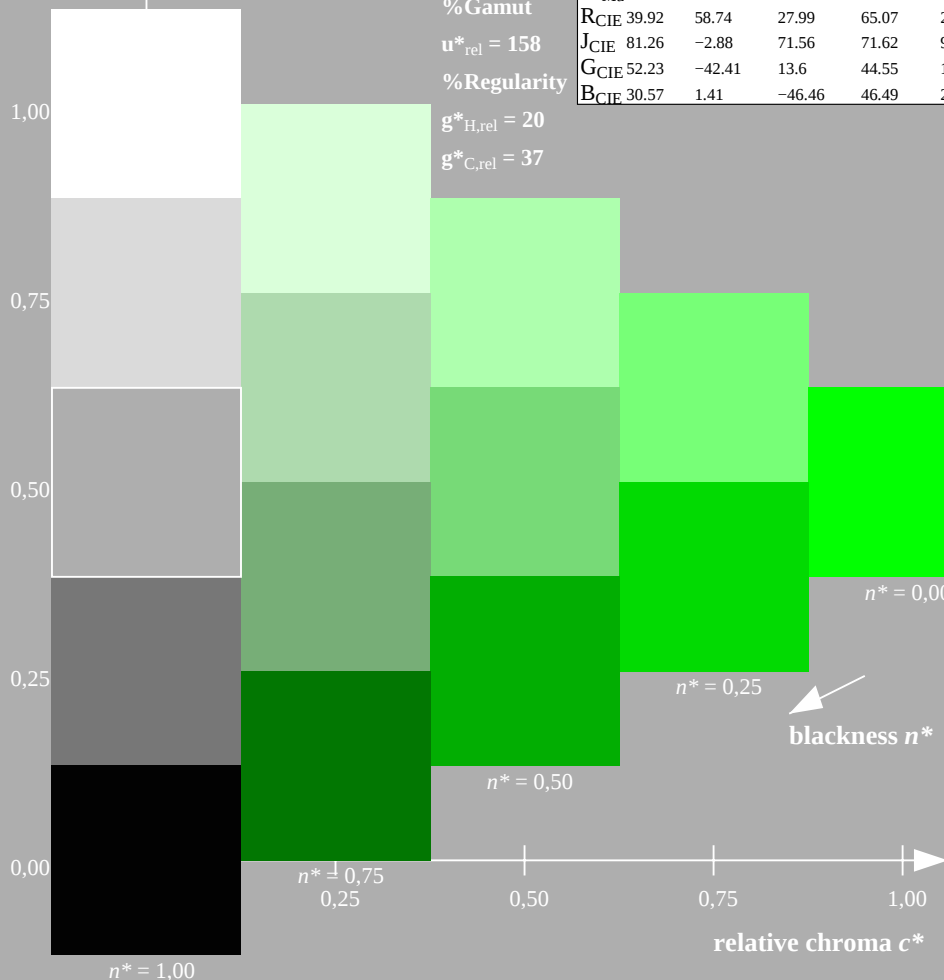

OE730-7N-130-2: 5 step scales for constant CIELAB hue 136/360 = 0.378 (left)

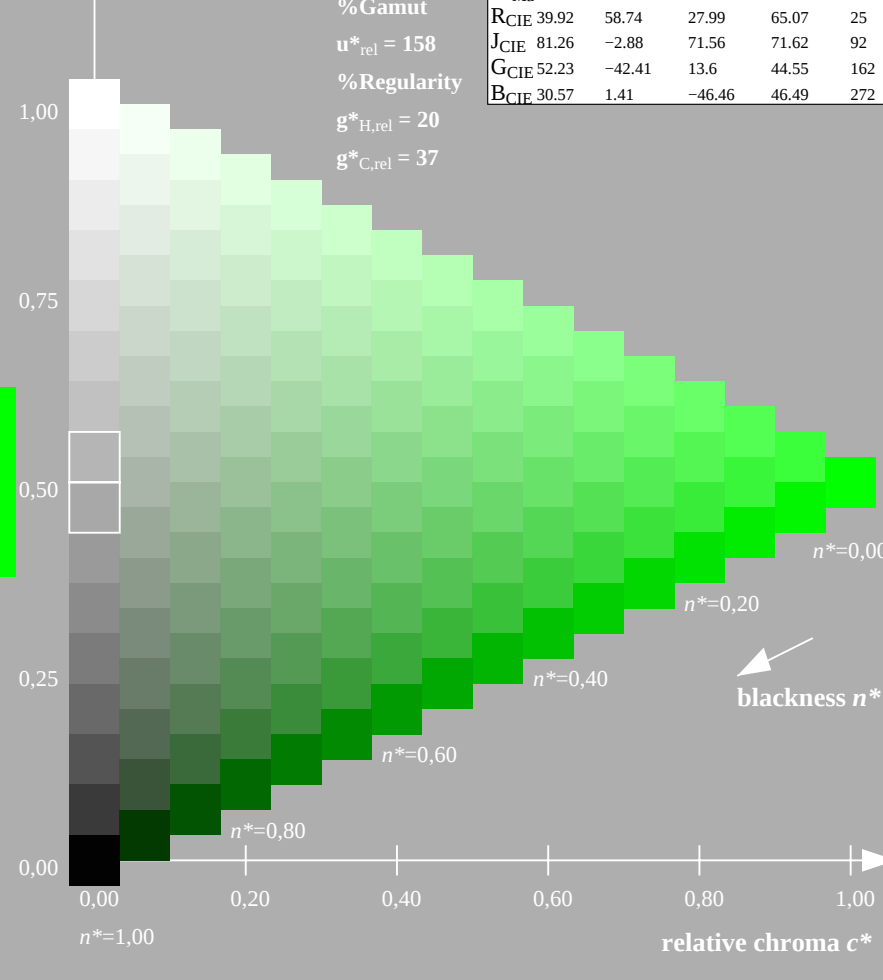

16 step scales for constant CIELAB hue 136/360 = 0.378 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue L; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{\Delta}$) $setcmyk$
output 136-2: $g_P=0.55$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 196/360 = 0.545$


lab^*tch and lab^*nch

D65: hue C

LCH*Ma: 87 48 196

olv*Ma: 0.0 1.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 196/360 = 0.545$


lab^*tch and lab^*nch

D65: hue C

LCH*Ma: 87 48 196

olv*Ma: 0.0 1.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

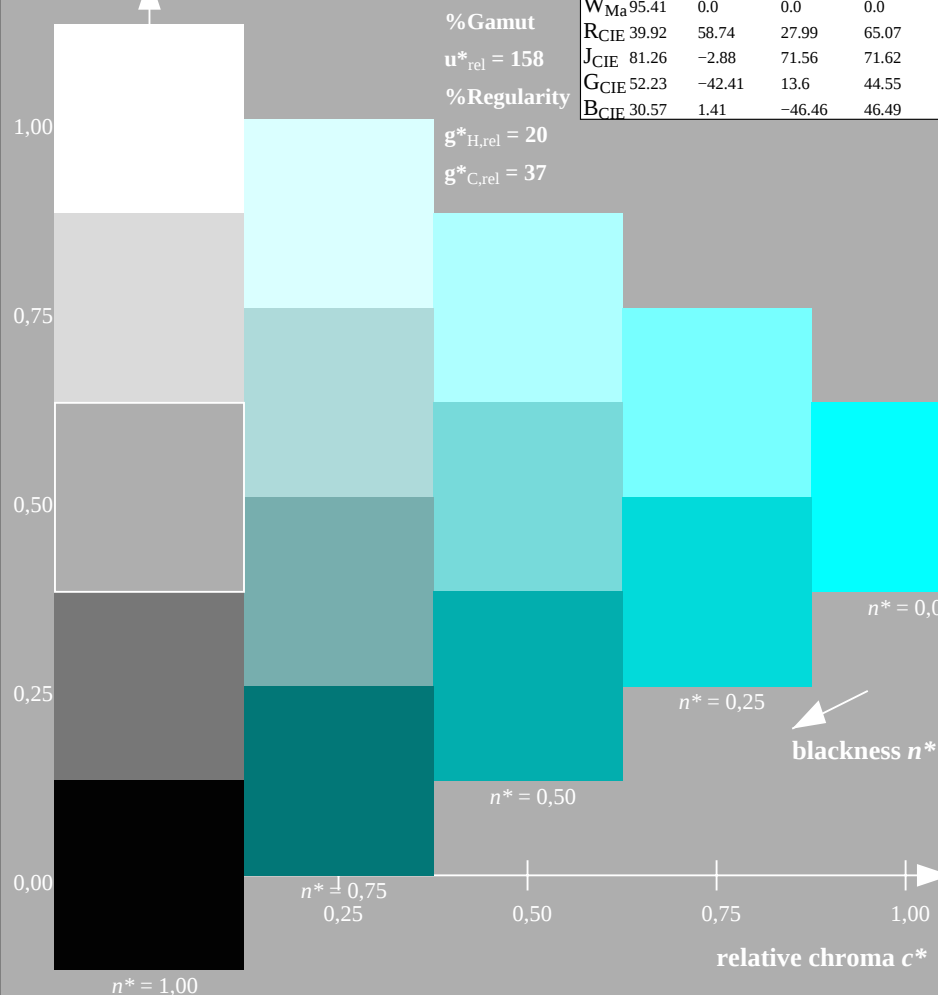

OE730-7N-130-3: 5 step scales for constant CIE LAB hue 196/360 = 0.545 (left)

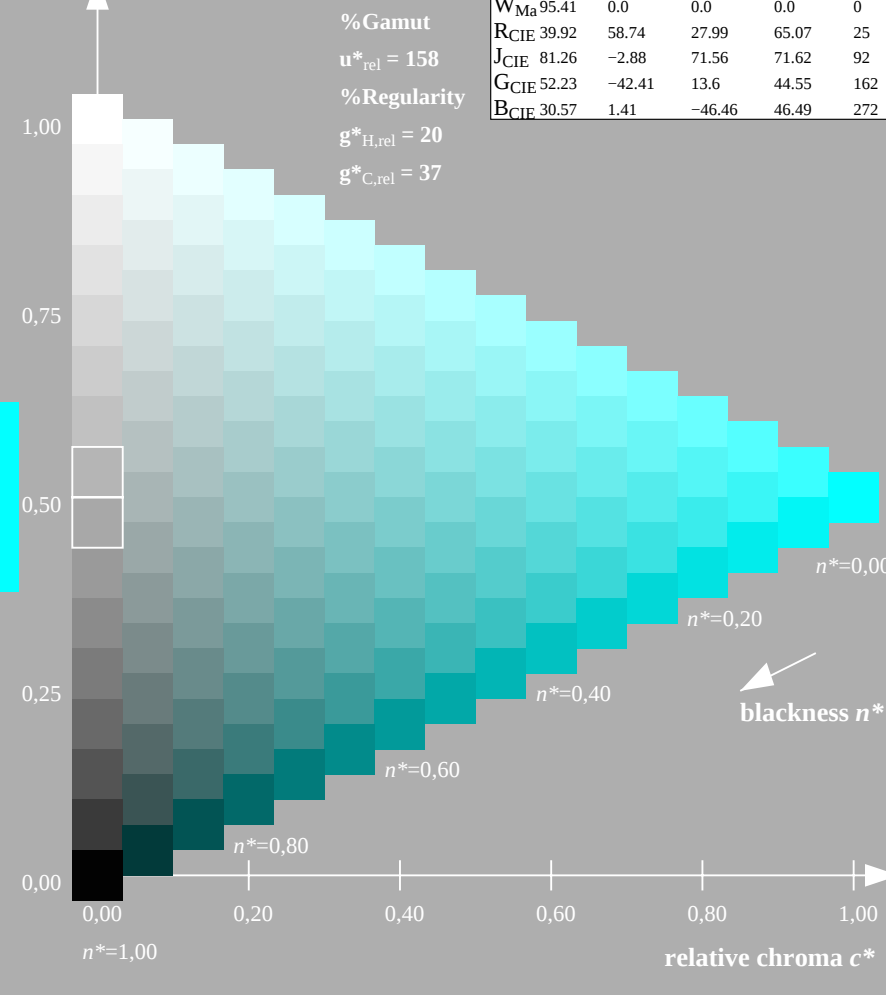

16 step scales for constant CIE LAB hue 196/360 = 0.545 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue C; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{\Delta}$) $setcmyk$
output 136-3: $g_P=0.55$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 306/360 = 0.851$


lab^*tch and lab^*nch

D65: hue V

LCH*Ma: 30 129 306

olv*Ma: 0.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 306/360 = 0.851$


lab^*tch and lab^*nch

D65: hue V

LCH*Ma: 30 129 306

olv*Ma: 0.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

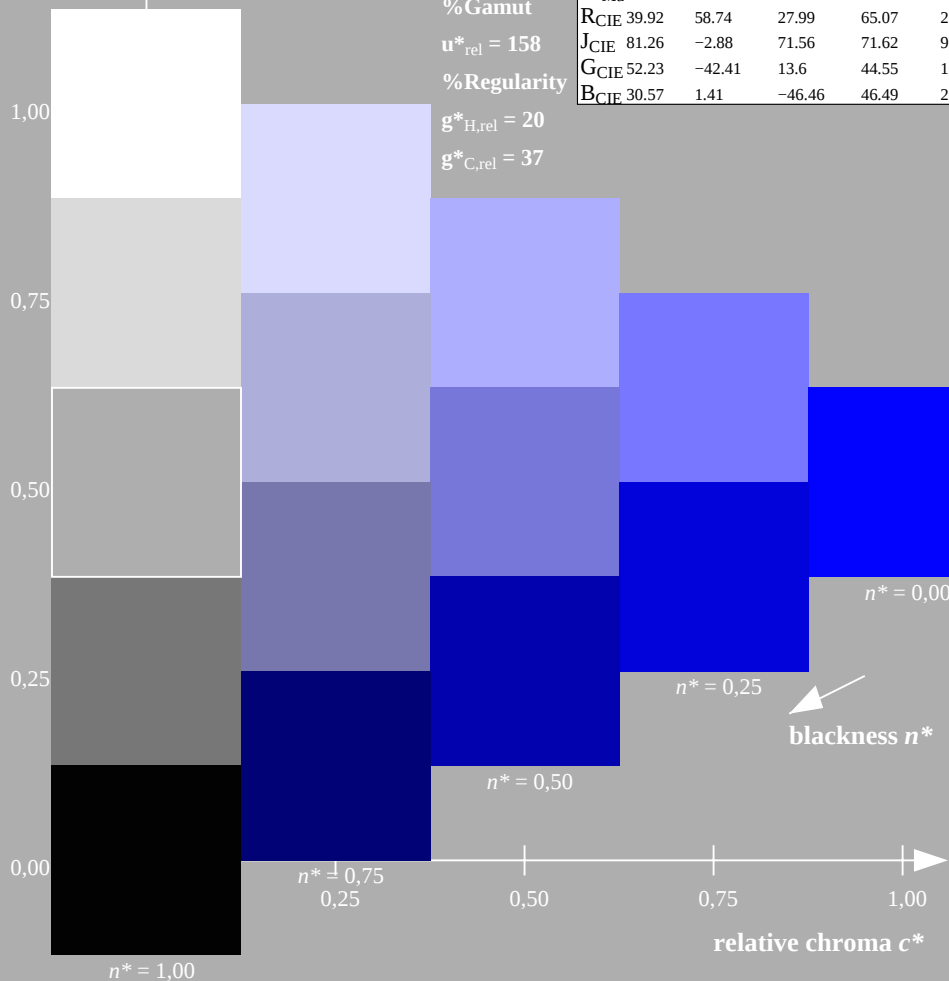

OE730-7N-130-4: 5 step scales for constant CIELAB hue 306/360 = 0.851 (left)

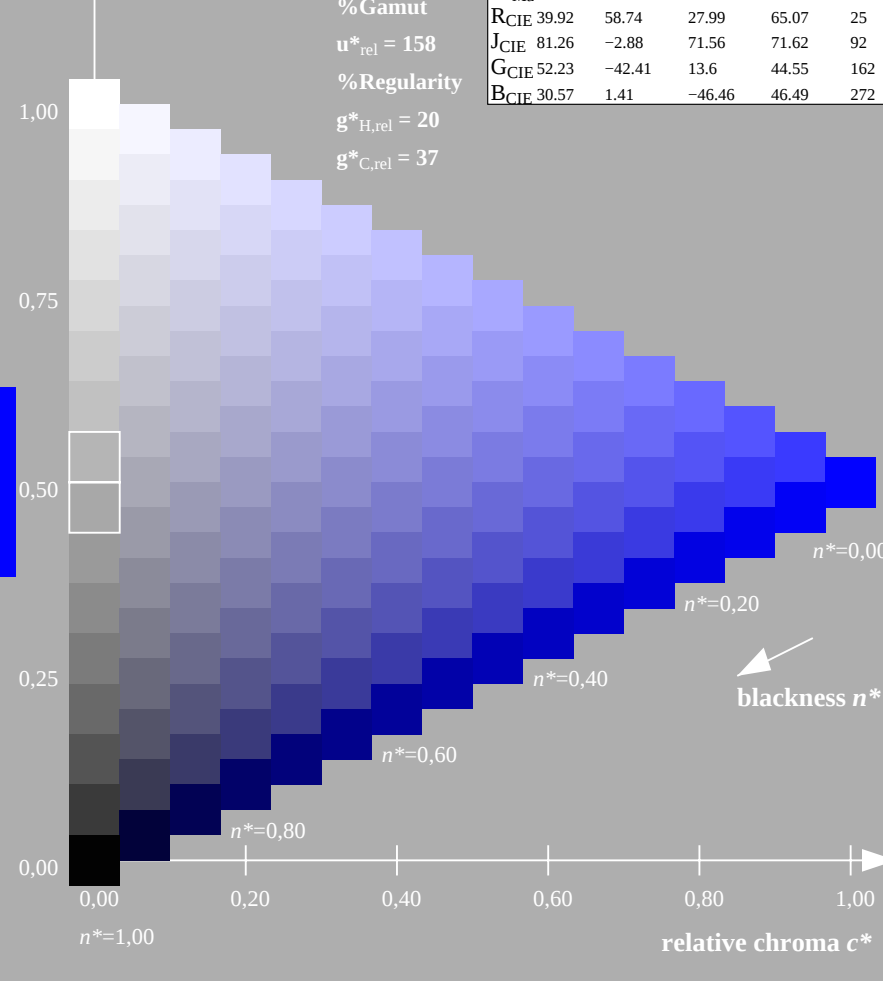

16 step scales for constant CIELAB hue 306/360 = 0.851 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue V; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{d}$) $setcmyk$
output 136-4: $g_P=0.55$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 328/360 = 0.912$


lab^*tch and lab^*nch

D65: hue M

LCH*Ma: 57 111 328

ol v^* Ma: 1.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 328/360 = 0.912$


lab^*tch and lab^*nch

D65: hue M

LCH*Ma: 57 111 328

ol v^* Ma: 1.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

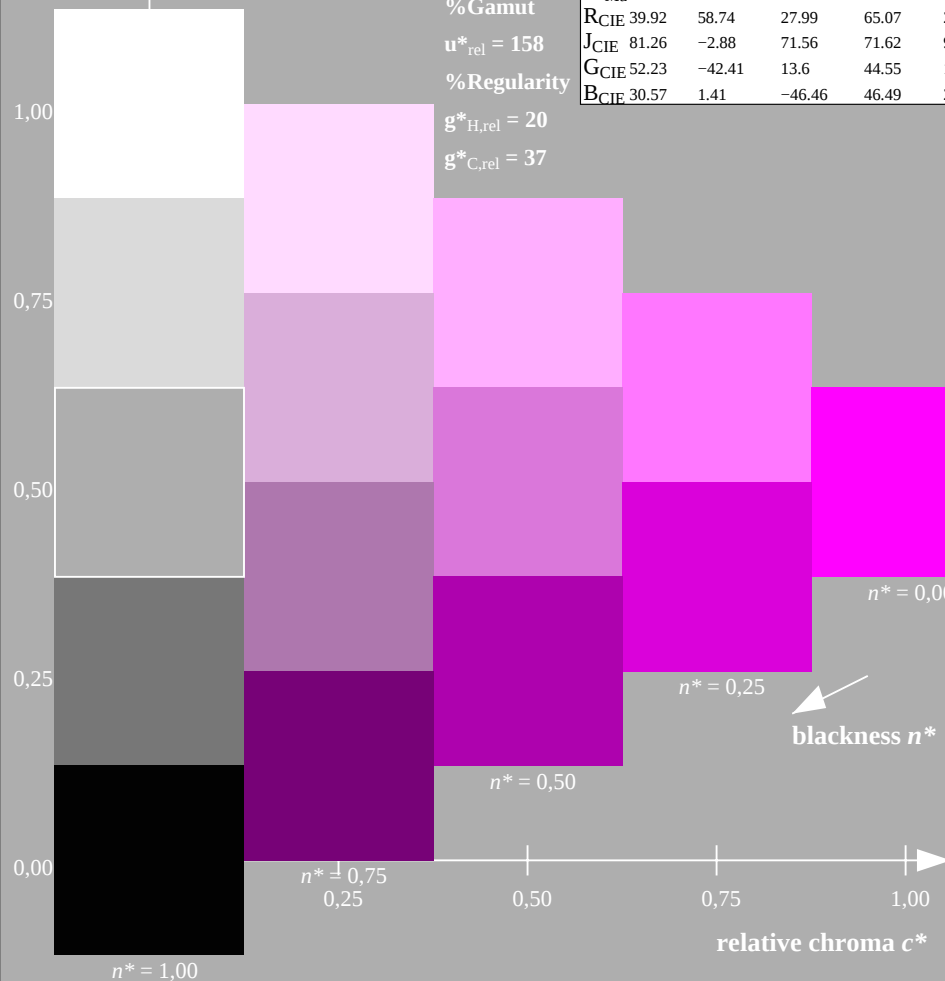

OE730-7N-130-5: 5 step scales for constant CIELAB hue 328/360 = 0.912 (left)

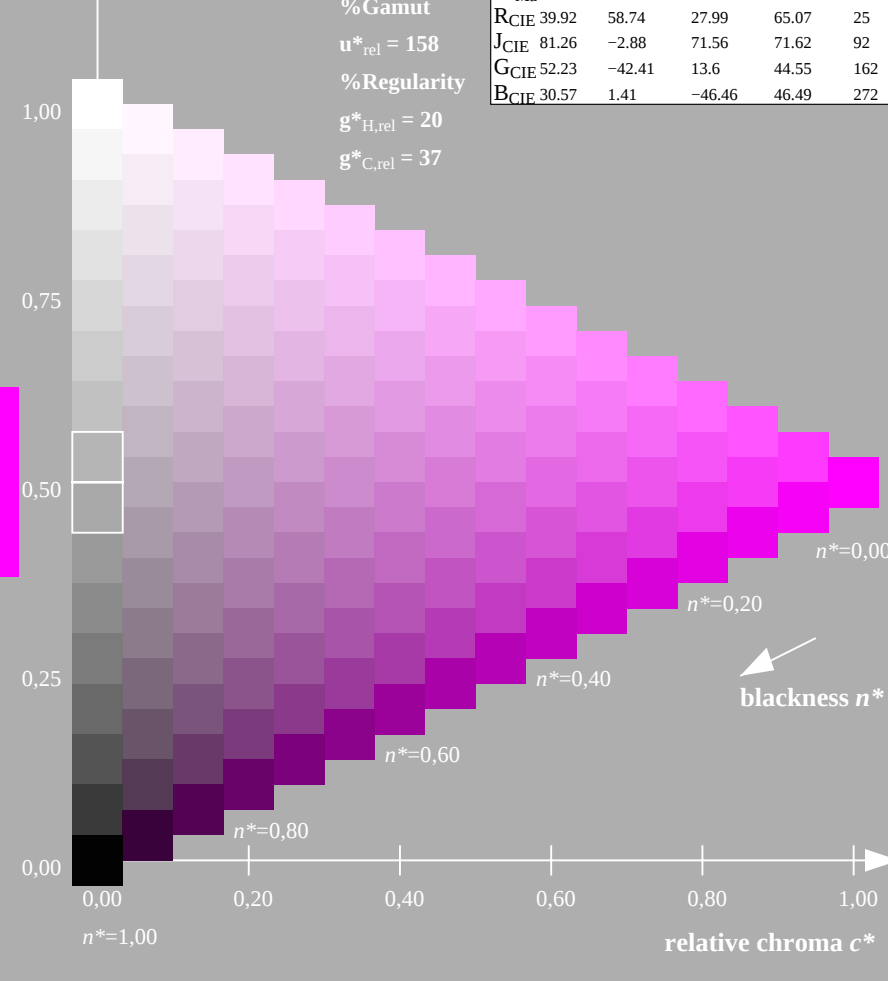

16 step scales for constant CIELAB hue 328/360 = 0.912 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue M; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_d$) $setcmyk$
output 136-5: $g_P=0.55$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 25/360 = 0.071$


lab^*tch and lab^*nch

D65: hue R

LCH*Ma: 52 89 25

olv*Ma: 1.0 0.0 0.21

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 25/360 = 0.071$


lab^*tch and lab^*nch

D65: hue R

LCH*Ma: 52 89 25

olv*Ma: 1.0 0.0 0.21

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

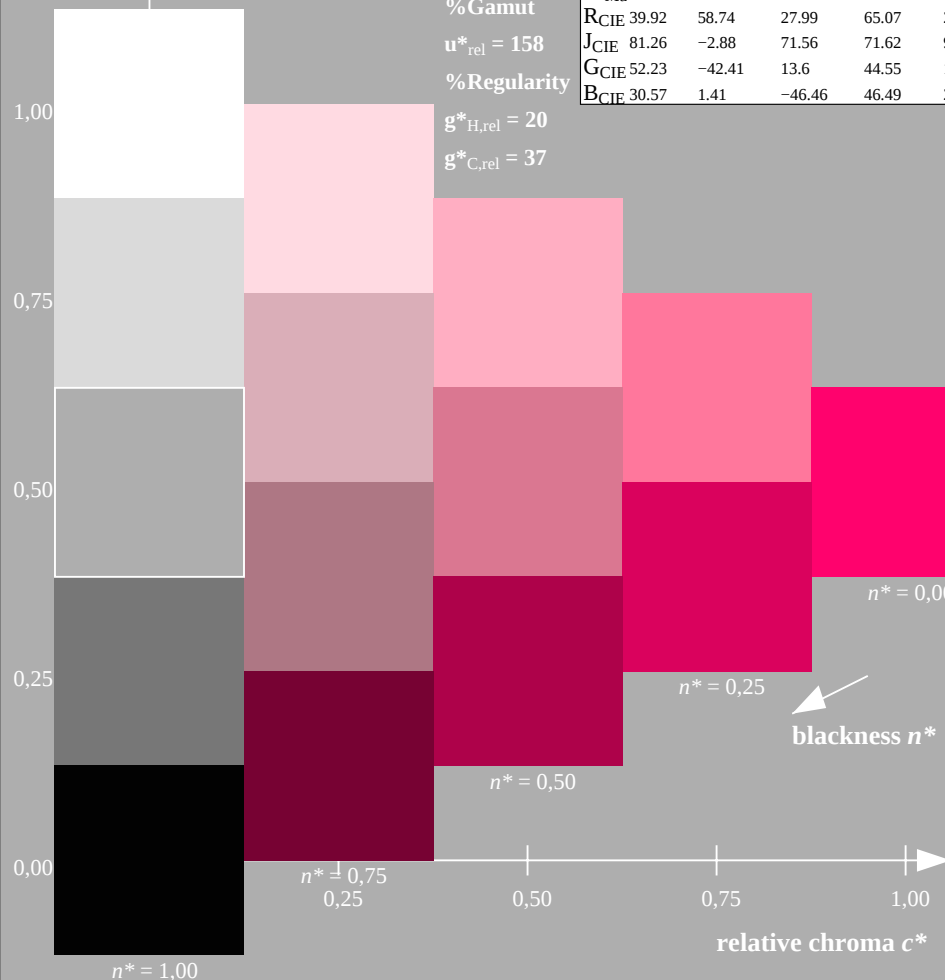

OE730-7N-130-6: 5 step scales for constant CIELAB hue 25/360 = 0.071 (left)

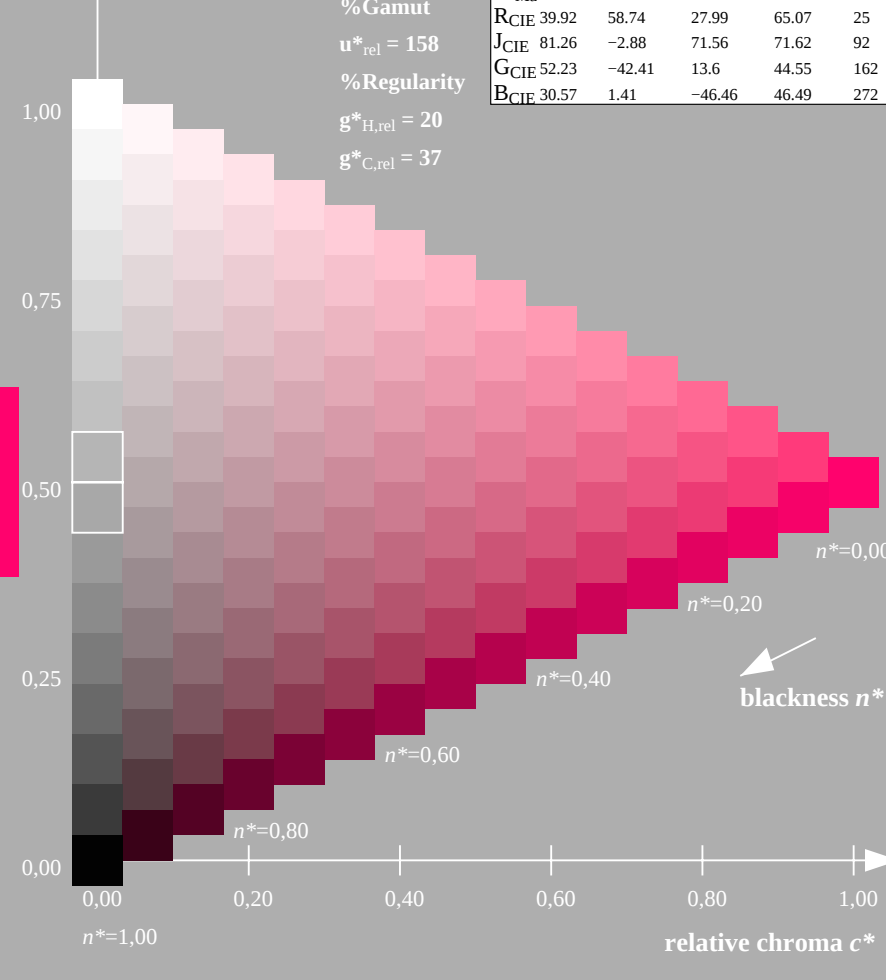

16 step scales for constant CIELAB hue 25/360 = 0.071 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue R; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 136-6: $g_P=0.55$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 92/360 = 0.256$


lab^*tch and lab^*nch

D65: hue J

LCH*Ma: 85 86 92

olv*Ma: 1.0 0.82 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 92/360 = 0.256$


lab^*tch and lab^*nch

D65: hue J

LCH*Ma: 85 86 92

olv*Ma: 1.0 0.82 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

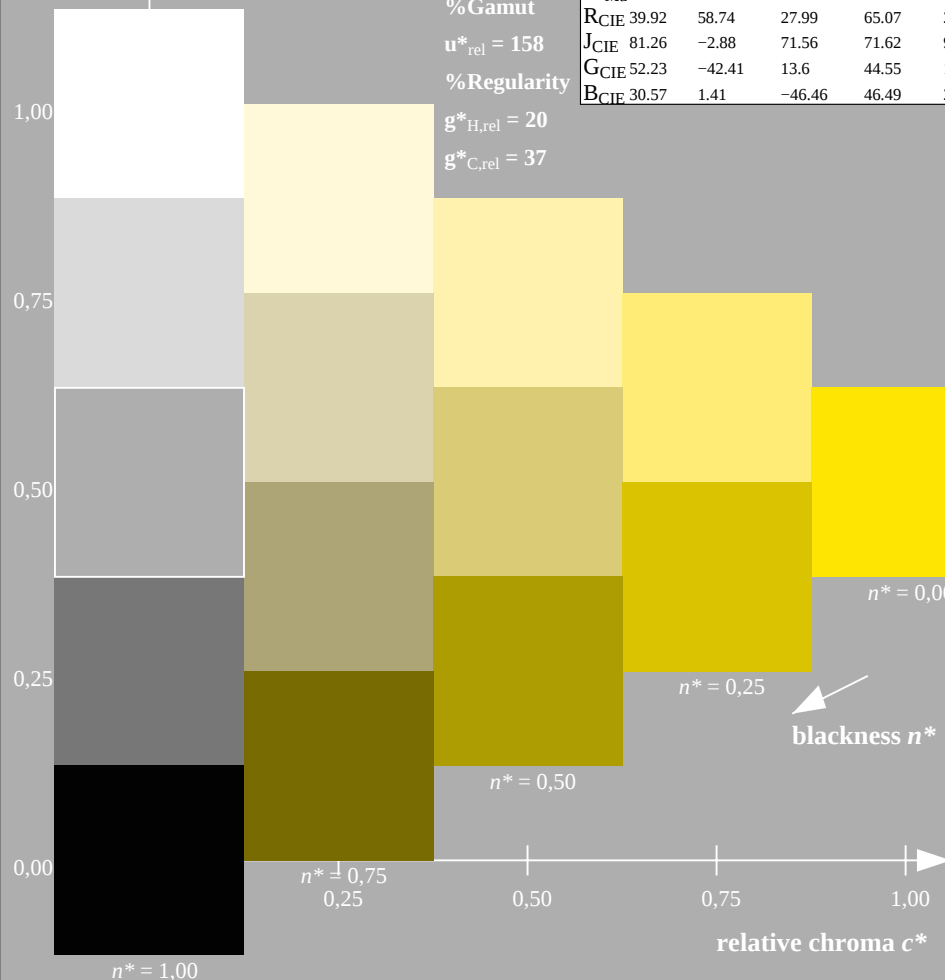

OE730-7N-130-7: 5 step scales for constant CIELAB hue 92/360 = 0.256 (left)

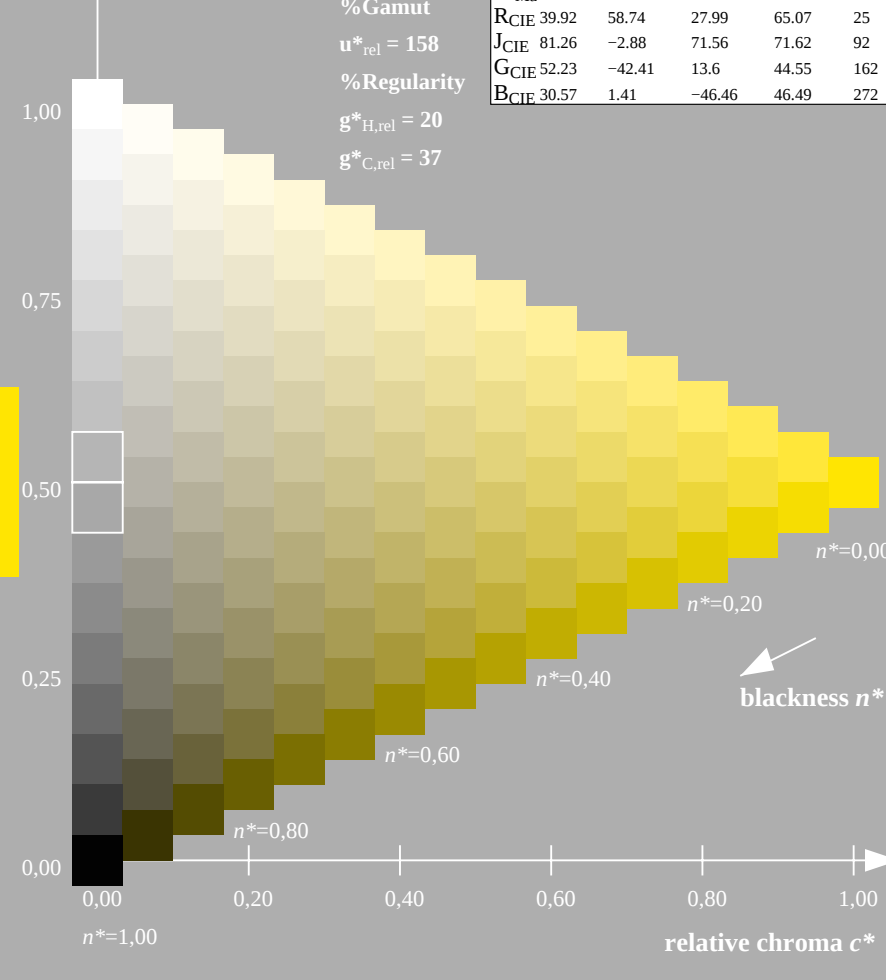

16 step scales for constant CIELAB hue 92/360 = 0.256 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue J; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 136-7: $g_P=0.55$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 162/360 = 0.451$


lab^*tch and lab^*nch

D65: hue G

LCH*Ma: 86 62 162

ol v^* Ma: 0.0 1.0 0.65

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 162/360 = 0.451$


lab^*tch and lab^*nch

D65: hue G

LCH*Ma: 86 62 162

ol v^* Ma: 0.0 1.0 0.65

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

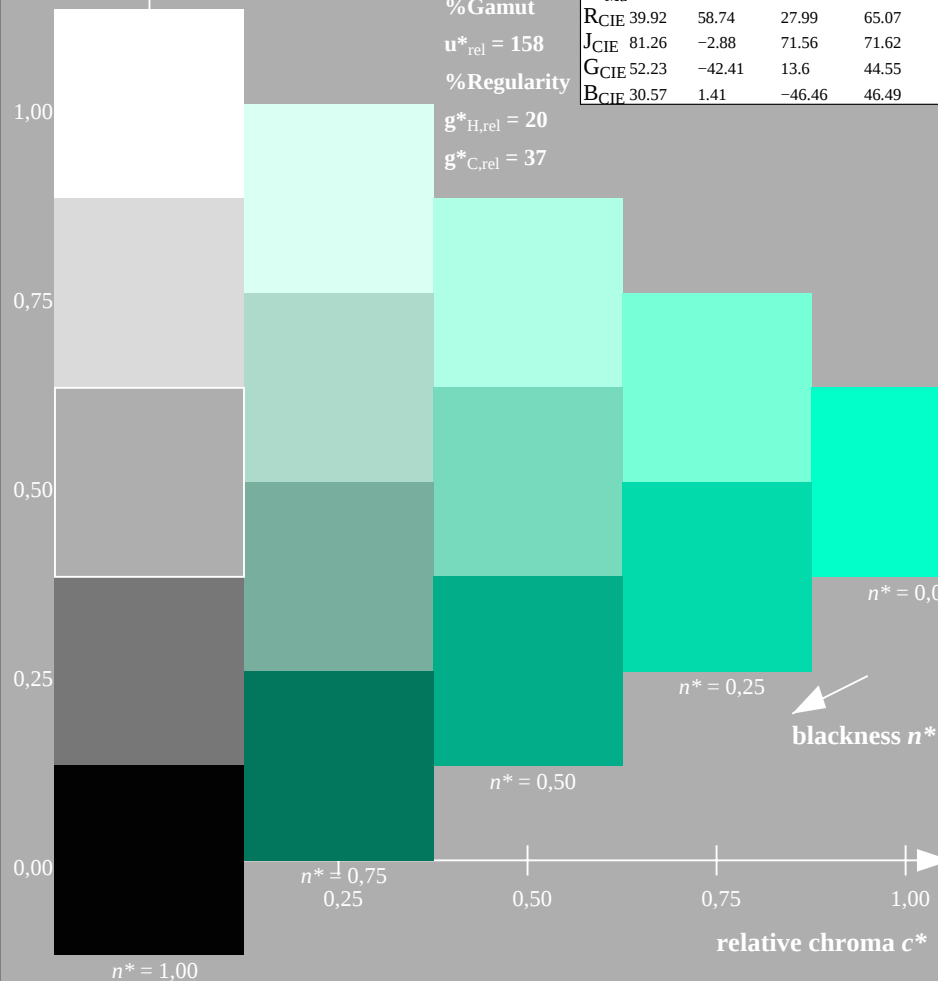

OE730-7N-130-8: 5 step scales for constant CIELAB hue 162/360 = 0.451 (left)

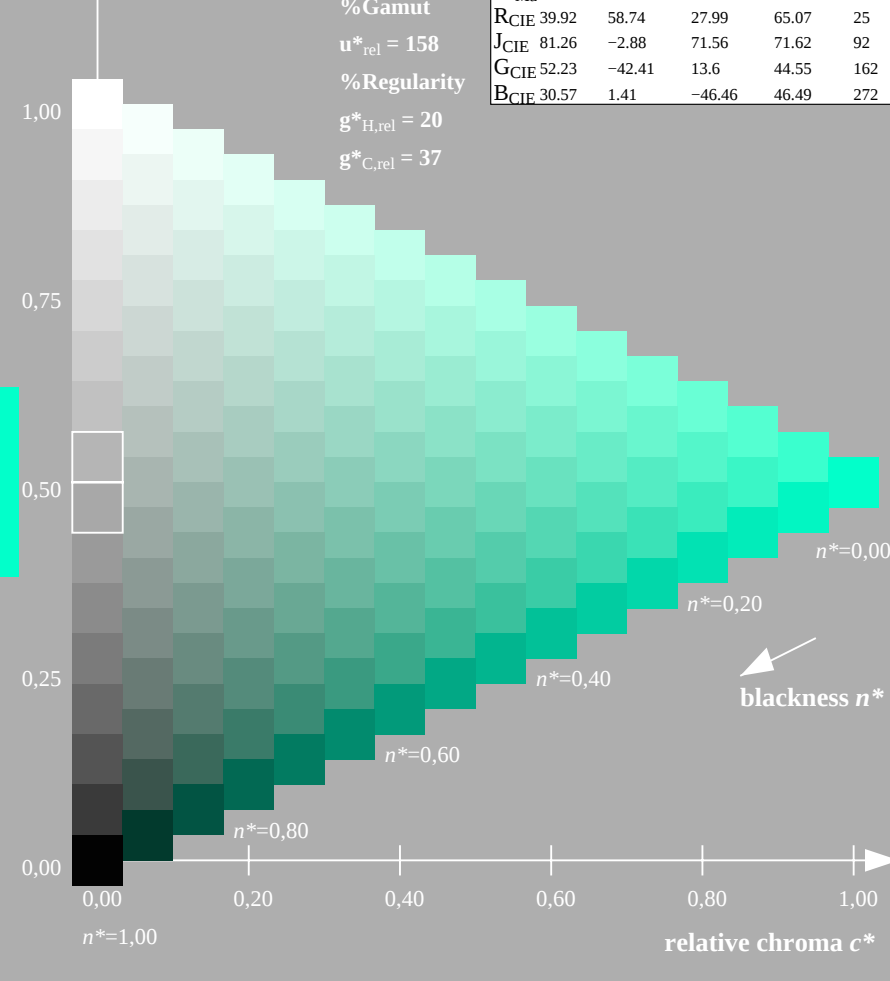

16 step scales for constant CIELAB hue 162/360 = 0.451 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue G; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 136-8: $g_P=0.55$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 272/360 = 0.755$


lab^*tch and lab^*nch

D65: hue B

LCH*Ma: 65 49 272

ol v^* Ma: 0.0 0.61 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 272/360 = 0.755$


lab^*tch and lab^*nch

D65: hue B

LCH*Ma: 65 49 272

ol v^* Ma: 0.0 0.61 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

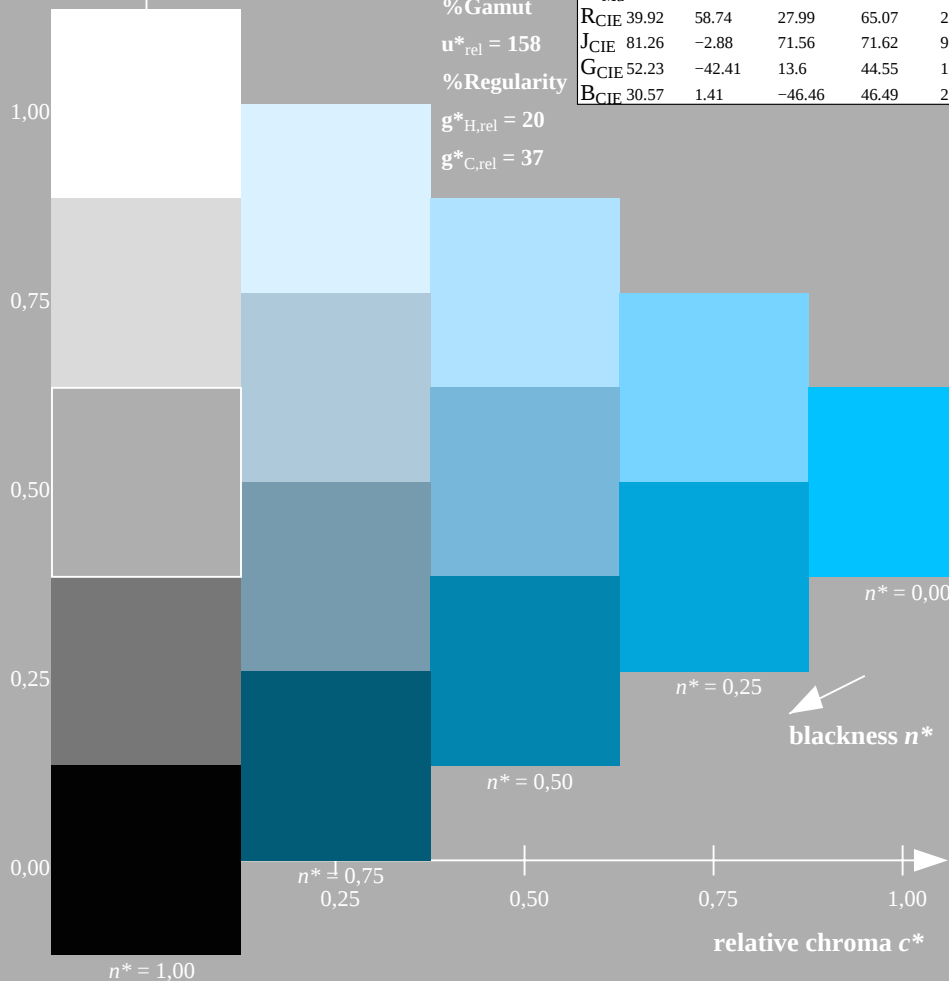

OE730-7N-130-9: 5 step scales for constant CIELAB hue 272/360 = 0.755 (left)

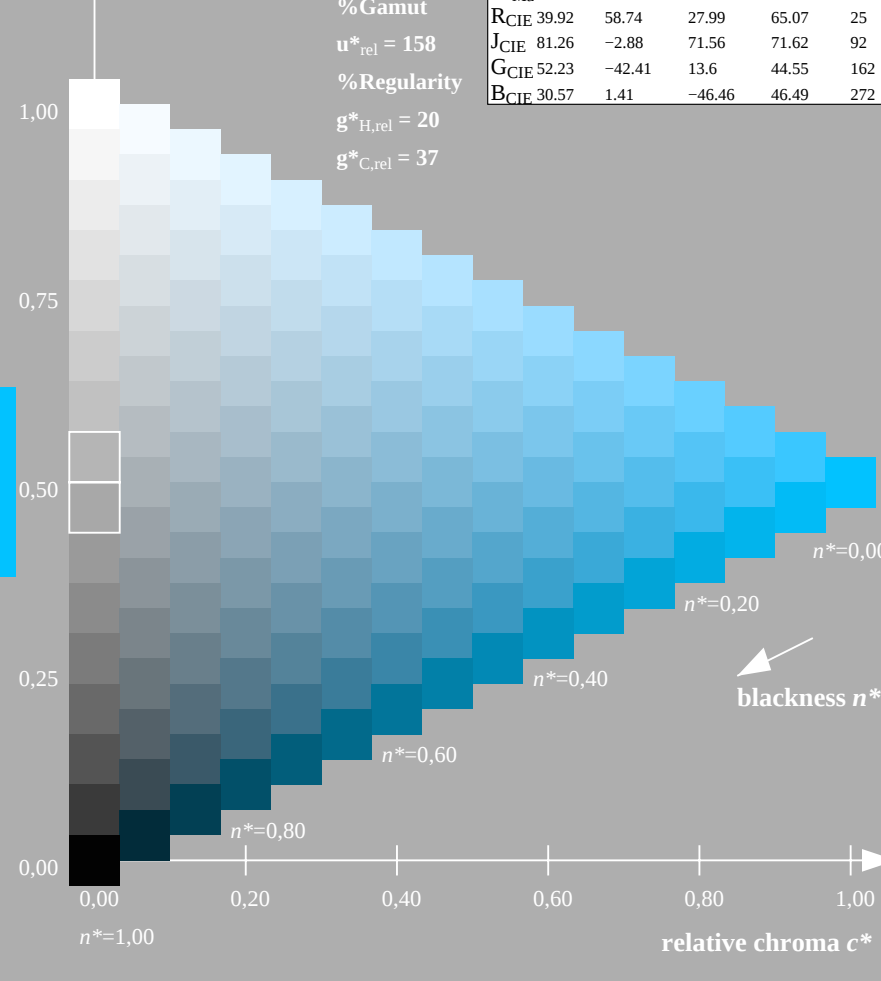


16 step scales for constant CIELAB hue 272/360 = 0.755 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue B; 1MR, DH
Discrimination of 5 and 16 step colour scales


input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 136-9: $g_P=0.55$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB


TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
TUB material: code=th4ta
application for output of displays: monitor systems or data projector systems



See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB




<http://130.149.60.45/~farbmetrik/OE73/OE73L0NA.TXT> /PS; linearized output, Page 11/12
 F: Output Linearization (OL) data OE73/OE73L0NA.TXT /PS in File (F)




TUB registration: 20110801-OE73/OE73L0NA.TXT /PS
 application for output of displays: monitor systems or data projector systems

TUB material: code=rh4ta



Discriminability of 5 step colour series (Yes/No decision)

Layout example: three 5 step colour series

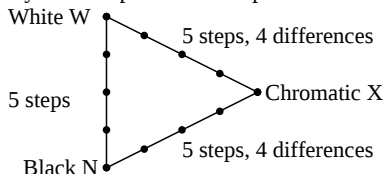

There are three basic colours on each page:
 Black N, White W and Chromatic X.
 Ten pages include 10 hue planes
 X = OYLCVM and RJGB.
 There are at maximum 12 distinguishable steps.

All steps of the three series N-W, W-X and X-N should be distinguishable on all pages.

Are the three 5step series distinguishable on all pages? underline: Yes/No

only in case of No: Are the three 5 step series on Page x of 10 pages distinguishable?

Underline Yes/No and give in case of No the number of distinguishable steps?

- Page 1: Yes/No, if No ../12 step differences are distinguishable of O = Orange Red
 Page 2: Yes/No, if No ../12 step differences are distinguishable of Y = Yellow
 Page 3: Yes/No, if No ../12 step differences are distinguishable of L = Leaf green
 Page 4: Yes/No, if No ../12 step differences are distinguishable of C = Cyan blue
 Page 5: Yes/No, if No ../12 step differences are distinguishable of V = Violett blue
 Page 6: Yes/No, if No ../12 step differences are distinguishable of M = Magenta Red
 Page 7: Yes/No, if No ../12 step differences are distinguishable of R = Elementary Red
 Page 8: Yes/No, if No ../12 step differences are distinguishable of J = Elementary yellow
 Page 9: Yes/No, if No ../12 step differences are distinguishable of G = Elementary Green
 Page 10: Yes/No, if No ../12 step differences are distinguishable of B = Elementary blue

Sum: ../10 Yes-Pages and ../120 step differences are distinguishable

Part 1

OE730-3N-136-10

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE73/OE73L0NP.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE73/OE73L0NA.PS> or underline Yes/No

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline monitor/data projector/printer

Device model, driver and version:.....

Device output with PDF/PS-file: underline PDF/PS-file

For device output with PDF-file OE73L0NP.PDF:

- either PDF-file transfer "download, copy" to PDF device.....
 or with computer system interpretation by "Display-PDF":.....
 or with software e. g. Adobe-Reader/-Acrobat and version:.....
 or with software e. g. Ghostscript and version:.....

For device output with PS-file OE73L0NA.PS:

- either PS-file transfer "download, copy" to PS device.....
 or with computer system interpretation by "Display-PS":.....
 or with software e. g. Ghostscript and version:.....
 or with software e. g. Mac-Yap and version:.....

Special remarks:Special remarks, e. g. output of Landscape (L)

.....

Part 3

OE730-7N-136-10




OE73: Form A for test chart 2 according to DIN 33872-2; 1MR, DHinput: *cmy0* (->*cmy0***g*) *setcmyk*
 Discrimination of colour scales (Yes/No decision)
 output 136-10: *g_P*=0.55; *g_N*=1.0



Discriminability of 16 step colour series (Yes/No decision)

Layout example: three 16 step colour series

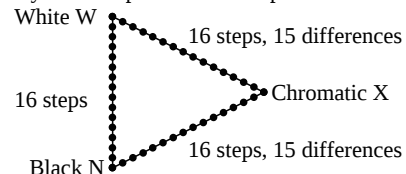

There are three basic colours on each page:
 Black N, White W and Chromatic X.
 Ten pages include 10 hue planes
 X = OYLCVM and RJGB.
 There are at maximum 45 distinguishable steps.

All steps of the three series N-W, W-X and X-N should be distinguishable on all pages.

Are the three 16step series distinguishable on all pages? underline: Yes/No

only in case of No: Are the three 16 step series on Page x of 10 pages distinguishable?

Underline Yes/No and give in case of No the number of distinguishable steps?

- Page 1: Yes/No, if No ../45 step differences are distinguishable of O = Orange Red
 Page 2: Yes/No, if No ../45 step differences are distinguishable of Y = Yellow
 Page 3: Yes/No, if No ../45 step differences are distinguishable of L = Leaf green
 Page 4: Yes/No, if No ../45 step differences are distinguishable of C = Cyan blue
 Page 5: Yes/No, if No ../45 step differences are distinguishable of V = Violett blue
 Page 6: Yes/No, if No ../45 step differences are distinguishable of M = Magenta Red
 Page 7: Yes/No, if No ../45 step differences are distinguishable of R = Elementary Red
 Page 8: Yes/No, if No ../45 step differences are distinguishable of J = Elementary yellow
 Page 9: Yes/No, if No ../45 step differences are distinguishable of G = Elementary Green
 Page 10: Yes/No, if No ../45 step differences are distinguishable of B = Elementary blue

Sum: ../10 Yes-Pages and ../450 step differences are distinguishable

Part 2

OE731-3N-136-10

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test:

- either according to DIN 6160:1996 with Anomaloskop of Nagel
 or with test charts using colour points according to Ishihara
 or tested with, please specify:

underline Yes/No

underline Yes/unknown

underline Yes/unknown

underline Yes/unknown

For visual evaluation of the display (monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky)

underline Yes/No

PDF file: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PDF>

underline Yes/No

PS file: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PS>

underline Yes/No

Picture A7-136-2: contrast range: (>F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)

compare standard print output according to ISO/IEC 15775 with range F:0 underline range

Remark: In daylighted offices the contrast range is in many cases:

on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF-File: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PDF>

picture A7-136-2

underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PS>

picture A7-136-2

or underline Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry:

underline Yes/No

If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T

Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer
 of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF

underline Yes/No

If No, please describe other method:

Part 4

OE731-7N-136-10



See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*
1	52.02 0.0 0.0	0.0 52.02 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
2	54.91 0.0 0.0	0.23 61.8 0.0	0.0 0.0 0.0	6.89 0.0 0.0	6.89
3	57.8 0.0 0.0	0.33 66.34 0.0	0.0 0.0 0.0	8.54 0.0 0.0	8.54
4	60.7 0.0 0.0	0.41 69.92 0.0	0.0 0.0 0.0	9.23 0.0 0.0	9.23
5	63.59 0.0 0.0	0.48 72.99 0.0	0.0 0.0 0.0	9.4 0.0 0.0	9.4
6	66.48 0.0 0.0	0.55 75.73 0.0	0.0 0.0 0.0	9.25 0.0 0.0	9.25
7	69.37 0.0 0.0	0.6 78.23 0.0	0.0 0.0 0.0	8.86 0.0 0.0	8.86
8	72.27 0.0 0.0	0.66 80.55 0.0	0.0 0.0 0.0	8.28 0.0 0.0	8.28
9	75.16 0.0 0.0	0.71 82.73 0.0	0.0 0.0 0.0	7.57 0.0 0.0	7.57
10	78.05 0.0 0.0	0.76 84.78 0.0	0.0 0.0 0.0	6.73 0.0 0.0	6.73
11	80.95 0.0 0.0	0.8 86.74 0.0	0.0 0.0 0.0	5.79 0.0 0.0	5.79
12	83.84 0.0 0.0	0.84 88.6 0.0	0.0 0.0 0.0	4.77 0.0 0.0	4.77
13	86.73 0.0 0.0	0.88 90.4 0.0	0.0 0.0 0.0	3.67 0.0 0.0	3.67
14	89.62 0.0 0.0	0.92 92.13 0.0	0.0 0.0 0.0	2.5 0.0 0.0	2.5
15	92.52 0.0 0.0	0.96 93.79 0.0	0.0 0.0 0.0	1.28 0.0 0.0	1.28
16	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
17	52.02 0.0 0.0	0.0 52.02 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
18	62.87 0.0 0.0	0.47 72.26 0.0	0.0 0.0 0.0	9.4 0.0 0.0	9.4
19	73.71 0.0 0.0	0.68 81.66 0.0	0.0 0.0 0.0	7.94 0.0 0.0	7.94
20	84.56 0.0 0.0	0.85 89.06 0.0	0.0 0.0 0.0	4.5 0.0 0.0	4.5
21	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps) $\Delta E^*_{CIELAB} = 5.8$

Mean lightness difference (5 steps) $\Delta L^*_{CIELAB} = 4.4$

Mean colour reproduction index: $R^*_{ab,m} = 75$

OE730-3N-136-11: File: Measure unknown; Device: Device unknown; Date: Date unknown

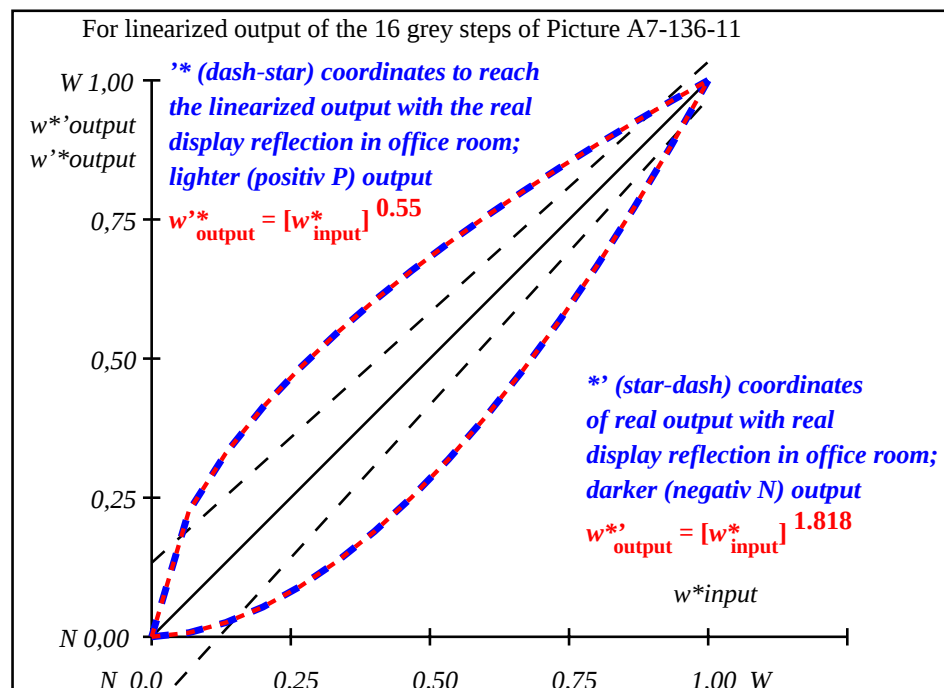

OE731-3N-136-11: File: Measure unknown; Device: Device unknown; Date: Date unknown

$L^*/Y_{intended}$ (absolute)	52.0/20.2	54.9/22.8	57.8/25.8	60.7/28.9	63.6/32.3	66.5/36.0	69.4/39.9	72.3/44.1	75.2/48.5	78.1/53.3	80.9/58.4	83.8/63.8	86.7/69.5	89.6/75.5	92.5/81.9	95.4/88.6
$w^* w^* w^*$ setrgb $g_P=0.55$ No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{CIELAB, r}$ (relative)	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
$w^*_{intended}$	0.0	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
w^*_{out}	0.0	0.226	0.33	0.413	0.484	0.546	0.604	0.658	0.707	0.755	0.8	0.843	0.885	0.925	0.963	1.0

OE730-7N, Picture A7-136-11: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*$ setrgbcolor

OE73: In-output relation according to ISO 9241-306; 1MR, DH
Viewing Y contrast $Y_W:Y_N=88,9:20$; Y_N range 15 to <30

input: $cmy0$ ($\rightarrow cmy0^*_d$) setcmyk
output 136-11: $g_P=0.55$; $g_N=1.0$

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 40/360 = 0.111$


lab^*tch and lab^*nch

D65: hue O

LCH*Ma: 51 100 40

olv*Ma: 1.0 0.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 40/360 = 0.111$


lab^*tch and lab^*nch

D65: hue O

LCH*Ma: 51 100 40

olv*Ma: 1.0 0.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

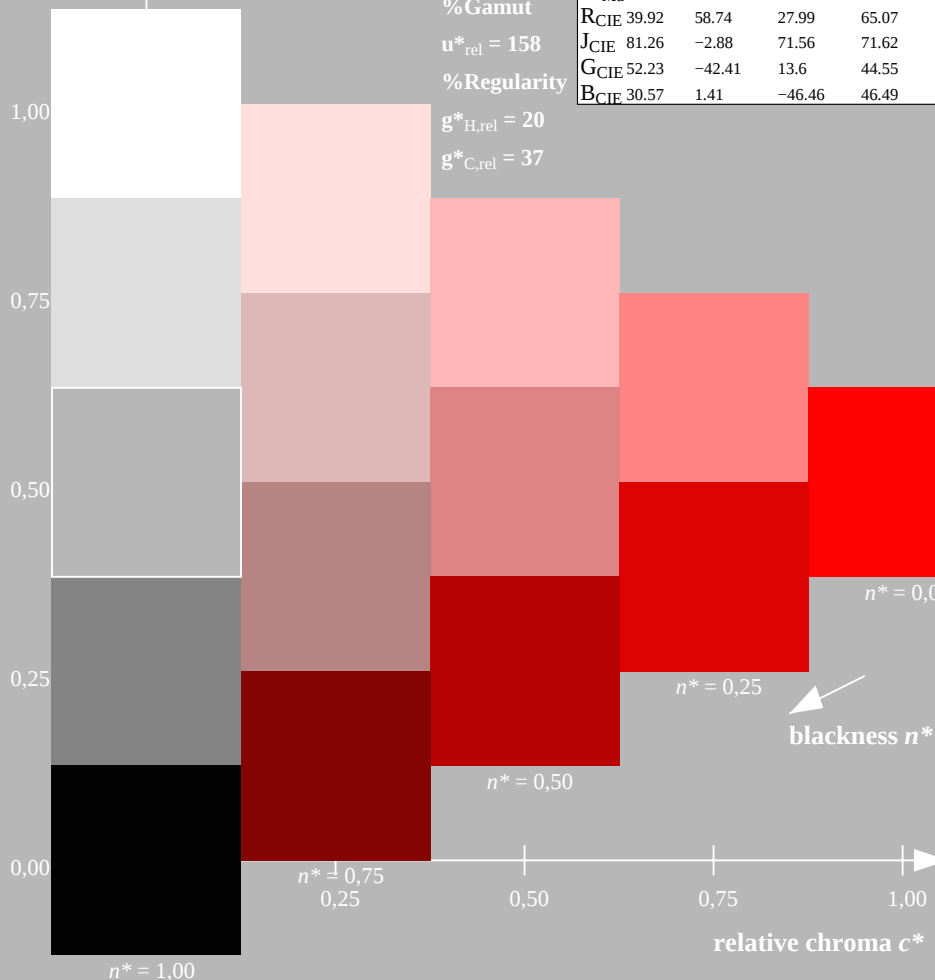

OE730-7N-130-0: 5 step scales for constant CIELAB hue 40/360 = 0.111 (left)

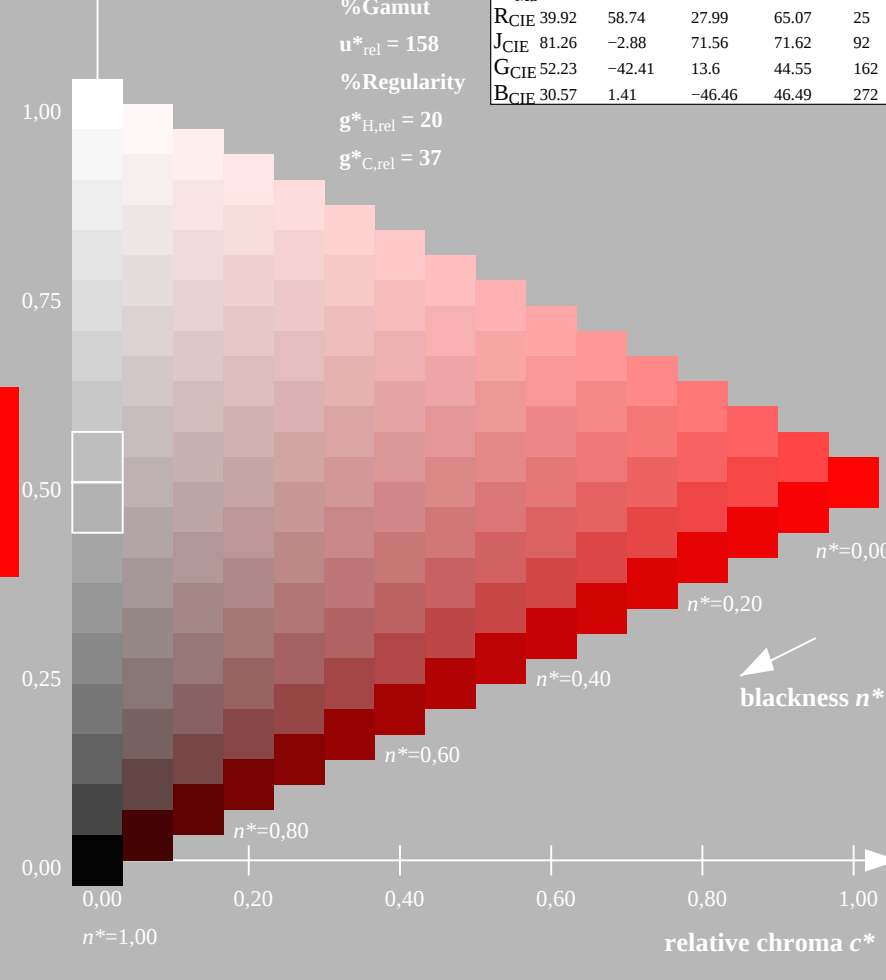

16 step scales for constant CIELAB hue 40/360 = 0.111 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue O; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_d$) $setcmyk$
output 137-0: $g_P=0.47$; $g_N=1.0$

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 103/360 = 0.286$


lab^*tch and lab^*nch

D65: hue Y

LCH*Ma: 93 93 103

olv*Ma: 1.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 103/360 = 0.286$


lab^*tch and lab^*nch

D65: hue Y

LCH*Ma: 93 93 103

olv*Ma: 1.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

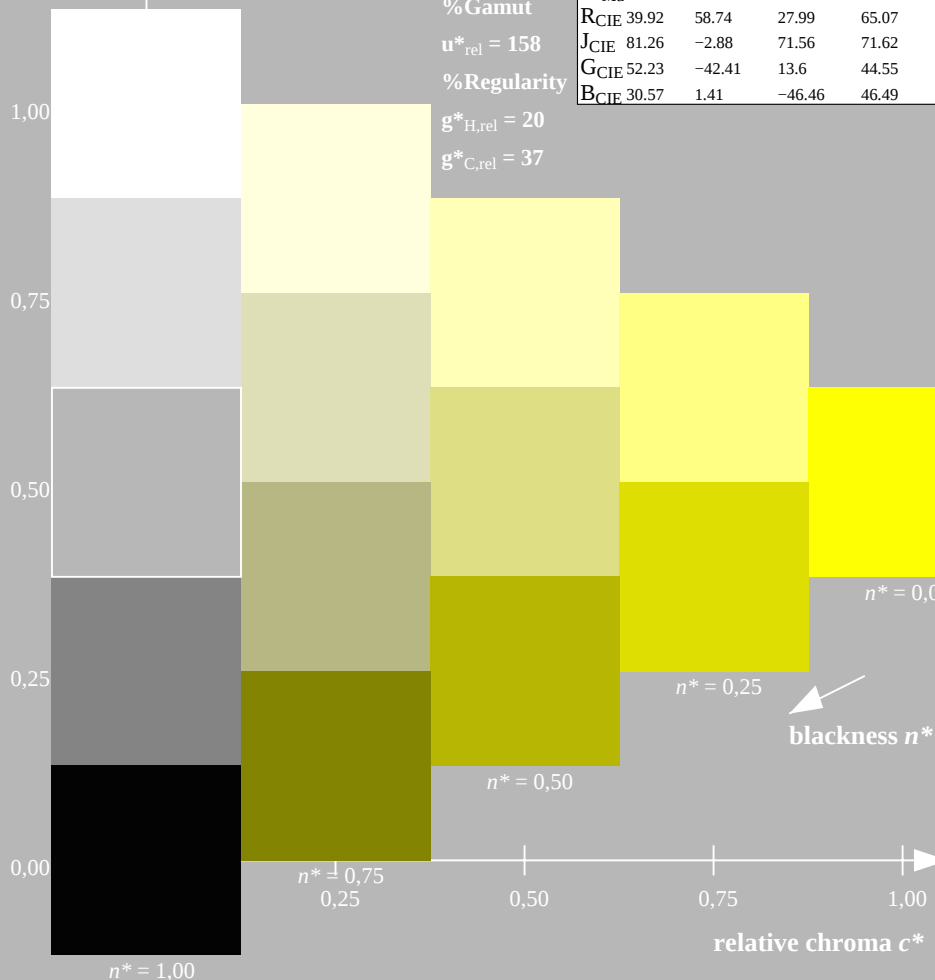

OE730-7N-130-1: 5 step scales for constant CIELAB hue 103/360 = 0.286 (left)

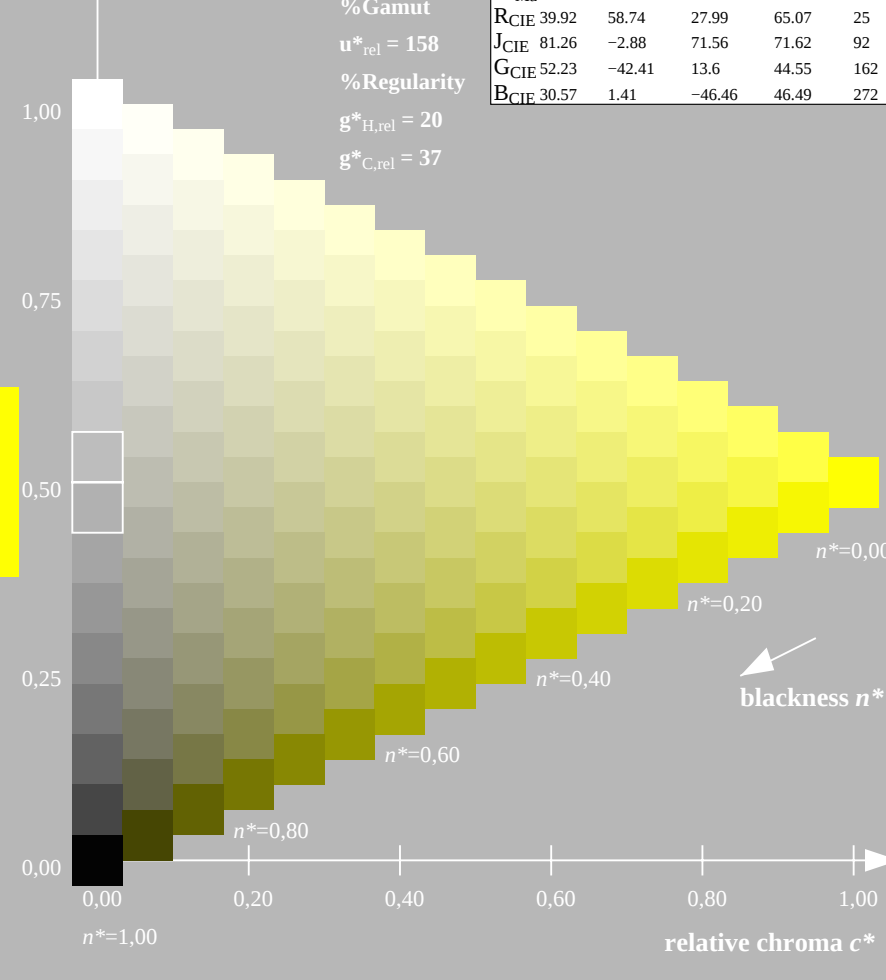

16 step scales for constant CIELAB hue 103/360 = 0.286 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue Y; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_d$) $setcmyk$
output 137-1: $g_P=0.47$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 136/360 = 0.378$


lab^*tch and lab^*nch

D65: hue L

LCH*Ma: 84 115 136

olv*Ma: 0.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 136/360 = 0.378$


lab^*tch and lab^*nch

D65: hue L

LCH*Ma: 84 115 136

olv*Ma: 0.0 1.0 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

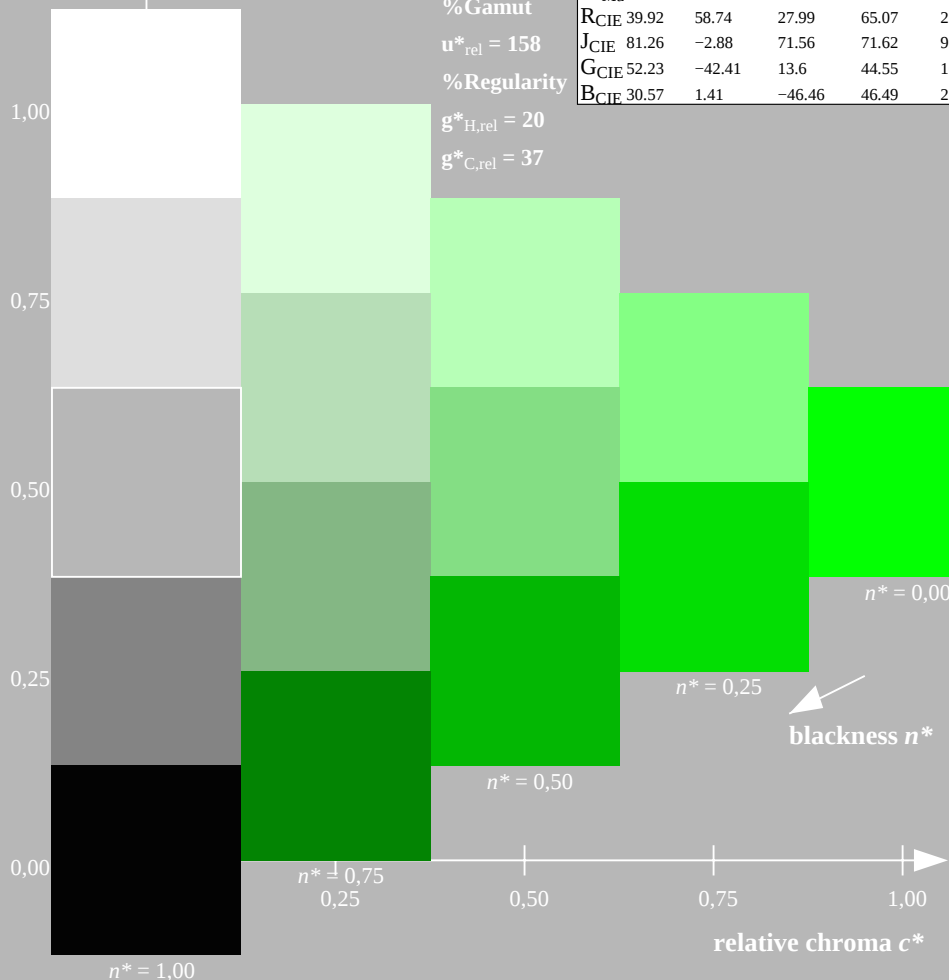

OE730-7N-130-2: 5 step scales for constant CIELAB hue 136/360 = 0.378 (left)

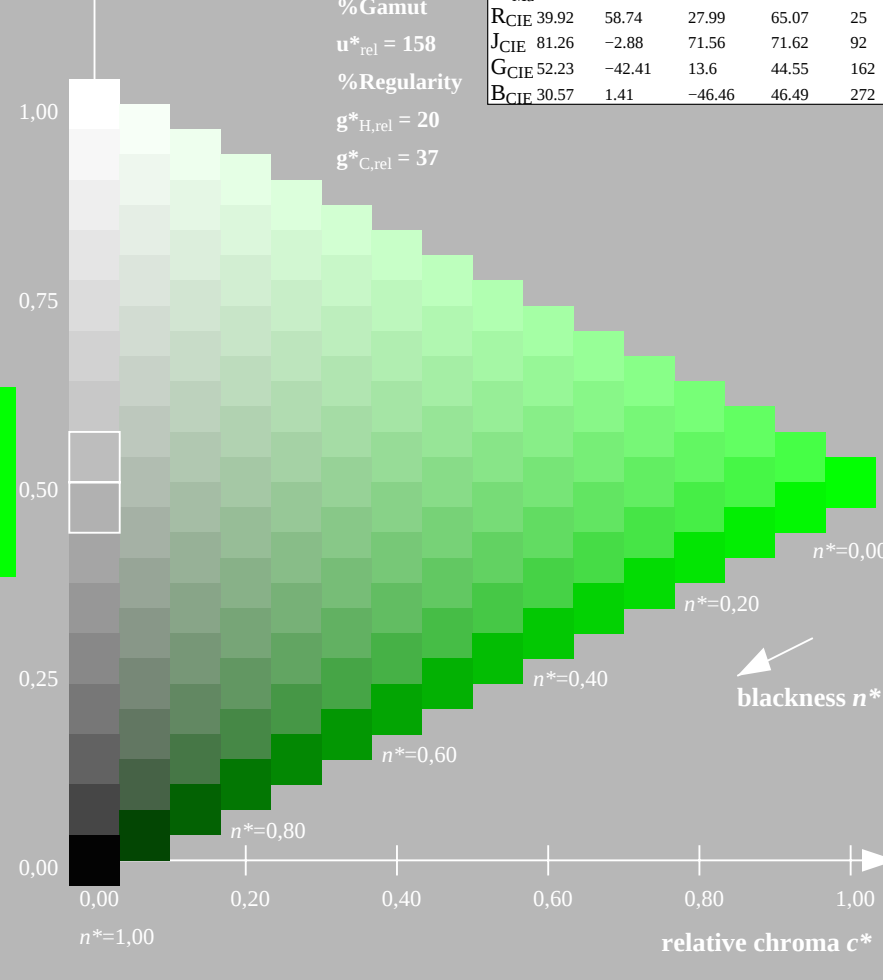

16 step scales for constant CIELAB hue 136/360 = 0.378 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue L; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{d}$) $setcmyk$
output 137-2: $g_P=0.47$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 196/360 = 0.545$


lab^*tch and lab^*nch

D65: hue C

LCH*Ma: 87 48 196

olv*Ma: 0.0 1.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 196/360 = 0.545$


lab^*tch and lab^*nch

D65: hue C

LCH*Ma: 87 48 196

olv*Ma: 0.0 1.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

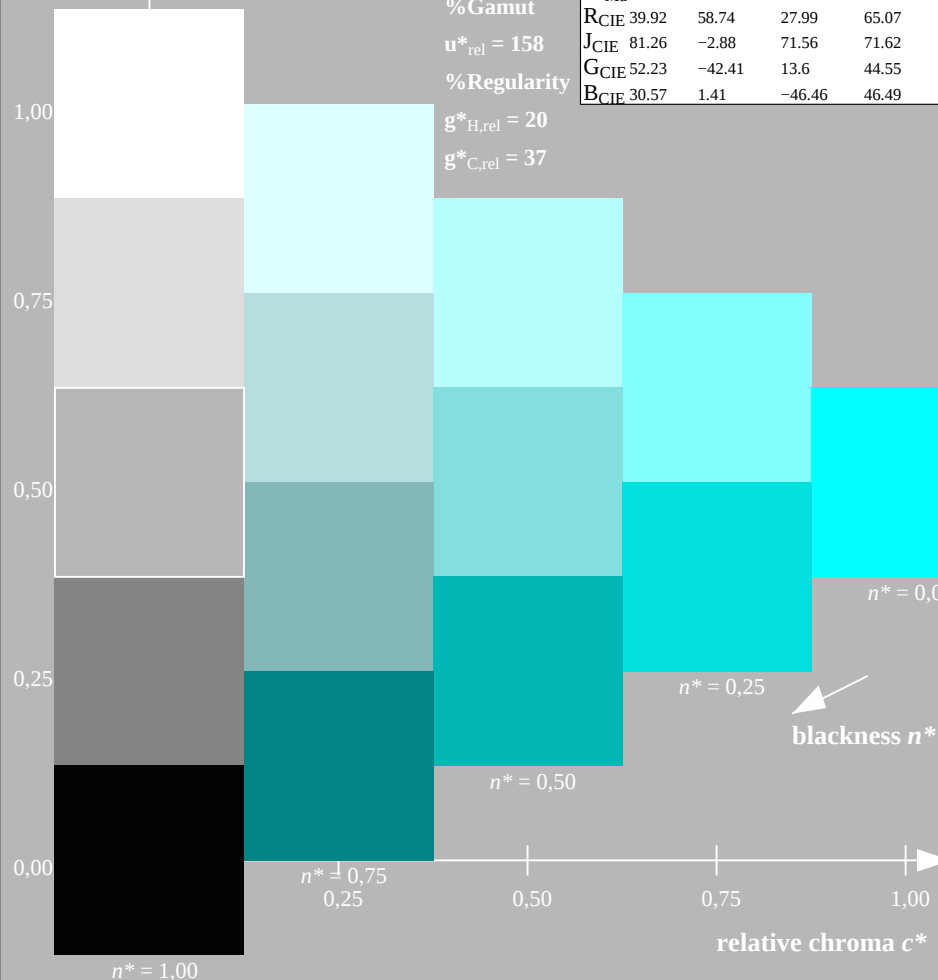

OE730-7N-130-3: 5 step scales for constant CIELAB hue 196/360 = 0.545 (left)

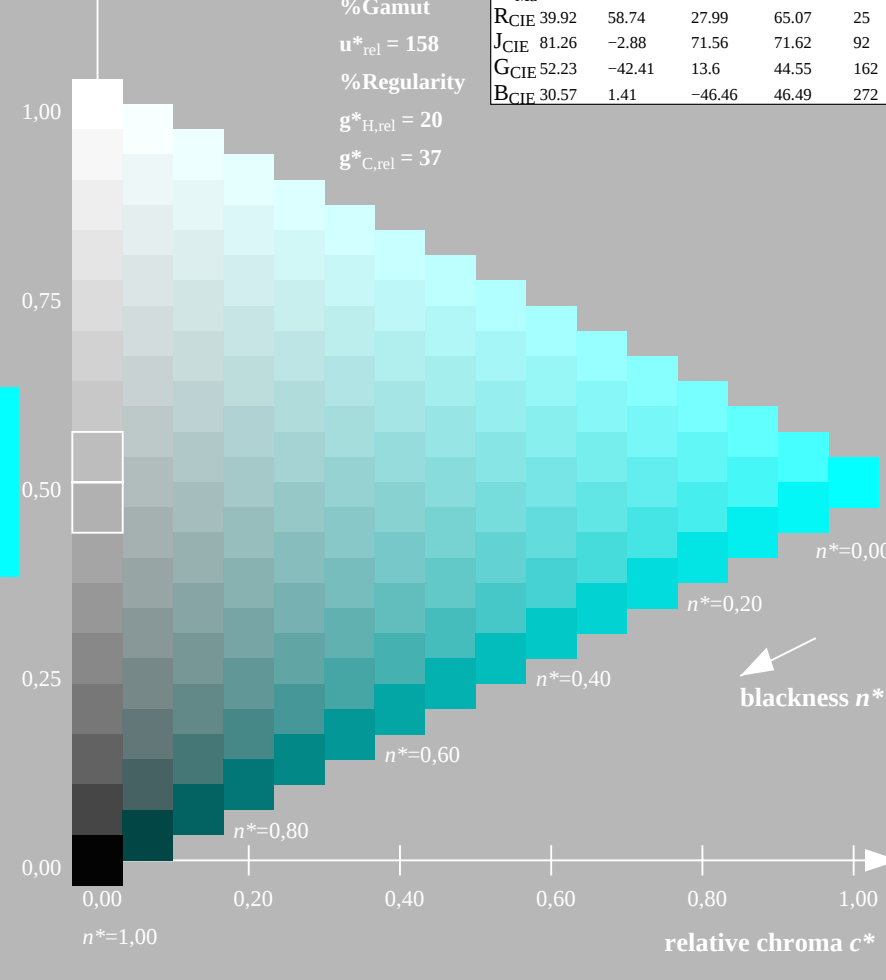

16 step scales for constant CIELAB hue 196/360 = 0.545 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue C; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{\Delta}$) $setcmyk$
output 137-3: $g_P=0.47$; $g_N=1.0$

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 306/360 = 0.851$


lab^*tch and lab^*nch

D65: hue V

LCH*Ma: 30 129 306

olv*Ma: 0.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 306/360 = 0.851$


lab^*tch and lab^*nch

D65: hue V

LCH*Ma: 30 129 306

olv*Ma: 0.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

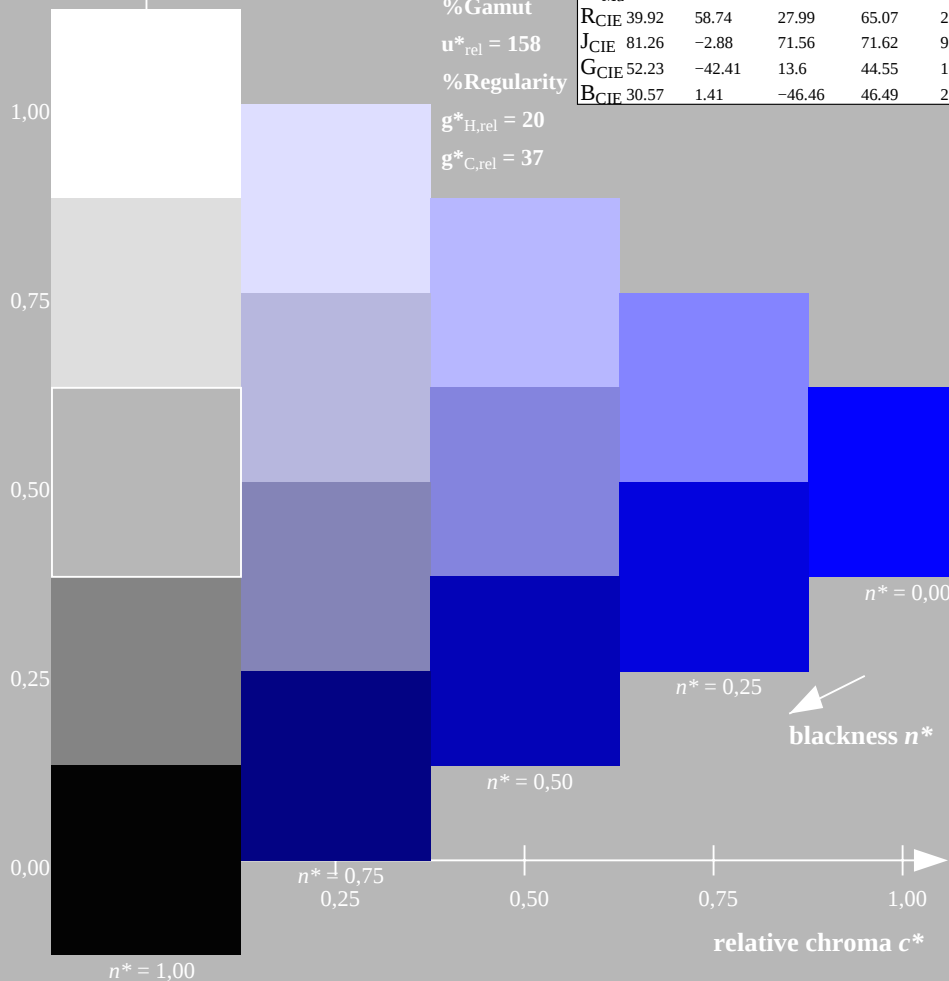

OE730-7N-130-4: 5 step scales for constant CIELAB hue 306/360 = 0.851 (left)

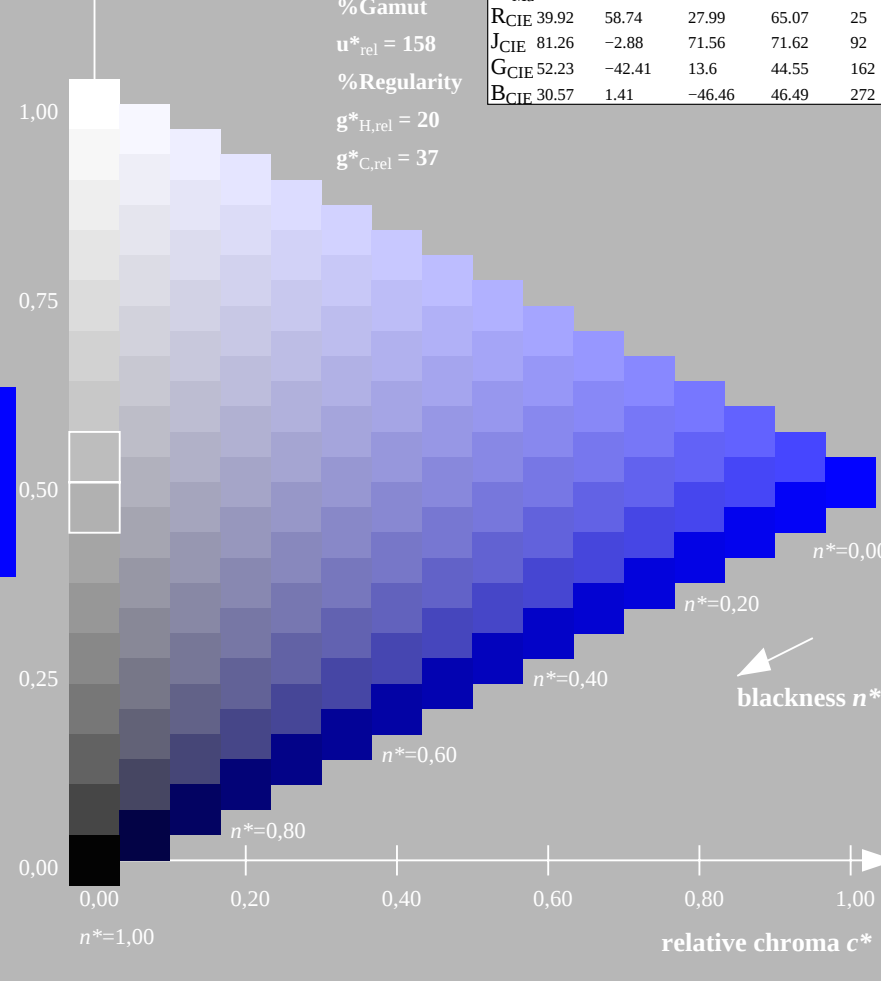

16 step scales for constant CIELAB hue 306/360 = 0.851 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue V; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{d}$) $setcmyk$
output 137-4: $g_P=0.47$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 328/360 = 0.912$


lab^*tch and lab^*nch

D65: hue M

LCH*Ma: 57 111 328

olv*Ma: 1.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 328/360 = 0.912$


lab^*tch and lab^*nch

D65: hue M

LCH*Ma: 57 111 328

olv*Ma: 1.0 0.0 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

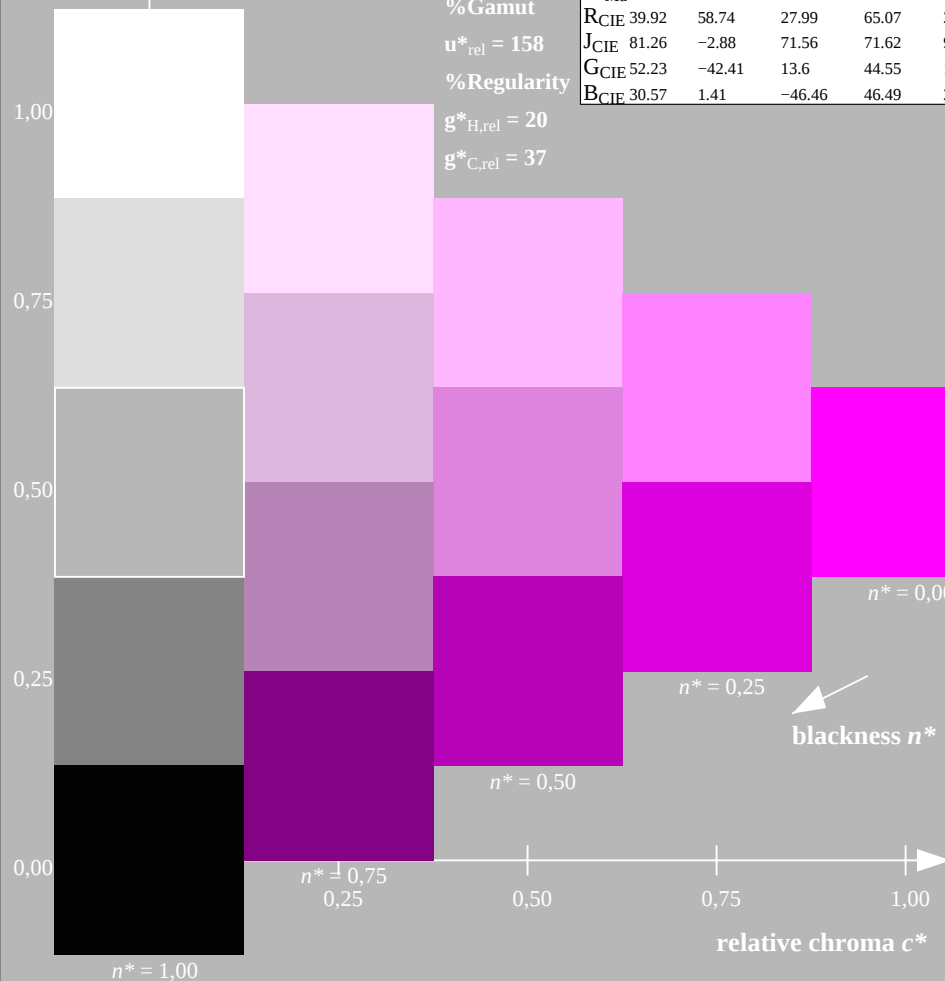

OE730-7N-130-5: 5 step scales for constant CIELAB hue 328/360 = 0.912 (left)

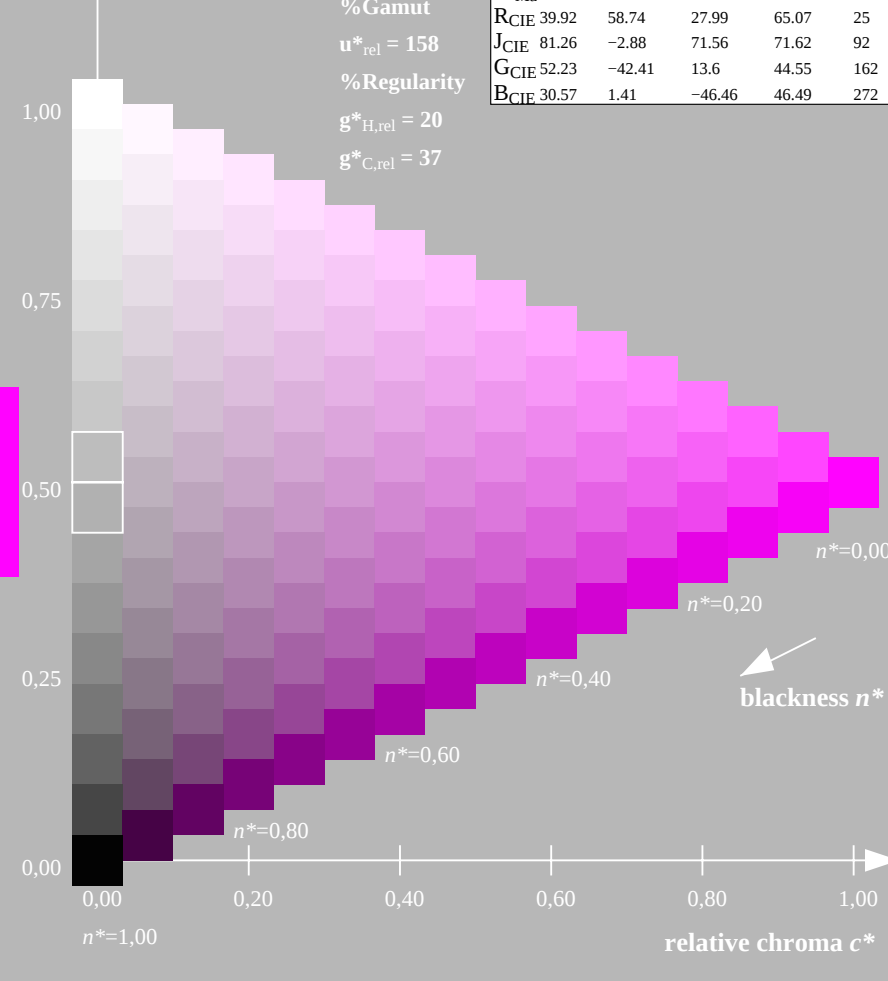

16 step scales for constant CIELAB hue 328/360 = 0.912 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue M; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{d}$) $setcmyk$
output 137-5: $g_P=0.47$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 25/360 = 0.071$


lab^*tch and lab^*nch

D65: hue R

LCH*Ma: 52 89 25

olv*Ma: 1.0 0.0 0.21

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 25/360 = 0.071$


lab^*tch and lab^*nch

D65: hue R

LCH*Ma: 52 89 25

olv*Ma: 1.0 0.0 0.21

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

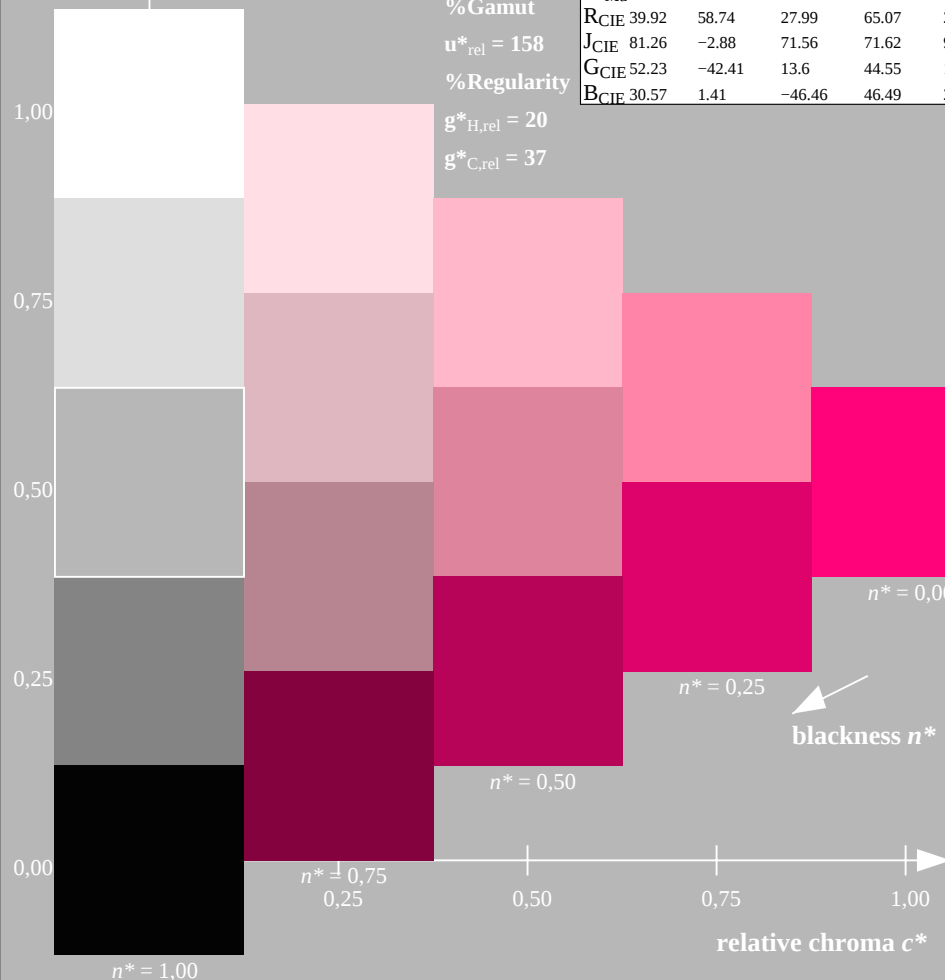

OE730-7N-130-6: 5 step scales for constant CIELAB hue 25/360 = 0.071 (left)

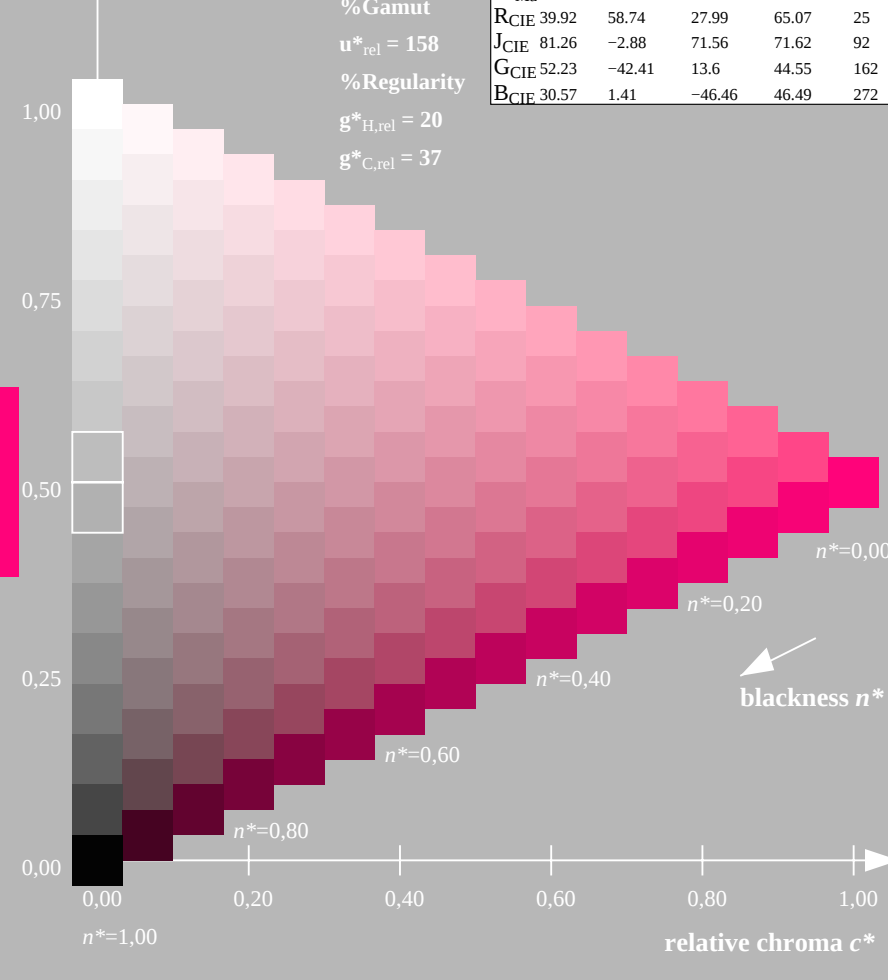

16 step scales for constant CIELAB hue 25/360 = 0.071 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue R; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 137-6: $g_P=0.47$; $g_N=1.0$

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 92/360 = 0.256$


lab^*tch and lab^*nch

D65: hue J

LCH*Ma: 85 86 92

olv*Ma: 1.0 0.82 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 92/360 = 0.256$


lab^*tch and lab^*nch

D65: hue J

LCH*Ma: 85 86 92

olv*Ma: 1.0 0.82 0.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

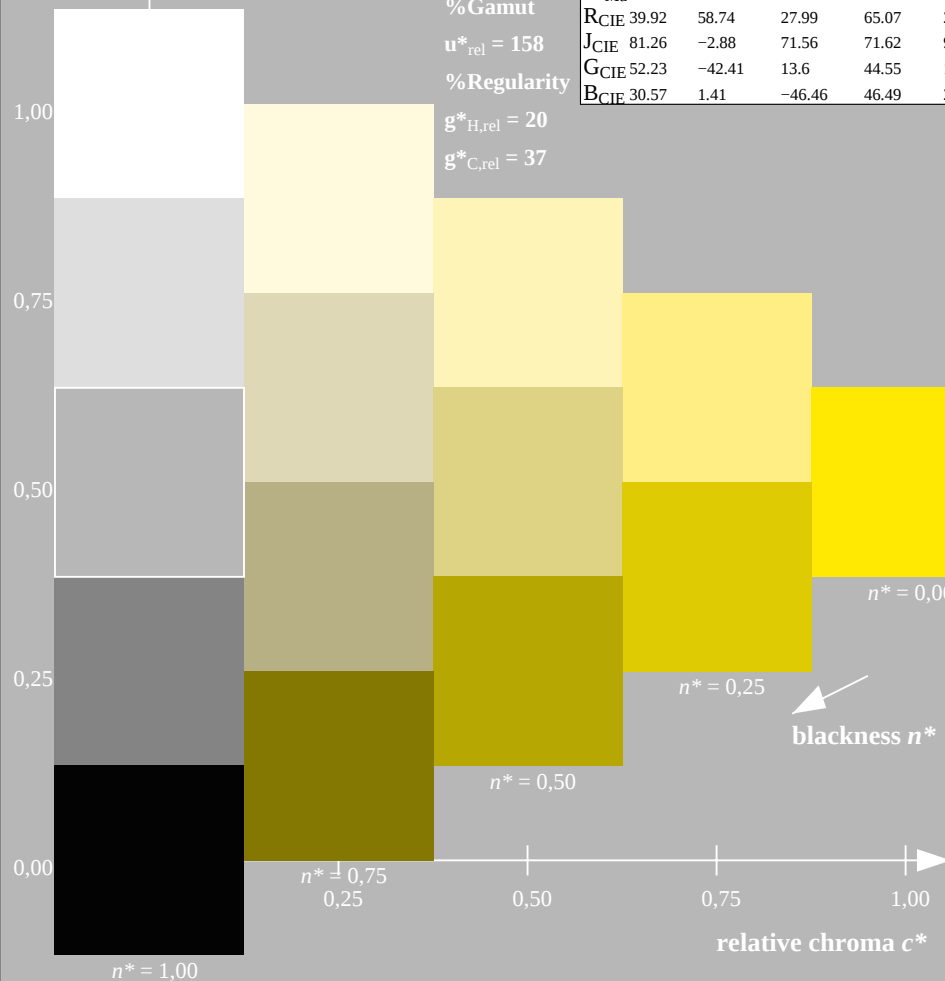

OE730-7N-130-7: 5 step scales for constant CIELAB hue 92/360 = 0.256 (left)

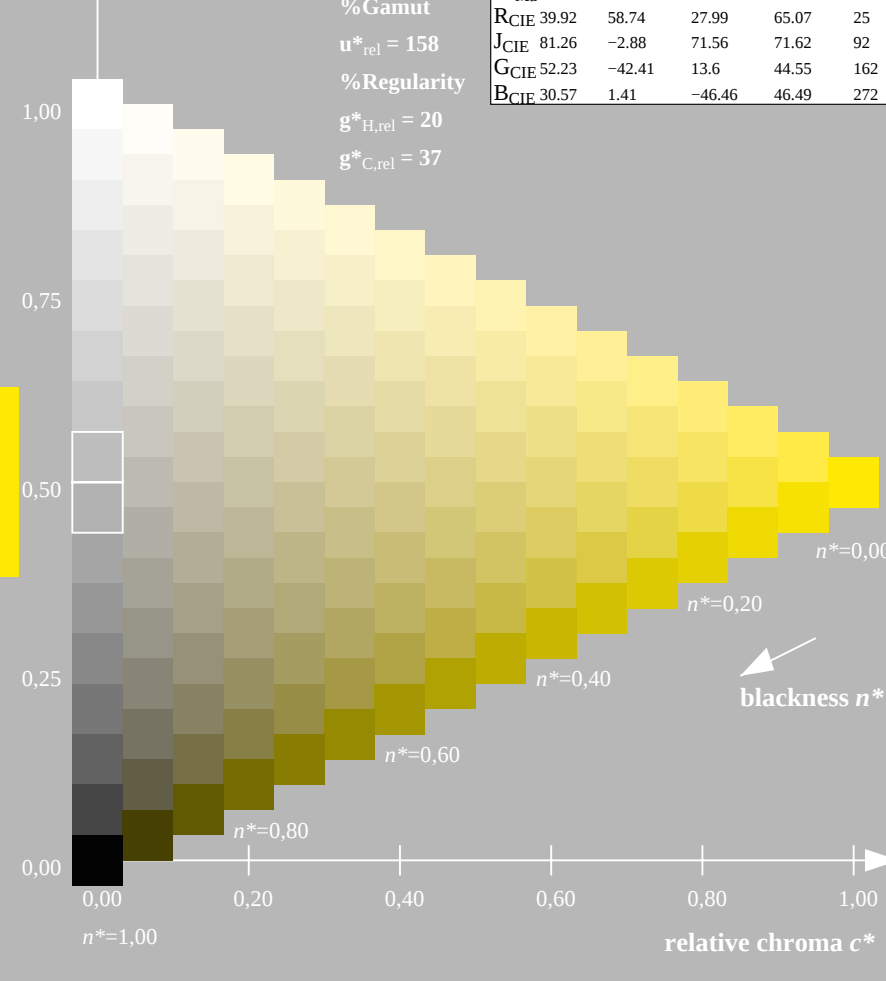

16 step scales for constant CIELAB hue 92/360 = 0.256 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue J; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 137-7: $g_P=0.47$; $g_N=1.0$

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 162/360 = 0.451$


lab^*tch and lab^*nch

D65: hue G

LCH*Ma: 86 62 162

olv*Ma: 0.0 1.0 0.65

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 162/360 = 0.451$


lab^*tch and lab^*nch

D65: hue G

LCH*Ma: 86 62 162

olv*Ma: 0.0 1.0 0.65

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

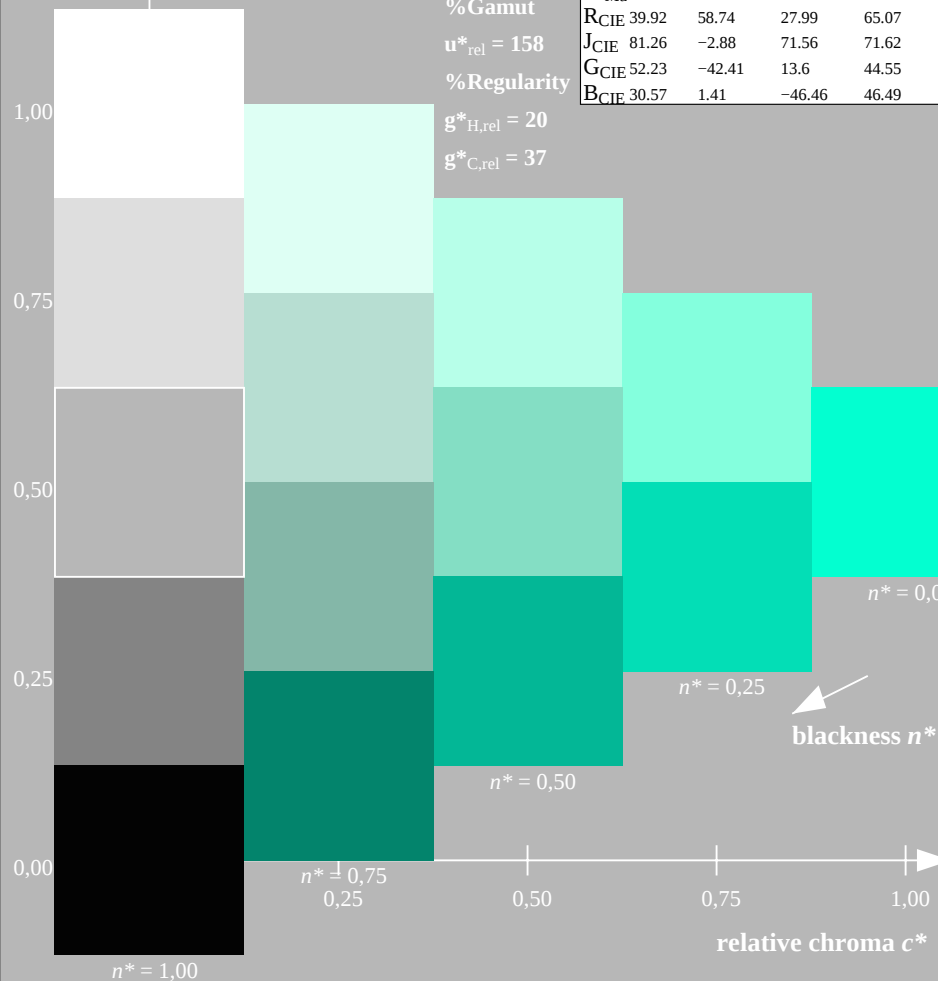

OE730-7N-130-8: 5 step scales for constant CIELAB hue 162/360 = 0.451 (left)

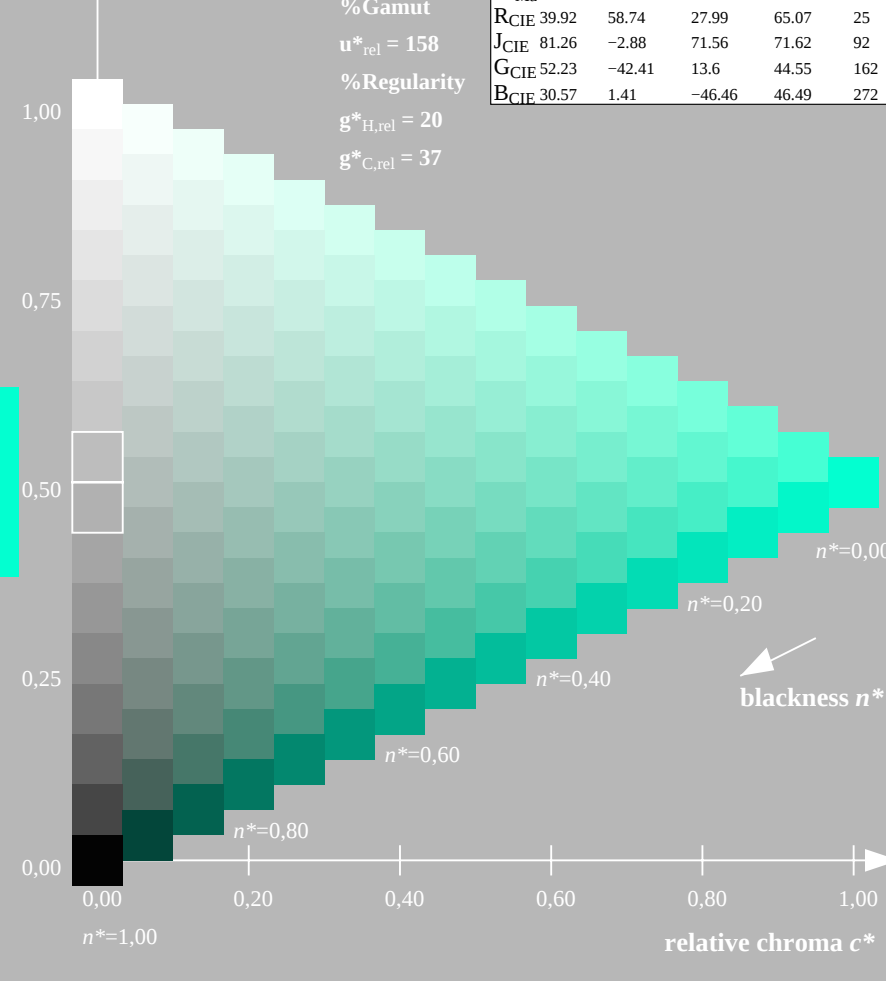

16 step scales for constant CIELAB hue 162/360 = 0.451 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue G; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmY0$ ($\rightarrow cmY0^*_{de}$) $setcmYk$
output 137-8: $g_P=0.47$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems

TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 272/360 = 0.755$


lab^*tch and lab^*nch

D65: hue B

LCH*Ma: 65 49 272

olv*Ma: 0.0 0.61 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$

%Regularity

$g^*_{H,rel} = 20$

$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a

for hue $h^* = lab^*h = 272/360 = 0.755$


lab^*tch and lab^*nch

D65: hue B

LCH*Ma: 65 49 272

olv*Ma: 0.0 0.61 1.0

triangle lightness t^*



%Gamut

$u^*_{rel} = 158$


%Regularity

$g^*_{H,rel} = 20$


$g^*_{C,rel} = 37$

TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

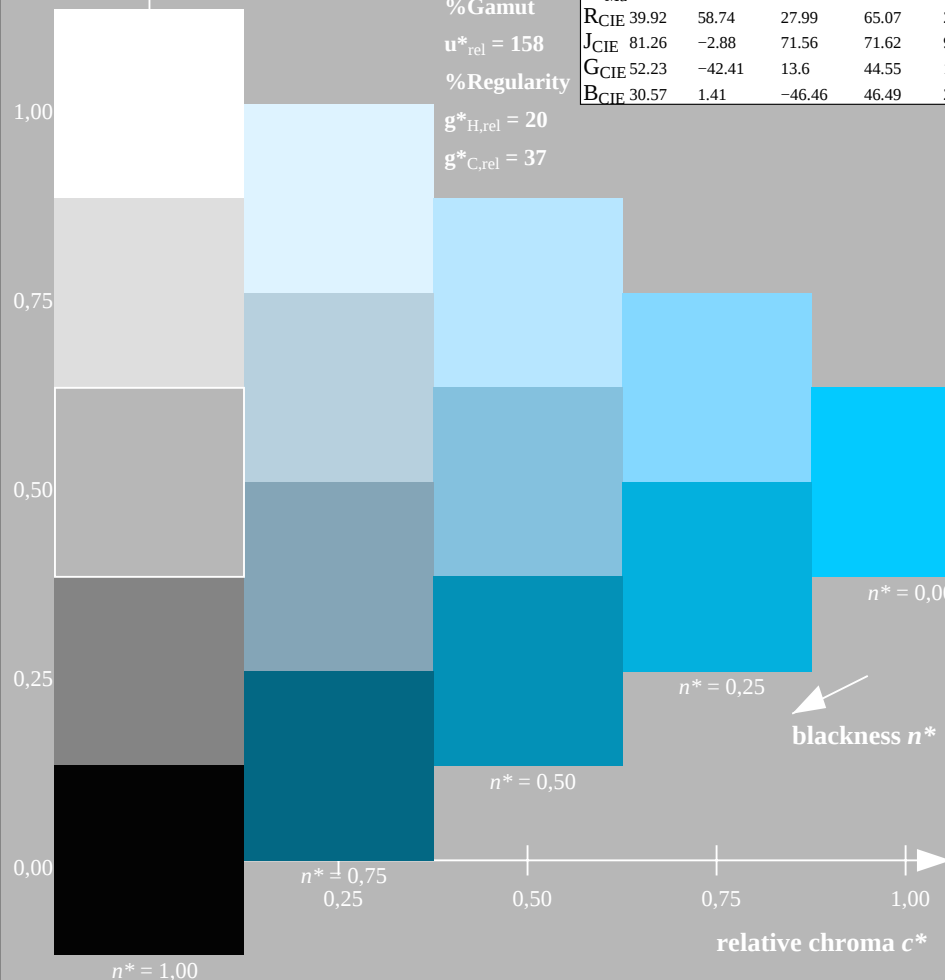

OE730-7N-130-9: 5 step scales for constant CIELAB hue 272/360 = 0.755 (left)

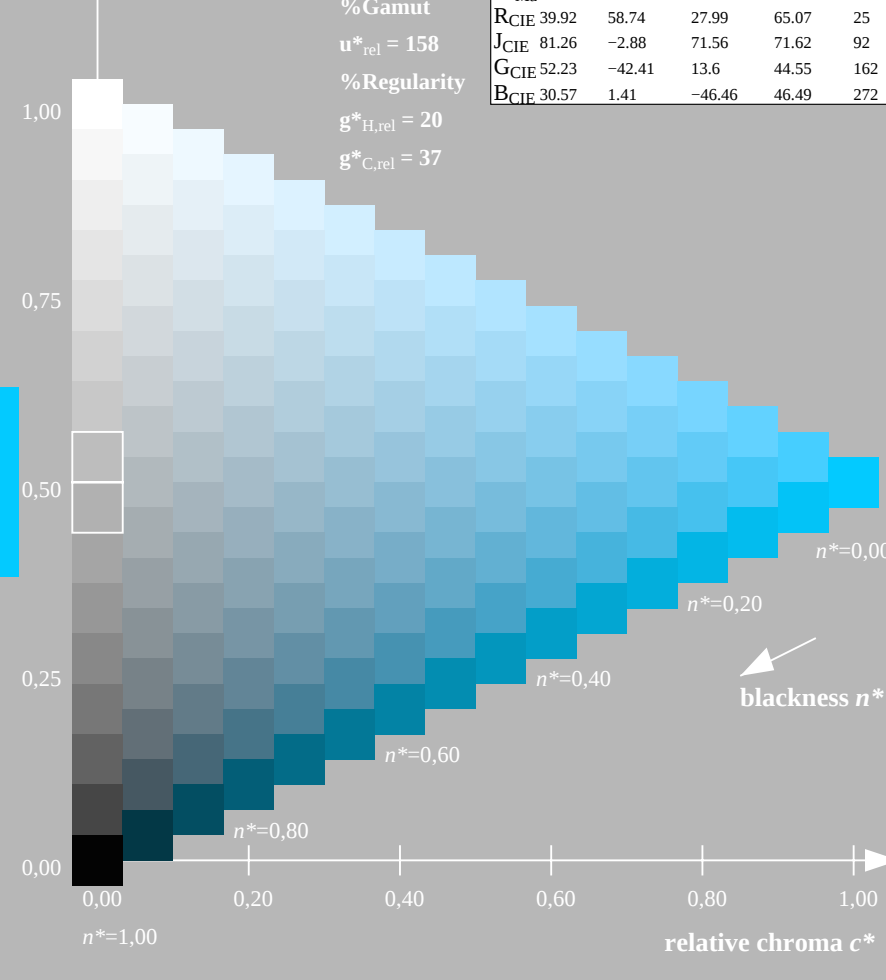


16 step scales for constant CIELAB hue 272/360 = 0.755 (right)

OE73: Test chart 2 according to DIN 33872-2, Hue B; 1MR, DH
Discrimination of 5 and 16 step colour scales

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
output 137-9: $g_P=0.47$; $g_N=1.0$

Discriminability of 5 step colour series (Yes/No decision)

Layout example: three 5 step colour series



There are three basic colours on each page:
Black N, White W and Chromatic X.
Ten pages include 10 hue planes
X = OYLCVM and RJGB.
There are at maximum 12 distinguishable steps.

All steps of the three series N-W, W-X and X-N should be distinguishable on all pages.

Are the three 5step series distinguishable on all pages? underline: Yes/No

only in case of No: Are the three 5 step series on Page x of 10 pages distinguishable?

Underline Yes/No and give in case of No the number of distinguishable steps?

- Page 1: Yes/No, if No ../12 step differences are distinguishable of O = Orange Red
Page 2: Yes/No, if No ../12 step differences are distinguishable of Y = Yellow
Page 3: Yes/No, if No ../12 step differences are distinguishable of L = Leaf green
Page 4: Yes/No, if No ../12 step differences are distinguishable of C = Cyan blue
Page 5: Yes/No, if No ../12 step differences are distinguishable of V = Violett blue
Page 6: Yes/No, if No ../12 step differences are distinguishable of M = Magenta Red
Page 7: Yes/No, if No ../12 step differences are distinguishable of R = Elementary Red
Page 8: Yes/No, if No ../12 step differences are distinguishable of J = Elementary yellow
Page 9: Yes/No, if No ../12 step differences are distinguishable of G = Elementary Green
Page 10: Yes/No, if No ../12 step differences are distinguishable of B = Elementary blue

Sum: ../10 Yes-Pages and ../120 step differences are distinguishable

Part 1

OE730-3N-137-10

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE73/OE73L0NP.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE73/OE73L0NA.PS> or underline Yes/No

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline monitor/data projector/printer

Device model, driver and version:.....

Device output with PDF/PS-file: underline PDF/PS-file

For device output with PDF-file OE73L0NP.PDF:

- either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file OE73L0NA.PS:

- either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks: Special remarks, e. g. output of Landscape (L)


.....
.....
.....

Part 3

OE730-7N-137-10

Discriminability of 16 step colour series (Yes/No decision)

Layout example: three 16 step colour series

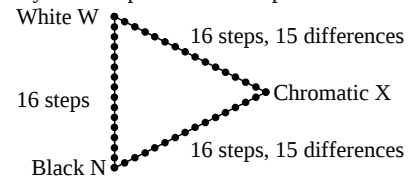

There are three basic colours on each page:
Black N, White W and Chromatic X.
Ten pages include 10 hue planes
X = OYLCVM and RJGB.
There are at maximum 45 distinguishable steps.

All steps of the three series N-W, W-X and X-N should be distinguishable on all pages.

Are the three 16step series distinguishable on all pages? underline: Yes/No

only in case of No: Are the three 16 step series on Page x of 10 pages distinguishable?

Underline Yes/No and give in case of No the number of distinguishable steps?

- Page 1: Yes/No, if No ../45 step differences are distinguishable of O = Orange Red
Page 2: Yes/No, if No ../45 step differences are distinguishable of Y = Yellow
Page 3: Yes/No, if No ../45 step differences are distinguishable of L = Leaf green
Page 4: Yes/No, if No ../45 step differences are distinguishable of C = Cyan blue
Page 5: Yes/No, if No ../45 step differences are distinguishable of V = Violett blue
Page 6: Yes/No, if No ../45 step differences are distinguishable of M = Magenta Red
Page 7: Yes/No, if No ../45 step differences are distinguishable of R = Elementary Red
Page 8: Yes/No, if No ../45 step differences are distinguishable of J = Elementary yellow
Page 9: Yes/No, if No ../45 step differences are distinguishable of G = Elementary Green
Page 10: Yes/No, if No ../45 step differences are distinguishable of B = Elementary blue

Sum: ../10 Yes-Pages and ../450 step differences are distinguishable

Part 2

OE731-3N-137-10

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test:

- either according to DIN 6160:1996 with Anomaloskop of Nagel
or with test charts using colour points according to Ishihara
or tested with, please specify:

underline Yes/No

underline Yes/unknown

underline Yes/unknown

underline Yes/unknown

For visual evaluation of the display (monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky)

underline Yes/No

PDF file: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PDF>

underline Yes/No

PS file: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PS>

underline Yes/No

Picture A7-137-2: contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)

compare standard print output according to ISO/IEC 15775 with range F:0

underline range

Remark: In daylighted offices the contrast range is in many cases:

on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF-File: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PDF>

picture A7-137-2

underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE73/OE73F1P2.PS>

picture A7-137-2

or underline Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry:

underline Yes/No

If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T

Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer
of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF

underline Yes/No

If No, please describe other method:

Part 4


OE731-7N-137-10

OE73: Form A for test chart 2 according to DIN 33872-2; 1MR, DHinput: *cmy0* (->*cmy0**₁) *setcmyk*
Discrimination of colour scales (Yes/No decision) output 137-10: *g_P*=0.47; *g_N*=1.0

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

i	LAB*ref			l*out			LAB*out			LAB*out/c--ref			ΔE*	Start output S1 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
1	69.7	0.0	0.0	0.0	69.7	0.0	0.0	0.0	0.0	0.0	0.0	0.01		
2	71.41	0.0	0.0	0.28	76.8	0.0	0.0	5.39	0.0	0.0	5.39			
3	73.13	0.0	0.0	0.38	79.57	0.0	0.0	6.45	0.0	0.0	6.45			
4	74.84	0.0	0.0	0.47	81.67	0.0	0.0	6.83	0.0	0.0	6.83			
5	76.55	0.0	0.0	0.53	83.42	0.0	0.0	6.87	0.0	0.0	6.87			
6	78.27	0.0	0.0	0.59	84.96	0.0	0.0	6.69	0.0	0.0	6.69			
7	79.98	0.0	0.0	0.65	86.34	0.0	0.0	6.35	0.0	0.0	6.35			
8	81.7	0.0	0.0	0.7	87.6	0.0	0.0	5.9	0.0	0.0	5.9			
9	83.41	0.0	0.0	0.74	88.77	0.0	0.0	5.36	0.0	0.0	5.36			
10	85.12	0.0	0.0	0.78	89.87	0.0	0.0	4.75	0.0	0.0	4.75			
11	86.84	0.0	0.0	0.82	90.91	0.0	0.0	4.07	0.0	0.0	4.07			
12	88.55	0.0	0.0	0.86	91.89	0.0	0.0	3.33	0.0	0.0	3.33			
13	90.27	0.0	0.0	0.9	92.82	0.0	0.0	2.56	0.0	0.0	2.56			
14	91.98	0.0	0.0	0.93	93.72	0.0	0.0	1.74	0.0	0.0	1.74			
15	93.7	0.0	0.0	0.97	94.58	0.0	0.0	0.89	0.0	0.0	0.89	Mean lightness difference (16 steps)		
16	95.41	0.0	0.0	1.0	95.41	0.0	0.0	0.0	0.0	0.0	0.01	ΔE* _{CIELAB} = 4.2		
17	69.7	0.0	0.0	0.0	69.7	0.0	0.0	0.0	0.0	0.0	0.01			
18	76.13	0.0	0.0	0.52	83.01	0.0	0.0	6.88	0.0	0.0	6.88			
19	82.55	0.0	0.0	0.72	88.2	0.0	0.0	5.64	0.0	0.0	5.64			
20	88.98	0.0	0.0	0.87	92.13	0.0	0.0	3.14	0.0	0.0	3.14	Mean lightness difference (5 steps)		
21	95.41	0.0	0.0	1.0	95.41	0.0	0.0	0.0	0.0	0.0	0.01	ΔL* _{CIELAB} = 3.1		
Mean colour reproduction index:												R* _{ab,m} = 82		

OE730-3N-137-11: File: Measure unknown; Device: Device unknown; Date: Date unknown

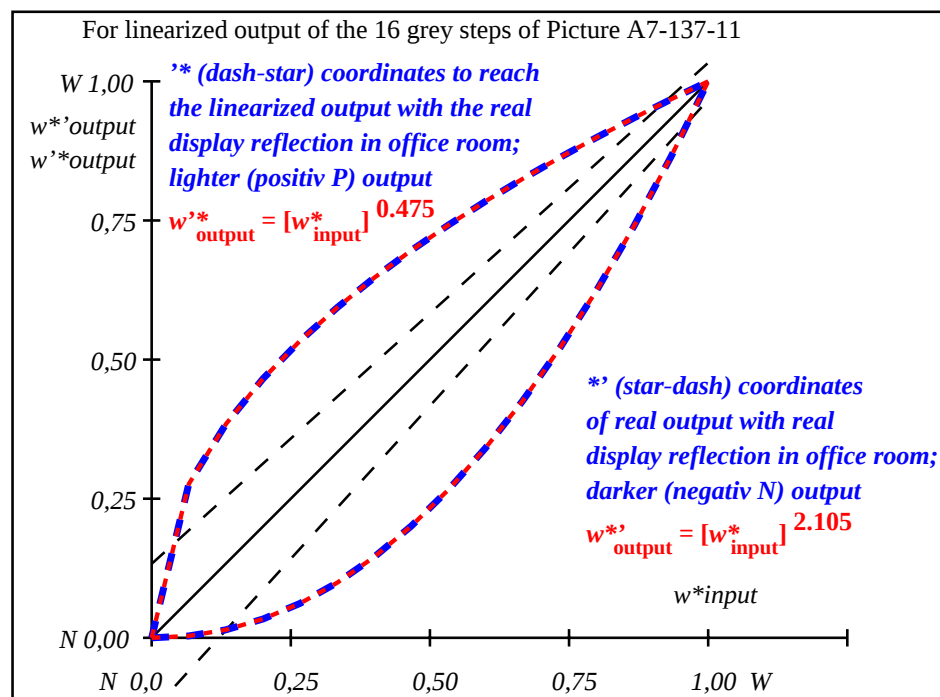

OE731-3N-137-11: File: Measure unknown; Device: Device unknown; Date: Date unknown

$L^*/Y_{intended}$ (absolute)	69.7/40.3	71.4/42.8	73.1/45.4	74.8/48.0	76.6/50.8	78.3/53.7	80.0/56.6	81.7/59.7	83.4/62.9	85.1/66.3	86.8/69.7	88.6/73.2	90.3/76.9	92.0/80.7	93.7/84.6	95.4/88.6
$w^* w^* w^*$ setrgb																
$g_P=0.48$ No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*_{CIELAB, r}$ (relative)																
$w^*_{intended}$	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
w^*_{out}	0.0	0.277	0.384	0.466	0.534	0.593	0.647	0.697	0.742	0.785	0.825	0.863	0.899	0.934	0.968	1.0

OE730-7N, Picture A7-137-11: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^* setrgbcolor$

OE73: In-output relation according to ISO 9241-306; 1MR, DH
Viewing Y contrast $Y_W:Y_N=88,9:40$; Y_N range 30 to <60

input: $cmy0$ (-> $cmy0^*_d$) $setcmyk$
output 137-11: $g_P=0.47$; $g_N=1.0$

TUB registration: 20110801-OE73/OE73L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta