


Input: Colorimetric Television Luminous System TLS00a

with *rgb* data of the
four elementary hues

1 0 0 = Red *R*
1 1 0 = Yellow *J*
0 1 0 = Green *G*
0 0 1 = Blue *B*




TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a


with hue number

$n = 00$ to 19
00 = Red *R*
05 = Yellow *J*
10 = Green *G*
15 = Blue *B*




TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

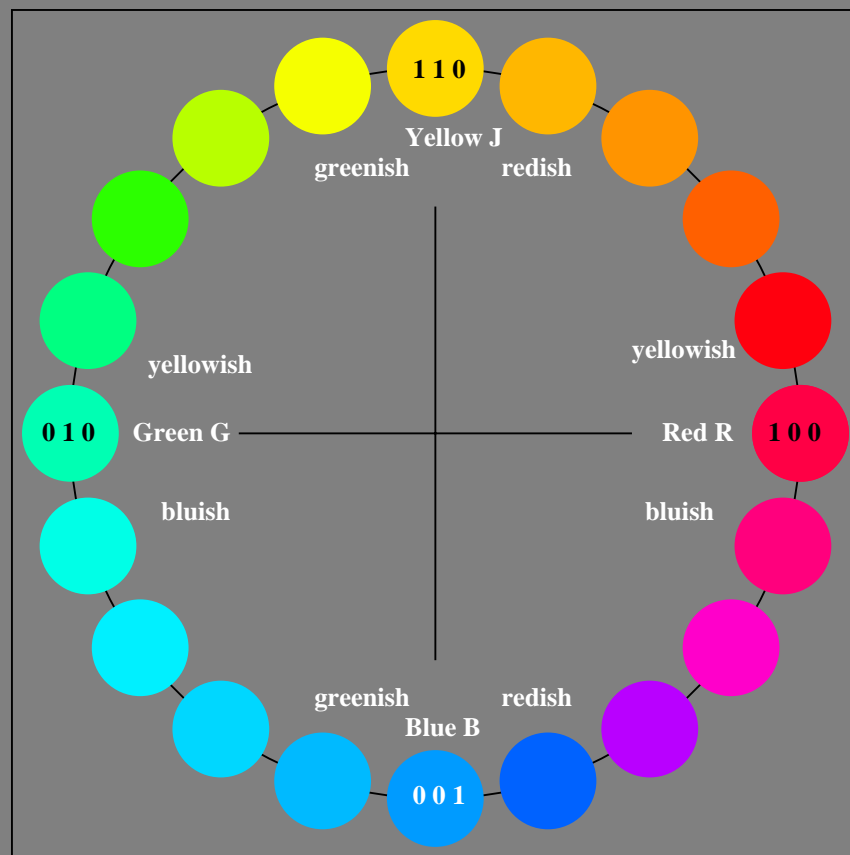

OE860-7N-130-0: 20 step hue circle with elementary colours *R*, *J*, *G*, *B* (left)

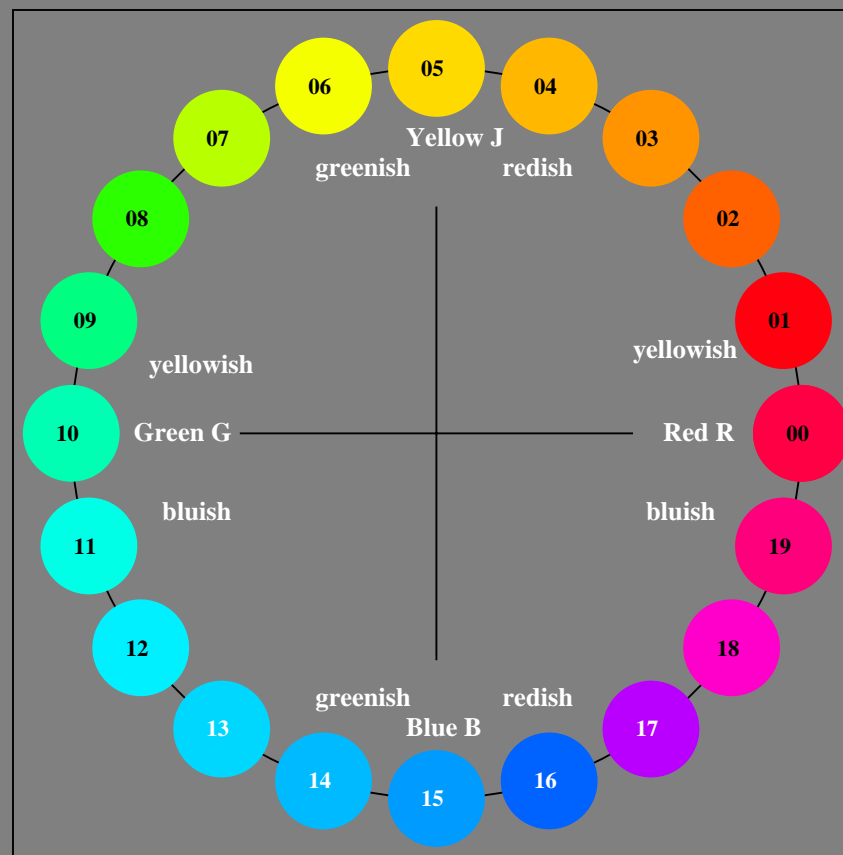


20 step hue circle with elementary colours *R*, *J*, *G*, *B* (right)

OE86: Test chart 5 according to DIN 33872-5; 1MR, DEH
Elementary hue agreement and discrimination

input: *rgb* (\rightarrow *rgb*_{de}) setrgbcolor
output 130-0: $g_P=1.0$; $g_N=1.0$

Agreement with elementary hues (Yes/No decision)

Layout example: agreement with elementary hues



There are four elementary hues on each page: Red R, Yellow J (=french Jaune), Green G, and Blue B.

Input data 1 0 0 should produce Red R.
Input data 0 1 0 should produce Green G.
Input data 0 0 1 should produce Blue B.
Input data 1 1 0 should produce Yellow J.

The elementary hues Red R and Green G should locate on the horizontal axis.
The elementary hues Yellow J and Blue B should locate on the vertical axis.

This test uses a hue circle with 20 hues.

No. 00 and 10 should be Red R and Green G.
No. 05 and 15 should be Yellow J and Blue B.

Are no. 00, 05, 10, and 15 the four elementary hues R, J, G and B? underline: Yes/No
Only in case of "No":

Elementary Red R is hue step no. (e. g. 00, 01, 19)	(neither yellowish nor blueish)
Elementary Yellow J is hue step no. (e. g. 05, 04, 06)	(neither reddish nor greenish)
Elementary Green G is hue step no. (e. g. 10, 09, 11)	(neither yellowish nor blueish)
Elementary Blue B is hue step no. (e. g. 15, 14, 16)	(neither reddish nor greenish)
Result: Of the 4 elementary hues (e.g. three) are at the intended location	

Part 1

OE860-3N-130-1

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE86/OE86L0NP.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE86/OE86L0NA.PS> or underline Yes/No

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline monitor/data projector/printer

Device model, driver and version:.....

Device output with PDF/PS-file: underline PDF/PS-file

For device output with PDF-file OE86L0NP.PDF:

either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file OE86L0NA.PS:

either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks: Special remarks, e. g. output of Landscape (L)


.....
.....
.....

Part 3

OE860-7N-130-1

Discriminability of colours with 20 hues (Yes/No decision)

Layout example: discriminability of colours with 20 hues



There are four elementary hues on each page: Red R, Yellow J (=french Jaune), Green G, and Blue B.

Input data 1 0 0 should produce Red R.
Input data 0 1 0 should produce Green G.
Input data 0 0 1 should produce Blue B.
Input data 1 1 0 should produce Yellow J.

Four hue steps are between:
Red R and Yellow J, Yellow J and Green G,
Green G and Blue B, and Blue B and Red R.

This test uses a hue circle with 20 hues.
All 20 hues should be distinguishable.

For this test it is **not** necessary:

1. All 19 differences are visually equal.
2. Elementary hues locate at 00, 05, 10, and 15.

Are all 20 colours of the 20 hues distinguishable? underline: Yes/No

Only in case of "No":

The colours of the two hue steps no. (e. g. 00 and 01)	are not distinguishable
The colours of the two hue steps no. (e. g. 14 and 15)	are not distinguishable
The colours of the two hue steps no. (e. g. 15 and 16)	are not distinguishable
List other pairs:	
Result: Of the 19 hue differences are (e.g. 18) differences visible	

Part 2

OE861-3N-130-1

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test:

either according to DIN 6160:1996 with Anomaloskop of Nagel
or with test charts using colour points according to Ishihara
or tested with, please specify:

underline Yes/No

underline Yes/unknown

underline Yes/unknown

underline Yes/unknown

For visual evaluation of the display (monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky)

underline Yes/No

PDF file: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PDF>

underline Yes/No

PS file: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PS>

underline Yes/No

Picture A7-130-2: **contrast range:** (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)

compare standard print output according to ISO/IEC 15775 with range F:0 underline range

Remark: In daylighted offices the contrast range is in many cases:

on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF-File: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PDF>

picture A7-130-2

underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PS>

picture A7-130-2

or underline Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry:

underline Yes/No

If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T

Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer

of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF

underline Yes/No

If No, please describe other method:

Part 4

OE861-7N-130-1

OE86: Form A for test chart 1 according to DIN 33872-5; 1MR, DEH
Elementary hue agreement, discrimination (Yes/No-decision) output 130-1: $g_P=1.0$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE*
1	0.0	0.0	0.0	0.0	0.01
2	6.36	0.0	0.07	6.36	0.01
3	12.72	0.0	0.13	12.72	0.01
4	19.08	0.0	0.2	19.08	0.01
5	25.44	0.0	0.27	25.44	0.01
6	31.8	0.0	0.33	31.8	0.01
7	38.16	0.0	0.4	38.16	0.01
8	44.52	0.0	0.47	44.52	0.01
9	50.89	0.0	0.53	50.89	0.01
10	57.25	0.0	0.6	57.25	0.01
11	63.61	0.0	0.67	63.61	0.01
12	69.97	0.0	0.73	69.97	0.01
13	76.33	0.0	0.8	76.33	0.01
14	82.69	0.0	0.87	82.69	0.01
15	89.05	0.0	0.93	89.05	0.01
16	95.41	0.0	1.0	95.41	0.01
17	0.0	0.0	0.0	0.0	0.01
18	23.85	0.0	0.25	23.85	0.01
19	47.71	0.0	0.5	47.71	0.01
20	71.56	0.0	0.75	71.56	0.01
21	95.41	0.0	1.0	95.41	0.01


Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G

Mean lightness difference (16 steps)
 $\Delta E^*_{\text{CIELAB}} = 0.0$

Mean lightness difference (5 steps)
 $\Delta L^*_{\text{CIELAB}} = 0.0$

Mean colour reproduction index: $R^*_{ab,m} = 100$

OE860-3N-130-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

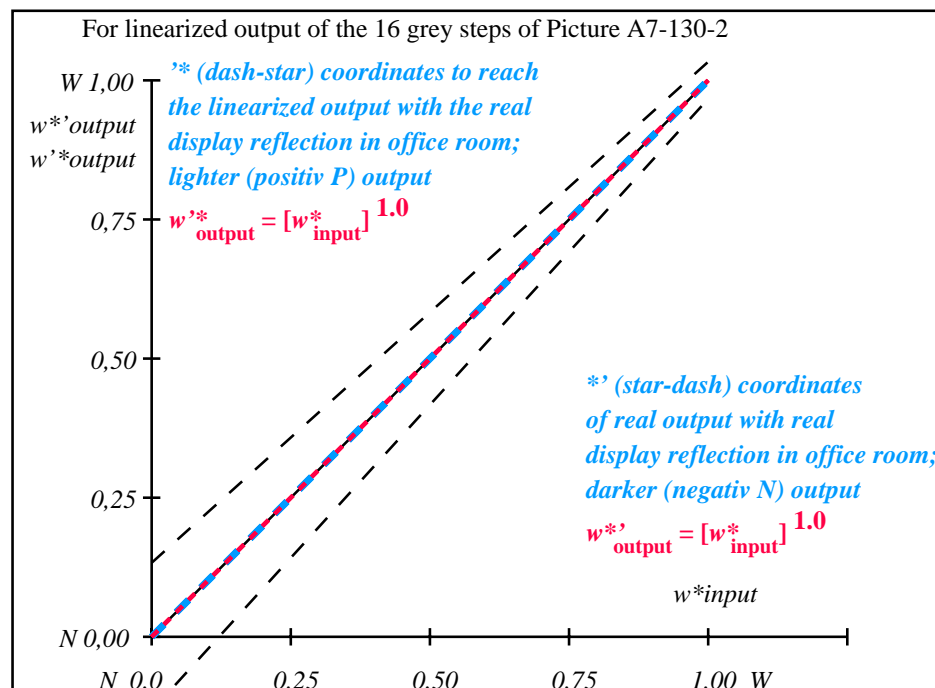

OE861-3N-130-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

L^*/Y_{intended} (absolute)	0.0/0.0	6.4/0.7	12.7/1.5	19.1/2.8	25.4/4.6	31.8/7.0	38.2/10.2	44.5/14.2	50.9/19.2	57.2/25.2	63.6/32.3	70.0/40.7	76.3/50.4	82.7/61.6	89.0/74.3	95.4/88.6
$w^* w^* w^*$ setrgb gp=1.0 No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*$ CIELAB, r (relative)	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
w^*_{intended} w^*_{out}	0.000 0.0	0.067 0.067	0.133 0.133	0.200 0.2	0.267 0.267	0.333 0.333	0.400 0.4	0.467 0.467	0.533 0.533	0.600 0.6	0.667 0.667	0.733 0.733	0.800 0.8	0.867 0.867	0.933 0.933	1.000 1.0


OE860-7N, Picture A7-130-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*$ setrgbcolor

OE86: In-output relation according to ISO 9241-306; 1MR, DEH input: $rgb \rightarrow rgb^*_{de}$ setrgbcolor
Viewing Y contrast $Y_W:Y_N=88,9:0,31$; Y_N range 0,0 to <0,46 output 130-2: $gp=1.0$; $g_N=1.0$

Input: Colorimetric Television Luminous System TLS00a

with *rgb* data of the
four elementary hues

1 0 0 = Red *R*
1 1 0 = Yellow *J*
0 1 0 = Green *G*
0 0 1 = Blue *B*




TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a


with hue number

$n = 00$ to 19
00 = Red *R*
05 = Yellow *J*
10 = Green *G*
15 = Blue *B*




TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

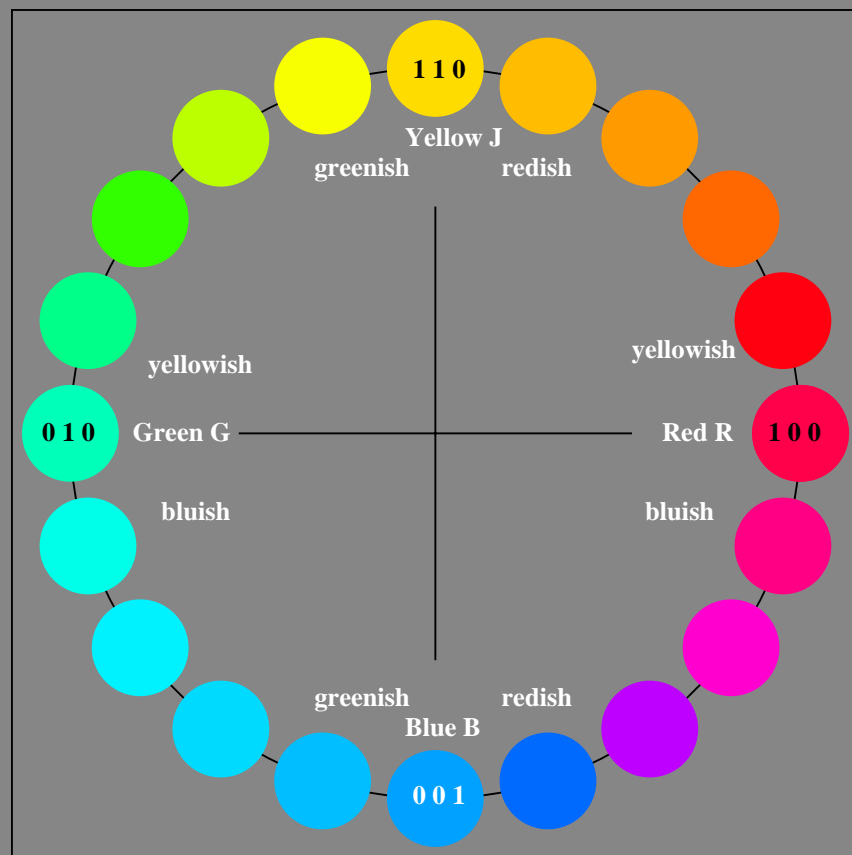

OE860-7N-131-0: 20 step hue circle with elementary colours *R*, *J*, *G*, *B* (left)

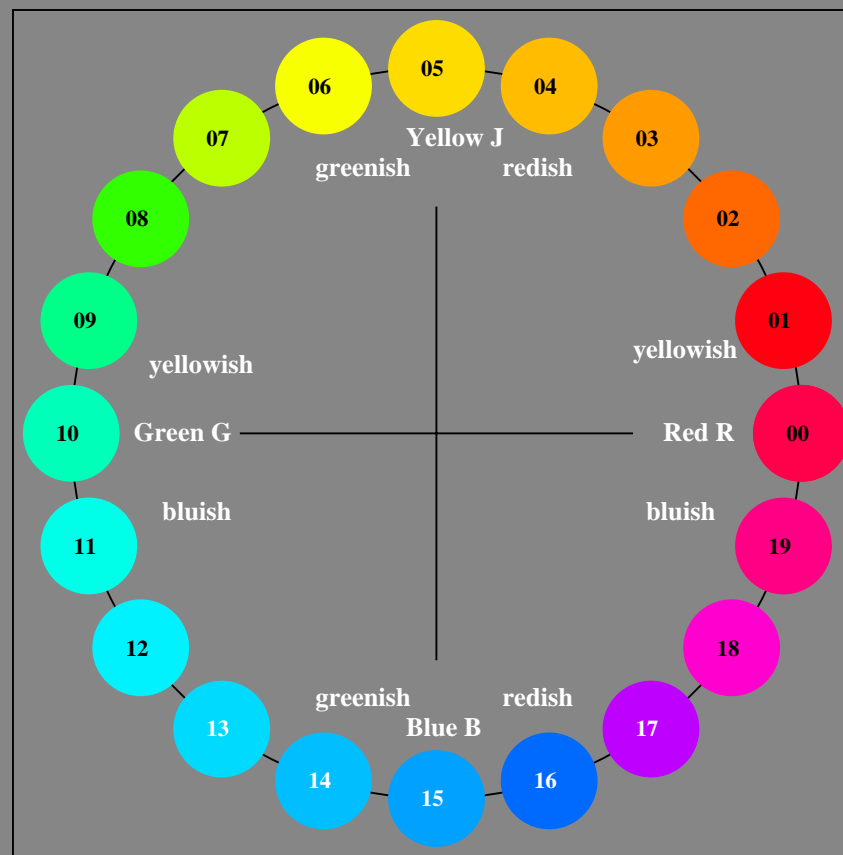


20 step hue circle with elementary colours *R*, *J*, *G*, *B* (right)

OE86: Test chart 5 according to DIN 33872-5; 1MR, DEH
Elementary hue agreement and discrimination

input: *rgb* (\rightarrow *rgb*_{de}) setrgbcolor
output 131-0: $g_P=0.92$; $g_N=1.0$

Agreement with elementary hues (Yes/No decision)

Layout example: agreement with elementary hues

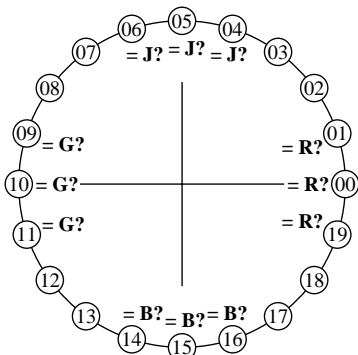

There are four elementary hues on each page: Red R, Yellow J (=french Jaune), Green G, and Blue B.

Input data 1 0 0 should produce Red R.
Input data 0 1 0 should produce Green G.
Input data 0 0 1 should produce Blue B.
Input data 1 1 0 should produce Yellow J.

The elementary hues Red R and Green G should locate on the horizontal axis.
The elementary hues Yellow J and Blue B should locate on the vertical axis.

This test uses a hue circle with 20 hues.

No. 00 and 10 should be Red R and Green G.
No. 05 and 15 should be Yellow J and Blue B.

Are no. 00, 05, 10, and 15 the four elementary hues R, J, G and B? underline: Yes/No

Only in case of "No":

Elementary Red R is hue step no. (e. g. 00, 01, 19)	(neither yellowish nor blueish)
Elementary Yellow J is hue step no. (e. g. 05, 04, 06)	(neither reddish nor greenish)
Elementary Green G is hue step no. (e. g. 10, 09, 11)	(neither yellowish nor blueish)
Elementary Blue B is hue step no. (e. g. 15, 14, 16)	(neither reddish nor greenish)
Result: Of the 4 elementary hues (e.g. three) are at the intended location	

Part 1

OE860-3N-131-1

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE86/OE86L0NP.PDF> underline: Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE86/OE86L0NA.PS> or underline: Yes/No

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline: monitor/data projector/printer

Device model, driver and version:.....

Device output with PDF/PS-file: underline: PDF/PS-file

For device output with PDF-file OE86L0NP.PDF:

either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file OE86L0NA.PS:

either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....


Special remarks: Special remarks, e. g. output of Landscape (L)

Part 3

OE860-7N-131-1

Discriminability of colours with 20 hues (Yes/No decision)

Layout example: discriminability of colours with 20 hues

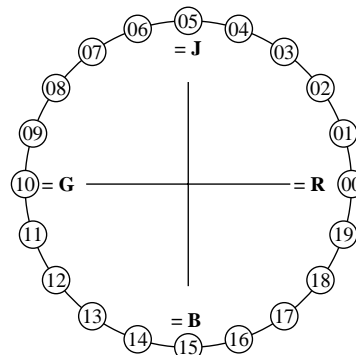

There are four elementary hues on each page: Red R, Yellow J (=french Jaune), Green G, and Blue B.

Input data 1 0 0 should produce Red R.
Input data 0 1 0 should produce Green G.
Input data 0 0 1 should produce Blue B.
Input data 1 1 0 should produce Yellow J.

Four hue steps are between:
Red R and Yellow J, Yellow J and Green G,
Green G and Blue B, and Blue B and Red R.

This test uses a hue circle with 20 hues.
All 20 hues should be distinguishable.

For this test it is **not** necessary:

1. All 19 differences are visually equal.
2. Elementary hues locate at 00, 05, 10, and 15.

Are all 20 colours of the 20 hues distinguishable? underline: Yes/No

Only in case of "No":

The colours of the two hue steps no. (e. g. 00 and 01)	are not distinguishable
The colours of the two hue steps no. (e. g. 14 and 15)	are not distinguishable
The colours of the two hue steps no. (e. g. 15 and 16)	are not distinguishable
List other pairs:	
Result: Of the 19 hue differences are (e.g. 18) differences visible	

Part 2

OE861-3N-131-1

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test:

either according to DIN 6160:1996 with Anomaloskop of Nagel
or with test charts using colour points according to Ishihara
or tested with, please specify:

underline: Yes/No

underline: Yes/unknown

underline: Yes/unknown

underline: Yes/unknown

For visual evaluation of the display (monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky)

underline: Yes/No

PDF file: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PDF>

underline: Yes/No

PS file: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PS>

underline: Yes/No

Picture A7-131-2: contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)
compare standard print output according to ISO/IEC 15775 with range F:0 underline: range

Remark: In daylighted offices the contrast range is in many cases:

on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF-File: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PDF>

picture A7-131-2

underline: Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PS>

picture A7-131-2

or underline: Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry:

underline: Yes/No

If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T

Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer
of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF

underline: Yes/No

If No, please describe other method:

Part 4

OE861-7N-131-1

OE86: Form A for test chart 1 according to DIN 33872-5; 1MR, DEH
Elementary hue agreement, discrimination (Yes/No-decision) output 131-1: $g_P=0.92$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE*
1	5.69 0.0 0.0	0.0 0.0 0.0	5.69 0.0 0.0	0.0 0.0 0.0	0.01
2	11.67 0.0 0.0	0.1 14.73 0.0	0.0 0.0 0.0	3.06 0.0 0.0	3.06
3	17.65 0.0 0.0	0.18 21.96 0.0	0.0 0.0 0.0	4.3 0.0 0.0	4.3
4	23.63 0.0 0.0	0.26 28.63 0.0	0.0 0.0 0.0	4.99 0.0 0.0	4.99
5	29.62 0.0 0.0	0.33 34.96 0.0	0.0 0.0 0.0	5.34 0.0 0.0	5.34
6	35.6 0.0 0.0	0.39 41.05 0.0	0.0 0.0 0.0	5.46 0.0 0.0	5.46
7	41.58 0.0 0.0	0.46 46.96 0.0	0.0 0.0 0.0	5.38 0.0 0.0	5.38
8	47.56 0.0 0.0	0.52 52.72 0.0	0.0 0.0 0.0	5.16 0.0 0.0	5.16
9	53.54 0.0 0.0	0.59 58.36 0.0	0.0 0.0 0.0	4.82 0.0 0.0	4.82
10	59.52 0.0 0.0	0.65 63.88 0.0	0.0 0.0 0.0	4.36 0.0 0.0	4.36
11	65.5 0.0 0.0	0.71 69.32 0.0	0.0 0.0 0.0	3.82 0.0 0.0	3.82
12	71.48 0.0 0.0	0.77 74.67 0.0	0.0 0.0 0.0	3.19 0.0 0.0	3.19
13	77.47 0.0 0.0	0.83 79.95 0.0	0.0 0.0 0.0	2.49 0.0 0.0	2.49
14	83.45 0.0 0.0	0.89 85.16 0.0	0.0 0.0 0.0	1.72 0.0 0.0	1.72
15	89.43 0.0 0.0	0.94 90.31 0.0	0.0 0.0 0.0	0.89 0.0 0.0	0.89
16	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
17	5.69 0.0 0.0	0.0 5.69 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
18	28.12 0.0 0.0	0.31 33.4 0.0	0.0 0.0 0.0	5.28 0.0 0.0	5.28
19	50.55 0.0 0.0	0.56 55.55 0.0	0.0 0.0 0.0	5.0 0.0 0.0	5.0
20	72.98 0.0 0.0	0.78 76.0 0.0	0.0 0.0 0.0	3.02 0.0 0.0	3.02
21	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01


Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G

Mean lightness difference (16 steps)
 $\Delta E^*_{\text{CIELAB}} = 3.4$

Mean lightness difference (5 steps)
 $\Delta L^*_{\text{CIELAB}} = 2.7$

Mean colour reproduction index: $R^*_{\text{ab,m}} = 85$

OE860-3N-131-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

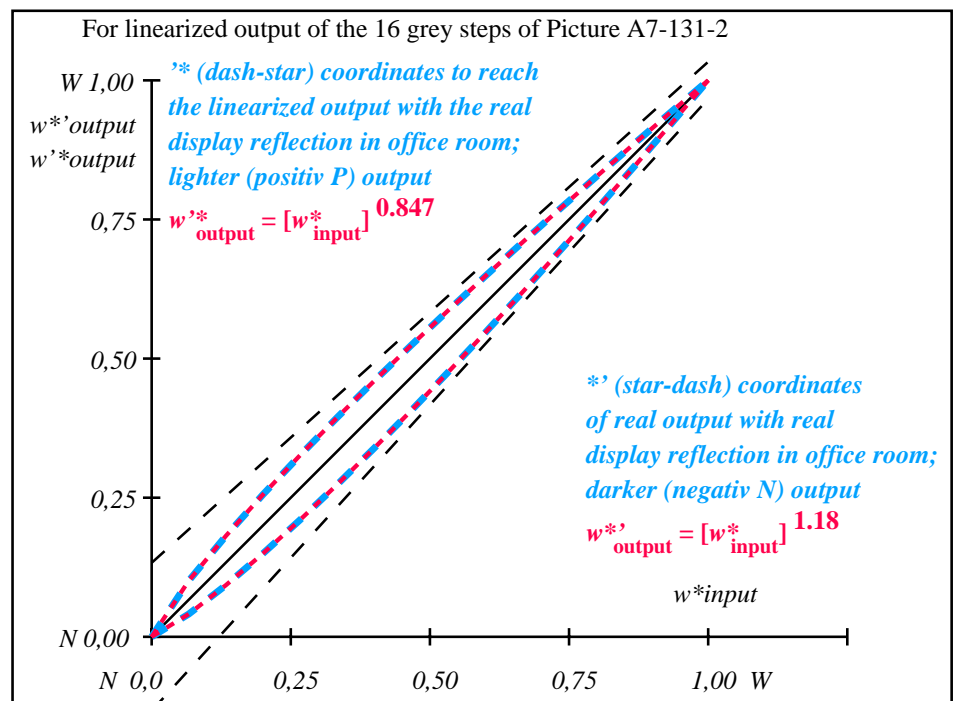

OE861-3N-131-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

L^*/Y_{intended} (absolute)	5.7/0.6	11.7/1.4	17.7/2.4	23.6/4.0	29.6/6.1	35.6/8.8	41.6/12.2	47.6/16.5	53.5/21.5	59.5/27.6	65.5/34.7	71.5/42.9	77.5/52.3	83.4/63.0	89.4/75.1	95.4/88.6
$w^* w^* w^*$ setrgb $g_P=0.85$ No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{\text{CIELAB}, r}$ (relative)																
w^*_{intended}	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
w^*_{out}	0.0	0.101	0.181	0.256	0.327	0.394	0.46	0.525	0.587	0.649	0.71	0.769	0.828	0.886	0.943	1.0


OE860-7N, Picture A7-131-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^* \text{setrgbcolor}$

OE86: In-output relation according to ISO 9241-306; 1MR, DEH input: $rgb \rightarrow rgb^*_{\text{de}}$ setrgbcolor
Viewing Y contrast $Y_W:Y_N=88,9:0,62$; Y_N range 0,46 to <0,93 output 131-2: $g_P=0,92$; $g_N=1,0$

Input: Colorimetric Television Luminous System TLS00a

with *rgb* data of the
four elementary hues

1 0 0 = Red *R*
1 1 0 = Yellow *J*
0 1 0 = Green *G*
0 0 1 = Blue *B*




TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a



with hue number

$n = 00$ to 19
00 = Red *R*
05 = Yellow *J*
10 = Green *G*
15 = Blue *B*



TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

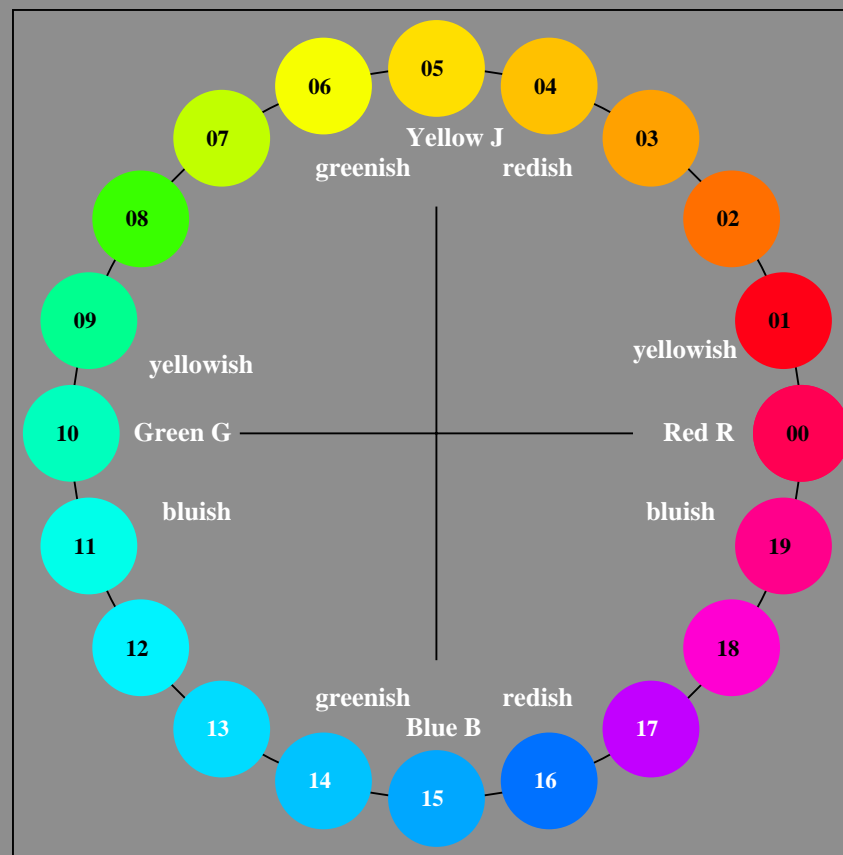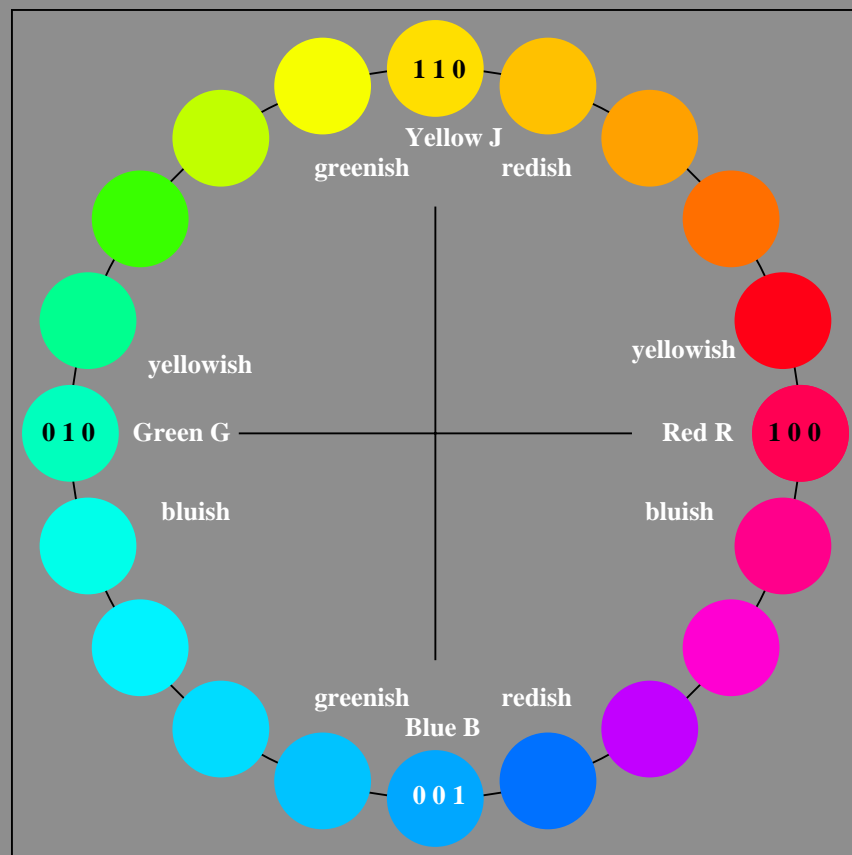

OE860-7N-132-0: 20 step hue circle with elementary colours *R*, *J*, *G*, *B* (left)


20 step hue circle with elementary colours *R*, *J*, *G*, *B* (right)

OE86: Test chart 5 according to DIN 33872-5; 1MR, DEH
Elementary hue agreement and discrimination

input: *rgb* (\rightarrow *rgb*_{de}) setrgbcolor
output 132-0: *g_p*=0.85; *g_N*=1.0

Agreement with elementary hues (Yes/No decision)

Layout example: agreement with elementary hues



There are four elementary hues on each page: Red R, Yellow J (=french Jaune), Green G, and Blue B.

Input data 1 0 0 should produce Red R.
Input data 0 1 0 should produce Green G.
Input data 0 0 1 should produce Blue B.
Input data 1 1 0 should produce Yellow J.

The elementary hues Red R and Green G should locate on the horizontal axis.
The elementary hues Yellow J and Blue B should locate on the vertical axis.

This test uses a hue circle with 20 hues.

No. 00 and 10 should be Red R and Green G.
No. 05 and 15 should be Yellow J and Blue B.

Are no. 00, 05, 10, and 15 the four elementary hues R, J, G and B? underline: Yes/No
Only in case of "No":

Elementary Red R is hue step no. (e. g. 00, 01, 19)	(neither yellowish nor blueish)
Elementary Yellow J is hue step no. (e. g. 05, 04, 06)	(neither reddish nor greenish)
Elementary Green G is hue step no. (e. g. 10, 09, 11)	(neither yellowish nor blueish)
Elementary Blue B is hue step no. (e. g. 15, 14, 16)	(neither reddish nor greenish)
Result: Of the 4 elementary hues (e.g. three)	

Part 1

OE860-3N-132-1

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE86/OE86L0NP.PDF> underline: Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE86/OE86L0NA.PS> or underline: Yes/No

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline: monitor/data projector/printer

Device model, driver and version:.....

Device output with PDF/PS-file: underline: PDF/PS-file

For device output with PDF-file OE86L0NP.PDF:

either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file OE86L0NA.PS:

either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks: Special remarks, e. g. output of Landscape (L)


.....
.....
.....

Part 3

OE860-7N-132-1

Discriminability of colours with 20 hues (Yes/No decision)

Layout example: discriminability of colours with 20 hues



There are four elementary hues on each page: Red R, Yellow J (=french Jaune), Green G, and Blue B.

Input data 1 0 0 should produce Red R.
Input data 0 1 0 should produce Green G.
Input data 0 0 1 should produce Blue B.
Input data 1 1 0 should produce Yellow J.

Four hue steps are between:
Red R and Yellow J, Yellow J and Green G,
Green G and Blue B, and Blue B and Red R.

This test uses a hue circle with 20 hues.
All 20 hues should be distinguishable.

For this test it is **not** necessary:

1. All 19 differences are visually equal.
2. Elementary hues locate at 00, 05, 10, and 15.

Are all 20 colours of the 20 hues distinguishable? underline: Yes/No

Only in case of "No":

The colours of the two hue steps no. (e. g. 00 and 01)	are not distinguishable
The colours of the two hue steps no. (e. g. 14 and 15)	are not distinguishable
The colours of the two hue steps no. (e. g. 15 and 16)	are not distinguishable
List other pairs:	
Result: Of the 19 hue differences are (e.g. 18)	

Part 2

OE861-3N-132-1

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test:

either according to DIN 6160:1996 with Anomaloskop of Nagel
or with test charts using colour points according to Ishihara
or tested with, please specify:

underline: Yes/No

underline: Yes/unknown

underline: Yes/unknown

underline: Yes/unknown

For visual evaluation of the display (monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky)

underline: Yes/No

PDF file: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PDF>

underline: Yes/No

PS file: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PS>

underline: Yes/No

Picture A7-132-2: contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)

compare standard print output according to ISO/IEC 15775 with range F:0 underline: range

Remark: In daylighted offices the contrast range is in many cases:

on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF-File: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PDF>

picture A7-132-2

underline: Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PS>

picture A7-132-2

or underline: Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry:

underline: Yes/No

If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T

Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer

of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF

underline: Yes/No

If No, please describe other method:

Part 4

OE861-7N-132-1

OE86: Form A for test chart 1 according to DIN 33872-5; 1MR, DEH
Elementary hue agreement, discrimination (Yes/No-decision) output 132-1: $g_P=0.85$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE*	Start output S1
1	10.99	0.0	0.0	10.99	0.0	0.0
2	16.62	0.0	0.0	14.22	0.0	0.0
3	22.25	0.0	0.0	23.25	0.0	0.0
4	27.88	0.0	0.0	31.88	0.0	0.0
5	33.5	0.0	0.0	36.84	0.0	0.0
6	39.13	0.0	0.0	42.93	0.0	0.0
7	44.76	0.0	0.0	48.63	0.0	0.0
8	50.39	0.0	0.0	54.03	0.0	0.0
9	56.02	0.0	0.0	59.19	0.0	0.0
10	61.64	0.0	0.0	64.17	0.0	0.0
11	67.27	0.0	0.0	68.98	0.0	0.0
12	72.9	0.0	0.0	73.65	0.0	0.0
13	78.53	0.0	0.0	78.2	0.0	0.0
14	84.15	0.0	0.0	82.64	0.0	0.0
15	89.78	0.0	0.0	86.98	0.0	0.0
16	95.41	0.0	0.0	91.23	0.0	0.0
17	10.99	0.0	0.0	10.99	0.0	0.0
18	32.1	0.0	0.0	41.45	0.0	0.0
19	53.2	0.0	0.0	61.7	0.0	0.0
20	74.31	0.0	0.0	79.32	0.0	0.0
21	95.41	0.0	0.0	95.41	0.0	0.0


Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps) $\Delta E^*_{CIELAB} = 6.0$

Mean lightness difference (5 steps) $\Delta E^*_{CIELAB} = 4.6$

Mean colour reproduction index: $R^*_{ab,m} = 74$

OE860-3N-132-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

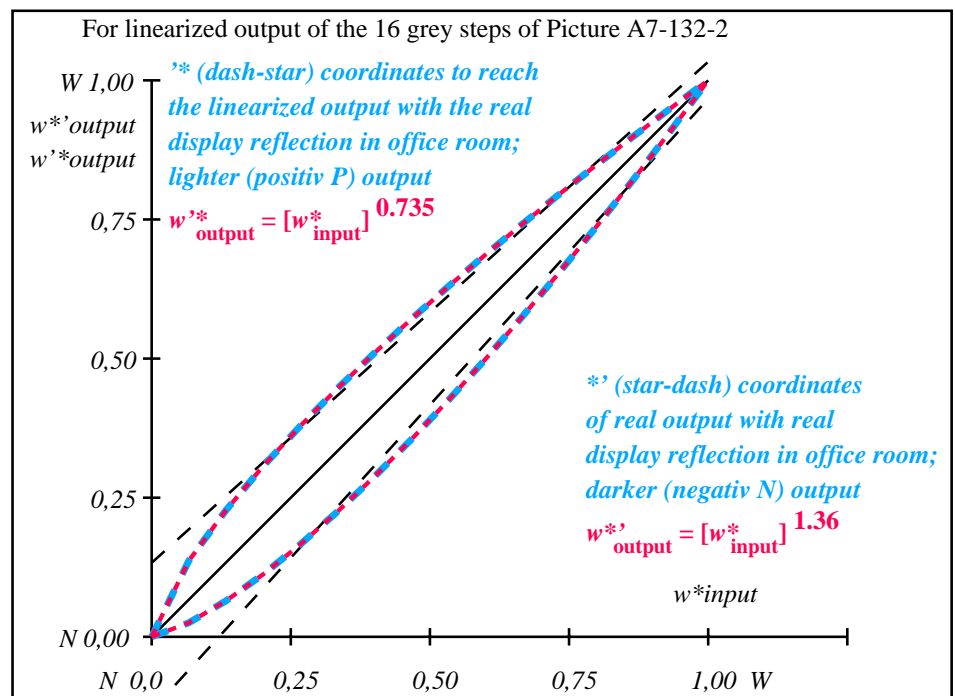

OE861-3N-132-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

$L^*/Y_{intended}$ (absolute)	11.0/1.3	16.6/2.2	22.2/3.6	27.9/5.4	33.5/7.8	39.1/10.7	44.8/14.4	50.4/18.7	56.0/23.9	61.6/30.0	67.3/37.0	72.9/45.0	78.5/54.1	84.2/64.4	89.8/75.8	95.4/88.6
$w^* w^* w^*$ setrgb $g_p=0.74$ No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*_{CIELAB,r}$ (relative)	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
$w^*_{intended}$ w^*_{out}	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000

OE860-7N, Picture A7-132-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*_{setrgbcolor}$


OE86: In-output relation according to ISO 9241-306; 1MR, DEH input: $rgb \rightarrow rgb^*_{de}$ setrgbcolor
Viewing Y contrast $Y_W:Y_N=88,9:1,25$; Y_N range 0,93 to <1,87 output 132-2: $g_p=0.85$; $g_N=1.0$

TUB registration: 20110801-OE86/OE86L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

with *rgb* data of the
four elementary hues

1 0 0 = Red *R*
1 1 0 = Yellow *J*
0 1 0 = Green *G*
0 0 1 = Blue *B*




TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a


with hue number

$n = 00$ to 19
00 = Red *R*
05 = Yellow *J*
10 = Green *G*
15 = Blue *B*




TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

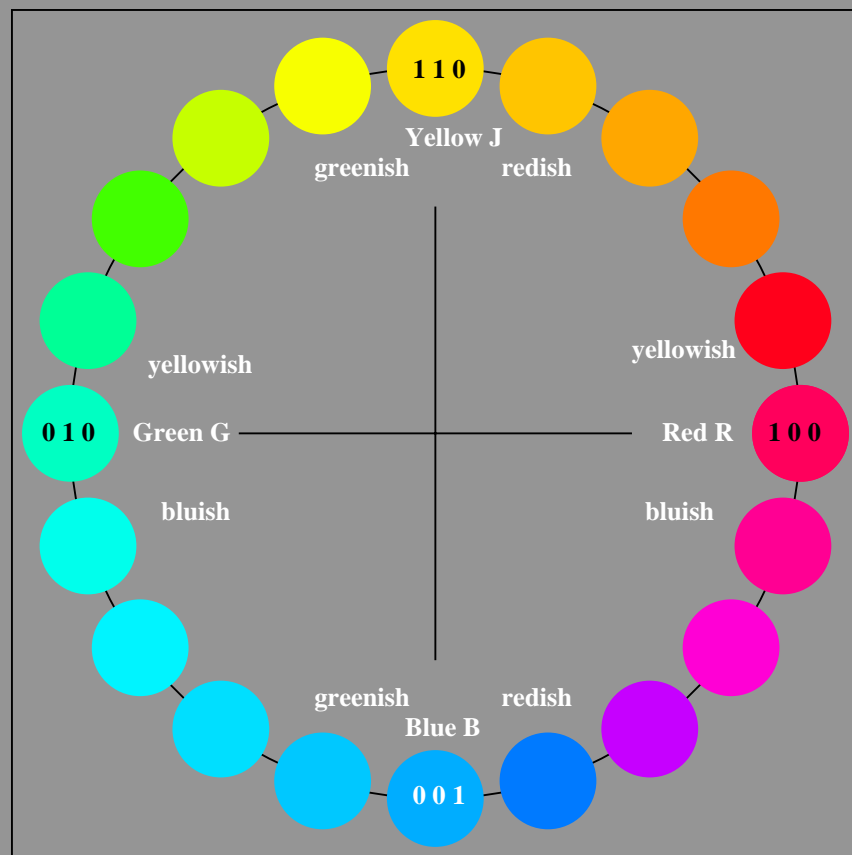

OE860-7N-133-0: 20 step hue circle with elementary colours *R*, *J*, *G*, *B* (left)

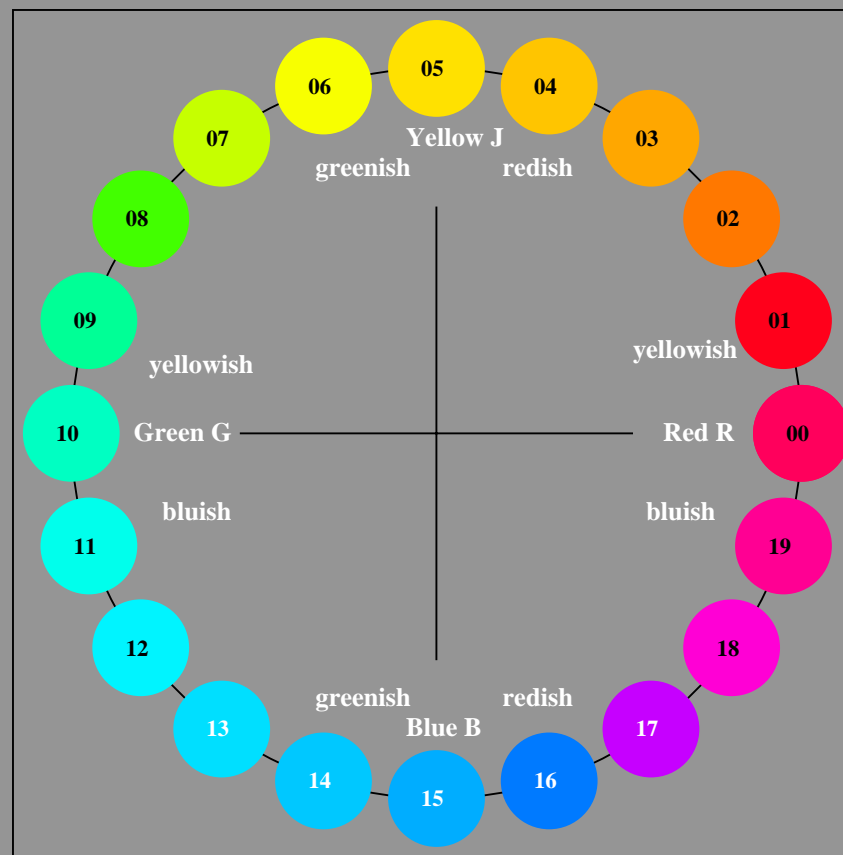


20 step hue circle with elementary colours *R*, *J*, *G*, *B* (right)

OE86: Test chart 5 according to DIN 33872-5; 1MR, DEH
Elementary hue agreement and discrimination

input: *rgb* (\rightarrow *rgb*_{de}) setrgbcolor
output 133-0: $g_P=0.77$; $g_N=1.0$

Agreement with elementary hues (Yes/No decision)

Layout example: agreement with elementary hues



There are four elementary hues on each page: Red R, Yellow J (=french Jaune), Green G, and Blue B.

Input data 1 0 0 should produce Red R.
Input data 0 1 0 should produce Green G.
Input data 0 0 1 should produce Blue B.
Input data 1 1 0 should produce Yellow J.

The elementary hues Red R and Green G should locate on the horizontal axis.
The elementary hues Yellow J and Blue B should locate on the vertical axis.

This test uses a hue circle with 20 hues.

No. 00 and 10 should be Red R and Green G.
No. 05 and 15 should be Yellow J and Blue B.

Are no. 00, 05, 10, and 15 the four elementary hues R, J, G and B? underline: Yes/No
Only in case of "No":

Elementary Red R is hue step no. (e. g. 00, 01, 19)	(neither yellowish nor blueish)
Elementary Yellow J is hue step no. (e. g. 05, 04, 06)	(neither reddish nor greenish)
Elementary Green G is hue step no. (e. g. 10, 09, 11)	(neither yellowish nor blueish)
Elementary Blue B is hue step no. (e. g. 15, 14, 16)	(neither reddish nor greenish)
Result: Of the 4 elementary hues (e.g. three)	

Part 1

OE860-3N-133-1

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE86/OE86L0NP.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE86/OE86L0NA.PS> or underline Yes/No

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline monitor/data projector/printer

Device model, driver and version:.....

Device output with PDF/PS-file: underline PDF/PS-file

For device output with PDF-file OE86L0NP.PDF:

either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file OE86L0NA.PS:

either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks:Special remarks, e. g. output of Landscape (L)


.....
.....
.....

Part 3

OE860-7N-133-1

Discriminability of colours with 20 hues (Yes/No decision)

Layout example: discriminability of colours with 20 hues



There are four elementary hues on each page: Red R, Yellow J (=french Jaune), Green G, and Blue B.

Input data 1 0 0 should produce Red R.
Input data 0 1 0 should produce Green G.
Input data 0 0 1 should produce Blue B.
Input data 1 1 0 should produce Yellow J.

Four hue steps are between:
Red R and Yellow J, Yellow J and Green G,
Green G and Blue B, and Blue B and Red R.

This test uses a hue circle with 20 hues.
All 20 hues should be distinguishable.

For this test it is **not** necessary:

1. All 19 differences are visually equal.
2. Elementary hues locate at 00, 05, 10, and 15.

Are all 20 colours of the 20 hues distinguishable?

underline: Yes/No

Only in case of "No":

The colours of the two hue steps no. (e. g. 00 and 01)	are not distinguishable
The colours of the two hue steps no. (e. g. 14 and 15)	are not distinguishable
The colours of the two hue steps no. (e. g. 15 and 16)	are not distinguishable
List other pairs:	
Result: Of the 19 hue differences are (e.g. 18)	

Part 2

OE861-3N-133-1

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test:

either according to DIN 6160:1996 with Anomaloskop of Nagel
or with test charts using colour points according to Ishihara
or tested with, please specify:

underline Yes/No

underline Yes/unknown

underline Yes/unknown

underline Yes/unknown

For visual evaluation of the display (monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky)

underline Yes/No

PDF file: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PDF>

underline Yes/No

PS file: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PS>

underline Yes/No

Picture A7-133-2: **contrast range:** (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)

compare standard print output according to ISO/IEC 15775 with range F:0 underline range

Remark: In daylighted offices the contrast range is in many cases:

on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF-File: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PDF>

picture A7-133-2

underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PS>

picture A7-133-2

or underline Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry:

underline Yes/No

If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T

Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer

of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF

underline Yes/No

If No, please describe other method:

Part 4


OE861-7N-133-1

OE86: Form A for test chart 1 according to DIN 33872-5; 1MR, DEH, **Input: rgb (->rgb*_{de}) setrgbcolor**
Elementary hue agreement, discrimination (Yes/No-decision) output 133-1: **g_P=0.77; g_N=1.0**

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE*
1	18.01 0.0 0.0	0.0 18.01 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
2	23.17 0.0 0.0	0.17 31.35 0.0	0.0 0.0 0.0	8.18 0.0 0.0	8.18
3	28.33 0.0 0.0	0.27 38.93 0.0	0.0 0.0 0.0	10.6 0.0 0.0	10.6
4	33.49 0.0 0.0	0.35 45.23 0.0	0.0 0.0 0.0	11.74 0.0 0.0	11.74
5	38.65 0.0 0.0	0.42 50.82 0.0	0.0 0.0 0.0	12.17 0.0 0.0	12.17
6	43.81 0.0 0.0	0.49 55.93 0.0	0.0 0.0 0.0	12.12 0.0 0.0	12.12
7	48.97 0.0 0.0	0.55 60.7 0.0	0.0 0.0 0.0	11.73 0.0 0.0	11.73
8	54.13 0.0 0.0	0.61 65.2 0.0	0.0 0.0 0.0	11.07 0.0 0.0	11.07
9	59.29 0.0 0.0	0.66 69.47 0.0	0.0 0.0 0.0	10.18 0.0 0.0	10.18
10	64.45 0.0 0.0	0.72 73.56 0.0	0.0 0.0 0.0	9.11 0.0 0.0	9.11
11	69.61 0.0 0.0	0.77 77.49 0.0	0.0 0.0 0.0	7.88 0.0 0.0	7.88
12	74.77 0.0 0.0	0.82 81.29 0.0	0.0 0.0 0.0	6.52 0.0 0.0	6.52
13	79.93 0.0 0.0	0.87 84.97 0.0	0.0 0.0 0.0	5.04 0.0 0.0	5.04
14	85.09 0.0 0.0	0.91 88.54 0.0	0.0 0.0 0.0	3.45 0.0 0.0	3.45
15	90.25 0.0 0.0	0.96 92.02 0.0	0.0 0.0 0.0	1.77 0.0 0.0	1.77
16	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
17	18.01 0.0 0.0	0.0 18.01 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
18	37.36 0.0 0.0	0.41 49.47 0.0	0.0 0.0 0.0	12.11 0.0 0.0	12.11
19	56.71 0.0 0.0	0.64 67.36 0.0	0.0 0.0 0.0	10.65 0.0 0.0	10.65
20	76.06 0.0 0.0	0.83 82.22 0.0	0.0 0.0 0.0	6.16 0.0 0.0	6.16
21	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
Mean lightness difference (16 steps)					ΔE* _{CIELAB} = 7.6
Mean lightness difference (5 steps)					ΔL* _{CIELAB} = 5.8
Mean colour reproduction index:					R* _{ab,m} = 67

OE860-3N-133-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

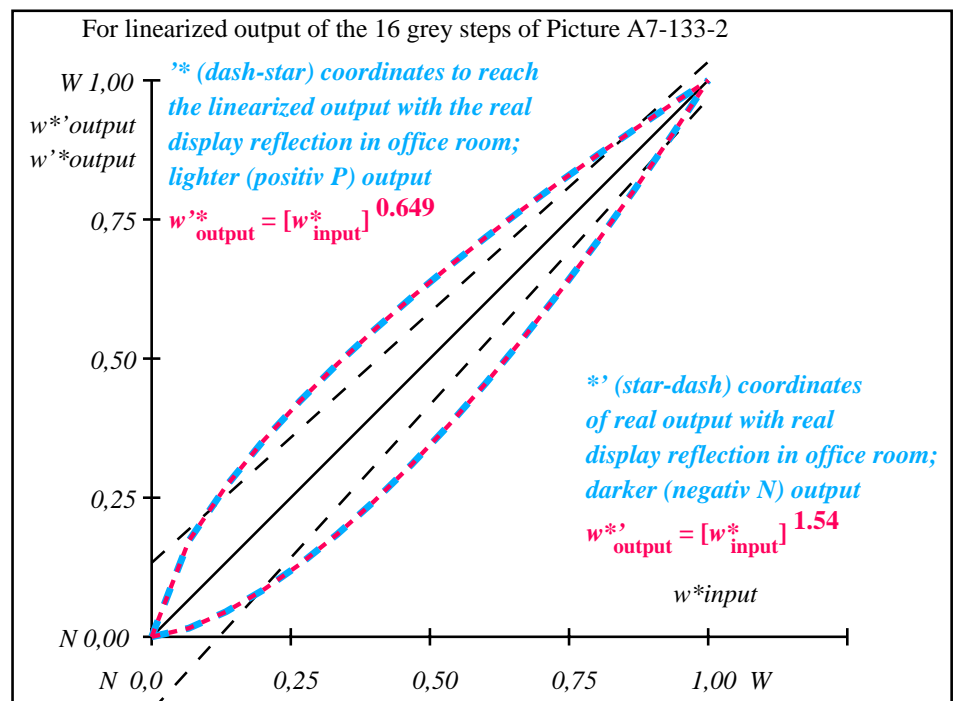

OE861-3N-133-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

L^*/Y_{intended} (absolute)	18.0/2.5	23.2/3.8	28.3/5.6	33.5/7.8	38.6/10.5	43.8/13.7	49.0/17.6	54.1/22.1	59.3/27.3	64.4/33.4	69.6/40.2	74.8/47.9	79.9/56.6	85.1/66.2	90.2/76.8	95.4/88.6
$w^* w^* w^*$ setrgb $g_p=0.65$ No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*$ _{CIELAB, r} (relative)	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
w^*_{intended} w^*_{out}	0.000 0.0	0.067 0.173	0.133 0.27	0.200 0.352	0.267 0.424	0.333 0.49	0.400 0.552	0.467 0.61	0.533 0.665	0.600 0.718	0.667 0.769	0.733 0.817	0.800 0.865	0.867 0.911	0.933 0.956	1.000 1.0

OE860-7N, Picture A7-133-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*$ setrgbcolor


OE86: In-output relation according to ISO 9241-306; 1MR, DEH input: $rgb \rightarrow rgb^*_{de}$ setrgbcolor
Viewing Y contrast $Y_W:Y_N=88,9:2,5$; Y_N range 1,87 to <3,75 output 133-2: $g_p=0.77$; $g_N=1.0$

TUB registration: 20110801-OE86/OE86L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta

Input: Colorimetric Television Luminous System TLS00a

with *rgb* data of the
four elementary hues

1 0 0 = Red *R*
1 1 0 = Yellow *J*
0 1 0 = Green *G*
0 0 1 = Blue *B*




TLS00a; adapted (a) CIELAB data					
	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272


Output: Colorimetric Television Luminous System TLS00a

with hue number


n = 00 to 19
00 = Red *R*
05 = Yellow *J*
10 = Green *G*
15 = Blue *B*



TLS00a; adapted (a) CIELAB data					
	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

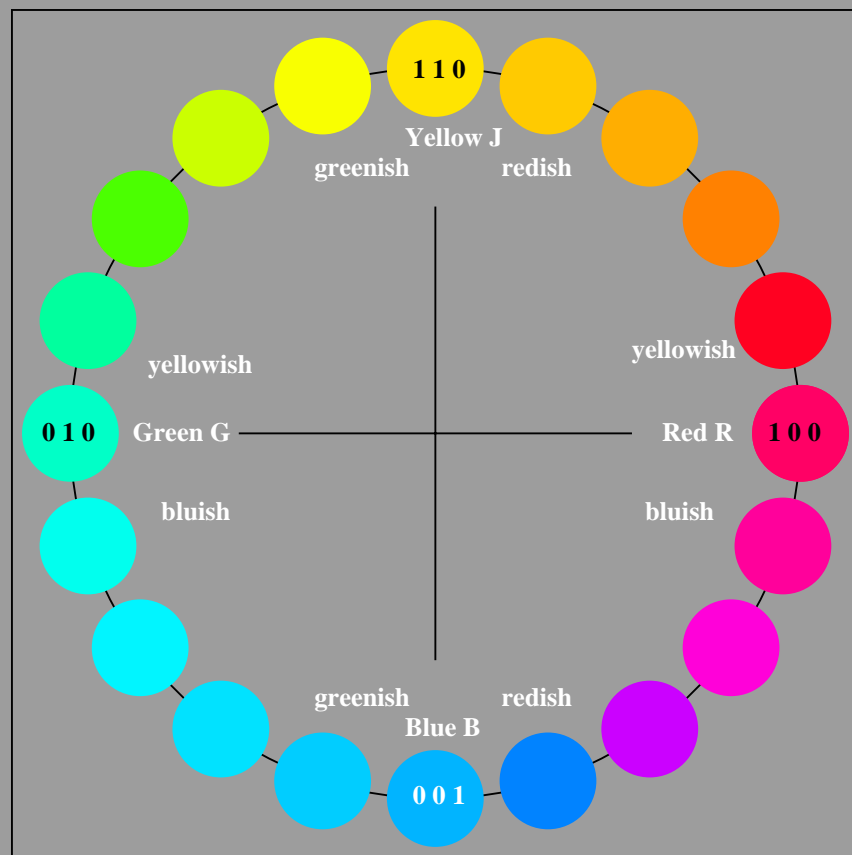

OE860-7N-134-0: 20 step hue circle with elementary colours *R*, *J*, *G*, *B* (left)

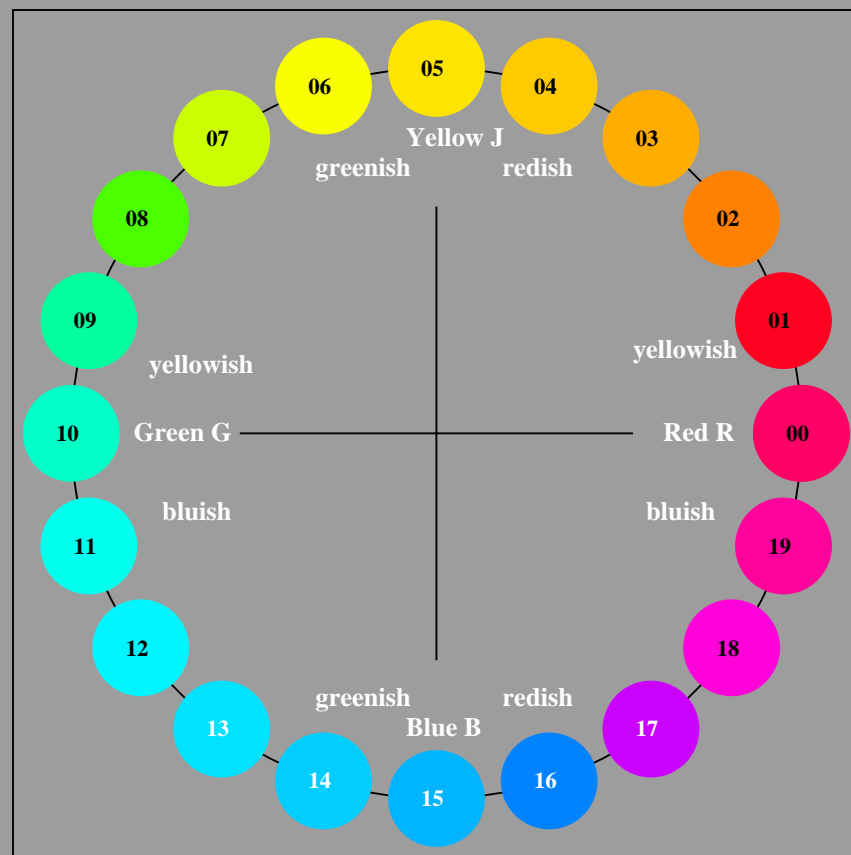


20 step hue circle with elementary colours *R*, *J*, *G*, *B* (right)

OE86: Test chart 5 according to DIN 33872-5; 1MR, DEH
Elementary hue agreement and discrimination

input: *rgb* (\rightarrow *rgb*_{de}) setrgbcolor
output 134-0: *g*_P=0.7; *g*_N=1.0

Agreement with elementary hues (Yes/No decision)

Layout example: agreement with elementary hues



There are four elementary hues on each page: Red R, Yellow J (=french Jaune), Green G, and Blue B.

Input data 1 0 0 should produce Red R.
Input data 0 1 0 should produce Green G.
Input data 0 0 1 should produce Blue B.
Input data 1 1 0 should produce Yellow J.

The elementary hues Red R and Green G should locate on the horizontal axis.
The elementary hues Yellow J and Blue B should locate on the vertical axis.

This test uses a hue circle with 20 hues.

No. 00 and 10 should be Red R and Green G.
No. 05 and 15 should be Yellow J and Blue B.

Are no. 00, 05, 10, and 15 the four elementary hues R, J, G and B? underline: Yes/No

Only in case of "No":

Elementary Red R is hue step no. (e. g. 00, 01, 19)	(neither yellowish nor blueish)
Elementary Yellow J is hue step no. (e. g. 05, 04, 06)	(neither reddish nor greenish)
Elementary Green G is hue step no. (e. g. 10, 09, 11)	(neither yellowish nor blueish)
Elementary Blue B is hue step no. (e. g. 15, 14, 16)	(neither reddish nor greenish)
Result: Of the 4 elementary hues (e.g. three)	

Part 1

OE860-3N-134-1

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE86/OE86L0NP.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE86/OE86L0NA.PS> or underline Yes/No

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline monitor/data projector/printer

Device model, driver and version:.....

Device output with PDF/PS-file: underline PDF/PS-file

For device output with PDF-file OE86L0NP.PDF:

either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file OE86L0NA.PS:

either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....


Special remarks: Special remarks, e. g. output of Landscape (L)

Part 3

OE860-7N-134-1

Discriminability of colours with 20 hues (Yes/No decision)

Layout example: discriminability of colours with 20 hues



There are four elementary hues on each page: Red R, Yellow J (=french Jaune), Green G, and Blue B.

Input data 1 0 0 should produce Red R.
Input data 0 1 0 should produce Green G.
Input data 0 0 1 should produce Blue B.
Input data 1 1 0 should produce Yellow J.

Four hue steps are between:
Red R and Yellow J, Yellow J and Green G,
Green G and Blue B, and Blue B and Red R.

This test uses a hue circle with 20 hues.
All 20 hues should be distinguishable.

For this test it is **not** necessary:

1. All 19 differences are visually equal.
2. Elementary hues locate at 00, 05, 10, and 15.

Are all 20 colours of the 20 hues distinguishable? underline: Yes/No

Only in case of "No":

The colours of the two hue steps no. (e. g. 00 and 01)	are not distinguishable
The colours of the two hue steps no. (e. g. 14 and 15)	are not distinguishable
The colours of the two hue steps no. (e. g. 15 and 16)	are not distinguishable
List other pairs:	
Result: Of the 19 hue differences are (e.g. 18)	

Part 2

OE861-3N-134-1

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test:

either according to DIN 6160:1996 with Anomaloskop of Nagel
or with test charts using colour points according to Ishihara
or tested with, please specify:

underline Yes/No

underline Yes/unknown

underline Yes/unknown

underline Yes/unknown

For visual evaluation of the display (monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky)

underline Yes/No

PDF file: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PDF>

underline Yes/No

PS file: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PS>

underline Yes/No

Picture A7-134-2: contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)
compare standard print output according to ISO/IEC 15775 with range F:0 underline range

Remark: In daylighted offices the contrast range is in many cases:

on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF-File: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PDF>

picture A7-134-2

underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PS>

picture A7-134-2

or underline Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry:

underline Yes/No

If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T

Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer
of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF

underline Yes/No

If No, please describe other method:

Part 4

OE861-7N-134-1

OE86: Form A for test chart 1 according to DIN 33872-5; 1MR, DEH, underline output: $rgb \rightarrow rgb_{de}$ setrgbcolor
Elementary hue agreement, discrimination (Yes/No-decision) output 134-1: $g_p=0.7$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE*
1	26.85 0.0 0.0	0.0 26.85 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
2	31.42 0.0 0.0	0.21 41.05 0.0	0.0 0.0 0.0	9.63 0.0 0.0	9.63
3	35.99 0.0 0.0	0.31 48.1 0.0	0.0 0.0 0.0	12.11 0.0 0.0	12.11
4	40.56 0.0 0.0	0.39 53.75 0.0	0.0 0.0 0.0	13.18 0.0 0.0	13.18
5	45.13 0.0 0.0	0.46 58.64 0.0	0.0 0.0 0.0	13.51 0.0 0.0	13.51
6	49.7 0.0 0.0	0.53 63.05 0.0	0.0 0.0 0.0	13.34 0.0 0.0	13.34
7	54.27 0.0 0.0	0.59 67.09 0.0	0.0 0.0 0.0	12.82 0.0 0.0	12.82
8	58.84 0.0 0.0	0.64 70.87 0.0	0.0 0.0 0.0	12.02 0.0 0.0	12.02
9	63.41 0.0 0.0	0.69 74.42 0.0	0.0 0.0 0.0	11.01 0.0 0.0	11.01
10	67.99 0.0 0.0	0.74 77.79 0.0	0.0 0.0 0.0	9.81 0.0 0.0	9.81
11	72.56 0.0 0.0	0.79 81.01 0.0	0.0 0.0 0.0	8.46 0.0 0.0	8.46
12	77.13 0.0 0.0	0.84 84.1 0.0	0.0 0.0 0.0	6.97 0.0 0.0	6.97
13	81.7 0.0 0.0	0.88 87.07 0.0	0.0 0.0 0.0	5.37 0.0 0.0	5.37
14	86.27 0.0 0.0	0.92 89.94 0.0	0.0 0.0 0.0	3.67 0.0 0.0	3.67
15	90.84 0.0 0.0	0.96 92.71 0.0	0.0 0.0 0.0	1.88 0.0 0.0	1.88
16	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
17	26.85 0.0 0.0	0.0 26.85 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
18	43.99 0.0 0.0	0.45 57.47 0.0	0.0 0.0 0.0	13.48 0.0 0.0	13.48
19	61.13 0.0 0.0	0.67 72.67 0.0	0.0 0.0 0.0	11.54 0.0 0.0	11.54
20	78.27 0.0 0.0	0.85 84.85 0.0	0.0 0.0 0.0	6.58 0.0 0.0	6.58
21	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01


Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G

Mean lightness difference (16 steps)
 $\Delta E^*_{\text{CIELAB}} = 8.4$

Mean lightness difference (5 steps)
 $\Delta L^*_{\text{CIELAB}} = 6.3$

Mean colour reproduction index: $R^*_{ab,m} = 64$

OE860-3N-134-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

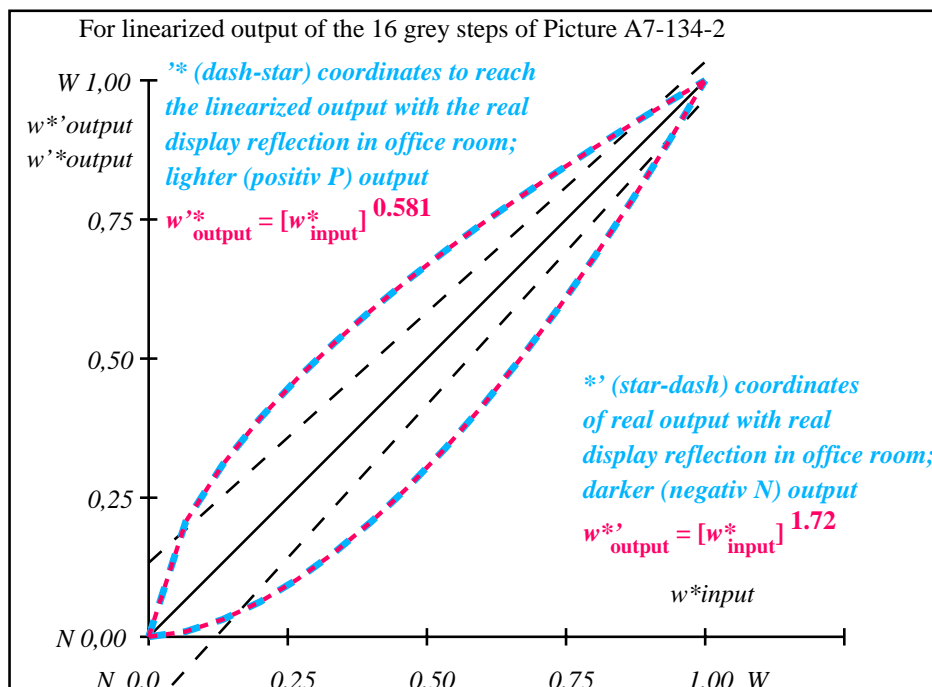

OE861-3N-134-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

L^*/Y_{intended} (absolute)	26.8/5.0	31.4/6.8	36.0/9.0	40.6/11.6	45.1/14.6	49.7/18.2	54.3/22.2	58.8/26.9	63.4/32.1	68.0/38.0	72.6/44.5	77.1/51.7	81.7/59.7	86.3/68.5	90.8/78.1	95.4/88.6
$w^* w^* w^*$ setrgb $g_p=0.58$ No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*$ CIELAB, r (relative)	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
w^*_{intended} w^*_{out}	0.000 0.0	0.067 0.208	0.133 0.309	0.200 0.392	0.267 0.464	0.333 0.528	0.400 0.587	0.467 0.642	0.533 0.694	0.600 0.743	0.667 0.79	0.733 0.835	0.800 0.878	0.867 0.92	0.933 0.96	1.000 1.0

OE860-7N, Picture A7-134-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^* \text{setrgbcolor}$


OE86: In-output relation according to ISO 9241-306; 1MR, DEH input: $rgb \rightarrow rgb^*_{de}$ setrgbcolor
Viewing Y contrast $Y_W:Y_N=88,9:5$; Y_N range 3,75 to <7,5 output 134-2: $g_p=0.7$; $g_N=1.0$

TUB registration: 20110801-OE86/OE86L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=thata

Input: Colorimetric Television Luminous System TLS00a

with *rgb* data of the
four elementary hues

1 0 0 = Red *R*
1 1 0 = Yellow *J*
0 1 0 = Green *G*
0 0 1 = Blue *B*




TLS00a; adapted (a) CIELAB data					
	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272



Output: Colorimetric Television Luminous System TLS00a

with hue number

$n = 00$ to 19
 $00 = \text{Red } R$
 $05 = \text{Yellow } J$
 $10 = \text{Green } G$
 $15 = \text{Blue } B$



TLS00a; adapted (a) CIELAB data					
	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

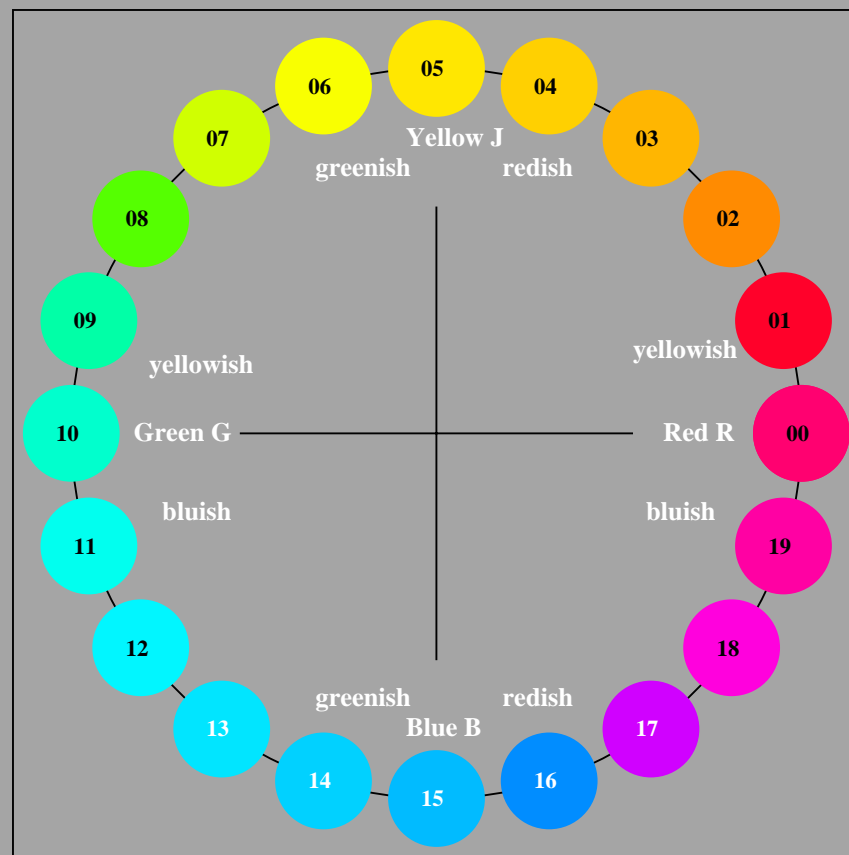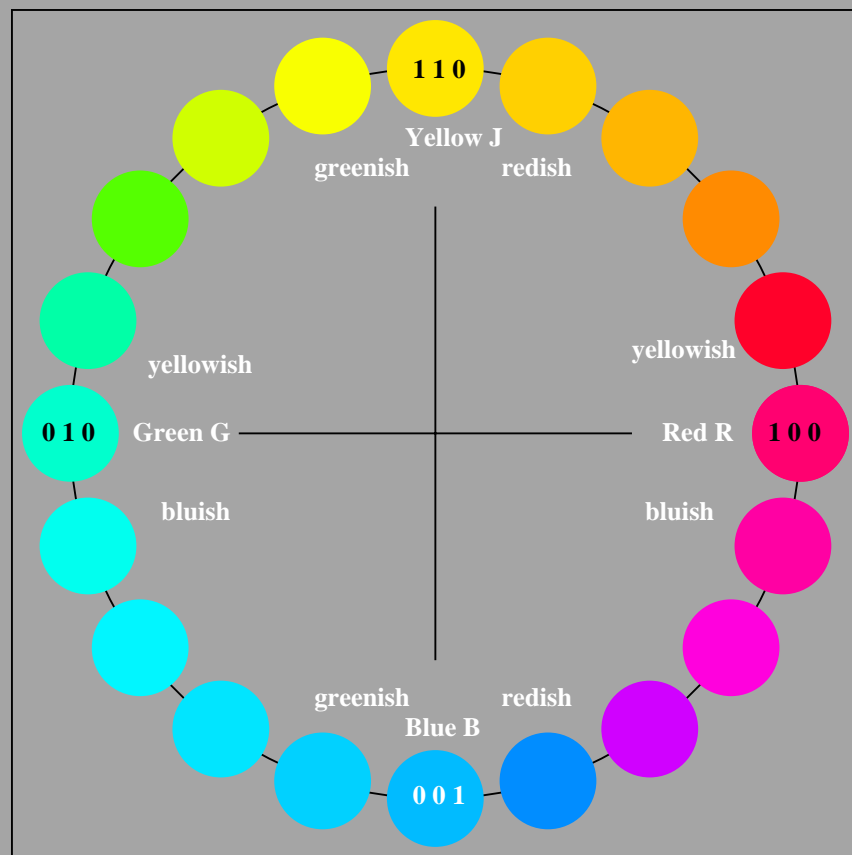

OE860-7N-135-0: 20 step hue circle with elementary colours *R*, *J*, *G*, *B* (left)


20 step hue circle with elementary colours *R*, *J*, *G*, *B* (right)

OE86: Test chart 5 according to DIN 33872-5; 1MR, DEH
Elementary hue agreement and discrimination

input: *rgb* ($\rightarrow \text{rgb}^*_{de}$) *setrgbcolor*
output 135-0: $g_p=0.62$; $g_N=1.0$

Agreement with elementary hues (Yes/No decision)

Layout example: agreement with elementary hues



There are four elementary hues on each page: Red R, Yellow J (=french Jaune), Green G, and Blue B.

Input data 1 0 0 should produce Red R.
Input data 0 1 0 should produce Green G.
Input data 0 0 1 should produce Blue B.
Input data 1 1 0 should produce Yellow J.

The elementary hues Red R and Green G should locate on the horizontal axis.
The elementary hues Yellow J and Blue B should locate on the vertical axis.

This test uses a hue circle with 20 hues.

No. 00 and 10 should be Red R and Green G.
No. 05 and 15 should be Yellow J and Blue B.

Are no. 00, 05, 10, and 15 the four elementary hues R, J, G and B? underline: Yes/No
Only in case of "No":

Elementary Red R is hue step no. (e. g. 00, 01, 19)	(neither yellowish nor blueish)
Elementary Yellow J is hue step no. (e. g. 05, 04, 06)	(neither reddish nor greenish)
Elementary Green G is hue step no. (e. g. 10, 09, 11)	(neither yellowish nor blueish)
Elementary Blue B is hue step no. (e. g. 15, 14, 16)	(neither reddish nor greenish)
Result: Of the 4 elementary hues (e.g. three) are at the intended location	

Part 1

OE860-3N-135-1

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE86/OE86L0NP.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE86/OE86L0NA.PS> or underline Yes/No

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline monitor/data projector/printer

Device model, driver and version:.....

Device output with PDF/PS-file: underline PDF/PS-file

For device output with PDF-file OE86L0NP.PDF:

either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file OE86L0NA.PS:

either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....

Special remarks:Special remarks, e. g. output of Landscape (L)


.....
.....
.....

Part 3

OE860-7N-135-1

Discriminability of colours with 20 hues (Yes/No decision)

Layout example: discriminability of colours with 20 hues



There are four elementary hues on each page: Red R, Yellow J (=french Jaune), Green G, and Blue B.

Input data 1 0 0 should produce Red R.
Input data 0 1 0 should produce Green G.
Input data 0 0 1 should produce Blue B.
Input data 1 1 0 should produce Yellow J.

Four hue steps are between:
Red R and Yellow J, Yellow J and Green G,
Green G and Blue B, and Blue B and Red R.

This test uses a hue circle with 20 hues.
All 20 hues should be distinguishable.

For this test it is **not** necessary:

1. All 19 differences are visually equal.
2. Elementary hues locate at 00, 05, 10, and 15.

Are all 20 colours of the 20 hues distinguishable? underline: Yes/No

Only in case of "No":

The colours of the two hue steps no. (e. g. 00 and 01)	are not distinguishable
The colours of the two hue steps no. (e. g. 14 and 15)	are not distinguishable
The colours of the two hue steps no. (e. g. 15 and 16)	are not distinguishable
List other pairs:	
Result: Of the 19 hue differences are (e.g. 18) differences visible	

Part 2

OE861-3N-135-1

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test:

either according to DIN 6160:1996 with Anomaloskop of Nagel
or with test charts using colour points according to Ishihara
or tested with, please specify:

underline Yes/No

underline Yes/unknown

underline Yes/unknown

underline Yes/unknown

For visual evaluation of the display (monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky)

underline Yes/No

PDF file: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PDF>

underline Yes/No

PS file: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PS>

underline Yes/No

Picture A7-135-2: **contrast range:** (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)

compare standard print output according to ISO/IEC 15775 with range F:0 underline range

Remark: In daylighted offices the contrast range is in many cases:

on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF-File: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PDF>

picture A7-135-2

underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PS>

picture A7-135-2

or underline Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry:

underline Yes/No

If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T

Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer

of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF

underline Yes/No

If No, please describe other method:

Part 4


OE861-7N-135-1

OE86: Form A for test chart 1 according to DIN 33872-5; 1MR, DEH, **Input: rgb (->rgb*_{de}) setrgbcolor**
Elementary hue agreement, discrimination (Yes/No-decision) output 135-1: **g_P=0.62; g_N=1.0**

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE*
1	37.99 0.0 0.0	0.0 37.99 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
2	41.81 0.0 0.0	0.24 51.79 0.0	0.0 0.0 0.0	9.98 0.0 0.0	9.98
3	45.64 0.0 0.0	0.35 57.87 0.0	0.0 0.0 0.0	12.23 0.0 0.0	12.23
4	49.47 0.0 0.0	0.43 62.6 0.0	0.0 0.0 0.0	13.13 0.0 0.0	13.13
5	53.3 0.0 0.0	0.5 66.63 0.0	0.0 0.0 0.0	13.33 0.0 0.0	13.33
6	57.13 0.0 0.0	0.56 70.19 0.0	0.0 0.0 0.0	13.07 0.0 0.0	13.07
7	60.96 0.0 0.0	0.62 73.44 0.0	0.0 0.0 0.0	12.48 0.0 0.0	12.48
8	64.78 0.0 0.0	0.67 76.44 0.0	0.0 0.0 0.0	11.65 0.0 0.0	11.65
9	68.61 0.0 0.0	0.72 79.23 0.0	0.0 0.0 0.0	10.62 0.0 0.0	10.62
10	72.44 0.0 0.0	0.76 81.87 0.0	0.0 0.0 0.0	9.43 0.0 0.0	9.43
11	76.27 0.0 0.0	0.81 84.37 0.0	0.0 0.0 0.0	8.11 0.0 0.0	8.11
12	80.1 0.0 0.0	0.85 86.76 0.0	0.0 0.0 0.0	6.66 0.0 0.0	6.66
13	83.93 0.0 0.0	0.89 89.05 0.0	0.0 0.0 0.0	5.12 0.0 0.0	5.12
14	87.75 0.0 0.0	0.93 91.24 0.0	0.0 0.0 0.0	3.49 0.0 0.0	3.49
15	91.58 0.0 0.0	0.96 93.36 0.0	0.0 0.0 0.0	1.78 0.0 0.0	1.78
16	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
17	37.99 0.0 0.0	0.0 37.99 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
18	52.34 0.0 0.0	0.48 65.67 0.0	0.0 0.0 0.0	13.33 0.0 0.0	13.33
19	66.7 0.0 0.0	0.69 77.86 0.0	0.0 0.0 0.0	11.16 0.0 0.0	11.16
20	81.05 0.0 0.0	0.86 87.34 0.0	0.0 0.0 0.0	6.29 0.0 0.0	6.29
21	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
Mean lightness difference (16 steps)					ΔE* _{CIELAB} = 8.2
Mean lightness difference (5 steps)					ΔL* _{CIELAB} = 6.2
Mean colour reproduction index:					R* _{ab,m} = 65

OE860-3N-135-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

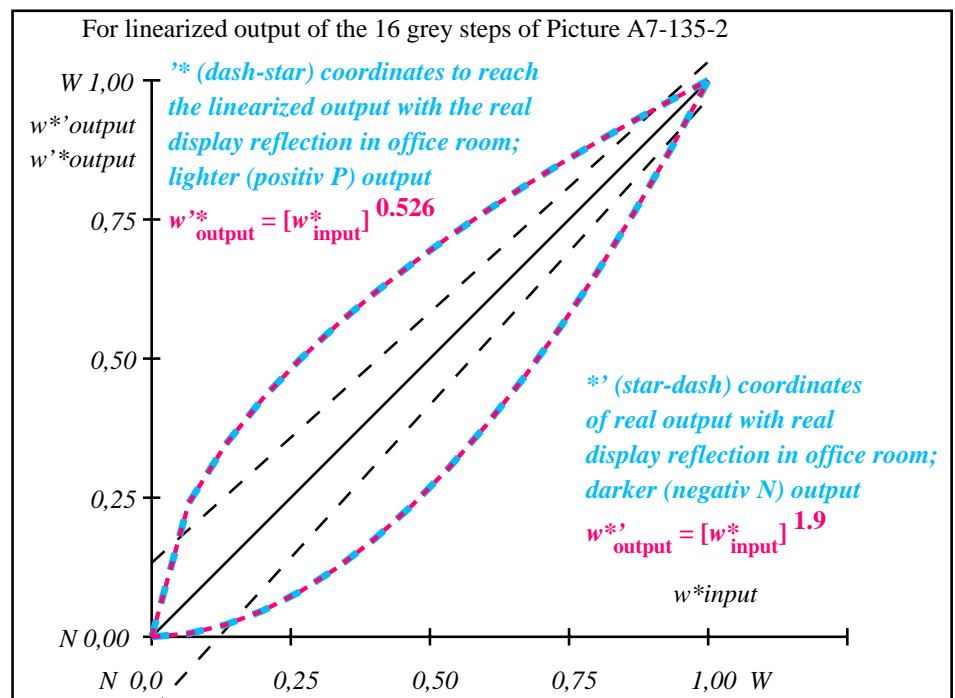

OE861-3N-135-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

L^*/Y_{intended} (absolute)	38.0/10.1	41.8/12.4	45.6/15.0	49.5/18.0	53.3/21.3	57.1/25.1	61.0/29.2	64.8/33.8	68.6/38.8	72.4/44.3	76.3/50.3	80.1/56.9	83.9/63.9	87.8/71.6	91.6/79.8	95.4/88.6
$w^* w^* w^*$ setrgb gp=0.53																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*$ CIELAB, r (relative)																
w^*_{intended}	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
w^*_{out}	0.0	0.241	0.346	0.429	0.499	0.561	0.617	0.67	0.718	0.764	0.808	0.849	0.889	0.928	0.964	1.0

OE860-7N, Picture A7-135-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*$ setrgbcolor


OE86: In-output relation according to ISO 9241-306; 1MR, DEH input: $rgb \rightarrow rgb^*_{\text{de}}$ setrgbcolor
Viewing Y contrast $Y_W:Y_N=88,9:10$; Y_N range 7,5 to <15 output 135-2: $g_P=0.62$; $g_N=1.0$

TUB registration: 20110801-OE86/OE86L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=thata

Input: Colorimetric Television Luminous System TLS00a

with *rgb* data of the
four elementary hues

1 0 0 = Red *R*
1 1 0 = Yellow *J*
0 1 0 = Green *G*
0 0 1 = Blue *B*




TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a


with hue number

$n = 00$ to 19
00 = Red *R*
05 = Yellow *J*
10 = Green *G*
15 = Blue *B*




TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

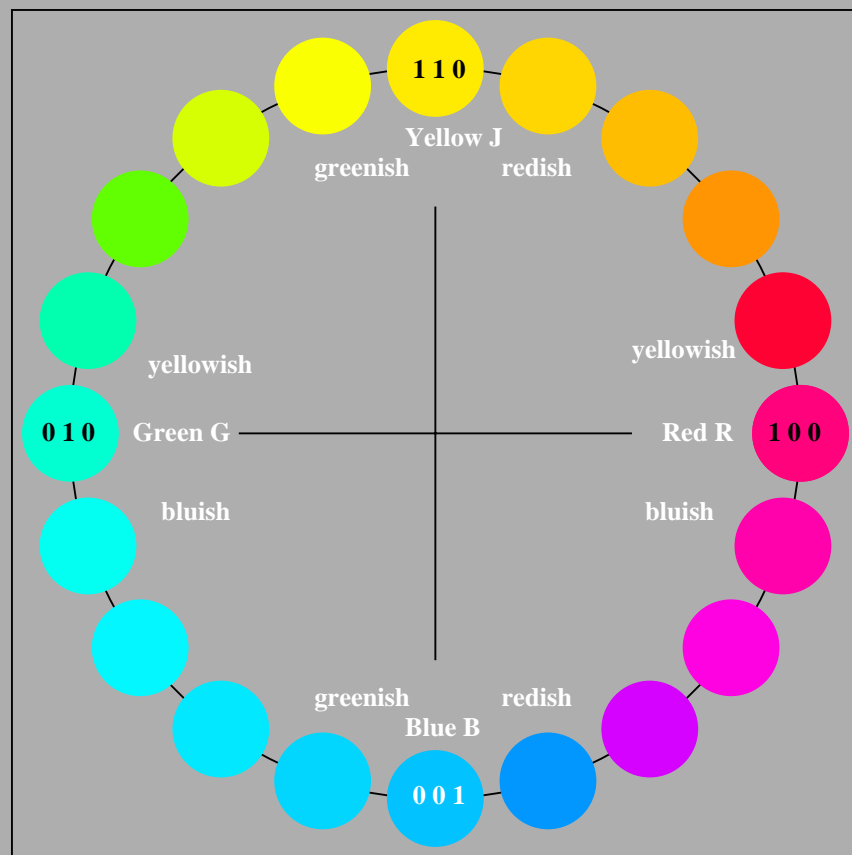

OE860-7N-136-0: 20 step hue circle with elementary colours *R*, *J*, *G*, *B* (left)

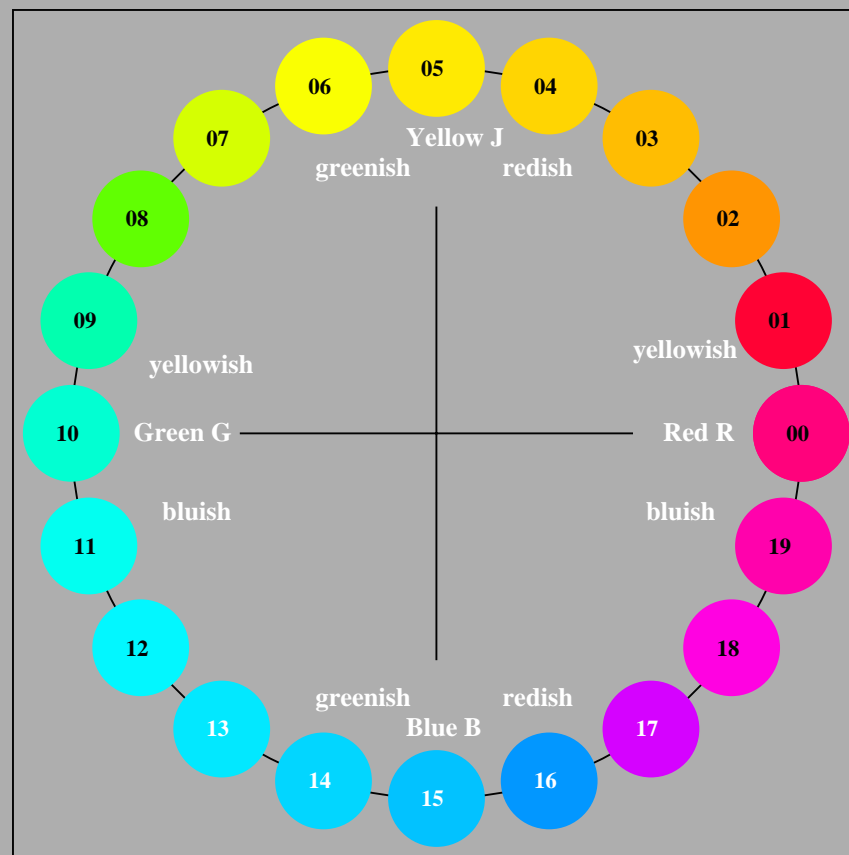


20 step hue circle with elementary colours *R*, *J*, *G*, *B* (right)

OE86: Test chart 5 according to DIN 33872-5; 1MR, DEH
Elementary hue agreement and discrimination

input: *rgb* (\rightarrow *rgb*_{de}) setrgbcolor
output 136-0: $g_p=0.55$; $g_N=1.0$

Agreement with elementary hues (Yes/No decision)

Layout example: agreement with elementary hues



There are four elementary hues on each page: Red R, Yellow J (=french Jaune), Green G, and Blue B.

Input data 1 0 0 should produce Red R.
Input data 0 1 0 should produce Green G.
Input data 0 0 1 should produce Blue B.
Input data 1 1 0 should produce Yellow J.

The elementary hues Red R and Green G should locate on the horizontal axis.
The elementary hues Yellow J and Blue B should locate on the vertical axis.

This test uses a hue circle with 20 hues.

No. 00 and 10 should be Red R and Green G.
No. 05 and 15 should be Yellow J and Blue B.

Are no. 00, 05, 10, and 15 the four elementary hues R, J, G and B? underline: Yes/No
Only in case of "No":

Elementary Red R is hue step no. (e. g. 00, 01, 19)	(neither yellowish nor blueish)
Elementary Yellow J is hue step no. (e. g. 05, 04, 06)	(neither reddish nor greenish)
Elementary Green G is hue step no. (e. g. 10, 09, 11)	(neither yellowish nor blueish)
Elementary Blue B is hue step no. (e. g. 15, 14, 16)	(neither reddish nor greenish)
Result: Of the 4 elementary hues (e.g. three)	

Part 1

OE860-3N-136-1

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE86/OE86L0NP.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE86/OE86L0NA.PS> or underline Yes/No

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline monitor/data projector/printer

Device model, driver and version:.....

Device output with PDF/PS-file: underline PDF/PS-file

For device output with PDF-file OE86L0NP.PDF:

either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file OE86L0NA.PS:

either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....


Special remarks:Special remarks, e. g. output of Landscape (L)

Part 3

OE860-7N-136-1

Discriminability of colours with 20 hues (Yes/No decision)

Layout example: discriminability of colours with 20 hues



There are four elementary hues on each page: Red R, Yellow J (=french Jaune), Green G, and Blue B.

Input data 1 0 0 should produce Red R.
Input data 0 1 0 should produce Green G.
Input data 0 0 1 should produce Blue B.
Input data 1 1 0 should produce Yellow J.

Four hue steps are between:
Red R and Yellow J, Yellow J and Green G,
Green G and Blue B, and Blue B and Red R.

This test uses a hue circle with 20 hues.
All 20 hues should be distinguishable.

For this test it is **not** necessary:

1. All 19 differences are visually equal.
2. Elementary hues locate at 00, 05, 10, and 15.

Are all 20 colours of the 20 hues distinguishable?

underline: Yes/No

Only in case of "No":

The colours of the two hue steps no. (e. g. 00 and 01)	are not distinguishable
The colours of the two hue steps no. (e. g. 14 and 15)	are not distinguishable
The colours of the two hue steps no. (e. g. 15 and 16)	are not distinguishable
List other pairs:	
Result: Of the 19 hue differences are (e.g. 18)	

Part 2

OE861-3N-136-1

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test:

either according to DIN 6160:1996 with Anomaloskop of Nagel
or with test charts using colour points according to Ishihara
or tested with, please specify:

underline Yes/No

underline Yes/unknown

underline Yes/unknown

underline Yes/unknown

For visual evaluation of the display (monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky)

underline Yes/No

PDF file: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PDF>

underline Yes/No

PS file: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PS>

underline Yes/No

Picture A7-136-2: contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)

compare standard print output according to ISO/IEC 15775 with range F:0 underline range

Remark: In daylighted offices the contrast range is in many cases:

on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF-File: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PDF>

picture A7-136-2

underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PS>

picture A7-136-2

or underline Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry:

underline Yes/No

If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T

Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer

of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF

underline Yes/No

If No, please describe other method:

Part 4

OE861-7N-136-1

OE86: Form A for test chart 1 according to DIN 33872-5; 1MR, DEH, underline $rgb \rightarrow rgb^*_{de}$ setrgbcolor
Elementary hue agreement, discrimination (Yes/No-decision) output 136-1: $g_p=0.55$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE*
1	52.02 0.0 0.0	0.0 52.02 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
2	54.91 0.0 0.0	0.27 63.82 0.0	0.0 0.0 0.0	8.91 0.0 0.0	8.91
3	57.8 0.0 0.0	0.38 68.49 0.0	0.0 0.0 0.0	10.69 0.0 0.0	10.69
4	60.7 0.0 0.0	0.46 72.03 0.0	0.0 0.0 0.0	11.34 0.0 0.0	11.34
5	63.59 0.0 0.0	0.53 75.0 0.0	0.0 0.0 0.0	11.41 0.0 0.0	11.41
6	66.48 0.0 0.0	0.59 77.61 0.0	0.0 0.0 0.0	11.12 0.0 0.0	11.12
7	69.37 0.0 0.0	0.64 79.95 0.0	0.0 0.0 0.0	10.57 0.0 0.0	10.57
8	72.27 0.0 0.0	0.69 82.1 0.0	0.0 0.0 0.0	9.83 0.0 0.0	9.83
9	75.16 0.0 0.0	0.74 84.09 0.0	0.0 0.0 0.0	8.93 0.0 0.0	8.93
10	78.05 0.0 0.0	0.78 85.96 0.0	0.0 0.0 0.0	7.91 0.0 0.0	7.91
11	80.95 0.0 0.0	0.82 87.72 0.0	0.0 0.0 0.0	6.78 0.0 0.0	6.78
12	83.84 0.0 0.0	0.86 89.4 0.0	0.0 0.0 0.0	5.56 0.0 0.0	5.56
13	86.73 0.0 0.0	0.9 91.0 0.0	0.0 0.0 0.0	4.26 0.0 0.0	4.26
14	89.62 0.0 0.0	0.93 92.53 0.0	0.0 0.0 0.0	2.9 0.0 0.0	2.9
15	92.52 0.0 0.0	0.97 93.99 0.0	0.0 0.0 0.0	1.48 0.0 0.0	1.48
16	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
17	52.02 0.0 0.0	0.0 52.02 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
18	62.87 0.0 0.0	0.51 74.3 0.0	0.0 0.0 0.0	11.43 0.0 0.0	11.43
19	73.71 0.0 0.0	0.72 83.11 0.0	0.0 0.0 0.0	9.4 0.0 0.0	9.4
20	84.56 0.0 0.0	0.87 89.81 0.0	0.0 0.0 0.0	5.24 0.0 0.0	5.24
21	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01


Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G

Mean lightness difference (16 steps)
 $\Delta E^*_{\text{CIELAB}} = 7.0$


Mean lightness difference (5 steps)
 $\Delta L^*_{\text{CIELAB}} = 5.2$

Mean colour reproduction index: $R^*_{\text{ab,m}} = 70$

OE860-3N-136-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

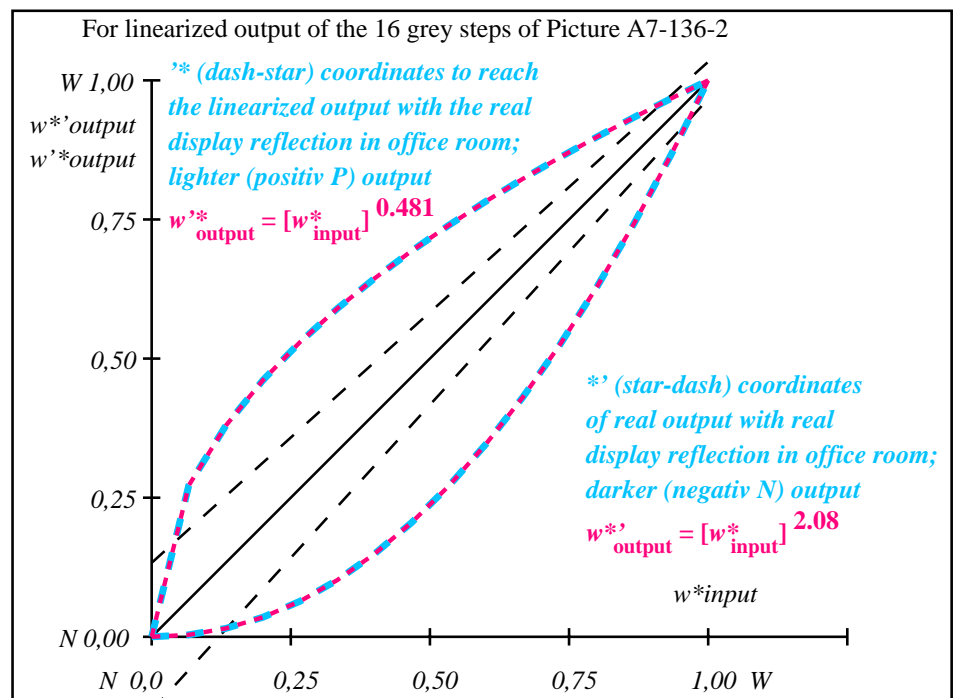

OE861-3N-136-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

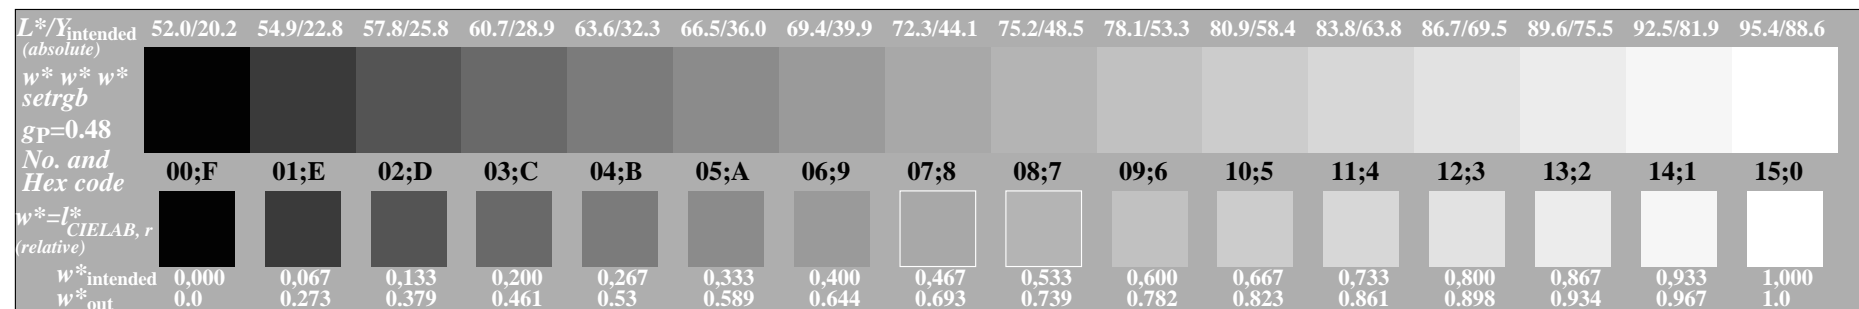

OE860-7N, Picture A7-136-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^* \text{setrgbcolor}$


OE86: In-output relation according to ISO 9241-306; 1MR, DEH input: $rgb \rightarrow rgb^*_{\text{de}}$ setrgbcolor
Viewing Y contrast $Y_W:Y_N=88,9:20$; Y_N range 15 to <30
output 136-2: $g_P=0.55$; $g_N=1.0$

TUB registration: 20110801-OE86/OE86L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th4ta

Input: Colorimetric Television Luminous System TLS00a

with *rgb* data of the
four elementary hues

1 0 0 = Red *R*
1 1 0 = Yellow *J*
0 1 0 = Green *G*
0 0 1 = Blue *B*




TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

Output: Colorimetric Television Luminous System TLS00a


with hue number

$n = 00$ to 19
00 = Red *R*
05 = Yellow *J*
10 = Green *G*
15 = Blue *B*




TLS00a; adapted (a) CIELAB data

	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
O _{Ma}	50.5	76.92	64.55	100.42	40
Y _{Ma}	92.66	-20.69	90.75	93.08	103
L _{Ma}	83.63	-82.75	79.9	115.04	136
C _{Ma}	86.88	-46.16	-13.55	48.12	196
V _{Ma}	30.39	76.06	-103.59	128.52	306
M _{Ma}	57.3	94.35	-58.41	110.97	328
N _{Ma}	0.01	0.0	0.0	0.0	0
W _{Ma}	95.41	0.0	0.0	0.0	0
R _{CIE}	39.92	58.74	27.99	65.07	25
J _{CIE}	81.26	-2.88	71.56	71.62	92
G _{CIE}	52.23	-42.41	13.6	44.55	162
B _{CIE}	30.57	1.41	-46.46	46.49	272

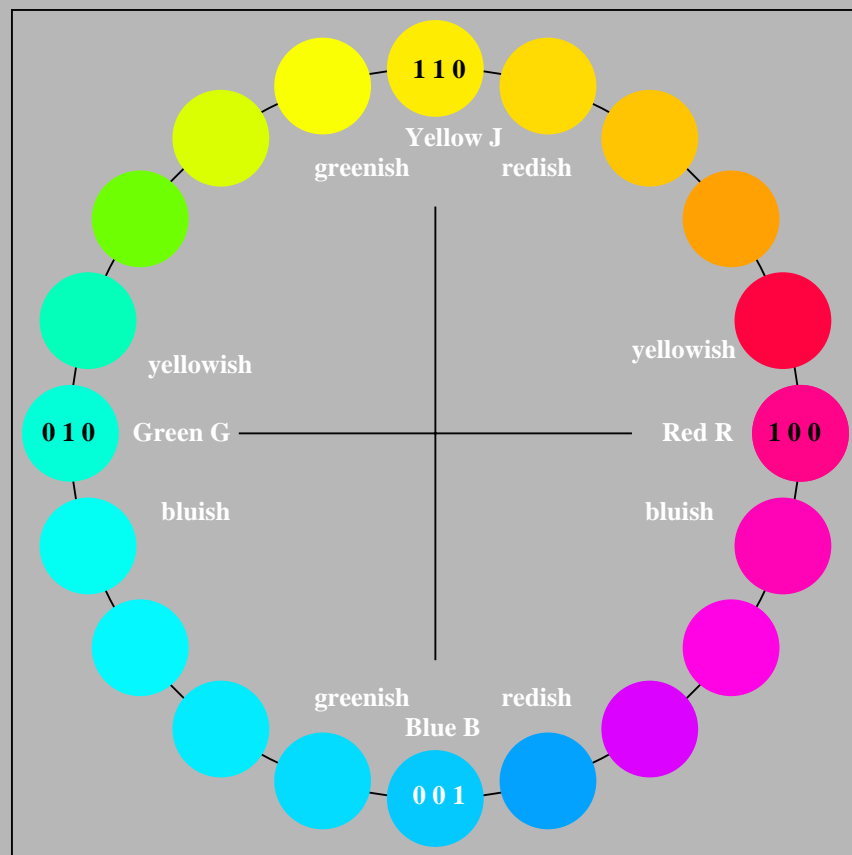

OE860-7N-137-0: 20 step hue circle with elementary colours *R*, *J*, *G*, *B* (left)

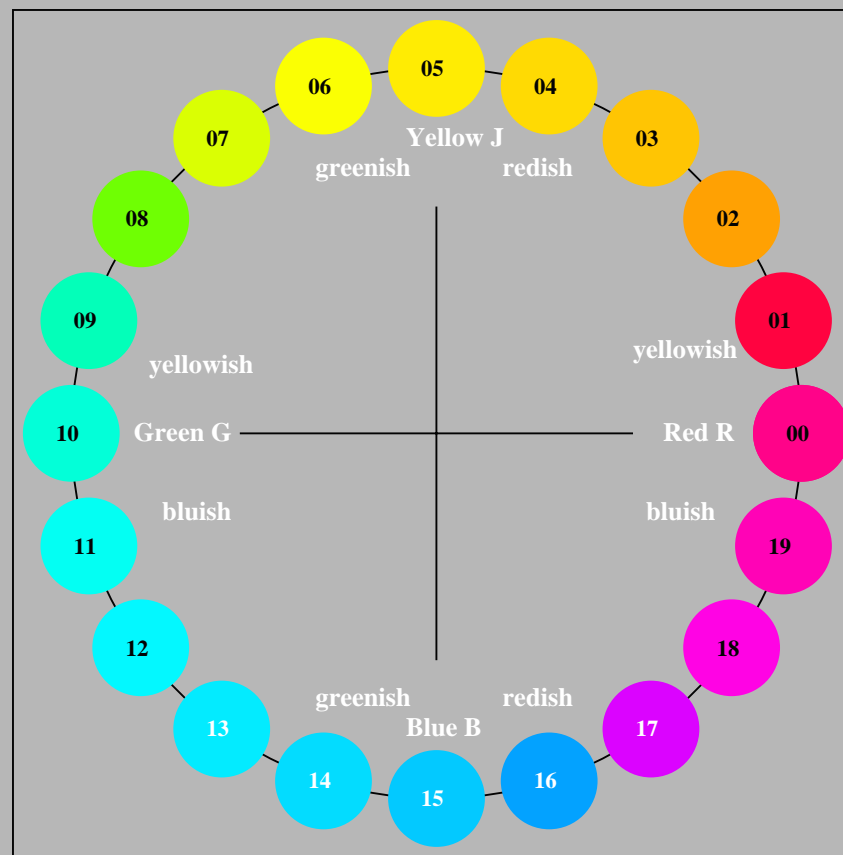


20 step hue circle with elementary colours *R*, *J*, *G*, *B* (right)

OE86: Test chart 5 according to DIN 33872-5; 1MR, DEH
Elementary hue agreement and discrimination

input: *rgb* (\rightarrow *rgb*_{de}) setrgbcolor
output 137-0: *g_p*=0.47; *g_N*=1.0

Agreement with elementary hues (Yes/No decision)

Layout example: agreement with elementary hues



There are four elementary hues on each page: Red R, Yellow J (=french Jaune), Green G, and Blue B.

Input data 1 0 0 should produce Red R.
Input data 0 1 0 should produce Green G.
Input data 0 0 1 should produce Blue B.
Input data 1 1 0 should produce Yellow J.

The elementary hues Red R and Green G should locate on the horizontal axis.
The elementary hues Yellow J and Blue B should locate on the vertical axis.

This test uses a hue circle with 20 hues.

No. 00 and 10 should be Red R and Green G.
No. 05 and 15 should be Yellow J and Blue B.

Are no. 00, 05, 10, and 15 the four elementary hues R, J, G and B? underline: Yes/No

Only in case of "No":

Elementary Red R is hue step no. (e. g. 00, 01, 19)	(neither yellowish nor blueish)
Elementary Yellow J is hue step no. (e. g. 05, 04, 06)	(neither reddish nor greenish)
Elementary Green G is hue step no. (e. g. 10, 09, 11)	(neither yellowish nor blueish)
Elementary Blue B is hue step no. (e. g. 15, 14, 16)	(neither reddish nor greenish)
Result: Of the 4 elementary hues (e.g. three)	

Part 1

OE860-3N-137-1

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE86/OE86L0NP.PDF> underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE86/OE86L0NA.PS> or underline Yes/No

Used computer operating system:

either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: underline monitor/data projector/printer

Device model, driver and version:.....

Device output with PDF/PS-file: underline PDF/PS-file

For device output with PDF-file OE86L0NP.PDF:

either PDF-file transfer "download, copy" to PDF device.....
or with computer system interpretation by "Display-PDF":.....
or with software e. g. Adobe-Reader/-Acrobat and version:.....
or with software e. g. Ghostscript and version:.....

For device output with PS-file OE86L0NA.PS:

either PS-file transfer "download, copy" to PS device.....
or with computer system interpretation by "Display-PS":.....
or with software e. g. Ghostscript and version:.....
or with software e. g. Mac-Yap and version:.....


Special remarks: Special remarks, e. g. output of Landscape (L)

Part 3

OE860-7N-137-1

Discriminability of colours with 20 hues (Yes/No decision)

Layout example: discriminability of colours with 20 hues



There are four elementary hues on each page: Red R, Yellow J (=french Jaune), Green G, and Blue B.

Input data 1 0 0 should produce Red R.
Input data 0 1 0 should produce Green G.
Input data 0 0 1 should produce Blue B.
Input data 1 1 0 should produce Yellow J.

Four hue steps are between:
Red R and Yellow J, Yellow J and Green G,
Green G and Blue B, and Blue B and Red R.

This test uses a hue circle with 20 hues.
All 20 hues should be distinguishable.

For this test it is **not** necessary:

1. All 19 differences are visually equal.
2. Elementary hues locate at 00, 05, 10, and 15.

Are all 20 colours of the 20 hues distinguishable? underline: Yes/No

Only in case of "No":

The colours of the two hue steps no. (e. g. 00 and 01)	are not distinguishable
The colours of the two hue steps no. (e. g. 14 and 15)	are not distinguishable
The colours of the two hue steps no. (e. g. 15 and 16)	are not distinguishable
List other pairs:	
Result: Of the 19 hue differences are (e.g. 18)	

Part 2

OE861-3N-137-1

Documentation of assessor colour vision properties for visual assessment

The assessor has **normal** colour vision according to one test:

either according to DIN 6160:1996 with Anomaloskop of Nagel
or with test charts using colour points according to Ishihara
or tested with, please specify:

underline Yes/No

underline Yes/unknown

underline Yes/unknown

underline Yes/unknown

For visual evaluation of the display (monitor, data projector) output

Office workplace illumination is daylight (clouded/north sky)

underline Yes/No

PDF file: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PDF>

underline Yes/No

PS file: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PS>

underline Yes/No

Picture A7-137-2: contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)
compare standard print output according to ISO/IEC 15775 with range F:0 underline range

Remark: In daylighted offices the contrast range is in many cases:

on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output

PDF-File: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PDF>

picture A7-137-2

underline Yes/No

PS-File: <http://130.149.60.45/farbmetrik/OE86/OE86F1P2.PS>

picture A7-137-2

or underline Yes/No

colour measurement and specification for:

CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry:

underline Yes/No

If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T

Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer
of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF

underline Yes/No

If No, please describe other method:

Part 4

OE861-7N-137-1

OE86: Form A for test chart 1 according to DIN 33872-5; 1MR, DEH, underline: $rgb \rightarrow rgb^*_{de}$ setrgbcolor
Elementary hue agreement, discrimination (Yes/No-decision) output 137-1: $g_P=0.47$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE*
1	69.7 0.0 0.0	0.0 69.7 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
2	71.41 0.0 0.0	0.3 77.46 0.0	0.0 0.0 0.0	6.04 0.0 0.0	6.04
3	73.13 0.0 0.0	0.41 80.24 0.0	0.0 0.0 0.0	7.11 0.0 0.0	7.11
4	74.84 0.0 0.0	0.49 82.31 0.0	0.0 0.0 0.0	7.47 0.0 0.0	7.47
5	76.55 0.0 0.0	0.56 84.02 0.0	0.0 0.0 0.0	7.47 0.0 0.0	7.47
6	78.27 0.0 0.0	0.62 85.51 0.0	0.0 0.0 0.0	7.24 0.0 0.0	7.24
7	79.98 0.0 0.0	0.67 86.84 0.0	0.0 0.0 0.0	6.86 0.0 0.0	6.86
8	81.7 0.0 0.0	0.71 88.05 0.0	0.0 0.0 0.0	6.35 0.0 0.0	6.35
9	83.41 0.0 0.0	0.76 89.17 0.0	0.0 0.0 0.0	5.76 0.0 0.0	5.76
10	85.12 0.0 0.0	0.8 90.21 0.0	0.0 0.0 0.0	5.08 0.0 0.0	5.08
11	86.84 0.0 0.0	0.84 91.19 0.0	0.0 0.0 0.0	4.35 0.0 0.0	4.35
12	88.55 0.0 0.0	0.87 92.11 0.0	0.0 0.0 0.0	3.56 0.0 0.0	3.56
13	90.27 0.0 0.0	0.91 92.99 0.0	0.0 0.0 0.0	2.73 0.0 0.0	2.73
14	91.98 0.0 0.0	0.94 93.83 0.0	0.0 0.0 0.0	1.85 0.0 0.0	1.85
15	93.7 0.0 0.0	0.97 94.64 0.0	0.0 0.0 0.0	0.94 0.0 0.0	0.94
16	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
17	69.7 0.0 0.0	0.0 69.7 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
18	76.13 0.0 0.0	0.54 83.62 0.0	0.0 0.0 0.0	7.5 0.0 0.0	7.5
19	82.55 0.0 0.0	0.74 88.62 0.0	0.0 0.0 0.0	6.06 0.0 0.0	6.06
20	88.98 0.0 0.0	0.88 92.34 0.0	0.0 0.0 0.0	3.35 0.0 0.0	3.35
21	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01


Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G

Mean lightness difference (16 steps)
 $\Delta E^*_{\text{CIELAB}} = 4.6$

Mean lightness difference (5 steps)
 $\Delta L^*_{\text{CIELAB}} = 3.4$

Mean colour reproduction index: $R^*_{\text{ab,m}} = 80$

OE860-3N-137-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

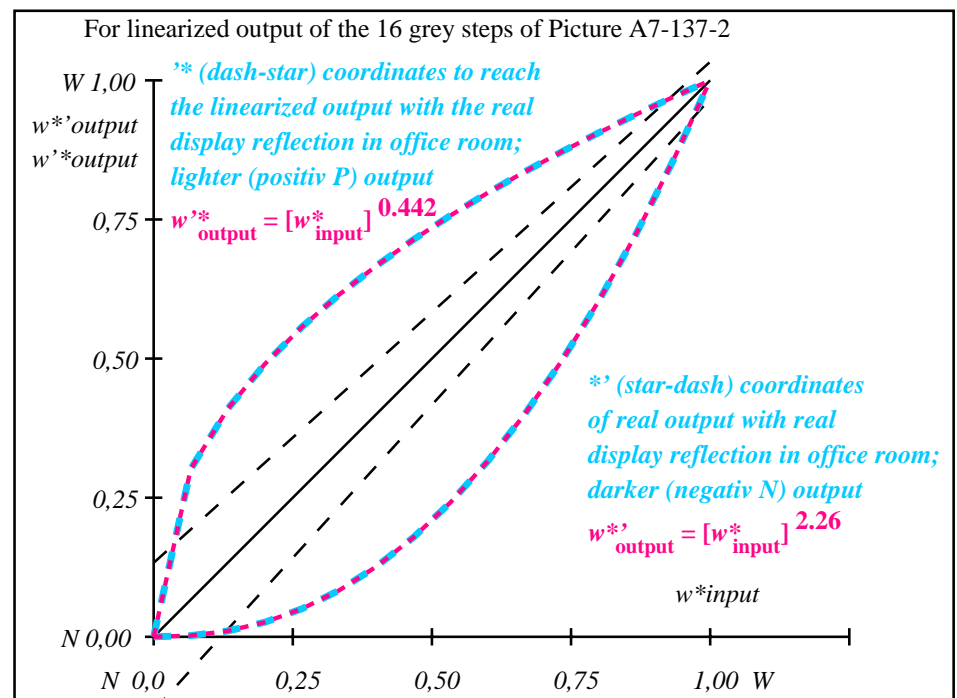

OE861-3N-137-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

L^*/Y_{intended} (absolute)	69.7/40.3	71.4/42.8	73.1/45.4	74.8/48.0	76.6/50.8	78.3/53.7	80.0/56.6	81.7/59.7	83.4/62.9	85.1/66.3	86.8/69.7	88.6/73.2	90.3/76.9	92.0/80.7	93.7/84.6	95.4/88.6
$w^* w^* w^*$ setrgb gp=0.44																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*$ CIELAB, r (relative)																
w^*_{intended}	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
w^*_{out}	0.0	0.302	0.41	0.491	0.557	0.615	0.667	0.714	0.757	0.798	0.836	0.872	0.906	0.939	0.97	1.0

OE860-7N, Picture A7-137-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^* \text{setrgbcolor}$

OE86: In-output relation according to ISO 9241-306; 1MR, DEH input: $\text{rgb} \rightarrow \text{rgb}^*_{\text{de}}$ setrgbcolor
Viewing Y contrast $Y_W:Y_N=88,9:40$; Y_N range 30 to <60
output 137-2: $g_P=0.47$; $g_N=1.0$

TUB registration: 20110801-OE86/OE86L0NA.TXT /.PS
application for output of displays: monitor systems or data projector systems
TUB material: code=thata