


i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE*	Start-Ausgabe S1
1	0.0	0.0	0.0	0.0	0.0	Kennzeichnung nach
2	6.36	0.0	0.07	6.36	0.0	ISO/IEC 15775 Anhang G
3	12.72	0.0	0.13	12.72	0.0	und DIN 33866-1 Anhang G
4	19.08	0.0	0.2	19.08	0.0	
5	25.44	0.0	0.27	25.44	0.0	
6	31.8	0.0	0.33	31.8	0.0	
7	38.16	0.0	0.4	38.16	0.0	
8	44.52	0.0	0.47	44.52	0.0	
9	50.89	0.0	0.53	50.89	0.0	
10	57.25	0.0	0.6	57.25	0.0	
11	63.61	0.0	0.67	63.61	0.0	
12	69.97	0.0	0.73	69.97	0.0	
13	76.33	0.0	0.8	76.33	0.0	
14	82.69	0.0	0.87	82.69	0.0	
15	89.05	0.0	0.93	89.05	0.0	Mittlerer Helligkeitsabstand (16 Stufen)
16	95.41	0.0	1.0	95.41	0.0	ΔE*CIELAB = 0.0
17	0.0	0.0	0.0	0.0	0.0	
18	23.85	0.0	0.25	23.85	0.0	
19	47.71	0.0	0.5	47.71	0.0	
20	71.56	0.0	0.75	71.56	0.0	Mittlerer Helligkeitsabstand (5 Stufen)
21	95.41	0.0	1.0	95.41	0.0	ΔL*CIELAB = 0.0

Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 100$

OG810-3N-130-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

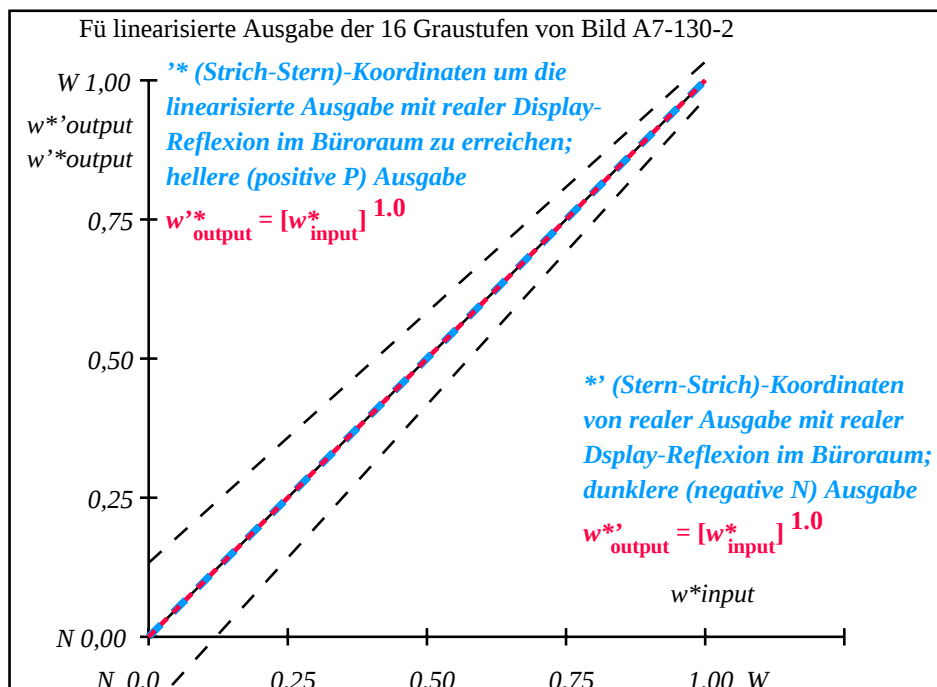

OG811-3N-130-2: File: Measure unknown; Device: Device unknown; Date: Date unknown


$L^*/Y_{intended}$ (absolut)	0.0/0.0	6.4/0.7	12.7/1.5	19.1/2.8	25.4/4.6	31.8/7.0	38.2/10.2	44.5/14.2	50.9/19.2	57.2/25.2	63.6/32.3	70.0/40.7	76.3/50.4	82.7/61.6	89.0/74.3	95.4/88.6
$w^* w^* w^*$ setrgb																
$g_P=1.0$																
Nr. und Hex-Code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*$ CIELAB, r (relativ)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0.0	0.067	0.133	0.2	0.267	0.333	0.4	0.467	0.533	0.6	0.667	0.733	0.8	0.867	0.933	1.0

OG810-7N, Bild A7-130-2: 16 visuell gleichabständige L^* -Graustufen; PS-Operator: $w^* w^* w^*$ setrgbcolor

OG81: Ein-Ausgabe-Beziehung nach ISO 9241-306; 1MR, DEH Eingabe: $cmy0 (-> cmy0^*_{de}) setcmyk$
Gesehener Y-Kontrast $Y_W:Y_N=88,9:0,31$; Y_N -Bereich 0,0 to <0,46 Ausgabe 130-2: $g_P=1.0$; $g_N=1.0$

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE*	Start-Ausgabe S1
1	5.69 0.0 0.0	0.0 0.0 0.0	5.69 0.0 0.0	0.0 0.0 0.0	0.01	Kennzeichnung nach
2	11.67 0.0 0.0	0.04 0.0 0.0	9.36 0.0 0.0	-2.3 0.0 0.0	2.31	ISO/IEC 15775 Anhang G
3	17.65 0.0 0.0	0.09 0.0 0.0	14.01 0.0 0.0	-3.63 0.0 0.0	3.64	und DIN 33866-1 Anhang G
4	23.63 0.0 0.0	0.15 0.0 0.0	19.12 0.0 0.0	-4.5 0.0 0.0	4.51	
5	29.62 0.0 0.0	0.21 0.0 0.0	24.55 0.0 0.0	-5.06 0.0 0.0	5.07	
6	35.6 0.0 0.0	0.27 0.0 0.0	30.23 0.0 0.0	-5.36 0.0 0.0	5.37	
7	41.58 0.0 0.0	0.34 0.0 0.0	36.12 0.0 0.0	-5.45 0.0 0.0	5.46	
8	47.56 0.0 0.0	0.41 0.0 0.0	42.19 0.0 0.0	-5.36 0.0 0.0	5.37	
9	53.54 0.0 0.0	0.48 0.0 0.0	48.42 0.0 0.0	-5.11 0.0 0.0	5.12	
10	59.52 0.0 0.0	0.55 0.0 0.0	54.79 0.0 0.0	-4.72 0.0 0.0	4.73	
11	65.5 0.0 0.0	0.62 0.0 0.0	61.29 0.0 0.0	-4.2 0.0 0.0	4.21	
12	71.48 0.0 0.0	0.69 0.0 0.0	67.91 0.0 0.0	-3.56 0.0 0.0	3.57	
13	77.47 0.0 0.0	0.77 0.0 0.0	74.64 0.0 0.0	-2.82 0.0 0.0	2.83	
14	83.45 0.0 0.0	0.84 0.0 0.0	81.47 0.0 0.0	-1.97 0.0 0.0	1.98	
15	89.43 0.0 0.0	0.92 0.0 0.0	88.4 0.0 0.0	-1.02 0.0 0.0	1.03	Mittlerer Helligkeitsabstand (16 Stufen)
16	95.41 0.0 0.0	1.0 0.0 0.0	95.41 0.0 0.0	0.0 0.0 0.0	0.01	$\Delta E^*_{CIELAB} = 3.4$
17	5.69 0.0 0.0	0.0 0.0 0.0	5.69 0.0 0.0	0.0 0.0 0.0	0.01	
18	28.12 0.0 0.0	0.19 0.0 0.0	23.17 0.0 0.0	-4.94 0.0 0.0	4.95	
19	50.55 0.0 0.0	0.44 0.0 0.0	45.29 0.0 0.0	-5.25 0.0 0.0	5.26	
20	72.98 0.0 0.0	0.71 0.0 0.0	69.58 0.0 0.0	-3.39 0.0 0.0	3.4	Mittlerer Helligkeitsabstand (5 Stufen)
21	95.41 0.0 0.0	1.0 0.0 0.0	95.41 0.0 0.0	0.0 0.0 0.0	0.01	$\Delta L^*_{CIELAB} = 2.7$
Mittlerer Farbwiedergabe-Index:					$R^*_{ab,m} = 85$	

OG810-3N-131-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

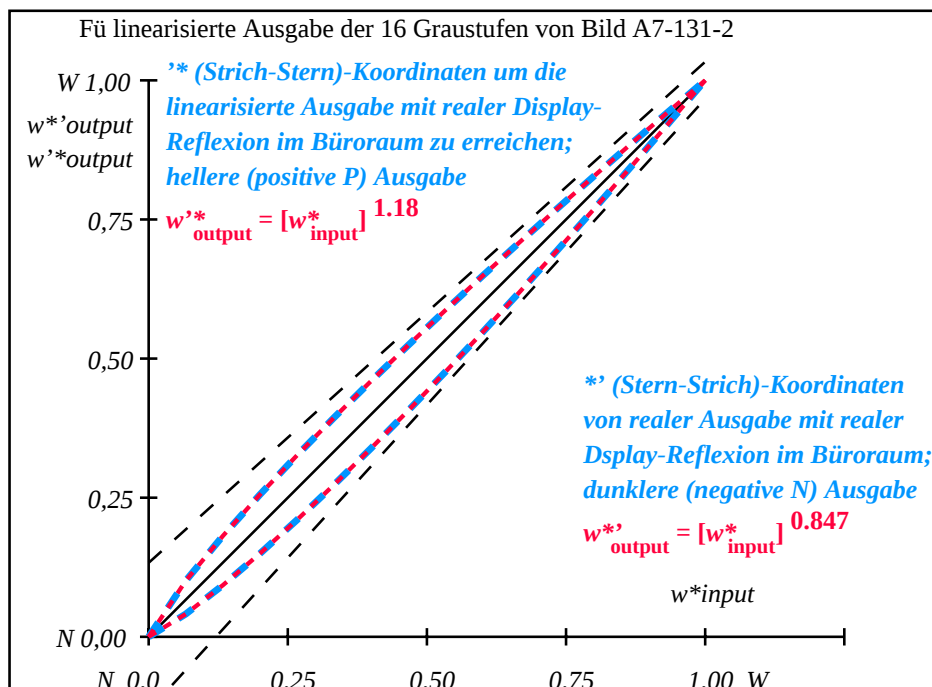

OG811-3N-131-2: File: Measure unknown; Device: Device unknown; Date: Date unknown


$L^*/Y_{intended}$ (absolut)	5.7/0.6	11.7/1.4	17.7/2.4	23.6/4.0	29.6/6.1	35.6/8.8	41.6/12.2	47.6/16.5	53.5/21.5	59.5/27.6	65.5/34.7	71.5/42.9	77.5/52.3	83.4/63.0	89.4/75.1	95.4/88.6
$w^* w^* w^*$ setrgb																
$g_N=1.18$ Nr. und Hex-Code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*_{CIELAB,r}$ (relativ)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0.0	0.041	0.093	0.15	0.211	0.273	0.339	0.407	0.476	0.547	0.62	0.693	0.769	0.845	0.921	1.0

OG810-7N, Bild A7-131-2: 16 visuell gleichabständige L^* -Graustufen; PS-Operator: $w^* w^* w^* \text{setrgbcolor}$

OG81: Ein-Ausgabe-Beziehung nach ISO 9241-306; 1MR, DEH Eingabe: $cmy0 (-> cmy0^*_{de}) \text{setcmyk}$
Gesehener Y-Kontrast $Y_W:Y_N=88,9:0,62$; Y_N -Bereich 0,46 to <0,9 Ausgabe 130-2: $g_P=1.0$; $g_N=1.08$

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE*	Start-Ausgabe S1
1	10.99	0.0	0.0	0.0	0.0	Kennzeichnung nach
2	16.62	0.0	0.03	13.12	0.0	ISO/IEC 15775 Anhang G
3	22.25	0.0	0.06	16.44	0.0	und DIN 33866-1 Anhang G
4	27.88	0.0	0.11	20.45	0.0	
5	33.5	0.0	0.17	24.98	0.0	
6	39.13	0.0	0.22	29.94	0.0	
7	44.76	0.0	0.29	35.27	0.0	
8	50.39	0.0	0.35	40.93	0.0	
9	56.02	0.0	0.43	46.9	0.0	
10	61.64	0.0	0.5	53.13	0.0	
11	67.27	0.0	0.58	59.63	0.0	
12	72.9	0.0	0.66	66.36	0.0	
13	78.53	0.0	0.74	73.31	0.0	
14	84.15	0.0	0.82	80.48	0.0	
15	89.78	0.0	0.91	87.85	0.0	Mittlerer Helligkeitsabstand (16 Stufen)
16	95.41	0.0	1.0	95.41	0.0	ΔE* _{CIELAB} = 6.0
17	10.99	0.0	0.0	10.99	0.0	
18	32.1	0.0	0.15	23.81	0.0	
19	53.2	0.0	0.39	43.88	0.0	
20	74.31	0.0	0.68	68.08	0.0	Mittlerer Helligkeitsabstand (5 Stufen)
21	95.41	0.0	1.0	95.41	0.0	ΔL* _{CIELAB} = 4.8
Mittlerer Farbwiedergabe-Index:					R* _{ab,m} = 74	

OG810-3N-132-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

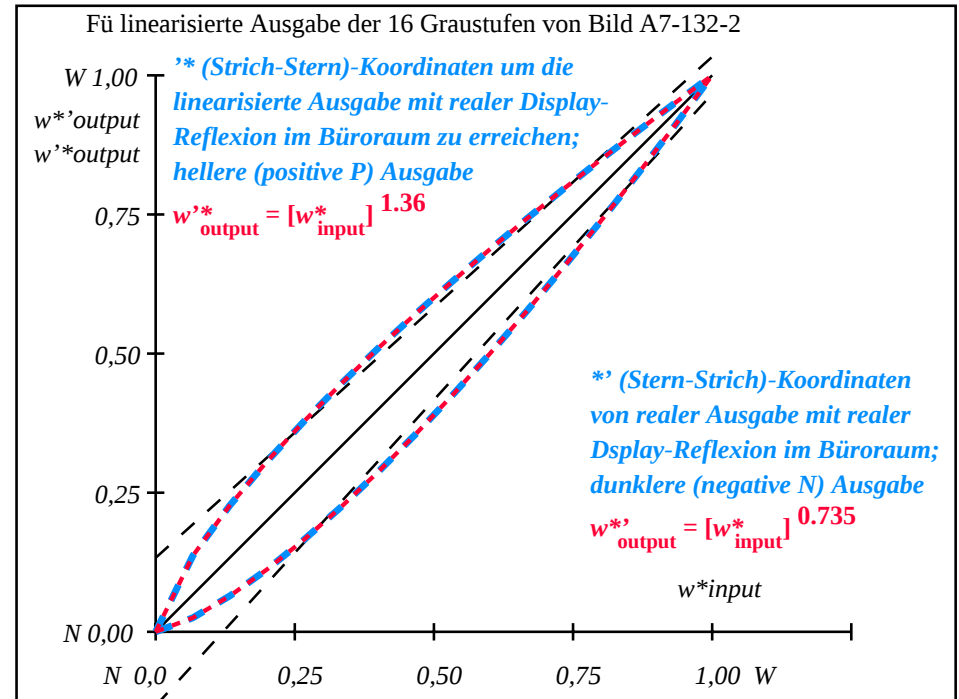


$L^*/Y_{intended}$ (absolut)	11.0/1.3	16.6/2.2	22.2/3.6	27.9/5.4	33.5/7.8	39.1/10.7	44.8/14.4	50.4/18.7	56.0/23.9	61.6/30.0	67.3/37.0	72.9/45.0	78.5/54.1	84.2/64.4	89.8/75.8	95.4/88.6
$w^* w^* w^*$ setrgb																
$g_N=1.36$																
Nr. und Hex-Code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*_{CIELAB, r}$ (relativ)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0.0	0.025	0.064	0.112	0.166	0.224	0.288	0.355	0.425	0.499	0.577	0.655	0.738	0.824	0.91	1.0

OG810-7N, Bild A7-132-2: 16 visuell gleichabständige L^* -Graustufen; PS-Operator: $w^* w^* w^*$ setrgbcolor

OG81: Ein-Ausgabe-Beziehung nach ISO 9241-306; 1MR, DEH Eingabe: $cmy0 (-> cmy0^*_{de}) setcmyk$
Gesehener Y-Kontrast $Y_W:Y_N=88,9:1,25$; Y_N -Bereich 0,93 to <1,8 Ausgabe 130-2: $g_P=1.0$; $g_N=1.17$

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE*	Start-Ausgabe S1
1	18.01 0.0 0.0	0.0 0.0 0.0	18.01 0.0 0.0	0.0 0.0 0.0	0.01	Kennzeichnung nach
2	23.17 0.0 0.0	0.02 0.0 0.0	19.2 0.0 0.0	-3.95 0.0 0.0	3.96	ISO/IEC 15775 Anhang G
3	28.33 0.0 0.0	0.04 0.0 0.0	21.49 0.0 0.0	-6.83 0.0 0.0	6.84	und DIN 33866-1 Anhang G
4	33.49 0.0 0.0	0.08 0.0 0.0	24.5 0.0 0.0	-8.98 0.0 0.0	8.99	
5	38.65 0.0 0.0	0.13 0.0 0.0	28.12 0.0 0.0	-10.52 0.0 0.0	10.53	
6	43.81 0.0 0.0	0.18 0.0 0.0	32.26 0.0 0.0	-11.53 0.0 0.0	11.54	
7	48.97 0.0 0.0	0.24 0.0 0.0	36.89 0.0 0.0	-12.07 0.0 0.0	12.08	
8	54.13 0.0 0.0	0.31 0.0 0.0	41.94 0.0 0.0	-12.18 0.0 0.0	12.19	
9	59.29 0.0 0.0	0.38 0.0 0.0	47.41 0.0 0.0	-11.87 0.0 0.0	11.88	
10	64.45 0.0 0.0	0.46 0.0 0.0	53.25 0.0 0.0	-11.19 0.0 0.0	11.2	
11	69.61 0.0 0.0	0.54 0.0 0.0	59.46 0.0 0.0	-10.14 0.0 0.0	10.15	
12	74.77 0.0 0.0	0.62 0.0 0.0	66.02 0.0 0.0	-8.74 0.0 0.0	8.75	
13	79.93 0.0 0.0	0.71 0.0 0.0	72.9 0.0 0.0	-7.02 0.0 0.0	7.03	
14	85.09 0.0 0.0	0.8 0.0 0.0	80.1 0.0 0.0	-4.98 0.0 0.0	4.99	
15	90.25 0.0 0.0	0.9 0.0 0.0	87.61 0.0 0.0	-2.63 0.0 0.0	2.64	Mittlerer Helligkeitsabstand (16 Stufen)
16	95.41 0.0 0.0	1.0 0.0 0.0	95.41 0.0 0.0	0.0 0.0 0.0	0.01	$\Delta E^*_{CIELAB} = 7.7$
17	18.01 0.0 0.0	0.0 0.0 0.0	18.01 0.0 0.0	0.0 0.0 0.0	0.01	
18	37.36 0.0 0.0	0.12 0.0 0.0	27.16 0.0 0.0	-10.19 0.0 0.0	10.2	
19	56.71 0.0 0.0	0.34 0.0 0.0	44.63 0.0 0.0	-12.07 0.0 0.0	12.08	
20	76.06 0.0 0.0	0.64 0.0 0.0	67.71 0.0 0.0	-8.34 0.0 0.0	8.35	Mittlerer Helligkeitsabstand (5 Stufen)
21	95.41 0.0 0.0	1.0 0.0 0.0	95.41 0.0 0.0	0.0 0.0 0.0	0.01	$\Delta L^*_{CIELAB} = 6.1$
Mittlerer Farbwiedergabe-Index:					$R^*_{ab,m} = 66$	

OG810-3N-133-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

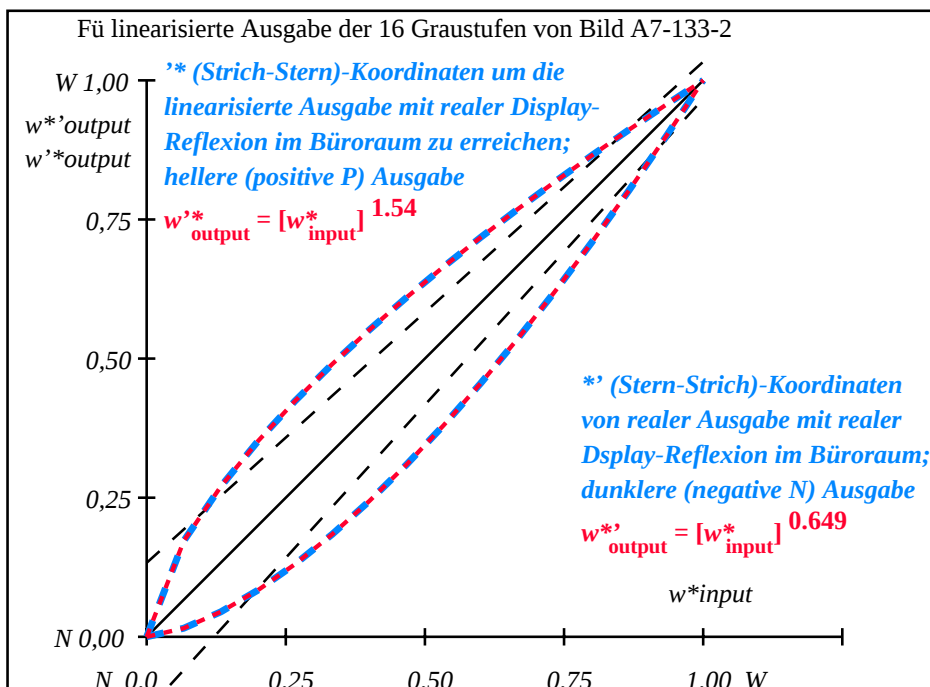

OG811-3N-133-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

$L^*/Y_{intended}$ (absolut)	18.0/2.5	23.2/3.8	28.3/5.6	33.5/7.8	38.6/10.5	43.8/13.7	49.0/17.6	54.1/22.1	59.3/27.3	64.4/33.4	69.6/40.2	74.8/47.9	79.9/56.6	85.1/66.2	90.2/76.8	95.4/88.6
$w^* w^* w^*$ setrgb																
$g_N=1.54$																
Nr. und Hex-Code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*_{CIELAB,r}$ (relativ)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0,0	0,016	0,045	0,084	0,131	0,184	0,244	0,31	0,379	0,455	0,536	0,62	0,709	0,803	0,899	1,0

OG810-7N, Bild A7-133-2: 16 visuell gleichabständige L^* -Graustufen; PS-Operator: $w^* w^* w^*$ setrgbcolor

OG81: Ein-Ausgabe-Beziehung nach ISO 9241-306; 1MR, DEH Eingabe: $cmy0 (-> cmy0^*_{de}) setcmyk$
Gesehener Y-Kontrast $Y_W:Y_N=88,9:2,5$; Y_N -Bereich 1,87 to <3,75 Ausgabe 130-2: $g_P=1.0$; $g_N=1.29$

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE*
1	26.85 0.0 0.0	0.0 26.85 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
2	31.42 0.0 0.0	0.01 27.5 0.0	0.0 -3.91 0.0	0.0 0.0 0.0	3.92
3	35.99 0.0 0.0	0.03 28.99 0.0	0.0 -6.99 0.0	0.0 0.0 0.0	7.0
4	40.56 0.0 0.0	0.06 31.15 0.0	0.0 -9.4 0.0	0.0 0.0 0.0	9.41
5	45.13 0.0 0.0	0.1 33.91 0.0	0.0 -11.21 0.0	0.0 0.0 0.0	11.22
6	49.7 0.0 0.0	0.15 37.21 0.0	0.0 -12.48 0.0	0.0 0.0 0.0	12.49
7	54.27 0.0 0.0	0.21 41.03 0.0	0.0 -13.24 0.0	0.0 0.0 0.0	13.25
8	58.84 0.0 0.0	0.27 45.33 0.0	0.0 -13.5 0.0	0.0 0.0 0.0	13.51
9	63.41 0.0 0.0	0.34 50.1 0.0	0.0 -13.3 0.0	0.0 0.0 0.0	13.31
10	67.99 0.0 0.0	0.42 55.33 0.0	0.0 -12.65 0.0	0.0 0.0 0.0	12.66
11	72.56 0.0 0.0	0.5 60.98 0.0	0.0 -11.56 0.0	0.0 0.0 0.0	11.57
12	77.13 0.0 0.0	0.59 67.06 0.0	0.0 -10.05 0.0	0.0 0.0 0.0	10.06
13	81.7 0.0 0.0	0.68 73.56 0.0	0.0 -8.13 0.0	0.0 0.0 0.0	8.14
14	86.27 0.0 0.0	0.78 80.45 0.0	0.0 -5.81 0.0	0.0 0.0 0.0	5.82
15	90.84 0.0 0.0	0.89 87.74 0.0	0.0 -3.09 0.0	0.0 0.0 0.0	3.1
16	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
17	26.85 0.0 0.0	0.0 26.85 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
18	43.99 0.0 0.0	0.09 33.17 0.0	0.0 -10.81 0.0	0.0 0.0 0.0	10.82
19	61.13 0.0 0.0	0.3 47.66 0.0	0.0 -13.46 0.0	0.0 0.0 0.0	13.47
20	78.27 0.0 0.0	0.61 68.65 0.0	0.0 -9.61 0.0	0.0 0.0 0.0	9.62
21	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01


Start-Ausgabe S1
Kennzeichnung nach
ISO/IEC 15775 Anhang G
und DIN 33866-1 Anhang G

Mittlerer Helligkeitsabstand (16 Stufen)
 $\Delta E^*_{CIELAB} = 8.5$

Mittlerer Helligkeitsabstand (5 Stufen)
 $\Delta L^*_{CIELAB} = 6.8$

Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 63$

OG810-3N-134-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

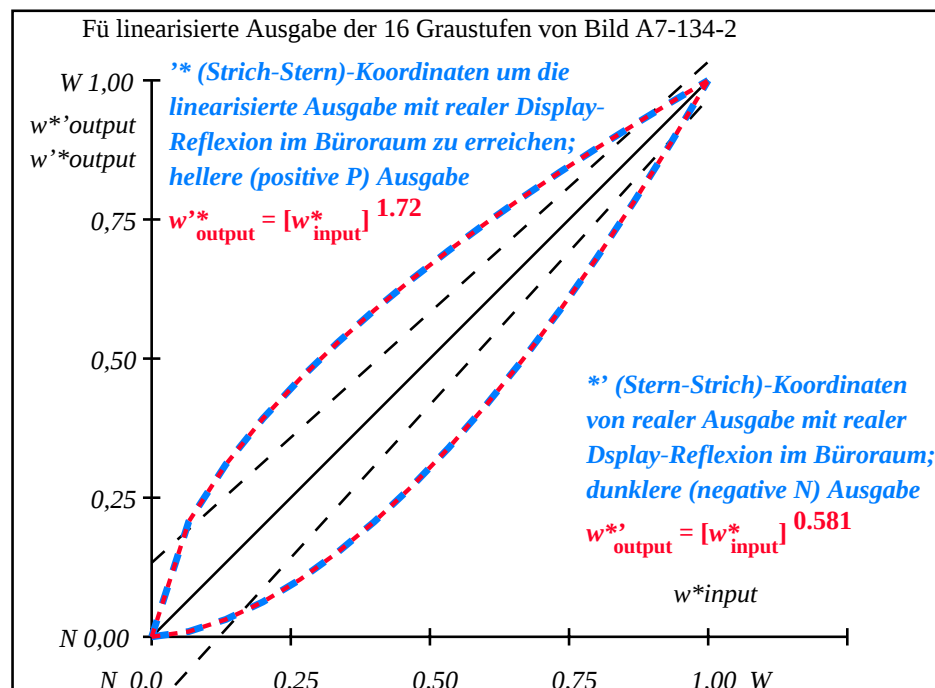

OG811-3N-134-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

$L^*/Y_{intended}$ (absolut)	26.8/5.0	31.4/6.8	36.0/9.0	40.6/11.6	45.1/14.6	49.7/18.2	54.3/22.2	58.8/26.9	63.4/32.1	68.0/38.0	72.6/44.5	77.1/51.7	81.7/59.7	86.3/68.5	90.8/78.1	95.4/88.6
$w^* w^* w^*$ setrgb																
$g_N=1.72$ Nr. und Hex-Code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*_{CIELAB,r}$ (relativ)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0.0	0.01	0.031	0.063	0.103	0.151	0.207	0.27	0.339	0.415	0.498	0.586	0.681	0.782	0.888	1.0

OG810-7N, Bild A7-134-2: 16 visuell gleichabständige L^* -Graustufen; PS-Operator: $w^* w^* w^* \text{setrgbcolor}$


OG81: Ein-Ausgabe-Beziehung nach ISO 9241-306; 1MR, DEH Eingabe: $cmy0 (-> cmy0^*_{de}) \text{setcmyk}$
Gesehener Y-Kontrast $Y_W:Y_N=88,9:5$; Y_N -Bereich 3,75 to <7,5 Ausgabe 130-2: $g_P=1.0$; $g_N=1.42$

i	LAB*ref	l*out			LAB*out			LAB*out/c-ref			ΔE*	Start-Ausgabe S1
1	37.99 0.0 0.0	0.0 0.0 0.0	37.99 0.0 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01	Kennzeichnung nach ISO/IEC 15775 Anhang G und DIN 33866-1 Anhang G				
2	41.81 0.0 0.0	0.0 0.01 38.32 0.0 0.0	-3.48 0.0 0.0	3.49								
3	45.64 0.0 0.0	0.0 0.02 39.23 0.0 0.0	-6.4 0.0 0.0	6.41								
4	49.47 0.0 0.0	0.0 0.05 40.68 0.0 0.0	-8.78 0.0 0.0	8.79								
5	53.3 0.0 0.0	0.0 0.08 42.65 0.0 0.0	-10.64 0.0 0.0	10.65								
6	57.13 0.0 0.0	0.0 0.12 45.11 0.0 0.0	-12.01 0.0 0.0	12.02								
7	60.96 0.0 0.0	0.0 0.18 48.06 0.0 0.0	-12.89 0.0 0.0	12.9								
8	64.78 0.0 0.0	0.0 0.24 51.48 0.0 0.0	-13.29 0.0 0.0	13.3								
9	68.61 0.0 0.0	0.0 0.3 55.38 0.0 0.0	-13.22 0.0 0.0	13.23								
10	72.44 0.0 0.0	0.0 0.38 59.74 0.0 0.0	-12.69 0.0 0.0	12.7								
11	76.27 0.0 0.0	0.0 0.46 64.56 0.0 0.0	-11.69 0.0 0.0	11.7								
12	80.1 0.0 0.0	0.0 0.55 69.84 0.0 0.0	-10.25 0.0 0.0	10.26								
13	83.93 0.0 0.0	0.0 0.65 75.57 0.0 0.0	-8.35 0.0 0.0	8.36								
14	87.75 0.0 0.0	0.0 0.76 81.74 0.0 0.0	-6.0 0.0 0.0	6.01								
15	91.58 0.0 0.0	0.0 0.88 88.35 0.0 0.0	-3.22 0.0 0.0	3.23	Mittlerer Helligkeitsabstand (16 Stufen)							
16	95.41 0.0 0.0	0.0 1.0 95.41 0.0 0.0	0.0 0.0 0.0	0.01								
17	37.99 0.0 0.0	0.0 0.0 37.99 0.0 0.0	0.0 0.0 0.0	0.01	ΔE*CIELAB = 8.3							
18	52.34 0.0 0.0	0.0 0.07 42.11 0.0 0.0	-10.22 0.0 0.0	10.23								
19	66.7 0.0 0.0	0.0 0.27 53.37 0.0 0.0	-13.32 0.0 0.0	13.33								
20	81.05 0.0 0.0	0.0 0.58 71.23 0.0 0.0	-9.81 0.0 0.0	9.82	Mittlerer Helligkeitsabstand (5 Stufen)							
21	95.41 0.0 0.0	0.0 1.0 95.41 0.0 0.0	0.0 0.0 0.0	0.01								
Mittlerer Farbwiedergabe-Index:							R*ab,m = 64					
							ΔL*CIELAB = 6.7					

Mittlerer Farbwiedergabe-Index: $R_{ab,m} = 64$

OG810-3N-135-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

Fü linearisierte Ausgabe der 16 Graustufen von Bild A7-135-2

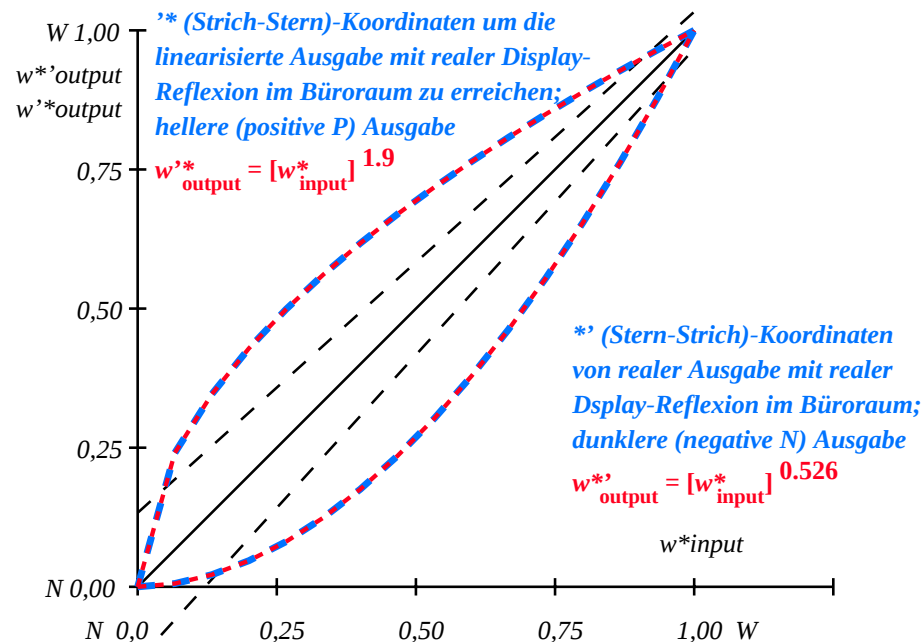

OG811-3N-135-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

$L^*/Y_{intended}$ (absolut)	38.0/10.1	41.8/12.4	45.6/15.0	49.5/18.0	53.3/21.3	57.1/25.1	61.0/29.2	64.8/33.8	68.6/38.8	72.4/44.3	76.3/50.3	80.1/56.9	83.9/63.9	87.8/71.6	91.6/79.8	95.4/88.6
$w^* w^* w^*$ setrgb																
$g_N=1.9$ Nr. und Hex-Code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*$ (relativ)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0.0	0.006	0.022	0.047	0.081	0.124	0.175	0.235	0.303	0.379	0.463	0.554	0.654	0.762	0.877	1.0


OG810-7N, Bild A7-135-2: 16 visuell gleichabständige L^* -Graustufen; PS-Operator: $w^* w^* w^* \text{setrgbcolor}$

OG81: Ein-Ausgabe-Beziehung nach ISO 9241-306; 1MR, DEH Eingabe: $cmy0 (-> cmy0^*_{de}) \text{setcmyk}$
Gesehener Y-Kontrast $Y_W:Y_N=88,9:10$; Y_N -Bereich 7,5 to <15 Ausgabe 130-2: $g_P=1.0$; $g_N=1.6$

94nliche ISO-Prüfvorlagen: <http://www.ps.bam.de/24705T>, <http://www.ps.bam.de/9241>
Technische Information: <http://www.ps.bam.de/33872> Version 2.1, io=1,1, CIELAB

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE*	Start-Ausgabe S1
1	52.02 0.0 0.0	0.0 0.0 0.0	52.02 0.0 0.0	0.0 0.0 0.0	0.01	Kennzeichnung nach
2	54.91 0.0 0.0	0.0 0.0 0.0	52.17 0.0 0.0	-2.73 0.0 0.0	2.74	ISO/IEC 15775 Anhang G
3	57.8 0.0 0.0	0.02 0.0 0.0	52.67 0.0 0.0	-5.12 0.0 0.0	5.13	und DIN 33866-1 Anhang G
4	60.7 0.0 0.0	0.04 0.0 0.0	53.54 0.0 0.0	-7.14 0.0 0.0	7.15	
5	63.59 0.0 0.0	0.06 0.0 0.0	54.79 0.0 0.0	-8.79 0.0 0.0	8.8	
6	66.48 0.0 0.0	0.1 0.0 0.0	56.43 0.0 0.0	-10.04 0.0 0.0	10.05	
7	69.37 0.0 0.0	0.15 0.0 0.0	58.47 0.0 0.0	-10.89 0.0 0.0	10.9	
8	72.27 0.0 0.0	0.2 0.0 0.0	60.91 0.0 0.0	-11.35 0.0 0.0	11.36	
9	75.16 0.0 0.0	0.27 0.0 0.0	63.75 0.0 0.0	-11.4 0.0 0.0	11.41	
10	78.05 0.0 0.0	0.35 0.0 0.0	67.01 0.0 0.0	-11.03 0.0 0.0	11.04	
11	80.95 0.0 0.0	0.43 0.0 0.0	70.69 0.0 0.0	-10.25 0.0 0.0	10.26	
12	83.84 0.0 0.0	0.52 0.0 0.0	74.78 0.0 0.0	-9.05 0.0 0.0	9.06	
13	86.73 0.0 0.0	0.63 0.0 0.0	79.3 0.0 0.0	-7.42 0.0 0.0	7.43	
14	89.62 0.0 0.0	0.74 0.0 0.0	84.24 0.0 0.0	-5.38 0.0 0.0	5.39	
15	92.52 0.0 0.0	0.87 0.0 0.0	89.61 0.0 0.0	-2.9 0.0 0.0	2.91	Mittlerer Helligkeitsabstand (16 Stufen)
16	95.41 0.0 0.0	1.0 0.0 0.0	95.41 0.0 0.0	0.0 0.0 0.0	0.01	$\Delta E^*_{CIELAB} = 7.1$
17	52.02 0.0 0.0	0.0 0.0 0.0	52.02 0.0 0.0	0.0 0.0 0.0	0.01	
18	62.87 0.0 0.0	0.06 0.0 0.0	54.44 0.0 0.0	-8.41 0.0 0.0	8.42	
19	73.71 0.0 0.0	0.24 0.0 0.0	62.28 0.0 0.0	-11.42 0.0 0.0	11.43	
20	84.56 0.0 0.0	0.55 0.0 0.0	75.87 0.0 0.0	-8.68 0.0 0.0	8.69	Mittlerer Helligkeitsabstand (5 Stufen)
21	95.41 0.0 0.0	1.0 0.0 0.0	95.41 0.0 0.0	0.0 0.0 0.0	0.01	$\Delta L^*_{CIELAB} = 5.7$
Mittlerer Farbwiedergabe-Index:					$R^*_{ab,m} = 69$	

OG810-3N-136-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

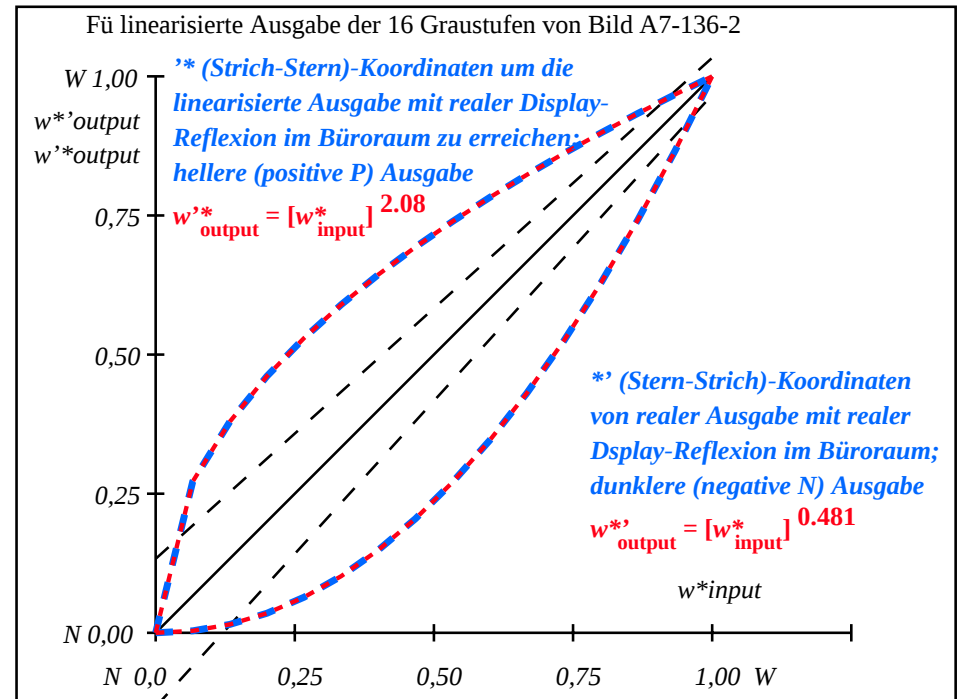

OG811-3N-136-2: File: Measure unknown; Device: Device unknown; Date: Date unknown


$L^*/Y_{intended}$ (absolut)	52.0/20.2	54.9/22.8	57.8/25.8	60.7/28.9	63.6/32.3	66.5/36.0	69.4/39.9	72.3/44.1	75.2/48.5	78.1/53.3	80.9/58.4	83.8/63.8	86.7/69.5	89.6/75.5	92.5/81.9	95.4/88.6
$w^* w^* w^*$ setrgb																
$g_N=2.08$																
Nr. und Hex-Code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*_{CIELAB, r}$ (relativ)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0.0	0.004	0.015	0.035	0.064	0.102	0.149	0.205	0.27	0.346	0.431	0.524	0.629	0.743	0.866	1.0

OG810-7N, Bild A7-136-2: 16 visuell gleichabständige L^* -Graustufen; PS-Operator: $w^* w^* w^* \text{setrgbcolor}$

OG81: Ein-Ausgabe-Beziehung nach ISO 9241-306; 1MR, DEH Eingabe: $cmy0 (-> cmy0^*_{de}) \text{setcmyk}$
Gesehener Y-Kontrast $Y_W:Y_N=88,9:20$; Y_N -Bereich 15 to <30 Ausgabe 130-2: $g_P=1.0$; $g_N=1.81$

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE*	Start-Ausgabe S1
1	69.7 0.0 0.0	0.0 0.0 0.0	69.7 0.0 0.0	0.0 0.0 0.0	0.01	Kennzeichnung nach
2	71.41 0.0 0.0	0.0 0.0 0.0	69.75 0.0 0.0	-1.65 0.0 0.0	1.66	ISO/IEC 15775 Anhang G
3	73.13 0.0 0.0	0.0 0.0 0.0	69.97 0.0 0.0	-3.15 0.0 0.0	3.16	und DIN 33866-1 Anhang G
4	74.84 0.0 0.0	0.0 0.0 0.0	70.37 0.0 0.0	-4.46 0.0 0.0	4.47	
5	76.55 0.0 0.0	0.0 0.0 0.0	70.99 0.0 0.0	-5.55 0.0 0.0	5.56	
6	78.27 0.0 0.0	0.0 0.0 0.0	71.84 0.0 0.0	-6.41 0.0 0.0	6.42	
7	79.98 0.0 0.0	0.0 0.0 0.0	72.94 0.0 0.0	-7.03 0.0 0.0	7.04	
8	81.7 0.0 0.0	0.0 0.0 0.0	74.29 0.0 0.0	-7.4 0.0 0.0	7.41	
9	83.41 0.0 0.0	0.0 0.0 0.0	75.91 0.0 0.0	-7.49 0.0 0.0	7.5	
10	85.12 0.0 0.0	0.0 0.0 0.0	77.8 0.0 0.0	-7.31 0.0 0.0	7.32	
11	86.84 0.0 0.0	0.0 0.0 0.0	79.98 0.0 0.0	-6.85 0.0 0.0	6.86	
12	88.55 0.0 0.0	0.0 0.0 0.0	82.45 0.0 0.0	-6.09 0.0 0.0	6.1	
13	90.27 0.0 0.0	0.0 0.0 0.0	85.23 0.0 0.0	-5.03 0.0 0.0	5.04	
14	91.98 0.0 0.0	0.0 0.0 0.0	88.3 0.0 0.0	-3.67 0.0 0.0	3.68	
15	93.7 0.0 0.0	0.0 0.0 0.0	91.7 0.0 0.0	-1.99 0.0 0.0	2.0	Mittlerer Helligkeitsabstand (16 Stufen)
16	95.41 0.0 0.0	0.0 1.0 0.0	95.41 0.0 0.0	0.0 0.0 0.0	0.01	$\Delta E^*_{CIELAB} = 4.6$
17	69.7 0.0 0.0	0.0 0.0 0.0	69.7 0.0 0.0	0.0 0.0 0.0	0.01	
18	76.13 0.0 0.0	0.0 0.0 0.0	70.82 0.0 0.0	-5.3 0.0 0.0	5.31	
19	82.55 0.0 0.0	0.0 0.0 0.0	75.07 0.0 0.0	-7.48 0.0 0.0	7.49	
20	88.98 0.0 0.0	0.0 0.0 0.0	83.12 0.0 0.0	-5.85 0.0 0.0	5.86	Mittlerer Helligkeitsabstand (5 Stufen)
21	95.41 0.0 0.0	0.0 1.0 0.0	95.41 0.0 0.0	0.0 0.0 0.0	0.01	$\Delta L^*_{CIELAB} = 3.7$
Mittlerer Farbwiedergabe-Index:					$R_{ab,m} = 80$	

OG810-3N-137-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

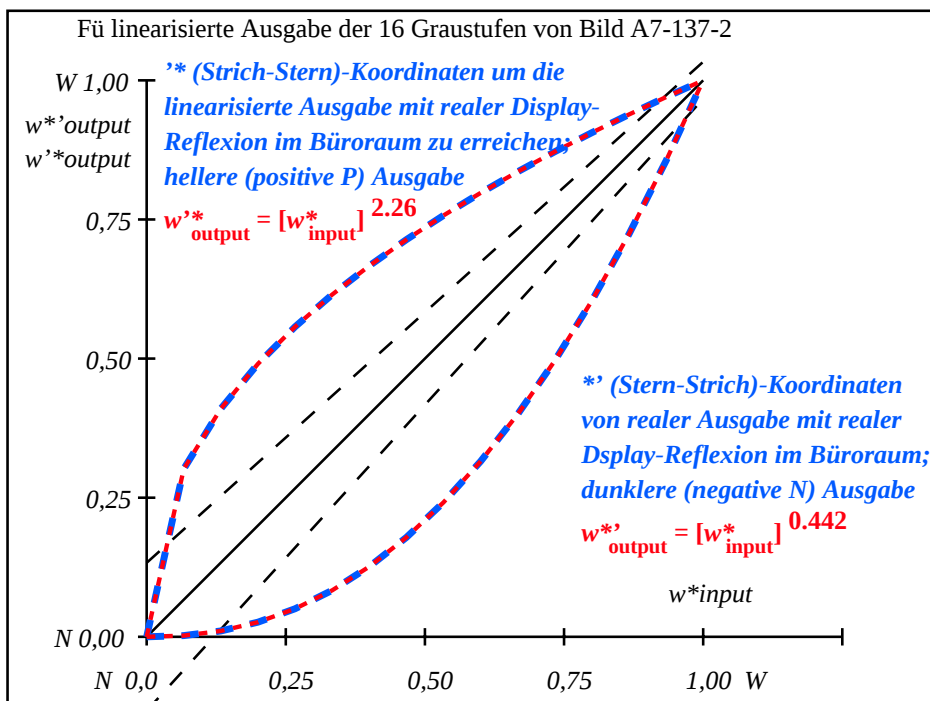

OG811-3N-137-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

$L^*/Y_{intended}$ (absolut)	69.7/40.3	71.4/42.8	73.1/45.4	74.8/48.0	76.6/50.8	78.3/53.7	80.0/56.6	81.7/59.7	83.4/62.9	85.1/66.3	86.8/69.7	88.6/73.2	90.3/76.9	92.0/80.7	93.7/84.6	95.4/88.6
$w^* w^* w^*$ setrgb																
$g_N=2.26$ Nr. und Hex-Code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^*=l^*_{CIELAB, r}$ (relativ)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0,0	0,002	0,01	0,026	0,051	0,083	0,126	0,179	0,241	0,315	0,4	0,496	0,604	0,724	0,855	1,0

OG810-7N, Bild A7-137-2: 16 visuell gleichabständige L^* -Graustufen; PS-Operator: $w^* w^* w^* setrgbcolor$

OG81: Ein-Ausgabe-Beziehung nach ISO 9241-306; 1MR, DEH Eingabe: $cmy0 (-> cmy0^*_{de}) setcmyk$
Gesehener Y-Kontrast $Y_W:Y_N=88,9:40$; Y_N -Bereich 30 to <60 Ausgabe 130-2: $g_P=1.0$; $g_N=2.1$