

Ein- und Ausgabe: Offset-Reflektiv-System ORS18a


Daten für jede Geräte- (d) oder
Elementarfarbe (e):

HIC*

Bunntext für die Farben
dieser Seite:



H*_{sc} = R00Y_{sc}, R25Y_{sc}, ..., B75R_{sc}

ORS20a; adaptierte CIELAB-Daten						
H*	L* = L* _a		a*	b*	C* _{ab,a} h* _{ab,a}	
R00Y ₁₀₀	100	100	48.4	66.1	40.2	77.3 31
R25Y ₁₀₀	100	100	56.8	48.0	50.5	69.6 46
R50Y ₁₀₀	100	100	68.6	25.0	63.9	68.6 68
R75Y ₁₀₀	100	100	80.6	4.8	77.2	77.3 86
Y00G ₁₀₀	100	100	90.2	-9.6	88.2	88.7 96
Y25G ₁₀₀	100	100	83.2	-18.4	79.9	81.9 102
Y50G ₁₀₀	100	100	73.3	-31.7	62.7	70.2 116
Y75G ₁₀₀	100	100	62.0	-49.7	43.2	65.8 139
G00B ₁₀₀	100	100	55.8	-65.2	33.8	73.4 152
G25B ₁₀₀	100	100	59.3	-50.3	-9.0	51.0 190
G50B ₁₀₀	100	100	63.0	-30.5	-42.0	51.9 234
G75B ₁₀₀	100	100	45.7	-5.7	-44.6	44.9 262
B00R ₁₀₀	100	100	27.5	25.9	-47.3	53.9 298
B25R ₁₀₀	100	100	38.3	52.6	-28.5	59.8 331
B50R ₁₀₀	100	100	49.5	73.5	-9.0	74.0 353
B75R ₁₀₀	100	100	48.9	69.3	12.9	70.4 10



%Umfang
u*_{rel} = 92
%Regularität
g*_{H,rel} = 57
g*_{C,rel} = 58

ORS18a; adaptierte CIELAB-Daten					
Name	L*	a*	b*	C* _{ab,a}	h* _{ab,a}
R _{sc}	47.9	65.3	50.5	82.6	37
Y _{sc}	90.3	-10.2	91.7	92.3	96
G _{sc}	50.9	-62.8	34.9	71.9	150
C _{sc}	58.6	-30.3	-45.0	54.2	236
B _{sc}	25.7	31.0	-44.4	54.2	305
M _{sc}	48.1	75.2	-8.3	75.7	353
N _{sc}	18.0	0.0	0.0	0.0	0
W _{sc}	95.4	0.0	0.0	0.0	0
R _{CIE}	39.9	58.7	27.9	65.0	25
Y _{CIE}	81.2	-2.8	71.5	71.6	92
G _{CIE}	52.2	-42.4	13.6	44.5	162
B _{CIE}	30.5	1.4	-46.4	46.4	271

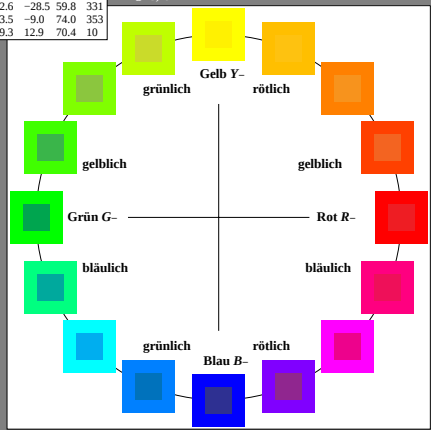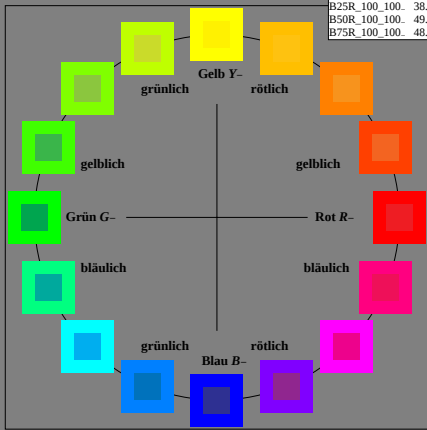

0-003030-L0 PG830-7N

TUB-Prüfvorlage PG83; 16 Bunttöne
Prüfvorlage nach DIN 33872, 3D=0, de=0, cmky

Eingabe: rgb/cmyk -> rgb/cmyk
Ausgabe: keine Änderung