

Ein- und Ausgabe: Drucker-Reflektiv-System FRS06a

Daten für jede Geräte- (d) oder  
Elementarfarbe (e):

$H^*_{IC}$

Bunntext für die Farben  
dieser Seite:

$H^*_{IC} = R00Y_{-}, R25Y_{-}, ..., B75R_{-}$

ORS20a; adaptierte CIELAB-Daten

| $H^*_{IC}$    | $L^* = L^*_{s,a}$ | $a^*_{s,a}$ | $b^*_{s,a}$ | $C^*_{s,a}$ | $h^*_{s,a}$ |
|---------------|-------------------|-------------|-------------|-------------|-------------|
| R00Y_100_100_ | 48.4              | 66.1        | 40.2        | 77.3        | 31          |
| R25Y_100_100_ | 56.8              | 48.0        | 50.5        | 69.6        | 46          |
| R50Y_100_100_ | 68.6              | 25.0        | 63.9        | 68.6        | 68          |
| R75Y_100_100_ | 80.6              | 4.8         | 77.2        | 77.3        | 86          |
| Y00G_100_100_ | 90.2              | -9.6        | 88.2        | 88.7        | 96          |
| Y25G_100_100_ | 83.2              | -18.4       | 79.9        | 81.9        | 102         |
| Y50G_100_100_ | 73.3              | -31.7       | 62.7        | 70.2        | 116         |
| Y75G_100_100_ | 62.0              | -49.7       | 43.2        | 65.8        | 139         |
| G00B_100_100_ | 55.8              | -65.2       | 33.8        | 73.4        | 152         |
| G25B_100_100_ | 59.3              | -50.3       | -9.0        | 51.0        | 190         |
| G50B_100_100_ | 63.0              | -30.5       | -42.0       | 51.9        | 234         |
| G75B_100_100_ | 45.7              | -5.7        | -44.6       | 44.9        | 262         |
| B00R_100_100_ | 27.5              | 25.9        | -47.3       | 53.9        | 298         |
| B25R_100_100_ | 38.3              | 52.6        | -28.5       | 59.8        | 331         |
| B50R_100_100_ | 49.5              | 73.5        | -9.0        | 74.0        | 353         |
| B75R_100_100_ | 48.9              | 69.3        | 12.9        | 70.4        | 10          |



%Umfang

$u^*_{rel} = 114$



%Regularität

$g^*_{H,rel} = 28$

$g^*_{C,rel} = 38$

FRS06a; adaptierte CIELAB-Daten

| Name   | $L^* = L^*_{s,a}$ | $a^*_{s,a}$ | $b^*_{s,a}$ | $C^*_{s,a}$ | $h^*_{s,a}$ |
|--------|-------------------|-------------|-------------|-------------|-------------|
| R_1Ma  | 32.5              | 62.3        | 46.4        | 77.7        | 36          |
| Y_1Ma  | 82.7              | -3.1        | 113.9       | 114.0       | 91          |
| G_1Ma  | 39.4              | -61.8       | 45.8        | 76.9        | 143         |
| B_1Ma  | 47.8              | -26.8       | -34.2       | 43.4        | 231         |
| R_2Ma  | 10.1              | 55.1        | -61.0       | 82.2        | 312         |
| M_1Ma  | 34.5              | 80.6        | -33.9       | 87.5        | 337         |
| N_1Ma  | 6.2               | 0.0         | 0.0         | 0.0         | 0           |
| W_1Ma  | 91.9              | 0.0         | 0.0         | 0.0         | 0           |
| R_1CIE | 39.9              | 58.7        | 27.9        | 65.0        | 25          |
| Y_1CIE | 81.2              | -2.8        | 71.5        | 71.6        | 92          |
| G_1CIE | 52.2              | -42.4       | 13.6        | 44.5        | 162         |
| B_1CIE | 30.5              | 1.4         | -46.4       | 46.4        | 271         |

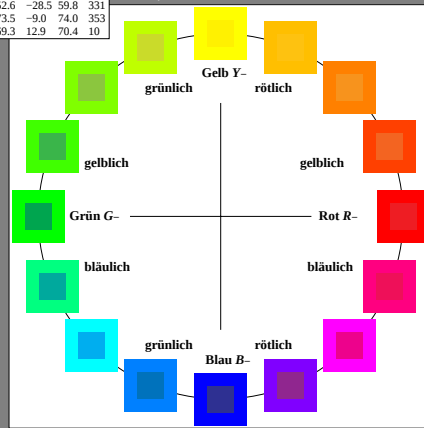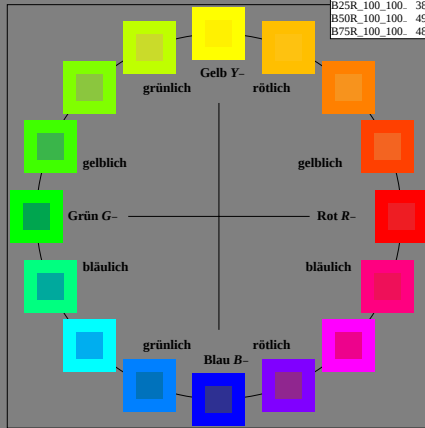

0-003030-L0 PG890-7N

TUB-Prüfvorlage PG89; 16 Bunntöne  
Prüfvorlage nach DIN 33872, 3D=0, de=0, cmyk

Eingabe: rgb/cmyk -> rgb/cmyk  
Ausgabe: keine Änderung