

Immettere y uscita: Offset Reflective System ORS18a

Dati del dispositivo (d) o colori elementari (e):

HIC*_e


codice di tonalità per i colori

questa pagina:

H*_e = R00Y_e, R25Y_e, ..., B75R_e

ORS20a; dati atti CIELAB (a)

H*	L*	L*	a*	b*	C*	h*
R00Y ₁₀₀	100	100	48.4	66.1	40.2	77.3
R25Y ₁₀₀	100	100	56.8	48.0	50.5	69.6
R50Y ₁₀₀	100	100	68.6	25.0	63.9	68.6
R75Y ₁₀₀	100	100	80.6	4.8	77.2	77.3
Y00G ₁₀₀	100	100	90.2	-9.6	88.2	88.7
Y25G ₁₀₀	100	100	83.2	-18.4	79.9	81.9
Y50G ₁₀₀	100	100	73.3	-31.7	62.7	70.2
Y75G ₁₀₀	100	100	62.0	-49.7	43.2	65.8
G00B ₁₀₀	100	100	55.8	-65.2	33.8	73.4
G25B ₁₀₀	100	100	59.3	-50.3	-9.0	51.0
G50B ₁₀₀	100	100	63.0	-30.5	-42.0	51.9
G75B ₁₀₀	100	100	45.7	-5.7	-44.6	44.9
B00R ₁₀₀	100	100	27.5	25.9	-47.3	53.9
B25R ₁₀₀	100	100	38.3	52.6	-28.5	59.8
B50R ₁₀₀	100	100	49.5	73.5	-9.0	74.0
B75R ₁₀₀	100	100	48.9	69.3	12.9	70.4



%Gamma

u*_{rel} = 92

%Regularità

g*_{H,rel} = 57

g*_{C,rel} = 58

ORS18a; dati atti CIELAB (a)

name	L*	L*	a*	b*	C*	h*
R _{-Ma}	47.9	65.3	50.5	82.6	37	
Y _{-Ma}	90.3	-10.2	91.7	92.3	96	
G _{-Ma}	50.9	-62.8	34.9	71.9	150	
C _{-Ma}	58.6	-30.3	-45.0	54.2	236	
B _{-Ma}	25.7	31.0	-44.4	54.2	305	
M _{-Ma}	48.1	75.2	-8.3	75.7	353	
N _{-Ma}	18.0	0.0	0.0	0.0	0	
W _{-Ma}	95.4	0.0	0.0	0.0	0	
R _{-CIE}	39.9	58.7	27.9	65.0	25	
Y _{-CIE}	81.2	-2.8	71.5	71.6	92	
G _{-CIE}	52.2	-42.4	13.6	44.5	162	
B _{-CIE}	30.5	1.4	-46.4	46.4	271	

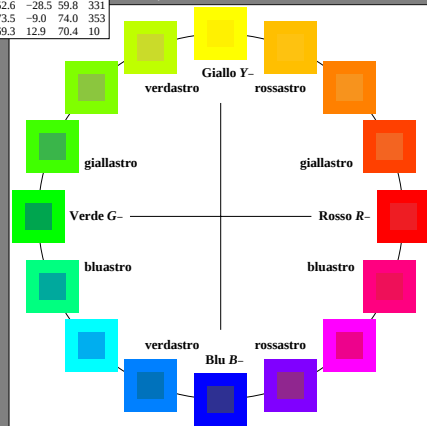
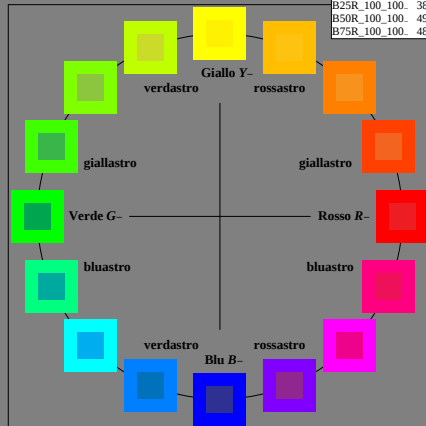


grafico TUB-PI87; cerchio delle tinte a 16 passi
grafico conformemente a DIN 33872, 3D=0, de=0, cmy0

Input: rgb/cmyk -> rgb/cmyk
Output: nessun cambiamento