


Immettere y uscita: Offset Reflective System ORS18a

Dati del dispositivo (d) o colori elementari (e):

HIC*
codice di tonalità per i colori
questa pagina:

H*_{sc} = R00Y_{sc}, R25Y_{sc}, ..., B75R_{sc}

ORS20a; dati atti CIELAB (a)					
H*	L*=L* _a	a*	b*	C* _{ab}	h* _{ab}
R00Y ₁₀₀	100	100	48.4	66.1	40.2
R25Y ₁₀₀	100	100	56.8	48.0	50.5
R50Y ₁₀₀	100	100	68.6	25.0	63.9
R75Y ₁₀₀	100	100	80.6	4.8	77.2
Y00G ₁₀₀	100	100	90.2	-9.6	88.2
Y25G ₁₀₀	100	100	83.2	-18.4	79.9
Y50G ₁₀₀	100	100	73.3	-31.7	62.7
Y75G ₁₀₀	100	100	62.0	-49.7	43.2
G00B ₁₀₀	100	100	55.8	-65.2	33.8
G25B ₁₀₀	100	100	59.3	-50.3	-9.0
G50B ₁₀₀	100	100	63.0	-30.5	-42.0
G75B ₁₀₀	100	100	45.7	-5.7	-44.6
B00R ₁₀₀	100	100	27.5	25.9	-47.3
B25R ₁₀₀	100	100	38.3	52.6	-28.5
B50R ₁₀₀	100	100	49.5	73.5	-9.0
B75R ₁₀₀	100	100	48.9	69.3	12.9



%Gamma

u*_{rel} = 92

%Regularità

g*_{H,rel} = 57



g*_{C,rel} = 58

ORS18a; dati atti CIELAB (a)					
name	L*=L* _a	a*	b*	C* _{ab}	h* _{ab}
R _{sc}	47.9	65.3	50.5	82.6	37
Y _{sc}	90.3	-10.2	91.7	92.3	96
G _{sc}	50.9	-62.8	34.9	71.9	150
C _{sc}	58.6	-30.3	-45.0	54.2	236
B _{sc}	25.7	31.0	-44.4	54.2	305
M _{sc}	48.1	75.2	-8.3	75.7	353
N _{sc}	18.0	0.0	0.0	0.0	0
W _{sc}	95.4	0.0	0.0	0.0	0
R _{sc}	39.9	58.7	27.9	65.0	25
Y _{sc}	81.2	-2.8	71.5	71.6	92
G _{sc}	52.2	-42.4	13.6	44.5	162
B _{sc}	30.5	1.4	-46.4	46.4	271

iscrizione TUB: 20150701-PI88/PI88LON1.TXT /PS
Applicazione per la misura dell'output output nella stampa di offset

TUB materiale: code=thadha

PI88sol

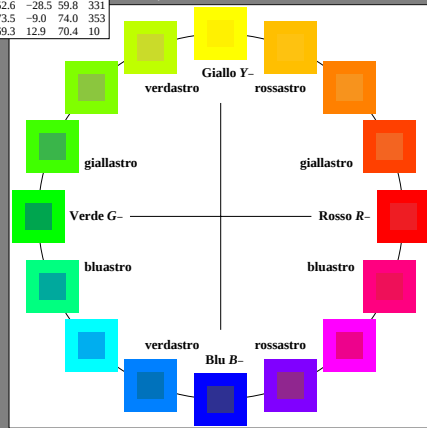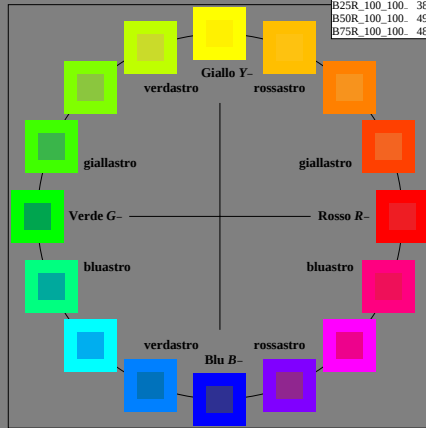

4-003031-L0 PI880-7N

grafico TUB-PI88; cerchio delle tinte a 16 passi
grafico conformemente a DIN 33872, 3D=0, de=0, cmy0

Input: rgb/cmyk -> rgb/cmyk
Output: nessun cambiamento