

Entrada i salida: Printer Reflective System FRS06a


Datos del dispositivo (d) o
elemental (e) color:

HIC*
código de tono para los colores

esta página:
H*_{..} = R00Y_{..}, R25Y_{..}, ..., B75R_{..}

ORS20a; datos adaptados CIELAB (a)
H*_{..} L*_{..}=L*_s a*_s b*_s C*_{s,ab,a} h*_{s,ab,a}

R00Y_100_100	48.4	66.1	40.2	77.3	31
R25Y_100_100	56.8	48.0	50.5	69.6	46
R50Y_100_100	68.6	25.0	63.9	68.6	68
R75Y_100_100	80.6	4.8	77.2	77.3	86
Y00G_100_100	90.2	-9.6	88.2	88.7	96
Y25G_100_100	83.2	-18.4	79.9	81.9	102
Y50G_100_100	73.3	-31.7	62.7	70.2	116
Y75G_100_100	62.0	-49.7	43.2	65.8	139
G00B_100_100	55.8	-65.2	33.8	73.4	152
G25B_100_100	59.3	-50.3	-9.0	51.0	190
G50B_100_100	63.0	-30.5	-42.0	51.9	234
G75B_100_100	45.7	-5.7	-44.6	44.9	262
B00R_100_100	27.5	25.9	-47.3	53.9	298
B25R_100_100	38.3	52.6	-28.5	59.8	331
B50R_100_100	49.5	73.5	-9.0	74.0	353
B75R_100_100	48.9	69.3	12.9	70.4	10



%Gama

u*_{rel} = 114

%Regularidad

g*_{H,rel} = 28


g*_{C,rel} = 38

FRS06a; datos adaptados CIELAB (a)
name L*_{..}=L*_s a*_s b*_s C*_{s,ab,a} h*_{s,ab,a}

R_..Ma	32.5	62.3	46.4	77.7	36
Y_..Ma	82.7	-3.1	113.9	114.0	91
G_..Ma	39.4	-61.8	45.8	76.9	143
B_..Ma	47.8	-26.8	-34.2	43.4	231
M_..Ma	10.1	55.1	-61.0	82.2	312
N_..Ma	34.5	80.6	-33.9	87.5	337
W_..Ma	6.2	0.0	0.0	0.0	0
R_..CIE	91.9	0.0	0.0	0.0	0
R_..CIE	39.9	58.7	27.9	65.0	25
Y_..CIE	81.2	-2.8	71.5	71.6	92
G_..CIE	52.2	-42.4	13.6	44.5	162
B_..CIE	30.5	1.4	-46.4	46.4	271

TUB matricula: 20130201-PS89/PS89L0N1.TXT /PS
aplicación para la medida salida de impresora laser

TUB material: code=rhata

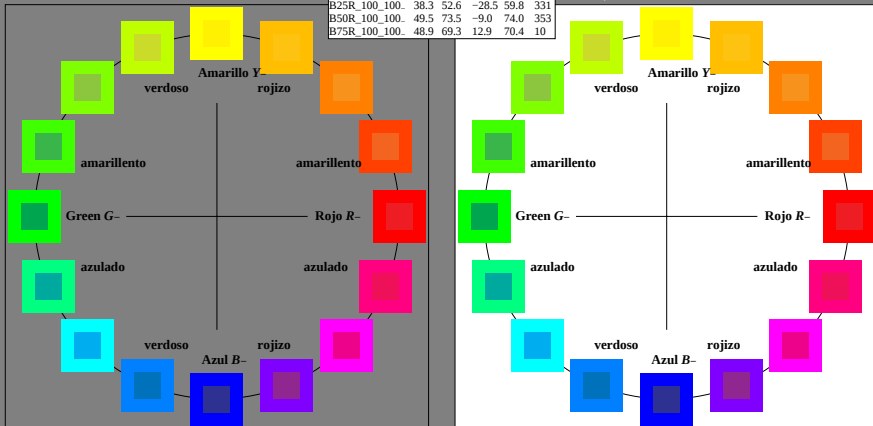

2-003030-L0 PS890-7N

gráfico TUB-PS89; círculo de tono, 16 pasos
gráfico según a DIN 33872, 3D=0, de=0, cmyk

entrada: rgb/cmyk -> rgb/cmyk
salida: ningún cambio