

Entrada i salida: Printer Reflective System FRS06a

Datos del dispositivo (d) o
elemental (e) color:


HIC^*

código de tono para los colores
esta página:

$H^*_L = R00Y-, R25Y-, ..., B75R-$

ORS20a; datos adaptados CIELAB (a)

H^*_L	$L^*=L^*_a a^*_a$	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
R00Y_100_100_	48.4	66.1	40.2	77.3
R25Y_100_100_	56.8	48.0	50.5	69.6
R50Y_100_100_	68.6	25.0	63.9	68.6
R75Y_100_100_	80.6	4.8	77.2	77.3
Y00G_100_100_	90.2	-9.6	88.2	88.7
Y25G_100_100_	83.2	-18.4	79.9	81.9
Y50G_100_100_	73.3	-31.7	62.7	70.2
Y75G_100_100_	62.0	-49.7	43.2	65.8
G00B_100_100_	55.8	-65.2	33.8	73.4
G25B_100_100_	59.3	-50.3	-9.0	51.0
G50B_100_100_	63.0	-30.5	-42.0	51.9
G75B_100_100_	45.7	-5.7	-44.6	44.9
B00R_100_100_	27.5	25.9	-47.3	53.9
B25R_100_100_	38.3	52.6	-28.5	59.8
B50R_100_100_	49.5	73.5	-9.0	74.0
B75R_100_100_	48.9	69.3	12.9	70.4



%Gama

$u^*_{rel} = 114$

%Regularidad

$g^*_{H,rel} = 28$



$g^*_{C,rel} = 38$

FRS06a; datos adaptados CIELAB (a)

name	$L^*=L^*_a a^*_a$	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
R-,Ma	32.5	62.3	46.4	77.7
Y-,Ma	82.7	-3.1	113.9	114.0
G-,Ma	39.4	-61.8	45.8	76.9
C-,Ma	47.8	-26.8	-34.2	43.4
B-,Ma	10.1	55.1	-61.0	82.2
M-,Ma	34.5	80.6	-33.9	87.5
N-,Ma	6.2	0.0	0.0	0.0
W-,Ma	91.9	0.0	0.0	0.0
R-,CIE	39.9	58.7	27.9	65.0
Y-,CIE	81.2	-2.8	71.5	71.6
G-,CIE	52.2	-42.4	13.6	44.5
B-,CIE	30.5	1.4	-46.4	46.4

TUB matrícula: 20130201-PS89/PS89L0NP.PDF /.PS
aplicación para la medida salida de impresora láser

TUB material: code=rha4ta

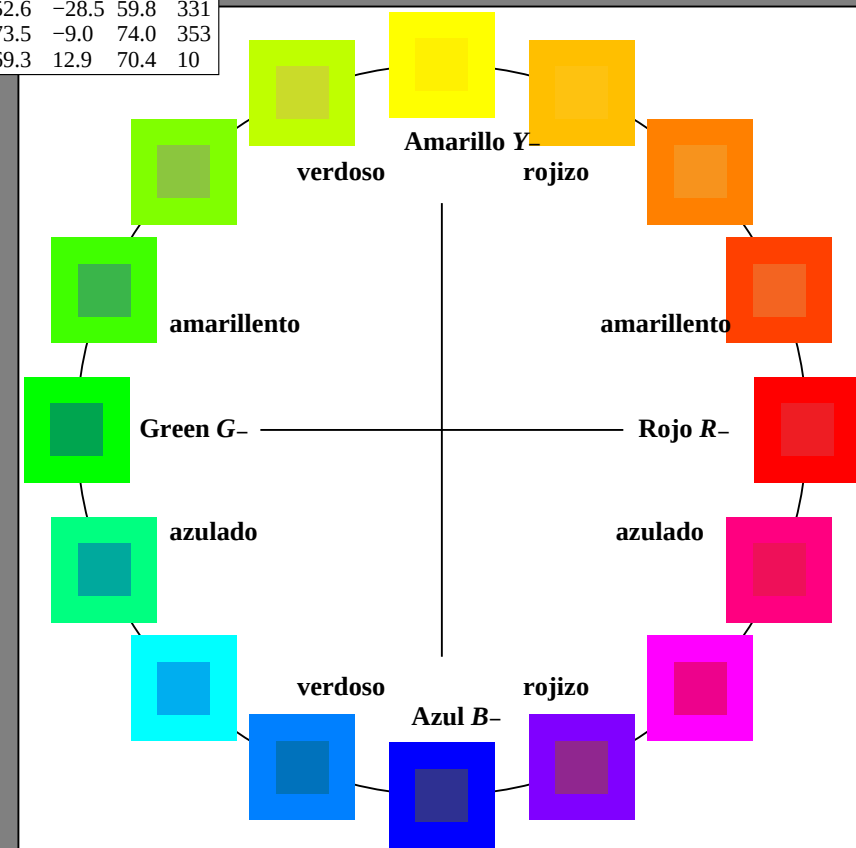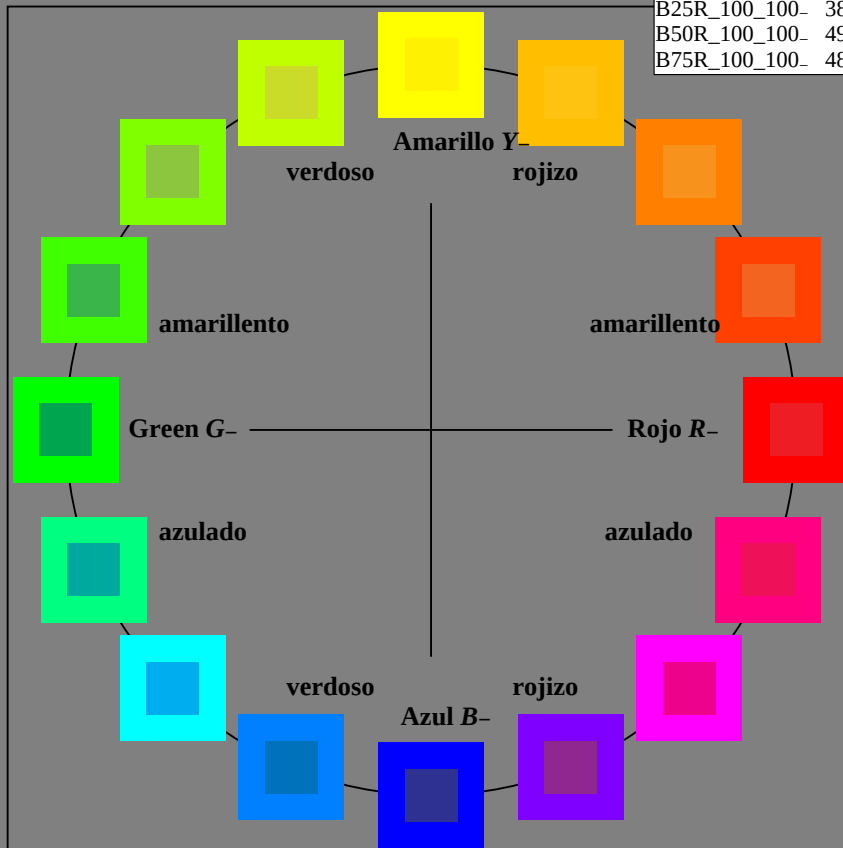

2-003030-L0 PS890-7N

gráfico TUB-PS89; círculo de tono, 16 pasos
gráfico según a DIN 33872, 3D=0, de=0, cmyk

entrada: *rgb/cmyk* -> *rgb/cmyk*
salida: ningún cambio