



Immettere y uscita: Printer Reflective System FRS06a for relative CIELAB hue  $h_{ab,a,rel} = h_{ab}/360 = 41/360 = 0.11$

Dati del dispositivo (d) o


colori elementari (e):

$HIC^*_e$

codice di tonalità per i colori  
questa pagina:


$H^*_e = R25Y_e$

triangolo chiarezza  $T^*$

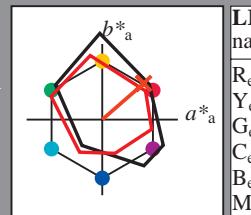

LRS18a; dati atti CIELAB (a)

name	$L^* = L^*_{a,a}$	$a^*_{a,a}$	$b^*_{a,a}$	$C^*_{ab,a}$	$h^*_{ab,a}$
R <sub>e,Ma</sub>	47.5	56.0	26.7	62.1	25
Y <sub>e,Ma</sub>	83.6	-3.1	76.8	76.9	92
G <sub>e,Ma</sub>	53.8	-65.9	21.1	69.2	162
C <sub>e,Ma</sub>	54.9	-38.7	-29.1	48.4	216
B <sub>e,Ma</sub>	37.3	1.4	-48.6	48.7	271
M <sub>e,Ma</sub>	38.5	46.7	-28.5	54.7	328
N <sub>e,Ma</sub>	23.8	0.0	0.0	0.0	0
W <sub>e,Ma</sub>	95.8	0.0	0.0	0.0	0
R <sub>e,CIE</sub>	39.9	58.7	27.9	65.0	25
Y <sub>e,CIE</sub>	81.2	-2.8	71.5	71.6	92
G <sub>e,CIE</sub>	52.2	-42.4	13.6	44.5	162
B <sub>e,CIE</sub>	30.5	1.4	-46.4	46.4	271

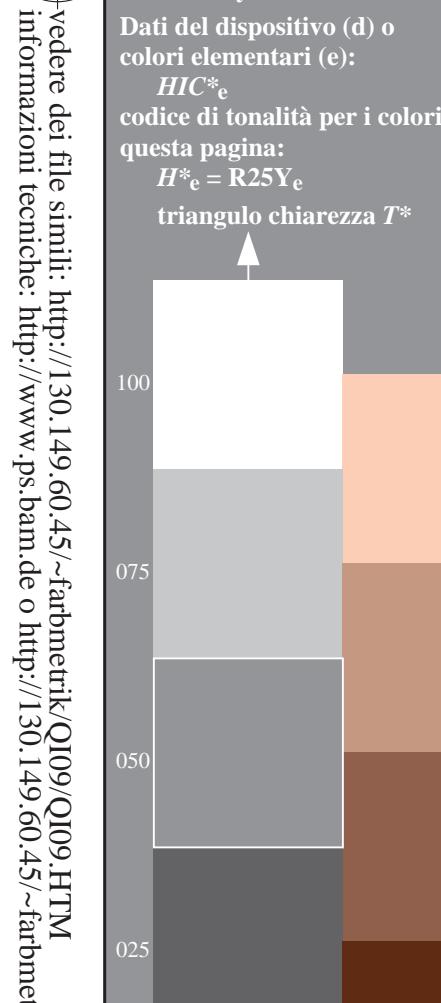

Il dati per il massimo colore (Ma):

$LabCh^*_{e,Ma}: 51\ 54\ 47\ 72\ 41$

$HIC^*_{e,Ma}: R25Y_100\_100_e$

$rgbic^*_{e,Ma}:$

1.0 0.1 0.0 1.0 1.0

triangolo chiarezza  $T^*$

%Gamma



$u^*_{rel} = 114$

%Regularità

$g^*H_{,rel} = 28$

$g^*C_{,rel} = 38$

$H^*_{e,e}$	$L^* = L^*_{a,a}$	$a^*_{a,a}$	$b^*_{a,a}$	$C^*_{ab,a}$	$h^*_{ab,a}$
R00Y_100_100_e	47.5	56.0	26.7	62.1	25
R25Y_100_100_e	51.4	54.8	47.7	72.6	41
R50Y_100_100_e	61.8	35.2	58.4	68.2	58
R75Y_100_100_e	72.3	16.1	68.2	70.1	76
Y00G_100_100_e	83.6	-3.1	76.8	76.9	92
Y25G_100_100_e	85.8	-26.4	78.5	82.9	108
Y50G_100_100_e	71.0	-41.7	54.8	68.9	127
Y75G_100_100_e	59.9	-58.2	39.3	70.2	145
G00B_100_100_e	53.8	-65.9	21.1	69.2	162
G25B_100_100_e	55.0	-51.6	-8.7	52.3	189
G50B_100_100_e	54.9	-38.7	-29.1	48.4	216
G75B_100_100_e	51.7	-23.3	-48.6	53.9	244
B00R_100_100_e	37.3	1.4	-48.6	48.7	271
B25R_100_100_e	31.5	24.4	-41.9	48.5	300
B50R_100_100_e	38.5	46.7	-28.5	54.7	328
B75R_100_100_e	49.4	65.5	-9.1	66.2	352

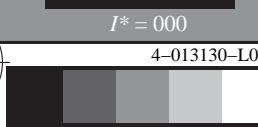

4-013130-L0

QI090-71

grafico TUB-QI09; codice di tinte:  $H^*_e=R25Y_e$   
grafico conformemente a DIN 33872, 3D=0, de=1, cmyk

immettere:  $rgb/cmyk \rightarrow rgbe_e$   
uscita: trasferire a  $cmyk_e$

TUB iscrizione: 20130201-QI09/QI09L0NP.PDF /PS  
TUB materiale: code=rha4ta  
la domanda per la misura di uscita della stampante laser, separazione cmy6 (CMYK)