

Immettere y uscita: Television Luminous System TLS00a for relative CIELAB hue  $h_{ab,a,rel} = h_{ab}/360 = 59/360 = 0.16$

$H^*_d = R50Y_d$


Dati del dispositivo (d) o colori elementari (e):

$HIC^*_d$

codice di tonalità per i colori questa pagina:

$H^*_d = R50Y_d$

triangolo chiarezza  $T^*$



TLS00a; dati atti CIELAB (a)

| name               | $L^*=L^*_a$ | $a^*_a$ | $b^*_a$ | $C^*_{ab,a}$ | $h^*_{ab,a}$ |
|--------------------|-------------|---------|---------|--------------|--------------|
| R <sub>d,Ma</sub>  | 50.4        | 76.9    | 64.5    | 100.4        | 40           |
| Y <sub>d,Ma</sub>  | 92.6        | -20.7   | 90.7    | 93.0         | 102          |
| G <sub>d,Ma</sub>  | 83.6        | -82.7   | 79.8    | 115.0        | 136          |
| C <sub>d,Ma</sub>  | 86.8        | -46.1   | -13.5   | 48.1         | 196          |
| B <sub>d,Ma</sub>  | 30.3        | 76.0    | -103.5  | 128.5        | 306          |
| M <sub>d,Ma</sub>  | 57.2        | 94.3    | -58.4   | 110.9        | 328          |
| N <sub>d,Ma</sub>  | 0.0         | 0.0     | 0.0     | 0.0          | 0            |
| W <sub>d,Ma</sub>  | 95.4        | 0.0     | 0.0     | 0.0          | 0            |
| R <sub>d,CIE</sub> | 39.9        | 58.7    | 27.9    | 65.0         | 25           |
| Y <sub>d,CIE</sub> | 81.2        | -2.8    | 71.5    | 71.6         | 92           |
| G <sub>d,CIE</sub> | 52.2        | -42.4   | 13.6    | 44.5         | 162          |
| B <sub>d,CIE</sub> | 30.5        | 1.4     | -46.4   | 46.4         | 271          |

Il dati per il massimo colore (Ma):

$LabCh^*_d, Ma$ : 63 41 71 82 59

$HIC^*_d, Ma$ : R50Y\_100\_100<sub>d</sub>

$rgbic^*_d, Ma$ :

1.0 0.5 0.0 1.0 1.0

triangolo chiarezza  $T^*$

%Gamma

$u^*_{rel} = 158$



%Regularità

$g^*_{H,rel} = 19$

$g^*_{C,rel} = 37$

TLS00a; dati atti CIELAB (a)

| $H^*_d$                   | $L^*=L^*_a$ | $a^*_a$ | $b^*_a$ | $C^*_{ab,a}$ | $h^*_{ab,a}$ |
|---------------------------|-------------|---------|---------|--------------|--------------|
| R00Y_100_100 <sub>d</sub> | 50.4        | 76.9    | 64.5    | 100.4        | 40           |
| R25Y_100_100 <sub>d</sub> | 53.7        | 67.6    | 65.8    | 94.4         | 44           |
| R50Y_100_100 <sub>d</sub> | 63.6        | 41.3    | 71.0    | 82.2         | 59           |
| R75Y_100_100 <sub>d</sub> | 78.2        | 7.8     | 80.6    | 81.0         | 84           |
| Y00G_100_100 <sub>d</sub> | 92.6        | -20.7   | 90.7    | 93.0         | 102          |
| Y25G_100_100 <sub>d</sub> | 88.7        | -43.3   | 86.2    | 96.5         | 116          |
| Y50G_100_100 <sub>d</sub> | 85.7        | -65.2   | 82.4    | 105.1        | 128          |
| Y75G_100_100 <sub>d</sub> | 84.0        | -78.7   | 80.4    | 112.5        | 134          |
| G00B_100_100 <sub>d</sub> | 83.6        | -82.7   | 79.8    | 115.0        | 136          |
| G25B_100_100 <sub>d</sub> | 84.3        | -73.7   | 44.9    | 86.4         | 148          |
| G50B_100_100 <sub>d</sub> | 86.8        | -46.1   | -13.5   | 48.1         | 196          |
| G75B_100_100 <sub>d</sub> | 51.7        | 18.3    | -68.3   | 70.7         | 285          |
| B00R_100_100 <sub>d</sub> | 30.3        | 76.0    | -103.5  | 128.5        | 306          |
| B25R_100_100 <sub>d</sub> | 38.5        | 79.8    | -89.7   | 120.0        | 311          |
| B50R_100_100 <sub>d</sub> | 57.2        | 94.3    | -58.4   | 110.9        | 328          |
| B75R_100_100 <sub>d</sub> | 52.0        | 81.1    | 4.1     | 81.2         | 2            |

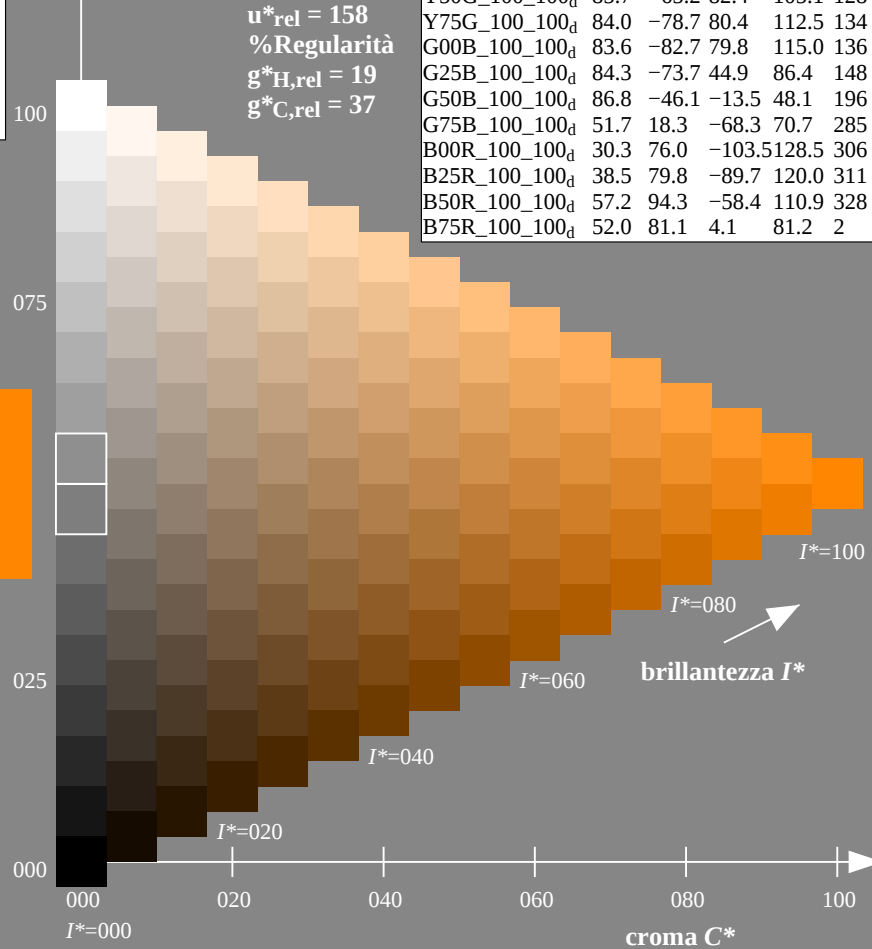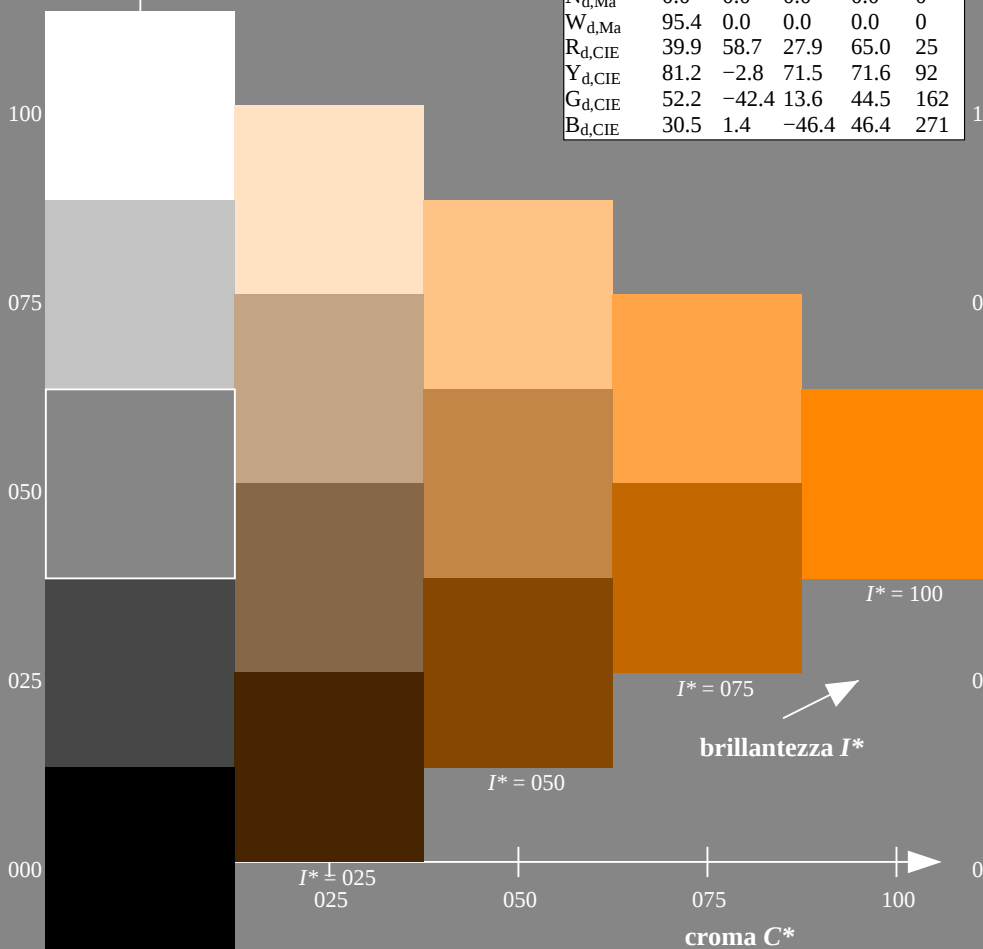

4-003130-L0 QI100-70

grafico TUB-QI10; codice di tinte:  $H^*_d = R50Y_d$   
grafico conformemente a DIN 33872, 3D=0, de=0, sRGB

immettere:  $rgb/cmyk \rightarrow rgb_d$   
uscita: trasferire a  $rgb_d$

TUB iscrizione: 20130201-QI10/QI10L0NP.PDF /.PS  
la domanda per la misura di stampa di display, nessuna separazione

TUB materiale: code=rh4ta