

Immettere y uscita: Offset Reflective System ORS18a for relative CIELAB hue  $h_{ab,a,rel} = h_{ab}/360 = 108/360 = 0.3$

$H^*_e = Y25G_e$


Dati del dispositivo (d) o colori elementari (e):

$HIC^*_e$

codice di tonalità per i colori questa pagina:

$H^*_e = Y25G_e$

triangolo chiarezza  $T^*$



ORS20a; dati atti CIELAB (a)

| Name                | $L^*=L^*_a$ | $a^*_a$ | $b^*_a$ | $C^*_{ab,a}$ | $h^*_{ab,a}$ |
|---------------------|-------------|---------|---------|--------------|--------------|
| R <sub>e</sub> ,Ma  | 45.6        | 72.2    | 34.4    | 80.0         | 25           |
| Y <sub>e</sub> ,Ma  | 83.6        | -3.6    | 90.4    | 90.4         | 92           |
| G <sub>e</sub> ,Ma  | 50.6        | -62.1   | 19.9    | 65.2         | 162          |
| C <sub>e</sub> ,Ma  | 55.0        | -36.2   | -27.2   | 45.3         | 216          |
| B <sub>e</sub> ,Ma  | 40.2        | 1.2     | -40.6   | 40.6         | 271          |
| M <sub>e</sub> ,Ma  | 31.1        | 47.7    | -29.1   | 55.9         | 328          |
| N <sub>e</sub> ,Ma  | 24.3        | 0.0     | 0.0     | 0.0          | 0            |
| W <sub>e</sub> ,Ma  | 95.6        | 0.0     | 0.0     | 0.0          | 0            |
| R <sub>e</sub> ,CIE | 39.9        | 58.7    | 27.9    | 65.0         | 25           |
| Y <sub>e</sub> ,CIE | 81.2        | -2.8    | 71.5    | 71.6         | 92           |
| G <sub>e</sub> ,CIE | 52.2        | -42.4   | 13.6    | 44.5         | 162          |
| B <sub>e</sub> ,CIE | 30.5        | 1.4     | -46.4   | 46.4         | 271          |

Il dati per il massimo colore (Ma):

LabCh<sup>\*</sup><sub>e</sub>,Ma: 74 -25 74 78 108

$HIC^*_e$ ,Ma: Y25G\_100\_100<sub>e</sub>

rgbic<sup>\*</sup><sub>e</sub>,Ma:

0.6 1.0 0.0 1.0 1.0

triangolo chiarezza  $T^*$

%Gamma

$u^*_{rel} = 92$



%Regularità

$g^*_{H,rel} = 57$

$g^*_{C,rel} = 58$

ORS20a; dati atti CIELAB (a)

| $H^*_e$                   | $L^*=L^*_a$ | $a^*_a$ | $b^*_a$ | $C^*_{ab,a}$ | $h^*_{ab,a}$ |
|---------------------------|-------------|---------|---------|--------------|--------------|
| R00Y_100_100 <sub>e</sub> | 45.6        | 72.2    | 34.4    | 80.0         | 25           |
| R25Y_100_100 <sub>e</sub> | 50.5        | 59.2    | 51.6    | 78.6         | 41           |
| R50Y_100_100 <sub>e</sub> | 60.2        | 38.2    | 63.4    | 74.1         | 58           |
| R75Y_100_100 <sub>e</sub> | 70.9        | 17.9    | 75.9    | 77.9         | 76           |
| Y00G_100_100 <sub>e</sub> | 83.6        | -3.6    | 90.4    | 90.4         | 92           |
| Y25G_100_100 <sub>e</sub> | 74.5        | -25.0   | 74.3    | 78.4         | 108          |
| Y50G_100_100 <sub>e</sub> | 62.6        | -40.9   | 53.8    | 67.6         | 127          |
| Y75G_100_100 <sub>e</sub> | 54.1        | -55.5   | 37.5    | 67.0         | 145          |
| G00B_100_100 <sub>e</sub> | 50.6        | -62.1   | 19.9    | 65.2         | 162          |
| G25B_100_100 <sub>e</sub> | 53.0        | -48.6   | -8.2    | 49.2         | 189          |
| G50B_100_100 <sub>e</sub> | 55.0        | -36.2   | -27.2   | 45.3         | 216          |
| G75B_100_100 <sub>e</sub> | 53.3        | -19.8   | -41.3   | 45.9         | 244          |
| B00R_100_100 <sub>e</sub> | 40.2        | 1.2     | -40.6   | 40.6         | 271          |
| B25R_100_100 <sub>e</sub> | 28.1        | 23.4    | -40.3   | 46.7         | 300          |
| B50R_100_100 <sub>e</sub> | 31.1        | 47.7    | -29.1   | 55.9         | 328          |
| B75R_100_100 <sub>e</sub> | 41.4        | 70.4    | -9.8    | 71.1         | 352          |

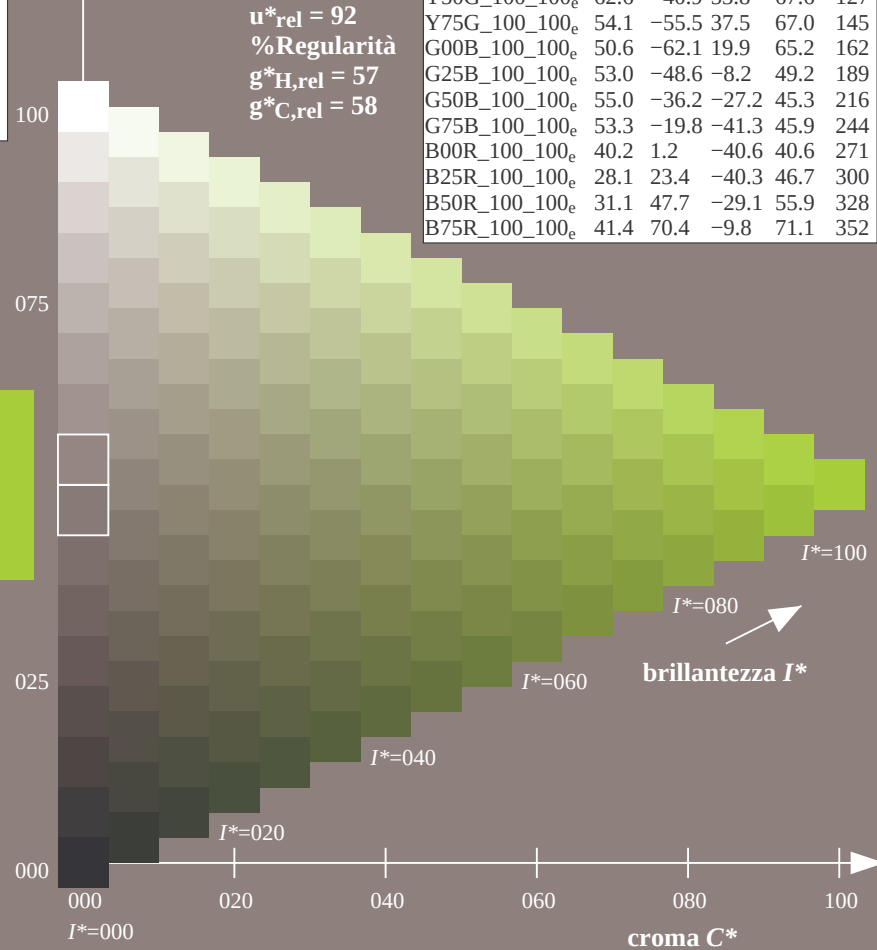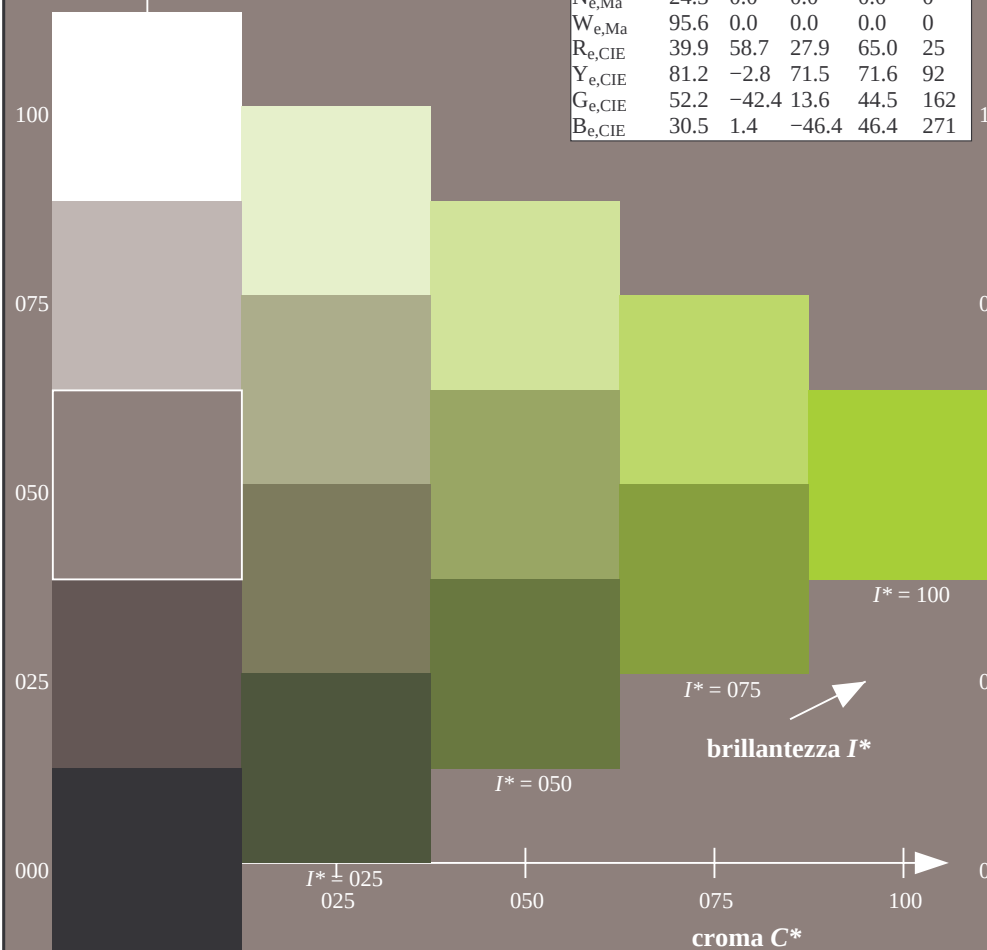

4-013131-L0 QI460-71

grafico TUB-QI46; codice di tinte:  $H^*_e=Y25G_e$   
grafico conformemente a DIN 33872, 3D=0, de=1, cmy0

immettere: rgb/cmyk  $\rightarrow$  rgb<sub>e</sub>  
uscita: trasferire a cmy0<sub>e</sub>

4-013131-F0