
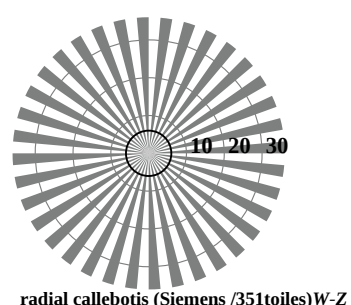
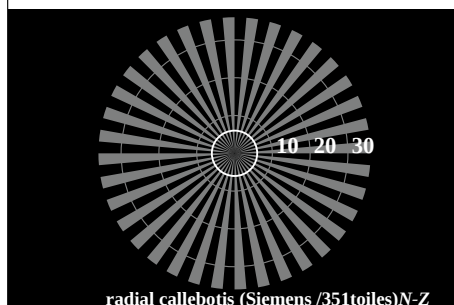
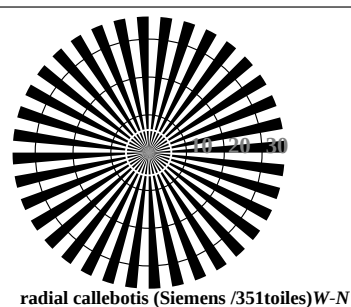


<http://130.149.60.45/~farbmétrik/RE99/RE99L0FP.PDF> / .PS; linéarisation 3D

F: linéarisation 3D RE99/RE99LF30FP.DAT dans fichier (F), page 2/2

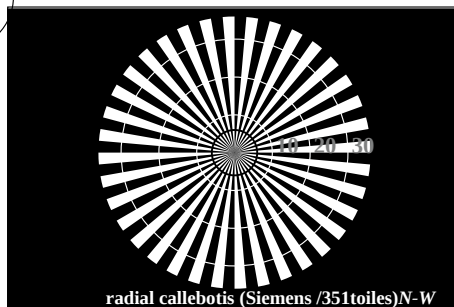

RE990-3, Fig. A1Wde: Élément A: radial callebotis N-W, W-N, N-Z et W-Z; PS operator: w* setgray

L^*/Y_{destin}^* (absolu)	18.0/18.0	37.3/37.3	56.7/56.7	76.1/76.0	95.4/95.4	N_0 (min.)	W_1 (max.)
							
$w^* = l^*_{CIELAB, r}$ (relative)							
$w^*_{\text{entrée}}$	0,000	0,250	0,500	0,750	1,000	N_0 (min.)	W_1 (max.)

RE990-5, Fig. A2Wde: Élément B: 5 équidistants L^* gris étapes + $N0$ + $W1$; PS operator: w^* setgray

L^*/Y_{destin} (absolu)	18.0/18.0	23.2/23.2	28.3/28.3	33.5/33.5	38.6/38.6	43.8/43.8	49.0/49.0	54.1/54.1	59.3/59.3	64.4/64.4	69.6/69.6	74.8/74.8	79.9/79.9	85.1/85.1	90.2/90.2	95.4/95.4
No et code Hex	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{\text{CIELAB}, r}$ (relative)																
$w^*_{\text{entrée}}$ w^*_{sortie}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000

RE990-7, Fig. A3Wde: Élément C: 16 équidistants L^* gris étapes; PS operator: w^* setgray



achromatic graphique de test N, 3D=1, de=1, sRGB*

entrée : $rgb/cmyk \rightarrow rgb_{de}$
 sortie : linéarisation 3D selon rgb^*_{de}



l'arriere-plan Øtipe
code hex

1 l'anneau Øtapes 0-1
code hex

7		8	7-8
E		F	E-F
2		0	2-0
8		6	8-6
F		D	F-D

anneaux Landolt W-N

code: l'arriere-plan-l'anneau Øta

RE991-1, Fig. A4Wde: Élément D: anneaux Landolt W-N; PS operator: w* setgray

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

de diamètre raster in *lpi*

RE991-3, Fig. A5Wde: Élément E: Linge raster sous 45° (ou 135°) degré; PS operator: w* *setgray*

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	
	de diamètre raster in lpi																

RE991-5, Fig. A6Wde: Élément F: Linge raster sous 90° (ou 0°) degré; PS operator: w* setgray