RN990-3, Figur A1W-: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: $w^* setgray$





| $L^*/Y_{intendert}$ (absolutt) | 18.0/18.0 | 37.3/37.3 | 56.7/56.7 | 76.1/76.0 | 95.4/95.4 | N_0 (min.) | W_I (max.) |
|--------------------------------------|-----------|-------------|-----------|--------------|-----------|--------------|--------------|
| $w^* = l^*_{CIELAB, r}$ (relativ) | [black] | [dark gray] | [white] | [light gray] | [black] | [white] | [white] |
| w^*_{input} | 0,000 | 0,250 | 0,500 | 0,750 | 1,000 | N_0 (min.) | W_I (max.) |

RN990-5, Figur A2W-: Element B: 5 visuelle ekvidistante L^* -gråtrinn + N_0 + W_I ; PS operator: $w^* setgray$


| $L^*/Y_{intendert}$ (absolutt) | 18.0/18.0 | 23.2/23.2 | 28.3/28.3 | 33.5/33.5 | 38.6/38.6 | 43.8/43.8 | 49.0/49.0 | 54.1/54.1 | 59.3/59.3 | 64.4/64.4 | 69.6/69.6 | 74.8/74.8 | 79.9/79.9 | 85.1/85.1 | 90.2/90.2 | 95.4/95.4 |
|--------------------------------------|-----------|-----------|-------------|-------------|-------------|-------------|-------------|-----------|--------------|--------------|--------------|--------------|--------------|-----------|-----------|-----------|
| Nr. og Hex-code | 00;F | 01;E | 02;D | 03;C | 04;B | 05;A | 06;9 | 07;8 | 08;7 | 09;6 | 10;5 | 11;4 | 12;3 | 13;2 | 14;1 | 15;0 |
| $w^* = l^*_{CIELAB, r}$ (relativ) | [black] | [black] | [dark gray] | [white] | [light gray] | [white] | [white] | [white] |
| w^*_{input} | 0,000 | 0,067 | 0,133 | 0,200 | 0,267 | 0,333 | 0,400 | 0,467 | 0,533 | 0,600 | 0,667 | 0,733 | 0,800 | 0,867 | 0,933 | 1,000 |




RN990-7, Figur A3W-: Element C: 16 visuelle ekvidistante L^* -gråtrinn; PS operator: $w^* setgray$

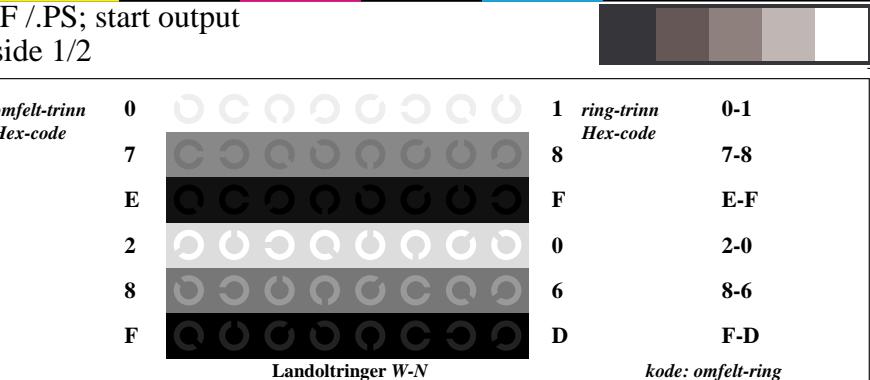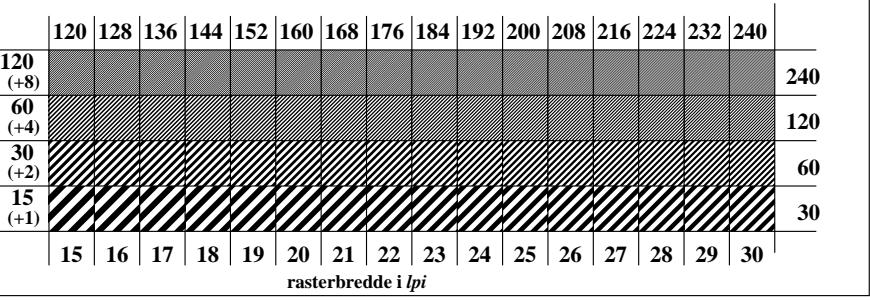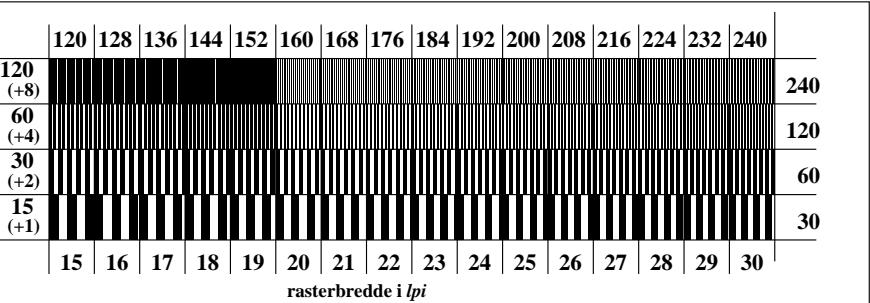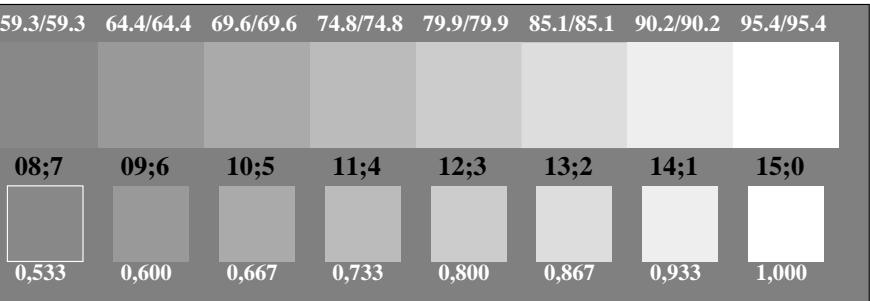prøveplansje RN99; ME16(ISO 9241-306), 3(ISO/IEC 15775) input: $rgb/cmyk \rightarrow rgb/cmyk$
akromatisk prøveplansje N output: ingen endring


RN991-1, Figur A4W-: Element D: Landoltringer W-N; PS operator: $w^* setgray$ RN991-3, Figur A5W-: Element E: Linjeraster med 45° (eller 135°); PS operator: $w^* setgray$ RN991-5, Figur A6W-: Element F: Linjeraster med 90° (eller 0°); PS operator: $w^* setgray$ 

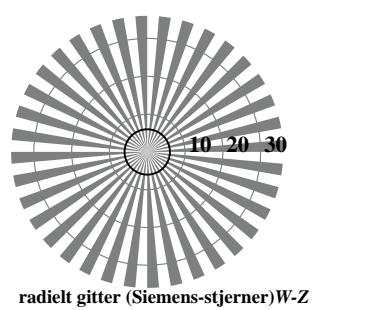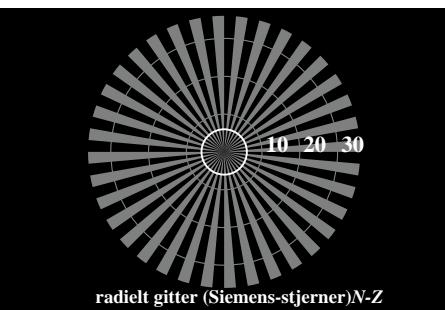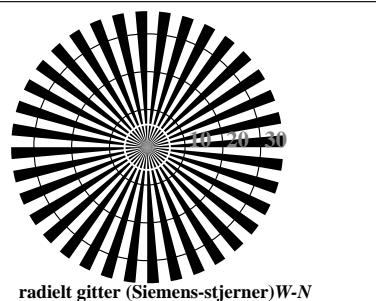se lignende filer: <http://130.149.60.45/~farbmeftrik/RN99/RN99.HTML>
teknisk informasjon: <http://www.ps.bam.de> eller <http://130.149.60.45/~farbmeftrik>







RN990-3, Figur A1Wdd: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: $w^* setgray$

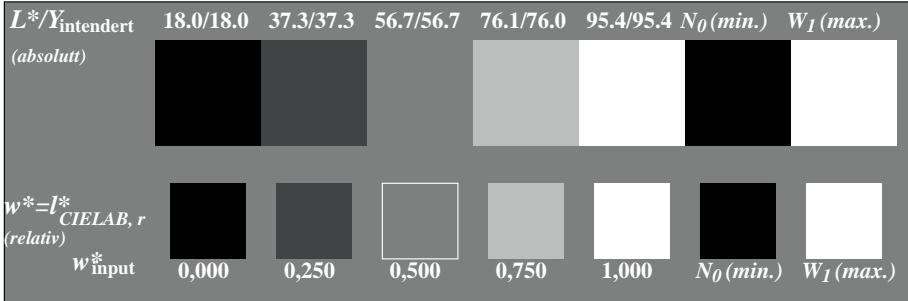


RN990-5, Figur A2Wdd: Element B: 5 visuelle ekvidistante L^* -gråtrinn + N_0 + W_I ; PS operator: $w^* setgray$

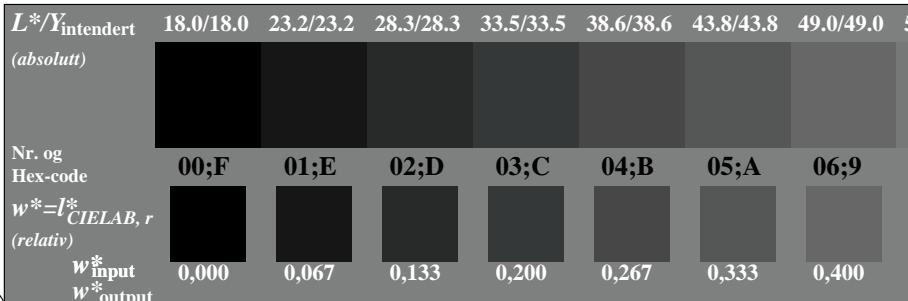


RN990-7, Figur A3Wdd: Element C: 16 visuelle ekvidistante L^* -gråtrinn; PS operator: $w^* setgray$

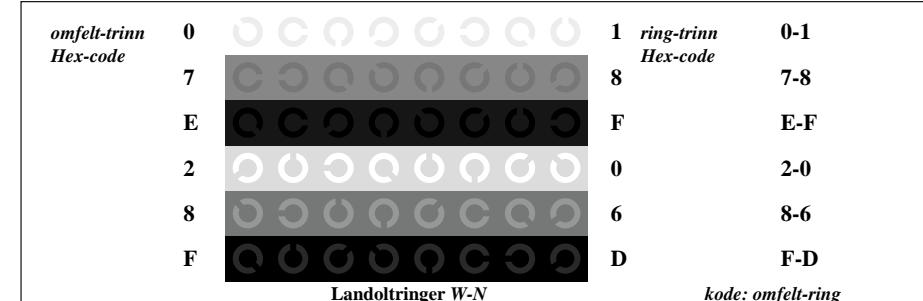


RN991-1, Figur A4Wdd: Element D: Landoltringer W-N; PS operator: $w^* setgray$

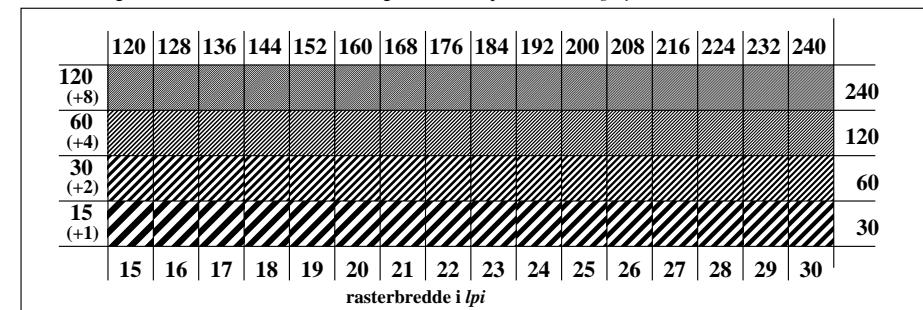







RN991-3, Figur A5Wdd: Element E: Linjeraster med 45° (eller 135°); PS operator: $w^* setgray$

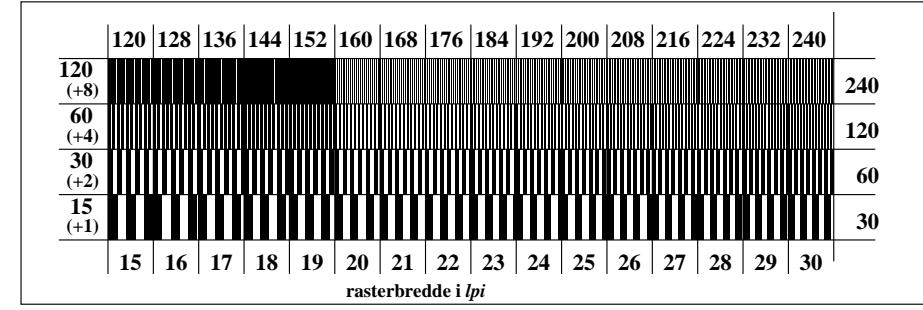


RN991-5, Figur A6Wdd: Element F: Linjeraster med 90° (eller 0°); PS operator: $w^* setgray$

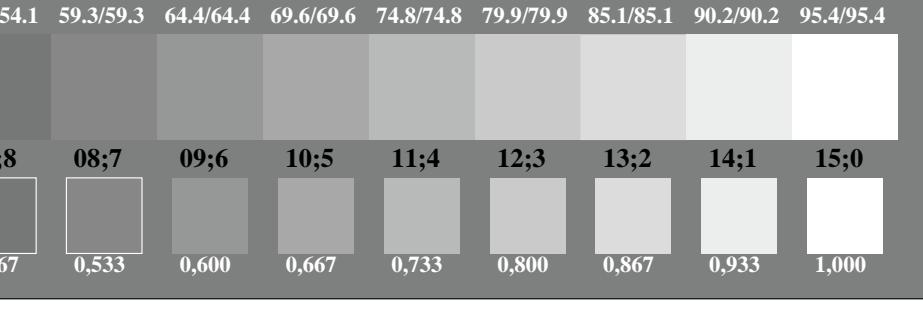

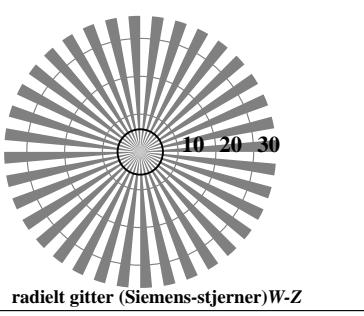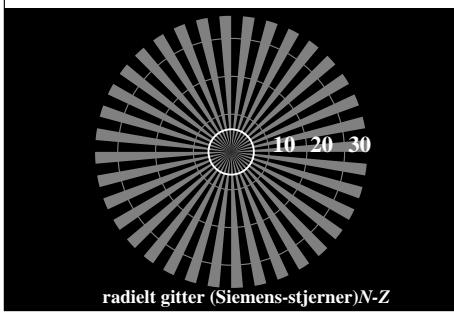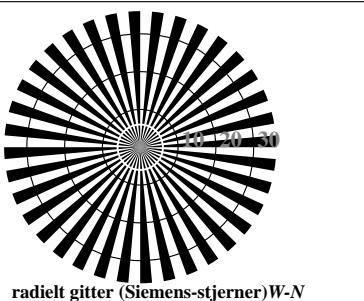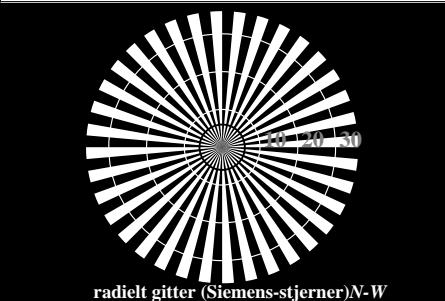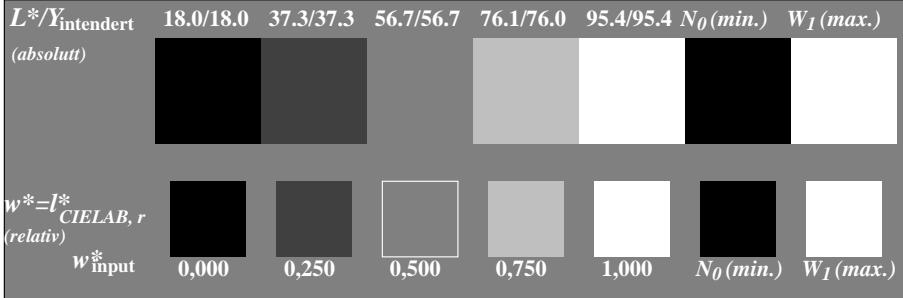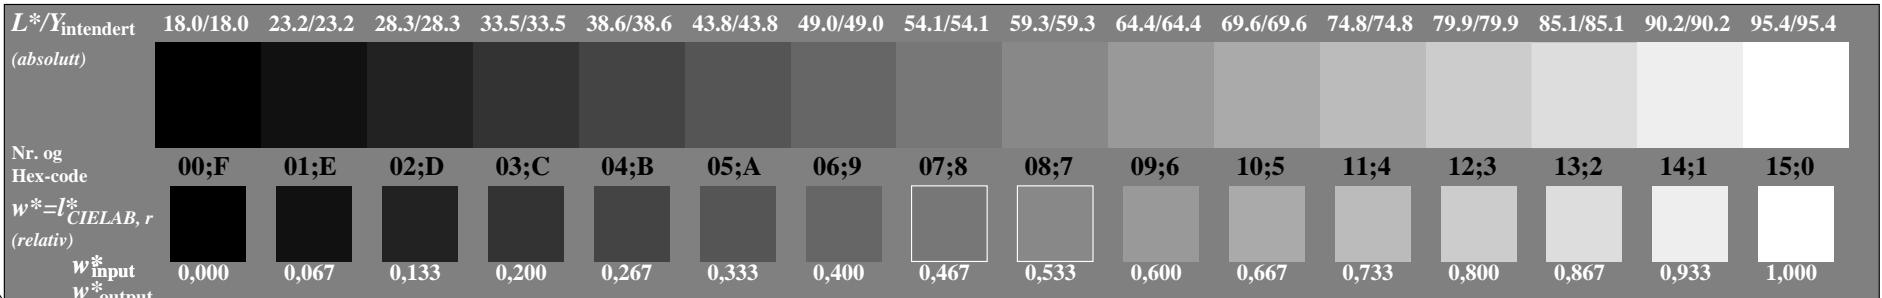prøveplansje RN99; ME16(ISO 9241-306), 3(ISO/IEC 15775) input: sRGB*
akromatisk prøveplansje N, 3D=1, de=0, sRGB*




RN990-3, Figur A1W:- Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: $w^* \text{setgray}$ RN990-5, Figur A2W:- Element B: 5 visuelle ekvidistante L^* -gråtrinn + N_0 + W_I ; PS operator: $w^* \text{setgray}$ RN990-7, Figur A3W:- Element C: 16 visuelle ekvidistante L^* -gråtrinn; PS operator: $w^* \text{setgray}$




prøveplansje RN99; ME16(ISO 9241-306), 3(ISO/IEC 15775) input: $rgb/cmky -> rgb/cmky$
 akromatisk prøveplansje N output: ingen endring







| 1 ring-trinn Hex-code | 0-1 |
|--------------------------|-----|
| 8 | 7-8 |
| F | E-F |
| 2 | 0-2 |
| 8 | 8-6 |
| F | F-D |

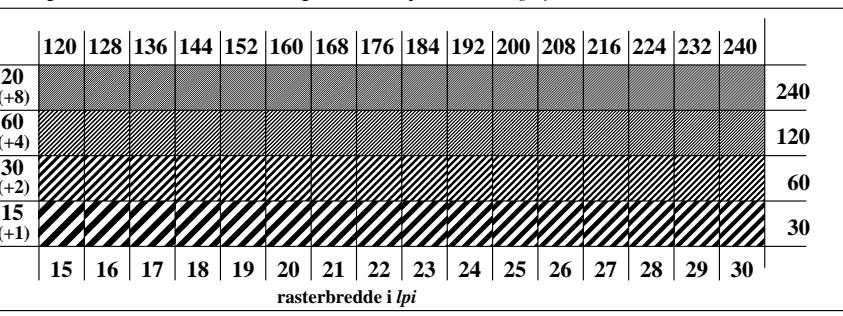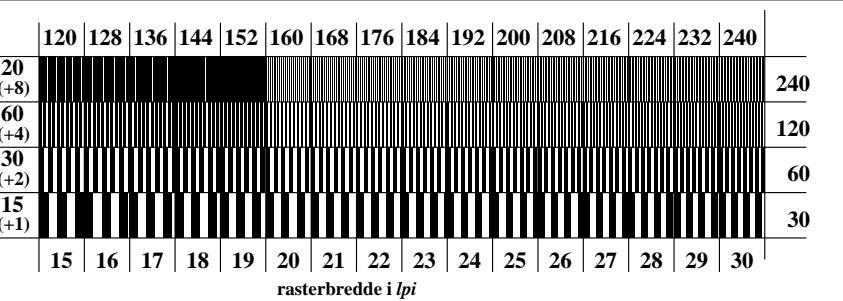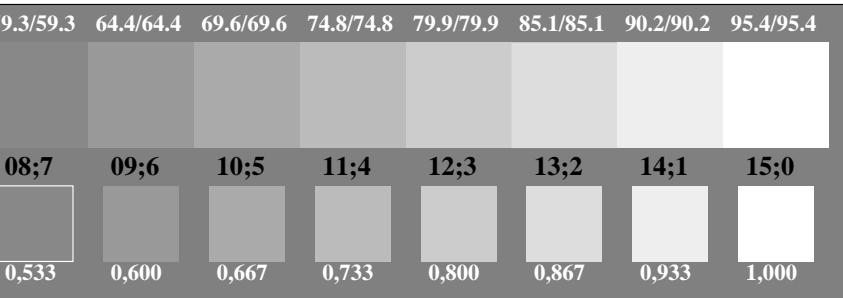Landoltringer W-N
kode: omfelt-ring

RN991-1, Figur A4W:- Element D: Landoltringer W-N; PS operator: $w^* \text{setgray}$ RN991-3, Figur A5W:- Element E: Linjeraster med 45° (eller 135°); PS operator: $w^* \text{setgray}$ RN991-5, Figur A6W:- Element F: Linjeraster med 90° (eller 0°); PS operator: $w^* \text{setgray}$ 

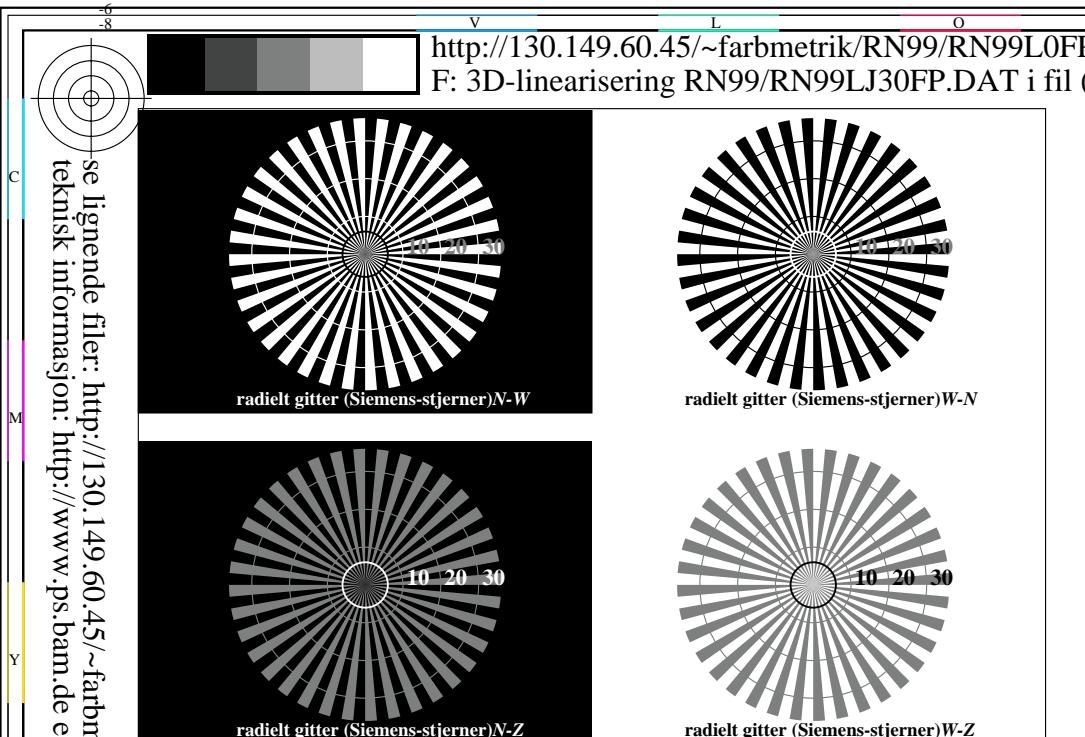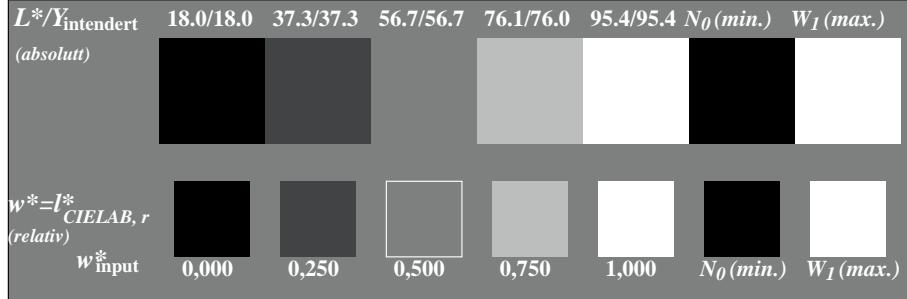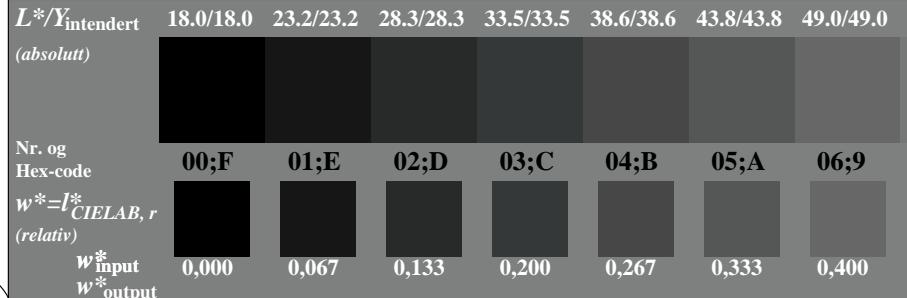RN990-3, Figur A1Wde: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: $w^* setgray$ RN990-5, Figur A2Wde: Element B: 5 visuelle ekvidistante L^* -gråtrinn + N_0 + W_I ; PS operator: $w^* setgray$ RN990-7, Figur A3Wde: Element C: 16 visuelle ekvidistante L^* -gråtrinn; PS operator: $w^* setgray$

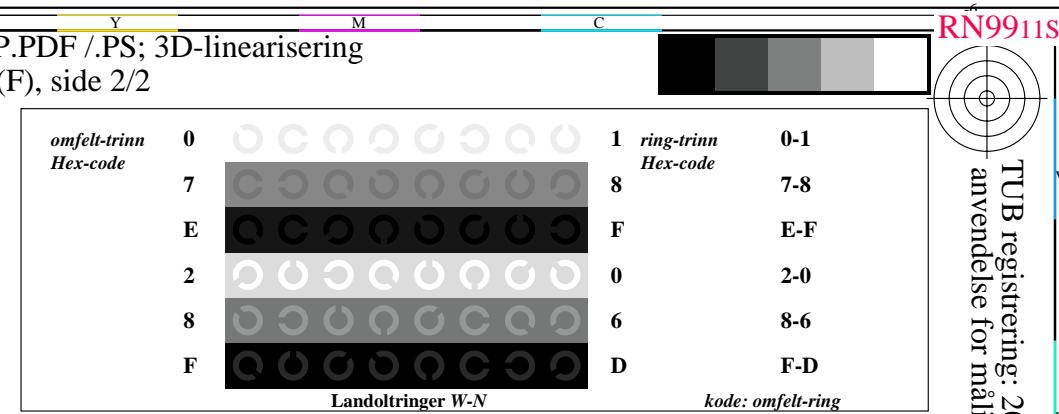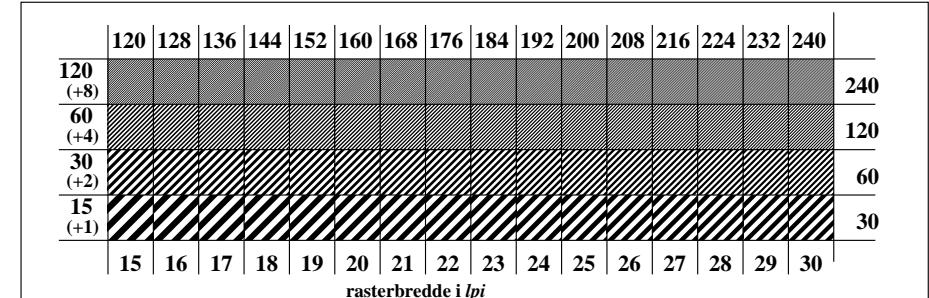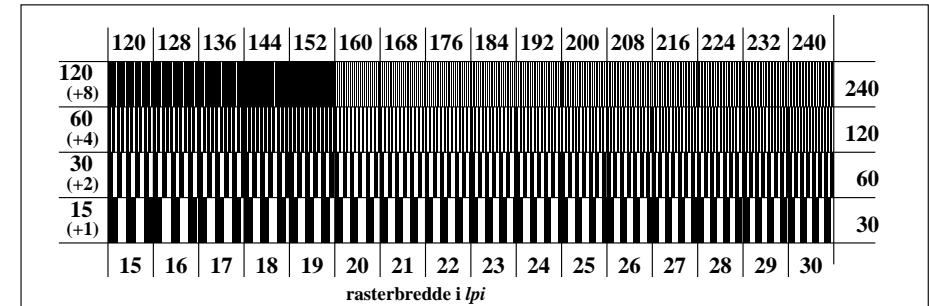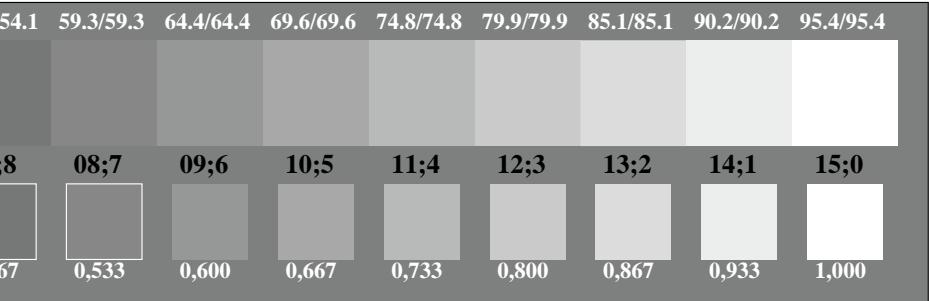prøveplansje RN99; ME16(ISO 9241-306), 3(ISO/IEC 15775) input: $rgb/cmyk \rightarrow rgbd_e$
 akromatisk prøveplansje N, 3D=1, de=1, sRGB*

RN991-1, Figur A4Wde: Element D: Landoltringer W-N; PS operator: $w^* setgray$ RN991-3, Figur A5Wde: Element E: Linjeraster med 45° (eller 135°); PS operator: $w^* setgray$ RN991-5, Figur A6Wde: Element F: Linjeraster med 90° (eller 0°); PS operator: $w^* setgray$ 

prøveplansje RN99; ME16(ISO 9241-306), 3(ISO/IEC 15775) input: $rgb/cmyk \rightarrow rgbd_e$
 output: 3D-linearisering til rgb^*_{de}