

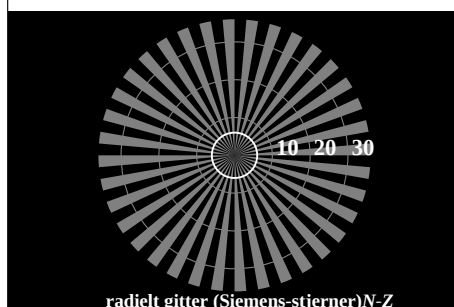

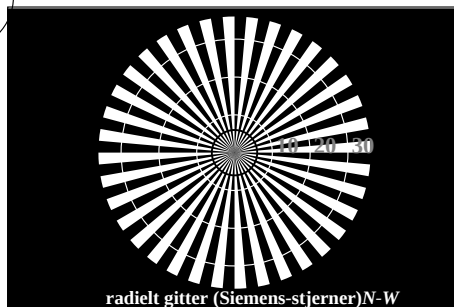
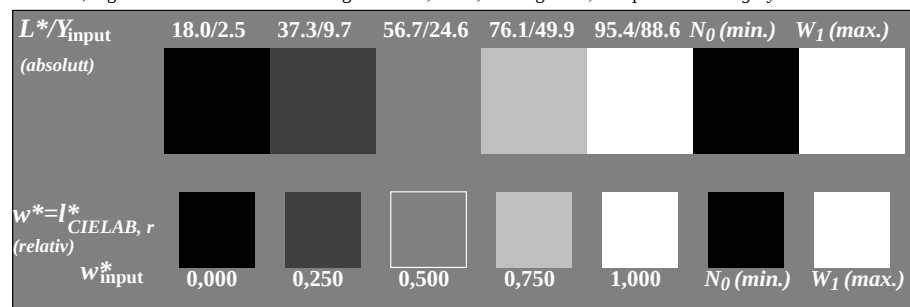


http://130.149.60.45/~farbmetrik/RN99/RN99L0NP.PDF /.PS; start output
N: ingen 3D-linearisering (OL) i fil (F) eller PS-startup (S), side 1/2

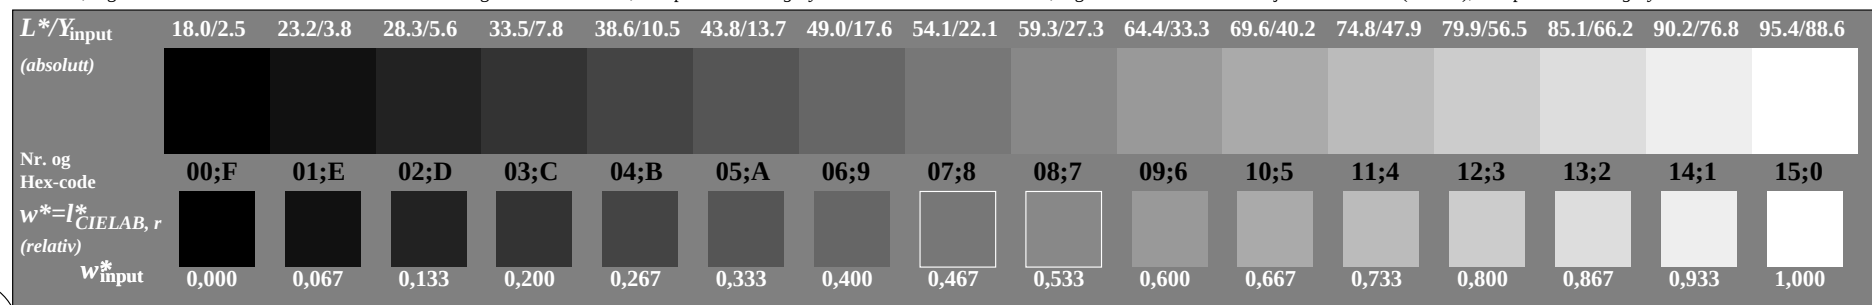


RN990-3, Figur A1W-: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: w* setgray

RN990-5, Figur A2W-: Element B: 5 visuelle ekvidistante L^* -gråtrinn + N_0 + W_1 ; PS operator: w* setgrayRN990-7, Figur A3W-: Element C: 16 visuelle ekvidistante L^* -gråtrinn; PS operator: w* setgray


prøveplansje RN99; ME16(ISO 9241-306), 3(ISO/IEC 15775) input: *rgb/cmyk* -> *rgb/cmyk*
akromatisk prøveplansje N output: ingen endring

omfelt-trinn Hex-code	0	7	E	2	8	F
ring-trinn Hex-code	0-1	7-8	E-F	2-0	8-6	F-D
Landoltringer W-N						kode: omfelt-ring

RN991-1, Figur A4W-: Element D: Landoltringer W-N; PS operator: w* setgray

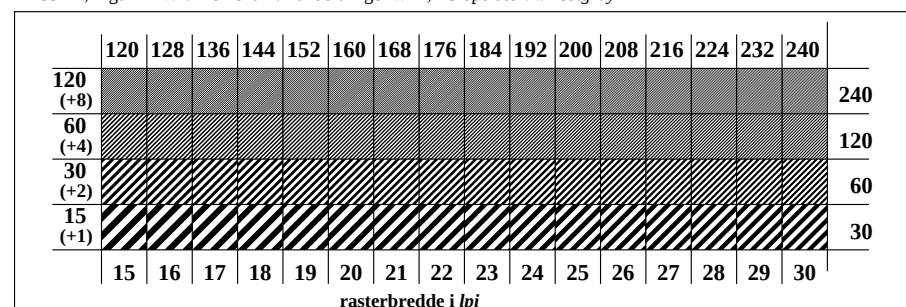

RN991-3, Figur A5W-: Element E: Linjeraster med 45° (eller 135°); PS operator: w* setgray

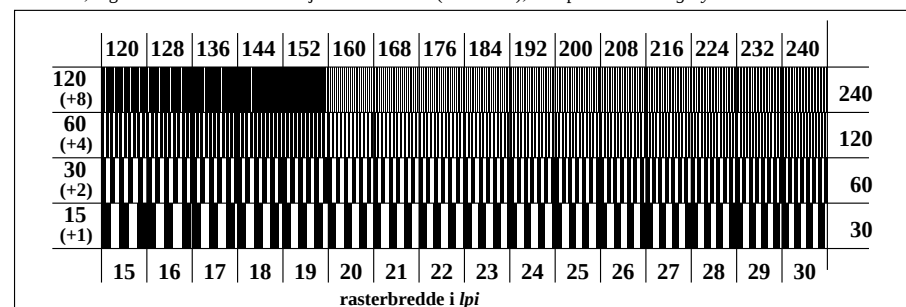

RN991-5, Figur A6W-: Element F: Linjeraster med 90° (eller 0°); PS operator: w* setgray