

Entrada i salida: Printer Reflective System FRS06a for relative CIELAB hue $h_{ab,a,rel} = h_{ab}/360 = 10/360 = 0.02$


$H^*_d = B75R_d$

Datos del dispositivo (d) o elemental (e) color:

HIC^*_d
código de tono para los colores
esta página:

$H^*_d = B75R_d$

triángulo claridad T^*



LRS18a; datos adaptados CIELAB (a)

name	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
R _d ,Ma	47.5	57.2	37.8	68.6	33
Y _d ,Ma	91.5	-15.8	84.6	86.1	100
G _d ,Ma	54.3	-67.6	30.8	74.3	155
C _d ,Ma	53.1	-30.0	-43.1	52.5	235
B _d ,Ma	32.5	16.9	-44.6	47.7	290
M _d ,Ma	48.1	65.4	-12.7	66.6	348
N _d ,Ma	23.8	0.0	0.0	0.0	0
W _d ,Ma	95.8	0.0	0.0	0.0	0
R _d ,CIE	39.9	58.7	27.9	65.0	25
Y _d ,CIE	81.2	-2.8	71.5	71.6	92
G _d ,CIE	52.2	-42.4	13.6	44.5	162
B _d ,CIE	30.5	1.4	-46.4	46.4	271

Los datos de color máximo (Ma):

$LabCh^*_{d,Ma}$: 47 58 10 59 10

$HIC^*_{d,Ma}$: B75R_100_100_d

$rgbic^*_{d,Ma}$:

1.0 0.0 0.5 1.0 1.0

triángulo claridad T^*

%Gama

$u^*_{rel} = 114$



%Regularidad

$g^*_{H,rel} = 28$

$g^*_{C,rel} = 38$

LRS18a; datos adaptados CIELAB (a)

H^*_d	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
R00Y_100_100 _d	47.5	57.2	37.8	68.6	33
R25Y_100_100 _d	57.4	43.5	54.5	69.7	51
R50Y_100_100 _d	70.5	19.2	66.2	69.0	73
R75Y_100_100 _d	83.5	-2.9	76.8	76.9	92
Y00G_100_100 _d	91.5	-15.8	84.6	86.1	100
Y25G_100_100 _d	90.4	-20.9	86.5	89.0	103
Y50G_100_100 _d	70.9	-41.7	54.8	68.9	127
Y75G_100_100 _d	60.1	-57.9	39.6	70.2	145
G00B_100_100 _d	54.3	-67.6	30.8	74.3	155
G25B_100_100 _d	55.0	-51.4	-8.9	52.2	189
G50B_100_100 _d	53.1	-30.0	-43.1	52.5	235
G75B_100_100 _d	46.1	-13.3	-49.4	51.1	254
B00R_100_100 _d	32.5	16.9	-44.6	47.7	290
B25R_100_100 _d	37.2	43.1	-30.8	53.0	324
B50R_100_100 _d	48.1	65.4	-12.7	66.6	348
B75R_100_100 _d	47.8	58.9	10.4	59.9	10

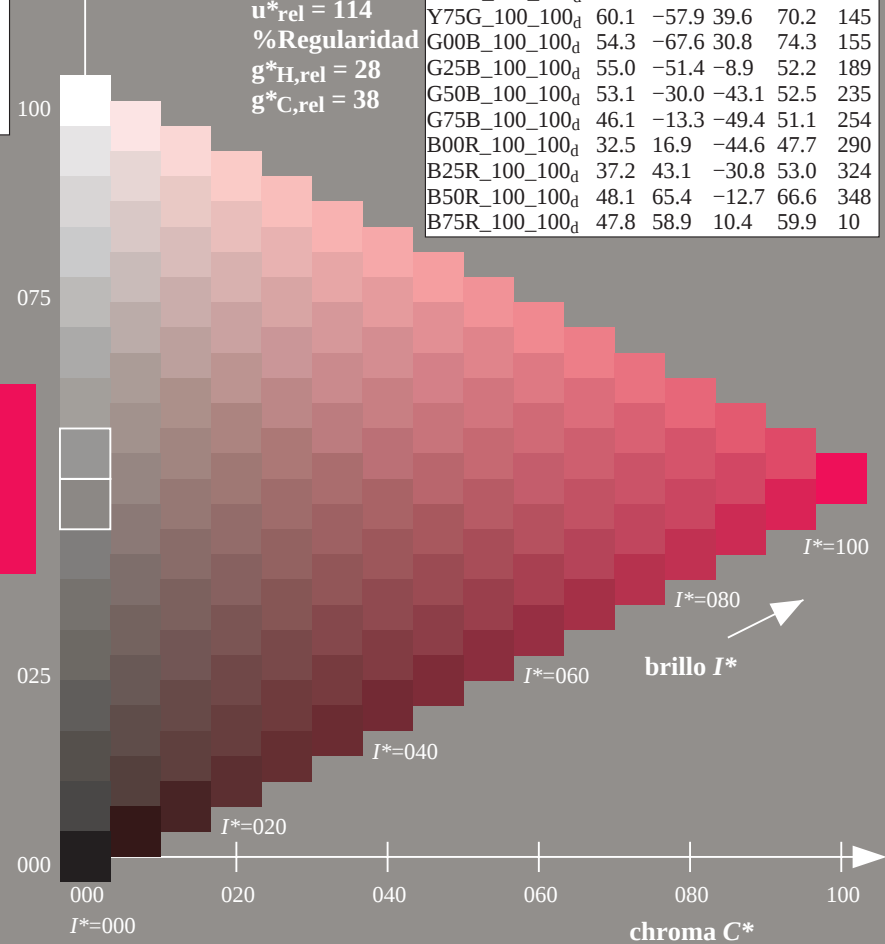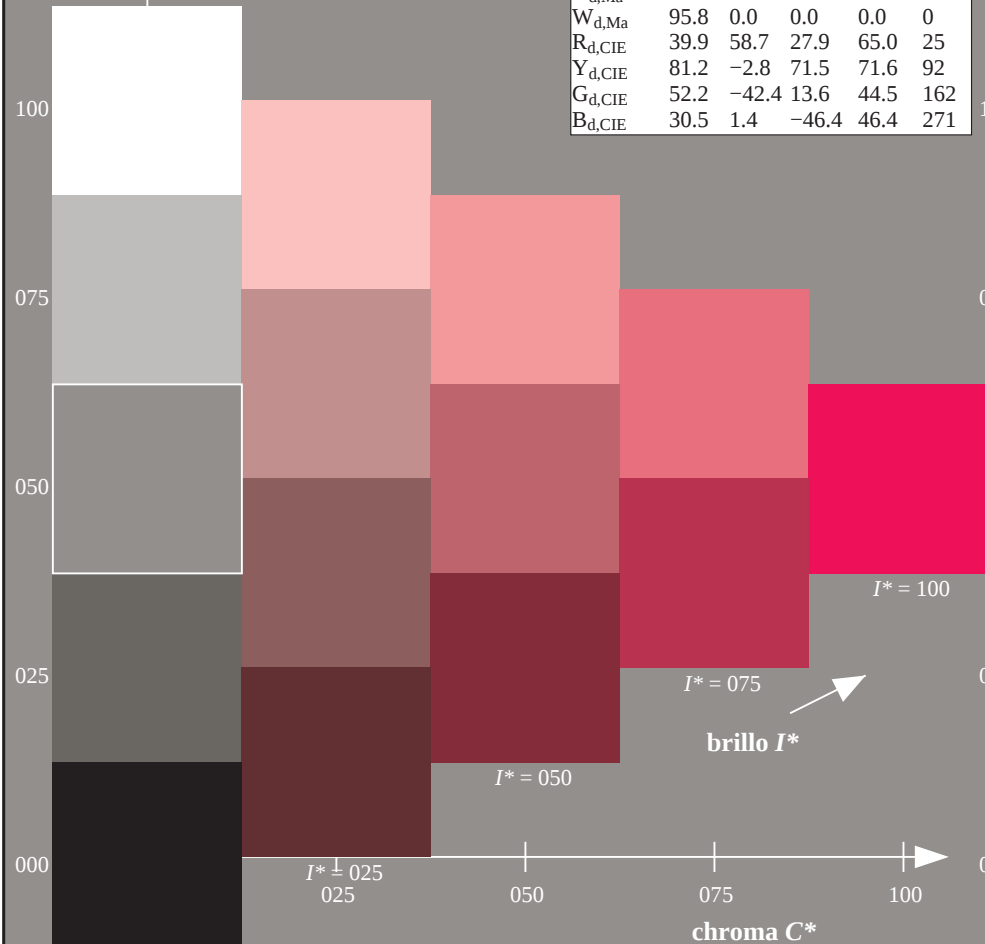

2-103130-L0 RS490-72

gráfico TUB-RS49; código de tono: $H^*_d=B75R_d$
gráfico según a DIN 33872, 3D=1, de=0, cmk^*

entrada: $rgb/cmyk \rightarrow rgb_{dd}$
salida: 3D-linealización a $cmyk^*_{dd}$

2-103130-F0