



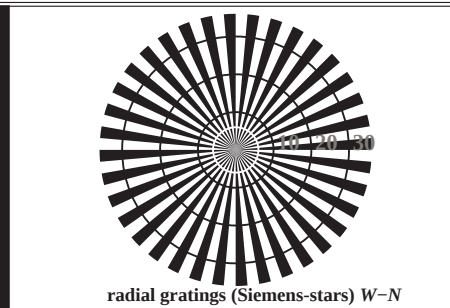

radial gratings (Siemens-stars) W-N

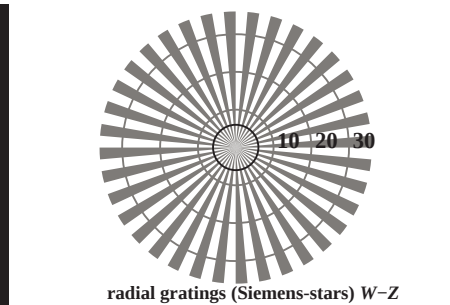

radial gratings (Siemens-stars) W-Z


L^*/Y_{intended} (absolute)	18.0/18.0	37.3/37.3	56.7/56.7	76.1/76.0	95.4/95.4	N_0 (min.)	W_1 (max.)
$w^* = I^*_{\text{CIELAB}, r}$ (relative)							
w^*_{input} w^*_{output}	0,000	0,250	0,500	0,750	1,000	N_0 (min.)	W_1 (max.)

L^*/Y_{intended}	18.0/18.0	23.2/23.2	28.3/28.3	33.5/33.5	38.6/38.6	43.8/43.8	49.0/49.0	54.1/54.1	59.3/59.3	64.4/64.4	69.6/69.6	74.8/74.8	79.9/79.9	85.1/85.1	90.2/90.2	95.4/95.4
(absolute)																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$W^*=L^*_{CIELAB}, r$																
W^*_{input}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
W^*_{output}																




test chart TE73; ME16(ISO 9241-306), 3(ISO/IEC 15775)
achromatic test chart N , 3D=1, de=1, $cm\dot{y}k^*$


input: $rgb/cmyk \rightarrow rgb_{de}$
output: 3D-linearization to $cmyk^*_{de}$

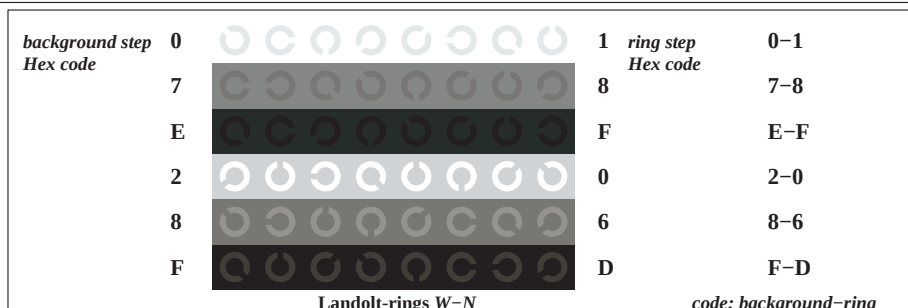

TE731-1, Picture C4Wde: Element D: Landolt-rings W-N; PS operator: *rgb/cmy0*

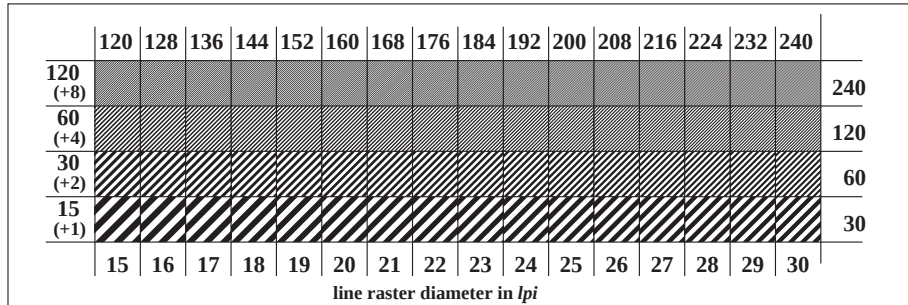

TE731-3, Picture C5Wde: Element E: Line raster under 45° (or 135°); PS operator: *rgb/cmy0*

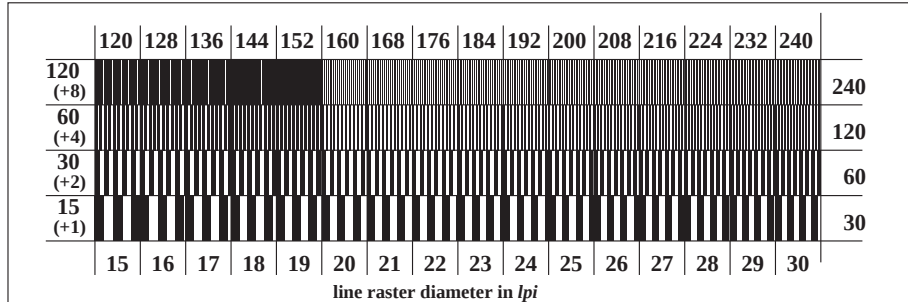

TE731-5, Picture C6Wde: Element F: Line raster under 90° (or 0°); PS operator: *rgb/cmy0*

