




Siehe ähnliche Dateien: <http://130.149.60.45/~farbmeterik/RE98/RE98.HTM>
Technische Information: <http://www.ps.bam.de> oder <http://130.149.60.45/~farbmeterik>

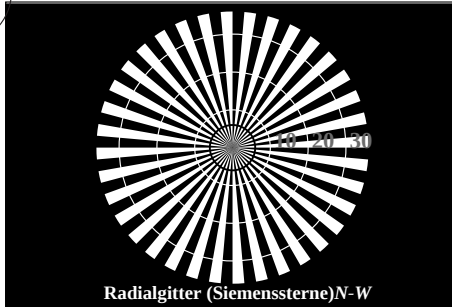


Radialgitter (Siemenssterne)N-W



Radialgitter (Siemenssterne) W-N

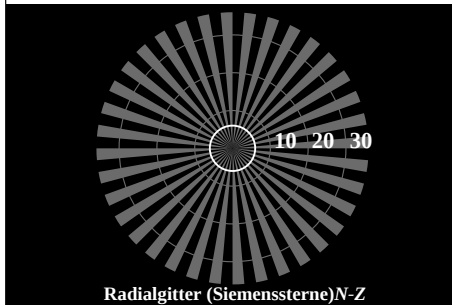

Radialgitter (Siemenssterne)N-Z



Radialgitter (Siemenssterne) W-Z

RE980-3, Bild A1Wde: Element A: Radialgitter $N-W$, $W-N$, $N-Z$ und $W-Z$; PS-Operator: w^* *setgray*

$L^*/Y_{\text{vorgesehen}}$ (absolut)	18.0/18.0	37.3/37.3	56.7/56.7	76.1/76.0	95.4/95.4	N_0 (min.)	W_1 (max.)
$W^*=L^*_{\text{CIELAB}, r}$ (relativ)							
W^*_{Eingabe}	0,000	0,250	0,500	0,750	1,000	N_0 (min.)	W_1 (max.)

RE980-5, Bild A2Wde: Element B: 5 visuell gleichabständige L^* -Graustufen + $N0$ + $W1$; PS-Operator: w^* *setgray*

$L^*/Y_{\text{vorgesehen}}$	18.0/18.0	23.2/23.2	28.3/28.3	33.5/33.5	38.6/38.6	43.8/43.8	49.0/49.0	54.1/54.1	59.3/59.3	64.4/64.4	69.6/69.6	74.8/74.8	79.9/79.9	85.1/85.1	90.2/90.2	95.4/95.4
(absolut)																
Nr. und Hex-Code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{CIELAB, r}$																
w^*_{Eingabe}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{Ausgabe}																

RE980-7, Bild A3Wde: Element C: 16 visuell gleichabständige L^* -Graustufen; PS-Operator: w^* *setgray*



Prüfvorlage RE98; ME16(ISO 9241-306), 3(ISO/IEC 15775)
Achromatische Prüfvorlage N, 3D=1, de=1, *cmYK**



Umfeldstufe	0								1	Ringstufe	0-1
Hex-Code	7								8	Hex-Code	7-8
	E								F		E-F
	2								0		2-0
	8								6		8-6
	F								D		F-D

Landoltringe W-N

Code: Umfeld-Ring

RE981-1, Bild A4Wde: Element D: Landoltringe W-N; PS-Operator: w* *setgray*

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

Rasterweite in lpi

Rasterweite in lpi

RE981-3, Bild A5Wde: Element E: Linienraster unter 45° (oder 135°); PS-Operator: w* *setgray*

Figure 1 displays a grid of raster patterns for different resolutions and line widths. The patterns are arranged in a 4x3 grid, with the following labels:

- Row 1: 120 (+8) 120 240
- Row 2: 60 (+4) 60 120
- Row 3: 30 (+2) 30 60
- Row 4: 15 (+1) 15 30

The patterns are labeled with their respective resolution and line width values. The patterns are arranged in a grid where the columns represent the resolution (120, 60, 30, 15 lpi) and the rows represent the line width (120, 60, 30, 15 lpi). The patterns are labeled with their respective resolution and line width values.

Rasterweite in lpi

RE981-5, Bild A6Wde: Element F: Linienraster unter 90° (oder 0°); PS-Operator: $w^* \text{ setgray}$

Eingabe: $rgb/cmyk \rightarrow rgb_{de}$
Ausgabe: 3D-Linearisierung $cmyk^*_{de}$