
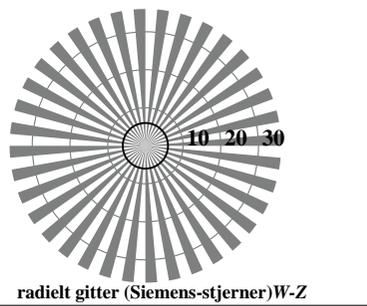
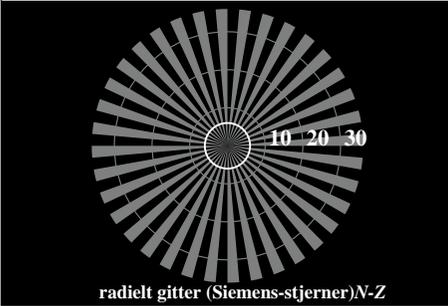
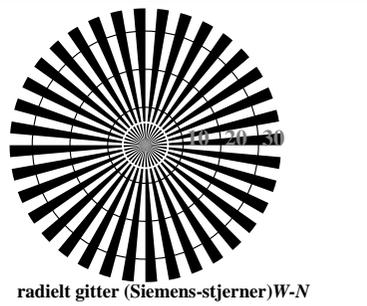



se lignende filer: http://130.149.60.45/~farbmetrik/RE99/RE99.LTM  
teknisk informasjon: http://www.ps.bam.de eller http://130.149.60.45/~farbmetrik

TUB registrering: 20150901-RE99/RE99L0FP.PDF /.PS  
anvendelse for måling av display output, ingen separasjon


TUB-material: code=rh4ta

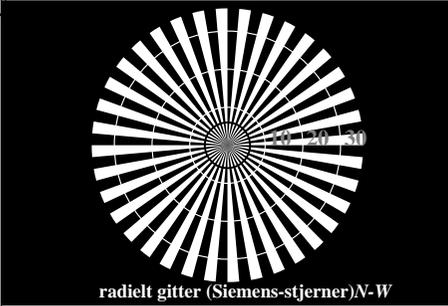

RE990-3, Figur A1Wdd: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: w\* setgray

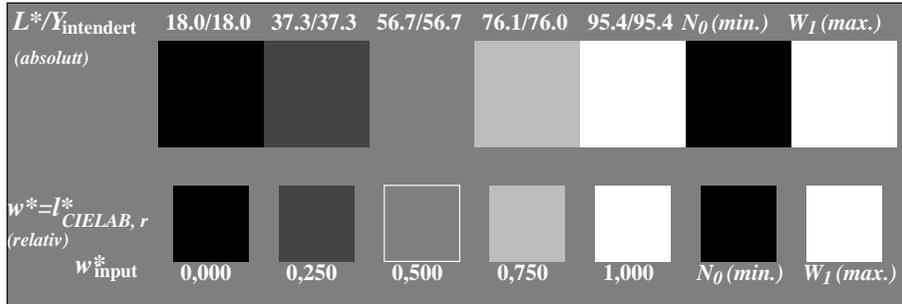


RE990-5, Figur A2Wdd: Element B: 5 visuelle ekvidistante  $L^*$ -gråtrinn +  $N_0$  +  $W_1$ ; PS operator: w\* setgray

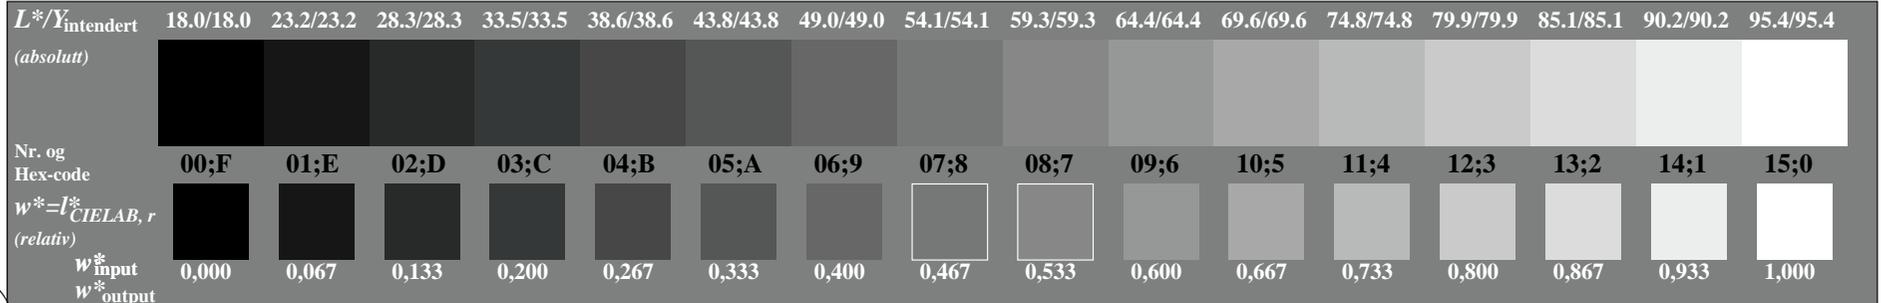


RE990-7, Figur A3Wdd: Element C: 16 visuelle ekvidistante  $L^*$ -gråtrinn; PS operator: w\* setgray


prøveplansje RE99; ME16(ISO 9241-306), 3(ISO/IEC 15775) input:  $rgb/cmyk \rightarrow rgb_{dd}$   
akromatisk prøveplansje N, 3D=1, de=0,  $sRGB^*$  output: 3D-linearisering til  $rgb^*_{dd}$

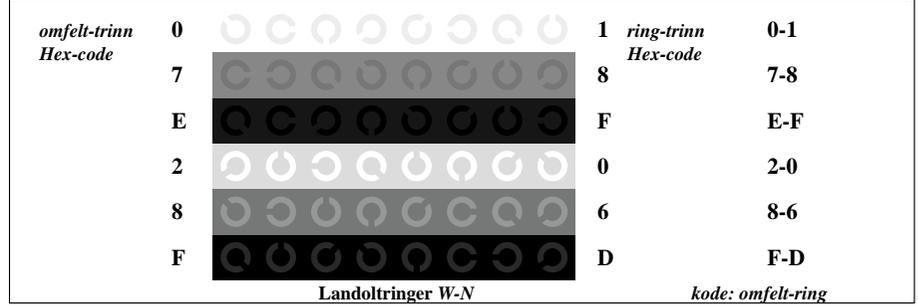

RE991-1, Figur A4Wdd: Element D: Landoltringer W-N; PS operator: w\* setgray

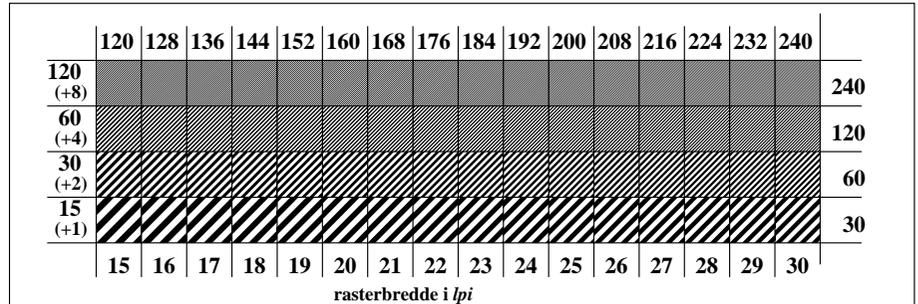

RE991-3, Figur A5Wdd: Element E: Linjeraster med 45° (eller 135°); PS operator: w\* setgray

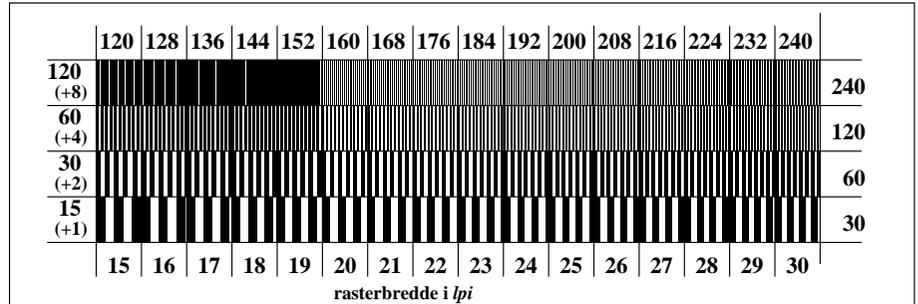

RE991-5, Figur A6Wdd: Element F: Linjeraster med 90° (eller 0°); PS operator: w\* setgray