

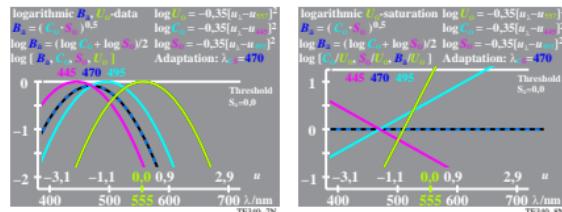
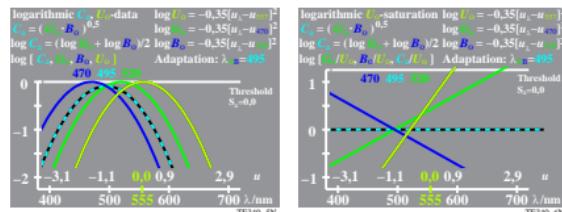
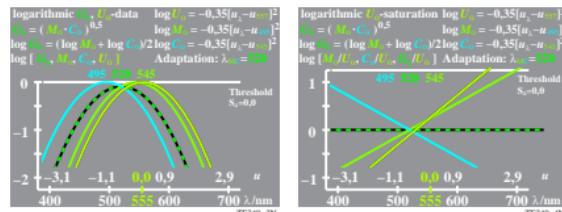
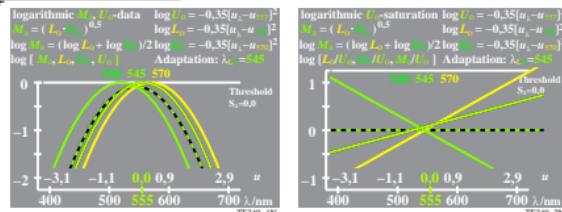
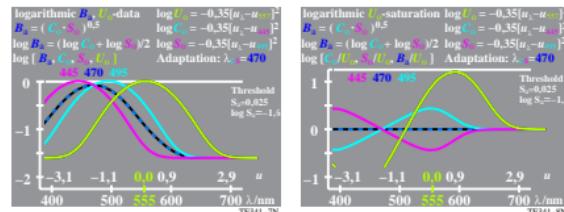
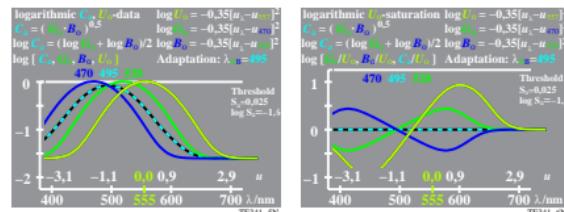


<http://130.149.60.45/~farbmeftrik/TE34/TE34L0N1.TXT> .PS; start output
N; no 3D-linearization (OL) in file (F) or PS-startup (S), page 1/1

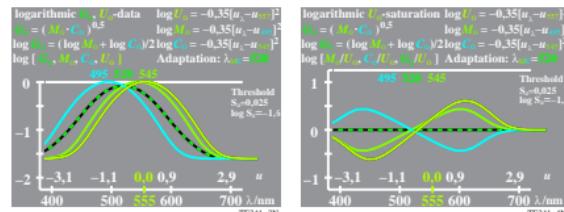

TUB-test chart TE34; colour vision and colorimetry
cone sensitivity and saturation for distance $\Delta\lambda=50$

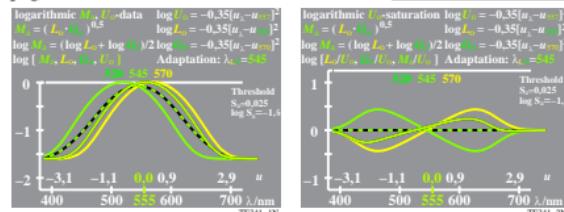

input: w/rgb/cmyk → w/rgb/cmyk
output: no change

see similar files: <http://130.149.60.45/~farbmertik/TE34/TE34.HTM>
technical information: <http://www.ps.bam.de> or <http://130.149.60.45/~farbmertik>

application for measurement of display output

IUB material; code=InData