




$L^*/Y_{\text{destin\c{e}}}$ (absolu)	18.0/18.0	37.3/37.3	56.7/56.7	76.1/76.0	95.4/95.4	N_0 (min.)	W_1 (max.)
$W^* = I^*_{\text{CIELAB}, r}$ (relative)							
$W^*_{\text{entr\c{e}}}$ W^*_{sortie}	0,000	0,250	0,500	0,750	1,000	N_0 (min.)	W_1 (max.)

L^*/Y destinii (absolu)	18.0/18.0	23.2/23.2	28.3/28.3	33.5/33.5	38.6/38.6	43.8/43.8	49.0/49.0	54.1/54.1	59.3/59.3	64.4/64.4	69.6/69.6	74.8/74.8	79.9/79.9	85.1/85.1	90.2/90.2	95.4/95.4
No et code Hex	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$W^* = I^*_{CIELAB, r}$ (relative)																
$W^*_{entrée}$ W^*_{sortie}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000

3-113130-F0

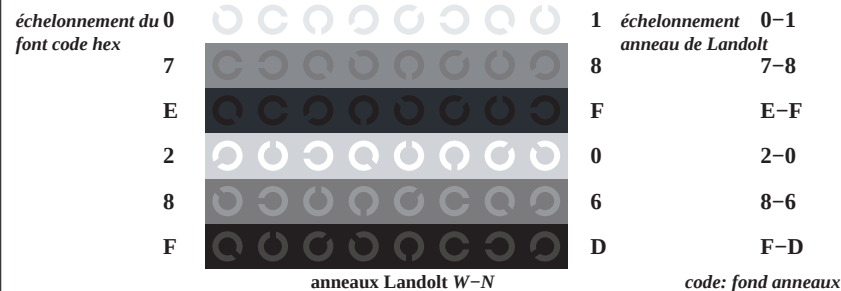

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

largeur de trame in *lpi*

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

largeur de trame in lpi

TF741-5, Fig. C6Wde: Élément F: trame linéaire à 90° (ou 0°); PS opérateur : *rgb/cmy0*