




http://130.149.60.45/~farbmetrik/TN70/TN70L0FP.PDF /.PS; start output
F: 3D-linearisering TN70/TN70LJ30FP.DAT i fil (F), side 1/2




radielt gitter (Siemens-stjerner) N-W



radielt gitter (Siemens-stjerner) W-N



radielt gitter (Siemens-stjerner) N-Z



radielt gitter (Siemens-stjerner) W-Z

TN700-3, Figur C1W-: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: *rgb/cmy0*

$L^*/Y_{\text{intendert}}$	18.0/18.0	37.3/37.3	56.7/56.7	76.1/76.0	95.4/95.4	N_0 (min.)	W_1 (max.)
(absolutt)							
$w^* = I^*_{\text{CIELAB}, r}$							
(relativ)							
w^*_{input}	0,000	0,250	0,500	0,750	1,000	N_0 (min.)	W_1 (max.)
w^*_{output}							

TN700-5, Figur C2W-: Element B: 5 visuelle ekvidistante L^* -gråtrinn + N_0 + W_1 ; PS operator: *rgb/cmy0*


$L^*/Y_{\text{intendert}}$	18.0/18.0	23.2/23.2	28.3/28.3	33.5/33.5	38.6/38.6	43.8/43.8	49.0/49.0	54.1/54.1	59.3/59.3	64.4/64.4	69.6/69.6	74.8/74.8	79.9/79.9	85.1/85.1	90.2/90.2	95.4/95.4
(absolutt)																
Nr. og Hex-code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = I^*_{\text{CIELAB}, r}$																
(relativ)																
w^*_{input}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{output}																

TN700-7, Figur C3W-: Element C: 16 visuelle ekvidistante L^* -gråtrinn; PS operator: *rgb/cmy0*


prøveplansje TN70; ME16(ISO 9241-306), 3(ISO/IEC 15775) input: *rgb/cmyk* -> *rgb/cmyk*
akromatisk prøveplansje N output: ingen endring

omfelt-trinn Hex-code	0								
	7								
	E								
	2								
	8								
	F								


http://130.149.60.45/~farbmetrik/TN70/TN70L0FP.PDF /.PS; start output
F: 3D-linearisering TN70/TN70LJ30FP.DAT i fil (F), side 1/2




radielt gitter (Siemens-stjerner) N-W



radielt gitter (Siemens-stjerner) W-N



radielt gitter (Siemens-stjerner) N-Z



radielt gitter (Siemens-stjerner) W-Z

TN700-3, Figur C1W-: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: *rgb/cmy0*

$L^*/Y_{\text{intendert}}$	18.0/18.0	37.3/37.3	56.7/56.7	76.1/76.0	95.4/95.4	N_0 (min.)	W_1 (max.)
(absolutt)							
$w^* = I^*_{\text{CIELAB}, r}$							
(relativ)							
w^*_{input}	0,000	0,250	0,500	0,750	1,000	N_0 (min.)	W_1 (max.)
w^*_{output}							



TN700-5, Figur C2W-: Element B: 5 visuelle ekvidistante L^* -gråtrinn + N_0 + W_1 ; PS operator: *rgb/cmy0*

$L^*/Y_{\text{intendert}}$	18.0/18.0	23.2/23.2	28.3/28.3	33.5/33.5	38.6/38.6	43.8/43.8	49.0/49.0	54.1/54.1	59.3/59.3	64.4/64.4	69.6/69.6	74.8/74.8	79.9/79.9	85.1/85.1	90.2/90.2	95.4/95.4
(absolutt)																
Nr. og Hex-code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = I^*_{\text{CIELAB}, r}$																
(relativ)																
w^*_{input}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{output}																

TN700-7, Figur C3W-: Element C: 16 visuelle ekvidistante L^* -gråtrinn; PS operator: *rgb/cmy0*

prøveplansje TN70; ME16(ISO 9241-306), 3(ISO/IEC 15775) input: *rgb/cmyk* -> *rgb/cmyk*
akromatisk prøveplansje N output: ingen endring

omfelt-trinn Hex-code	0								
	7								
	E								
	2								
	8								
	F								

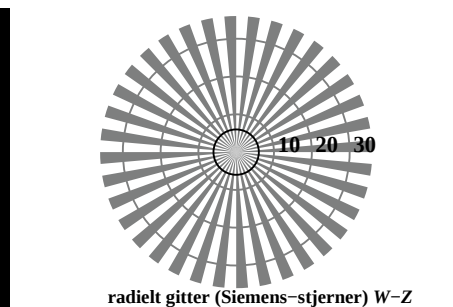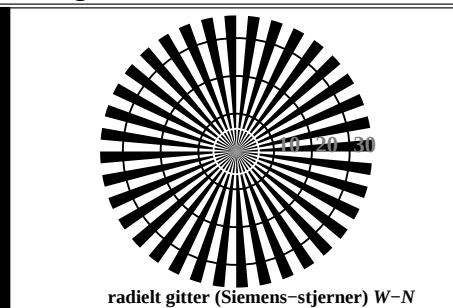

TN700-3, Figur C1Wde: Element A: Radielt gitter *N-W*, *W-N*, *N-Z* og *W-Z*; PS operator: *rgb/cmy0*

TN700-5, Figur C2Wde: Element B: 5 visuelle ekvidistante L^* -gråtrinn + $N0$ + $W1$; PS operator: $rgb/cmy0$

TN700-7, Figur C3Wde: Element C: 16 visuelle ekvidistante L^* -gråtrinn; PS operator: $rgb/cmy0$



TN701-1, Figur C4Wde: Element D: Landoltringer W-N; PS operator: *rgb/cmy0*

TN701-3, Figur C5Wde: Element E: Linjeraster med 45° (eller 135°); PS operator: *rgb/cmy0*

TN701-5, Figur C6Wde: Element F: Linjeraster med 90° (eller 0°); PS operator: *rgb/cmy0*