




http://130.149.60.45/~farbmetrik/TN70/TN70L0NP.PDF /.PS; start output  
N: ingen 3D-linearisering (OL) i fil (F) eller PS-startup (S), side 1/2




radielt gitter (Siemens-stjerner) N-W





radielt gitter (Siemens-stjerner) W-N




radielt gitter (Siemens-stjerner) N-Z




radielt gitter (Siemens-stjerner) W-Z

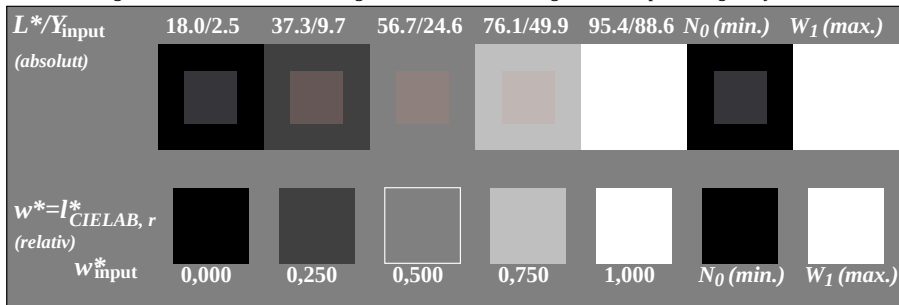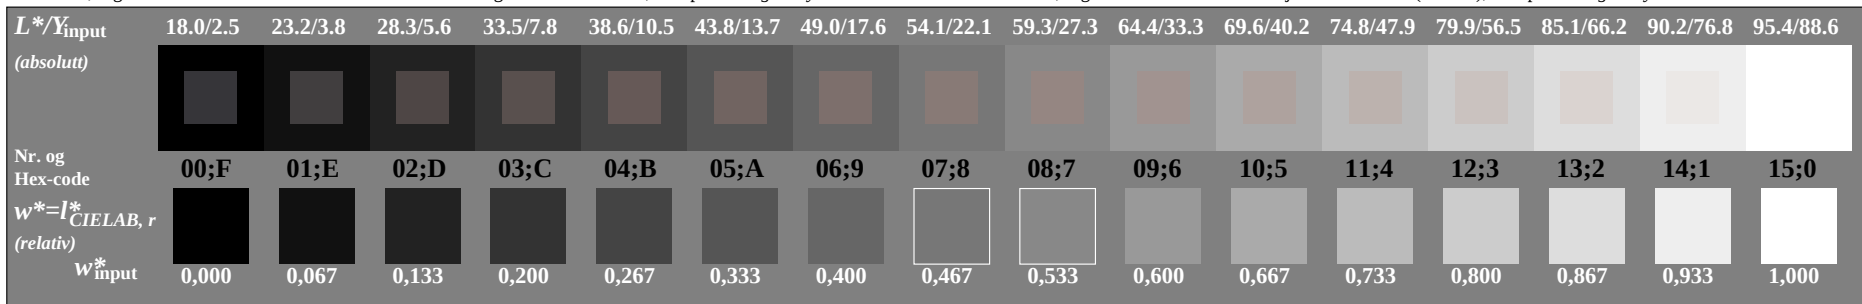TN700-3, Figur C1W-: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: *rgb/cmy0*TN700-5, Figur C2W-: Element B: 5 visuelle ekvidistante  $L^*$ -gråtrinn +  $N_0$  +  $W_1$ ; PS operator: *rgb/cmy0*TN700-7, Figur C3W-: Element C: 16 visuelle ekvidistante  $L^*$ -gråtrinn; PS operator: *rgb/cmy0*


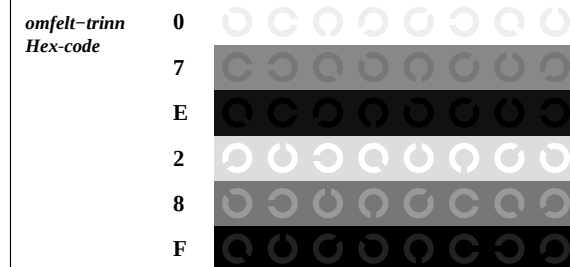
prøveplansje TN70; ME16(ISO 9241-306), 3(ISO/IEC 15775) input: *rgb/cmyk* -> *rgb/cmyk*  
akromatisk prøveplansje N output: ingen endring



Landoltringer W-N









kode: omfelt-ring


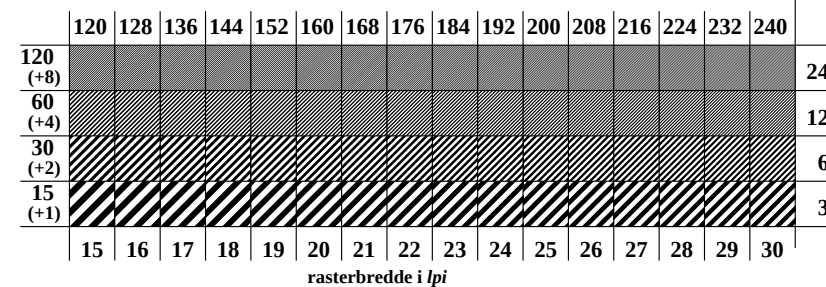
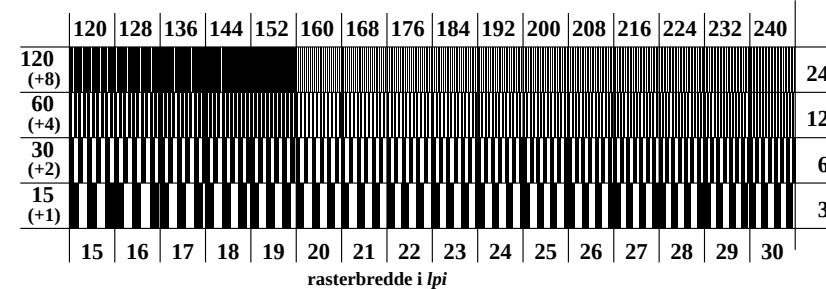
TN701-1, Figur C4W-: Element D: Landoltringer W-N; PS operator: *rgb/cmy0*TN701-3, Figur C5W-: Element E: Linjeraster med 45° (eller 135°); PS operator: *rgb/cmy0*TN701-5, Figur C6W-: Element F: Linjeraster med 90° (eller 0°); PS operator: *rgb/cmy0*

http://130.149.60.45/~farbmetrik/TN70/TN70L0NP.PDF /.PS; overføring output

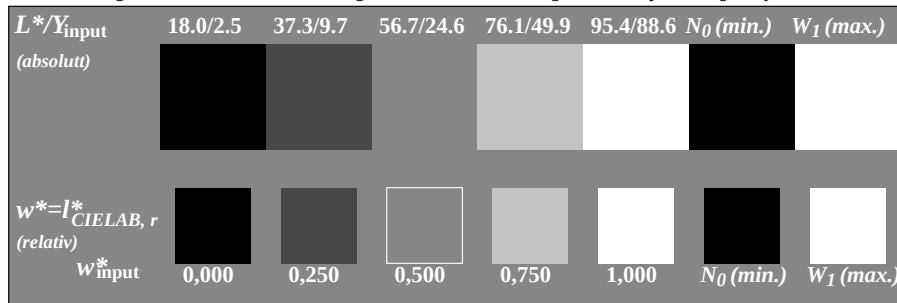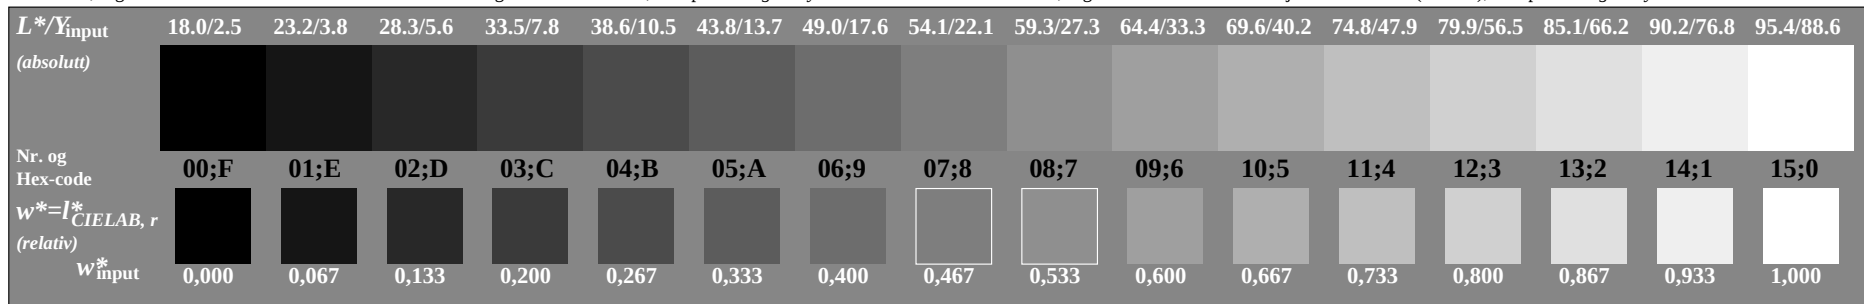
N: ingen 3D-linearisering (OL) i fil (F) eller PS-startup (S), side 2/2

TN700-3, Figur C1Wd: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: *rgb/cmy0*TN700-5, Figur C2Wd: Element B: 5 visuelle ekvidistante  $L^*$ -gråtrinn +  $N_0$  +  $W_1$ ; PS operator: *rgb/cmy0*TN700-7, Figur C3Wd: Element C: 16 visuelle ekvidistante  $L^*$ -gråtrinn; PS operator: *rgb/cmy0*

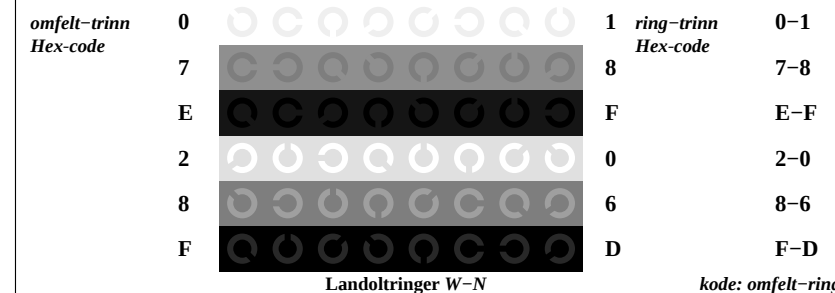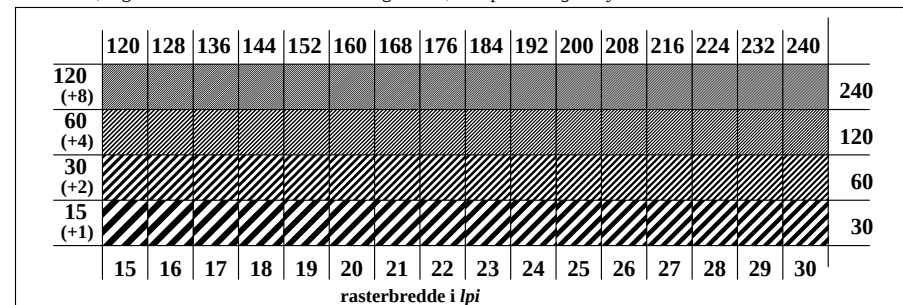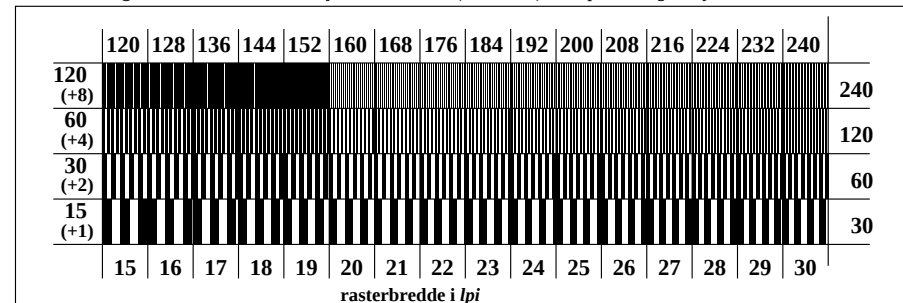
prøveplansje TN70; ME16(ISO 9241-306), 3(ISO/IEC 15775) input: *rgb/cmyk* -> *rgb<sub>d</sub>*  
akromatisk prøveplansje N, 3D=0, de=0, sRGB output: overføring til *rgb<sub>d</sub>*

TN701-1, Figur C4Wd: Element D: Landoltringer W-N; PS operator: *rgb/cmy0*TN701-3, Figur C5Wd: Element E: Linjeraster med 45° (eller 135°); PS operator: *rgb/cmy0*TN701-5, Figur C6Wd: Element F: Linjeraster med 90° (eller 0°); PS operator: *rgb/cmy0*


http://130.149.60.45/~farbmetrik/TN70/TN70L0NP.PDF /.PS; start output  
N: ingen 3D-linearisering (OL) i fil (F) eller PS-startup (S), side 1/2




radielt gitter (Siemens-stjerner) N-W





radielt gitter (Siemens-stjerner) W-N




radielt gitter (Siemens-stjerner) N-Z




radielt gitter (Siemens-stjerner) W-Z

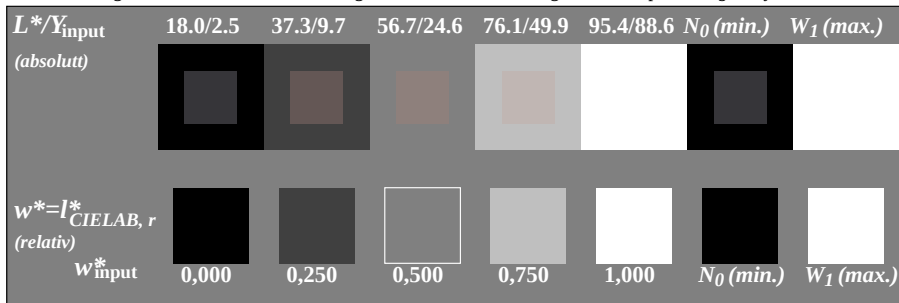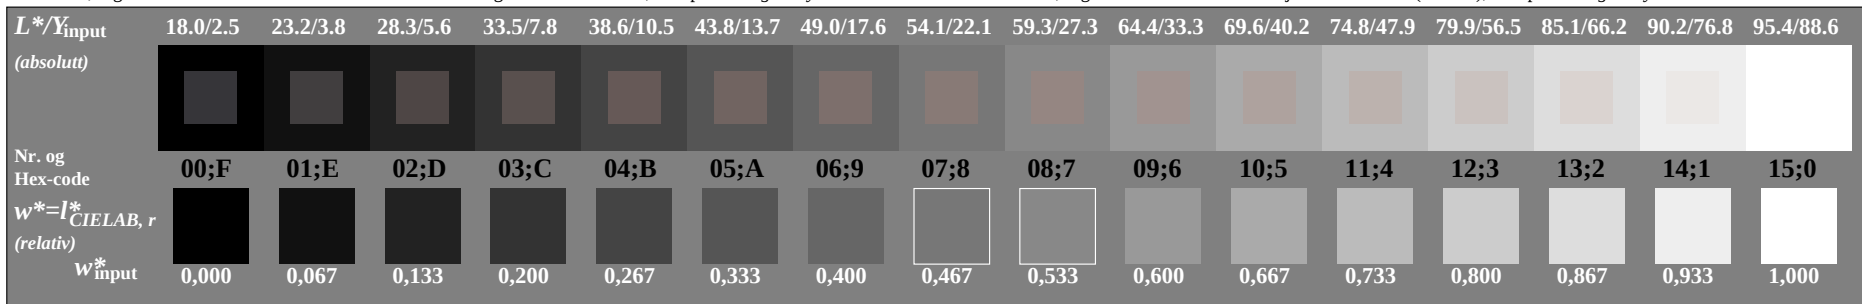TN700-3, Figur C1W-: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: *rgb/cmy0*TN700-5, Figur C2W-: Element B: 5 visuelle ekvidistante  $L^*$ -gråtrinn +  $N_0$  +  $W_1$ ; PS operator: *rgb/cmy0*TN700-7, Figur C3W-: Element C: 16 visuelle ekvidistante  $L^*$ -gråtrinn; PS operator: *rgb/cmy0*


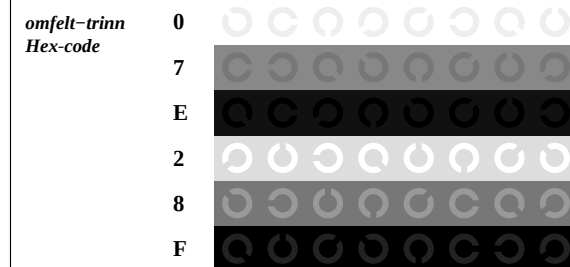
prøveplansje TN70; ME16(ISO 9241-306), 3(ISO/IEC 15775) input: *rgb/cmyk* -> *rgb/cmyk*  
akromatisk prøveplansje N output: ingen endring




Landoltringer W-N




kode: omfelt-ring

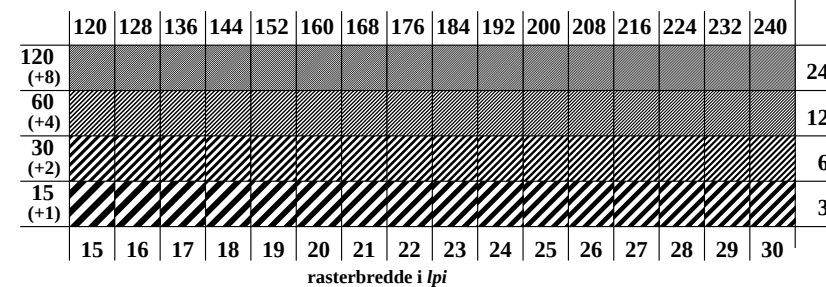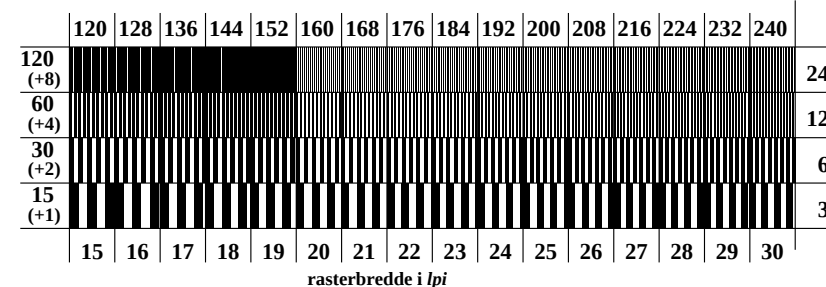TN701-1, Figur C4W-: Element D: Landoltringer W-N; PS operator: *rgb/cmy0*TN701-3, Figur C5W-: Element E: Linjeraster med 45° (eller 135°); PS operator: *rgb/cmy0*TN701-5, Figur C6W-: Element F: Linjeraster med 90° (eller 0°); PS operator: *rgb/cmy0*


http://130.149.60.45/~farbmetrik/TN70/TN70L0NP.PDF /.PS; overføring output  
N: ingen 3D-linearisering (OL) i fil (F) eller PS-startup (S), side 2/2




radielt gitter (Siemens-stjerner) N-W





radielt gitter (Siemens-stjerner) W-N




radielt gitter (Siemens-stjerner) N-Z



radielt gitter (Siemens-stjerner) W-Z

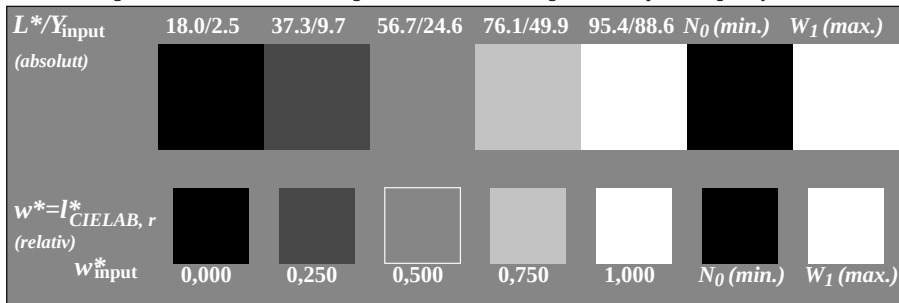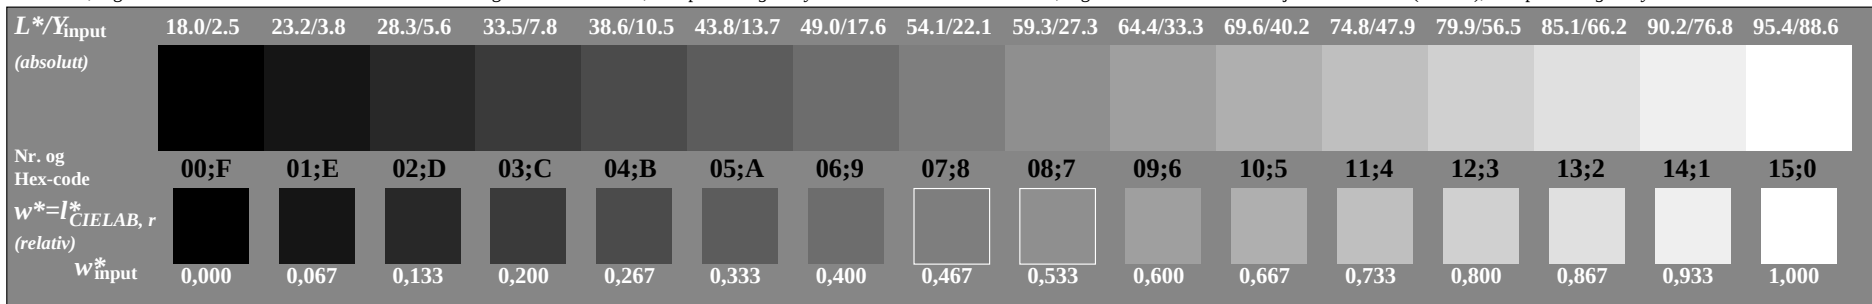TN700-3, Figur C1We: Element A: Radielt gitter N-W, W-N, N-Z og W-Z; PS operator: *rgb/cmy0*TN700-5, Figur C2We: Element B: 5 visuelle ekvidistante  $L^*$ -gråtrinn +  $N_0$  +  $W_1$ ; PS operator: *rgb/cmy0*TN700-7, Figur C3We: Element C: 16 visuelle ekvidistante  $L^*$ -gråtrinn; PS operator: *rgb/cmy0*


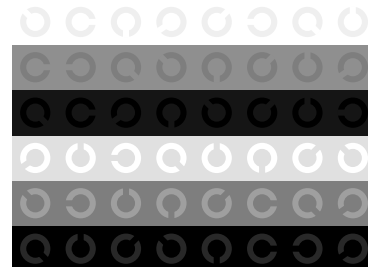
prøveplansje TN70; ME16(ISO 9241-306), 3(ISO/IEC 15775) input: *rgb/cmyk* ->  $rgb_e$   
akromatisk prøveplansje N, 3D=0, de=1, sRGB output: overføring til  $rgb_e$

omfelt-trinn  
Hex-code0  
7  
E  
2  
8  
F

Landoltringer W-N

1 ring-trinn  
Hex-code0-1  
7-8  
E-F  
2-0  
8-6  
F-D

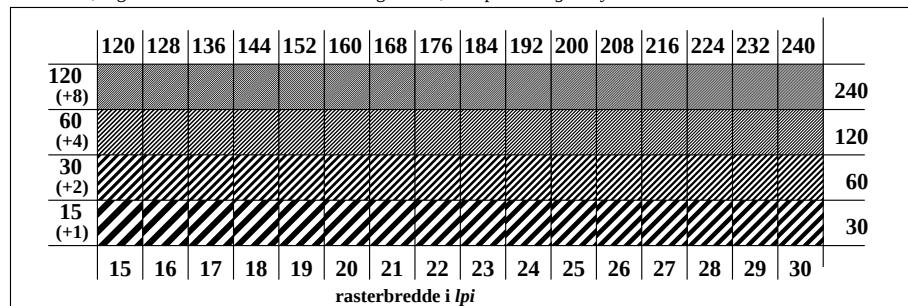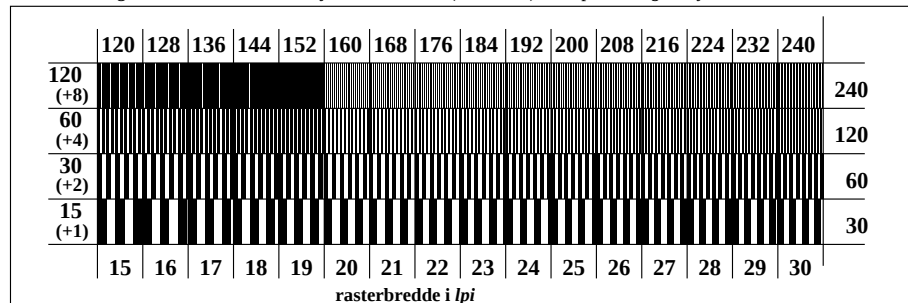kode: omfelt-ring

TN701-1, Figur C4We: Element D: Landoltringer W-N; PS operator: *rgb/cmy0*TN701-3, Figur C5We: Element E: Linjeraster med 45° (eller 135°); PS operator: *rgb/cmy0*TN701-5, Figur C6We: Element F: Linjeraster med 90° (eller 0°); PS operator: *rgb/cmy0*