



log ΔL luminance difference threshold; $\Delta L = L \cdot F$ • $L_s = 0,6 \text{ cd/m}^2$


x y
A 0,39 0,41 LI 0,4s A
A1=82.03 equation
A2=0.0
A3=1.0
A4=0.33

$$F = A1(F3'/E3' + F4'/F4); \Delta L = L \cdot F$$

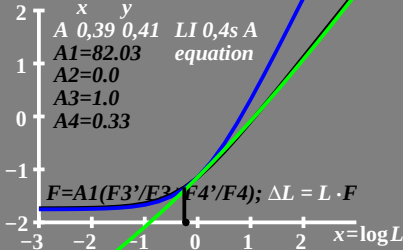


log ΔL luminance difference threshold; $\Delta L = L \cdot F$ • $L_g = 62 \text{ cd/m}^2$

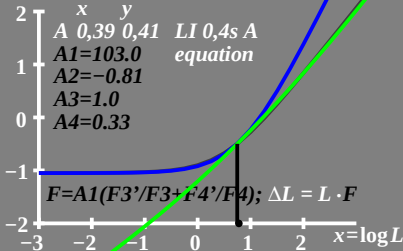

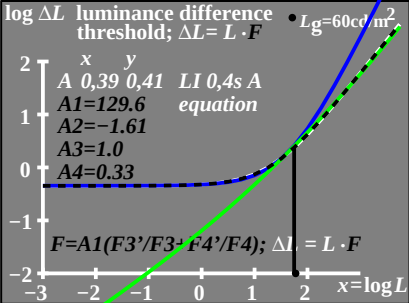

log ΔL luminance difference threshold; $\Delta L = L \cdot F$ • $L_g = 600 \text{ cd/m}^2$

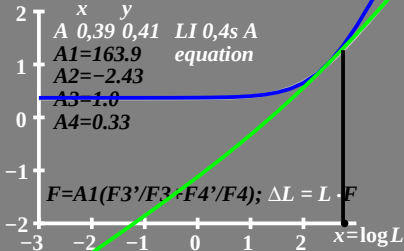

log ΔL luminance difference threshold; $\Delta L = L \cdot F$ • $L_g = 6000 \text{ cd/m}^2$

