

$\log \Delta L$ luminance difference threshold • $L_g = 63\text{cd/m}^2$

2 - 02 0,1s Y 63cd/m²; pot3


$$\Delta L = [A_1 + A_3 \cdot L]^t$$

$$A_1 = 0.34$$

$$A_2 = 1.29 = t$$

$$A_3 = 0.03$$

$$\Delta = 0.003$$

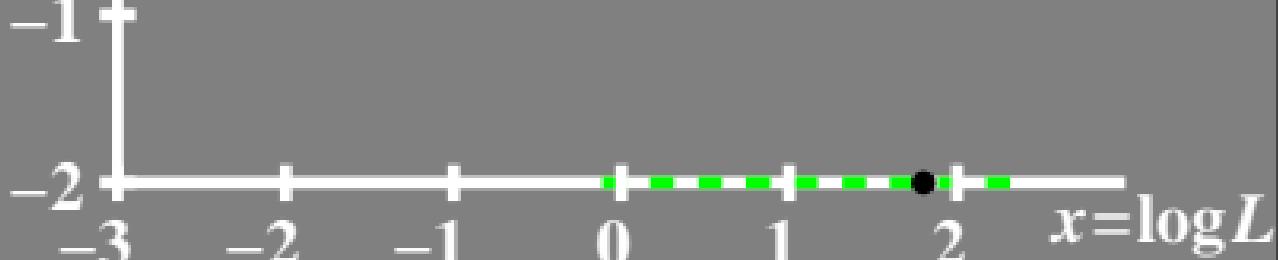

$\log(L/\Delta L)$ luminance contrast sensitivity threshold • $L_g = 63\text{cd/m}^2$

02 0, ls Y 63cd/m²; pot3


$$\log(L/\Delta L) = L / [A_1 + A_3 \cdot L] ^t$$

$$A_1 = 0.34$$

$$A_2 = 1.29 = t$$

$$A_3 = 0.03$$

$$\Delta = 0.003$$

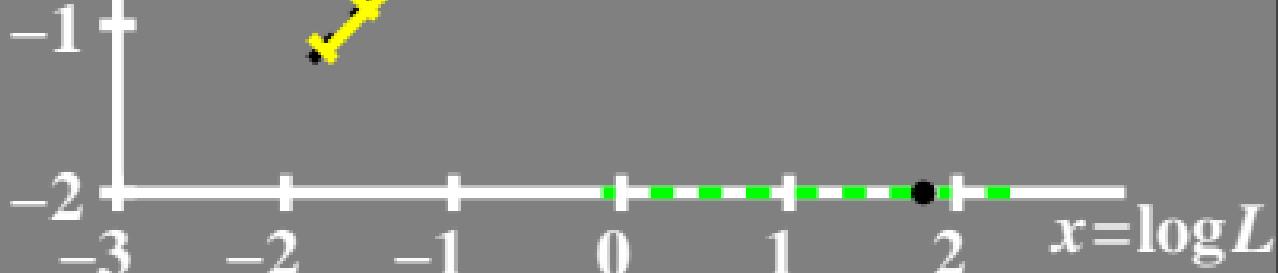

$L/\Delta L$ luminance contrast
sensitivity threshold

• $L_g = 63 \text{ cd/m}^2$

02 0,1s Y 63cd/m²; pot3

$$L/\Delta L = L / [A_1 + A_3 \cdot L]^t$$

$$A_1 = 0.34$$

$$A_2 = 1.29 = t$$

$$A_3 = 0.03$$

$$\Delta = 0.003$$

10

0

UE410-7A_3

-3

-2

-1

0

1

2

$x = \log L$



T^* luminance difference threshold sum

• $L_g = 63\text{cd/m}^2$

80 T 02 0,1s Y 63cd/m²; pot3

$$T^* = [A_1 + A \cdot L]^t - 1$$

$$A_1 = 0.34$$

$$A_2 = 1.29 = t$$

$$A_3 = 0.03$$

$$\Delta = 0.003$$

