

see similar files of the whole serie: <http://farbe.li.tu-berlin.de/feis.htm>
 technical information: <http://farbe.li.tu-berlin.de/A/33872E.htm>
 or <http://standards.iso.org/iso/9241/306/ed-2/index.html>

TUB registration: 20240301-fei0/fei010fa.txt /.ps
 application for evaluation and measurement of display or print output
 TUB material: code=rh4ta

| i | LAB*ref | l*out | LAB*out | LAB*out/c-ref | ΔE* |
|----|---------|-------|---------|---------------|------|
| 1 | 0.0 | 0.0 | 0.0 | 0.0 | 0.01 |
| 2 | 6.36 | 0.0 | 0.07 | 6.36 | 0.01 |
| 3 | 12.72 | 0.0 | 0.13 | 12.72 | 0.01 |
| 4 | 19.08 | 0.0 | 0.2 | 19.08 | 0.01 |
| 5 | 25.44 | 0.0 | 0.27 | 25.44 | 0.01 |
| 6 | 31.8 | 0.0 | 0.33 | 31.8 | 0.01 |
| 7 | 38.16 | 0.0 | 0.4 | 38.16 | 0.01 |
| 8 | 44.52 | 0.0 | 0.47 | 44.52 | 0.01 |
| 9 | 50.89 | 0.0 | 0.53 | 50.89 | 0.01 |
| 10 | 57.25 | 0.0 | 0.6 | 57.25 | 0.01 |
| 11 | 63.61 | 0.0 | 0.67 | 63.61 | 0.01 |
| 12 | 69.97 | 0.0 | 0.73 | 69.97 | 0.01 |
| 13 | 76.33 | 0.0 | 0.8 | 76.33 | 0.01 |
| 14 | 82.69 | 0.0 | 0.87 | 82.69 | 0.01 |
| 15 | 89.05 | 0.0 | 0.93 | 89.05 | 0.01 |
| 16 | 95.41 | 0.0 | 1.0 | 95.41 | 0.01 |
| 17 | 0.0 | 0.0 | 0.0 | 0.0 | 0.01 |
| 18 | 23.85 | 0.0 | 0.25 | 23.85 | 0.01 |
| 19 | 47.71 | 0.0 | 0.5 | 47.71 | 0.01 |
| 20 | 71.56 | 0.0 | 0.75 | 71.56 | 0.01 |
| 21 | 95.41 | 0.0 | 1.0 | 95.41 | 0.01 |


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps)
 $\Delta E^*_{CIELAB} = 0.0$

Mean lightness difference (5 steps)
 $\Delta L^*_{CIELAB} = 0.0$

Mean colour reproduction index: $R^*_{ab,m} = 100$

fei00-3n-130-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

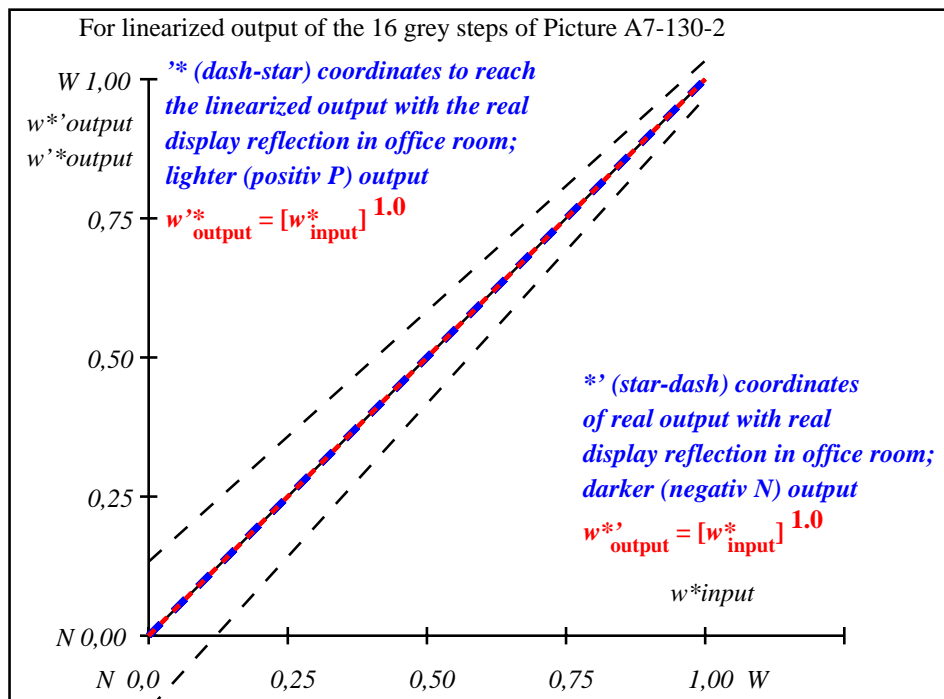

fei01-3n-130-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

| $L^*/Y^*_{intended}$ (absolute) | 0.0/0.0 | 6.3/0.7 | 12.7/1.5 | 19.0/2.7 | 25.4/4.5 | 31.8/6.9 | 38.1/10.1 | 44.5/14.2 | 50.8/19.1 | 57.2/25.1 | 63.6/32.3 | 69.9/40.7 | 76.3/50.4 | 82.6/61.5 | 89.0/74.2 | 95.4/88.5 |
|---------------------------------------|---------|---------|----------|----------|----------|----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| $w^* w^* w^*$ setrgb gp=1.0 | | | | | | | | | | | | | | | | |
| No. and Hex code | 00;F | 01;E | 02;D | 03;C | 04;B | 05;A | 06;9 | 07;8 | 08;7 | 09;6 | 10;5 | 11;4 | 12;3 | 13;2 | 14;1 | 15;0 |
| $w^* = l^*_{CIELAB, r}$ (relative) | | | | | | | | | | | | | | | | |
| $w^*_{intended}$ | 0,000 | 0,067 | 0,133 | 0,200 | 0,267 | 0,333 | 0,400 | 0,467 | 0,533 | 0,600 | 0,667 | 0,733 | 0,800 | 0,867 | 0,933 | 1,000 |
| w^*_{out} | 0.0 | 0.067 | 0.133 | 0.2 | 0.267 | 0.333 | 0.4 | 0.467 | 0.533 | 0.6 | 0.667 | 0.733 | 0.8 | 0.867 | 0.933 | 1.0 |

OE740-7n, Picture A7-130-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*$ setrgbcolor

TUB-test chart fei0; In-output relation according to ISO 9241-306; 1MR, DH
 Viewing Y contrast $Y_W:Y_N=88,9:0,31$; Y_N range 0,0 to <0,46

000n/w/cmy0/rgb
 ->rgb*_d, 130-2:

<http://farbe.li.tu-berlin.de/fei0/fei010fa.txt> /.ps; only vector graphic VG;
see separate images of this page: <http://farbe.li.tu-berlin.de/fei0/fei0.htm>

see similar files of the whole serie: <http://farbe.li.tu-berlin.de/feis.htm>
technical information: <http://farbe.li.tu-berlin.de/A/33872E.htm>
or <http://standards.iso.org/iso/9241/306/ed-2/index.html>

TUB registration: 20240301-fei0/fei010fa.txt /.ps
application for evaluation and measurement of display or print output
TUB material: code=rh4ta

| i | LAB*ref | l*out | LAB*out | LAB*out/c-ref | ΔE^* |
|----|---------|-------|---------|---------------|--------------|
| 1 | 5.69 | 0.0 | 0.0 | 5.69 | 0.0 |
| 2 | 11.67 | 0.0 | 0.1 | 14.73 | 0.0 |
| 3 | 17.65 | 0.0 | 0.18 | 21.96 | 0.0 |
| 4 | 23.63 | 0.0 | 0.26 | 28.63 | 0.0 |
| 5 | 29.62 | 0.0 | 0.33 | 34.96 | 0.0 |
| 6 | 35.6 | 0.0 | 0.39 | 41.05 | 0.0 |
| 7 | 41.58 | 0.0 | 0.46 | 46.96 | 0.0 |
| 8 | 47.56 | 0.0 | 0.52 | 52.72 | 0.0 |
| 9 | 53.54 | 0.0 | 0.59 | 58.36 | 0.0 |
| 10 | 59.52 | 0.0 | 0.65 | 63.88 | 0.0 |
| 11 | 65.5 | 0.0 | 0.71 | 69.32 | 0.0 |
| 12 | 71.48 | 0.0 | 0.77 | 74.67 | 0.0 |
| 13 | 77.47 | 0.0 | 0.83 | 79.95 | 0.0 |
| 14 | 83.45 | 0.0 | 0.89 | 85.16 | 0.0 |
| 15 | 89.43 | 0.0 | 0.94 | 90.31 | 0.0 |
| 16 | 95.41 | 0.0 | 1.0 | 95.41 | 0.0 |
| 17 | 5.69 | 0.0 | 0.0 | 5.69 | 0.0 |
| 18 | 28.12 | 0.0 | 0.31 | 33.4 | 0.0 |
| 19 | 50.55 | 0.0 | 0.56 | 55.55 | 0.0 |
| 20 | 72.98 | 0.0 | 0.78 | 76.0 | 0.0 |
| 21 | 95.41 | 0.0 | 1.0 | 95.41 | 0.0 |


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps)
 $\Delta E^*_{CIELAB} = 3.4$

Mean lightness difference (5 steps)
 $\Delta L^*_{CIELAB} = 2.7$

Mean colour reproduction index: $R^*_{ab,m} = 85$

fei00-3n-131-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

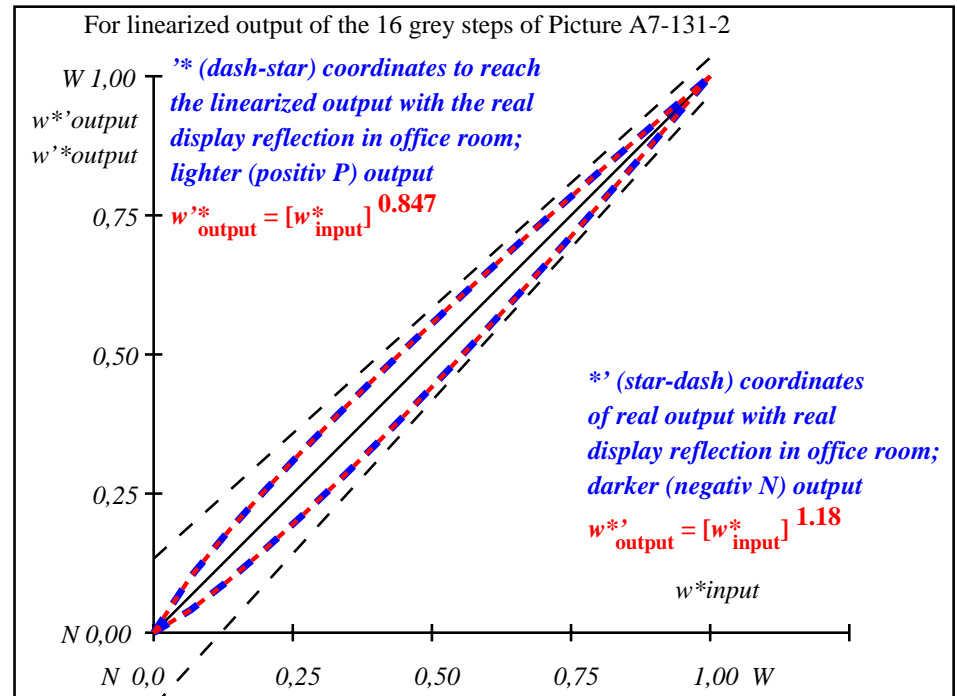

fei01-3n-131-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

| $L^*/Y^*_{intended}$ (absolute) | 5.6/0.6 | 11.6/1.3 | 17.6/2.4 | 23.6/3.9 | 29.6/6.0 | 35.5/8.8 | 41.5/12.2 | 47.5/16.4 | 53.5/21.5 | 59.5/27.5 | 65.5/34.6 | 71.4/42.8 | 77.4/52.3 | 83.4/63.0 | 89.4/75.0 | 95.4/88.5 |
|------------------------------------|---------|----------|----------|----------|----------|----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| $w^* w^* w^*$ setrgb | | | | | | | | | | | | | | | | |
| gp=0.92 | | | | | | | | | | | | | | | | |
| No. and Hex code | 00;F | 01;E | 02;D | 03;C | 04;B | 05;A | 06;9 | 07;8 | 08;7 | 09;6 | 10;5 | 11;4 | 12;3 | 13;2 | 14;1 | 15;0 |
| $w^* = l^*_{CIELAB, r}$ (relative) | | | | | | | | | | | | | | | | |
| $w^*_{intended}$ | 0,000 | 0,067 | 0,133 | 0,200 | 0,267 | 0,333 | 0,400 | 0,467 | 0,533 | 0,600 | 0,667 | 0,733 | 0,800 | 0,867 | 0,933 | 1,000 |
| w^*_{out} | 0.0 | 0.082 | 0.154 | 0.225 | 0.294 | 0.361 | 0.428 | 0.494 | 0.558 | 0.623 | 0.687 | 0.75 | 0.813 | 0.876 | 0.937 | 1.0 |

OE740-7n, Picture A7-131-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*$ setrgbcolor

TUB-test chart fei0; In-output relation according to ISO 9241-306; 1MR, DH
Viewing Y contrast $Y_W:Y_N=88,9:0,62$; Y_N range 0,46 to <0,93

000n/w/cmy0/rgb
->rgb*d, 131-2:

see similar files of the whole serie: <http://farbe.li.tu-berlin.de/feis.htm>
technical information: <http://farbe.li.tu-berlin.de/A/33872E.html>
or <http://standards.iso.org/iso/9241/306/ed-2/index.html>

TUB registration: 20240301-fei0/fei010fa.txt /.ps
application for evaluation and measurement of display or print output
TUB material: code=rh4ta


| i | LAB*ref | l*out | LAB*out | LAB*out/c-ref | ΔE^* |
|----|---------|-------|---------|---------------|--------------|
| 1 | 10.99 | 0.0 | 10.99 | 0.0 | 0.01 |
| 2 | 16.62 | 0.0 | 22.52 | 5.9 | 5.9 |
| 3 | 22.25 | 0.0 | 30.18 | 7.93 | 7.93 |
| 4 | 27.88 | 0.0 | 36.84 | 8.97 | 8.97 |
| 5 | 33.5 | 0.0 | 42.93 | 9.43 | 9.43 |
| 6 | 39.13 | 0.0 | 48.63 | 9.5 | 9.5 |
| 7 | 44.76 | 0.0 | 54.03 | 9.27 | 9.27 |
| 8 | 50.39 | 0.0 | 59.19 | 8.81 | 8.81 |
| 9 | 56.02 | 0.0 | 64.17 | 8.15 | 8.15 |
| 10 | 61.64 | 0.0 | 68.98 | 7.33 | 7.33 |
| 11 | 67.27 | 0.0 | 73.65 | 6.38 | 6.38 |
| 12 | 72.9 | 0.0 | 78.2 | 5.3 | 5.3 |
| 13 | 78.53 | 0.0 | 82.64 | 4.11 | 4.11 |
| 14 | 84.15 | 0.0 | 86.98 | 2.82 | 2.82 |
| 15 | 89.78 | 0.0 | 91.23 | 1.45 | 1.45 |
| 16 | 95.41 | 0.0 | 95.41 | 0.0 | 0.01 |
| 17 | 10.99 | 0.0 | 10.99 | 0.0 | 0.01 |
| 18 | 32.1 | 0.0 | 41.45 | 9.36 | 9.36 |
| 19 | 53.2 | 0.0 | 61.7 | 8.5 | 8.5 |
| 20 | 74.31 | 0.0 | 79.32 | 5.01 | 5.01 |
| 21 | 95.41 | 0.0 | 95.41 | 0.0 | 0.01 |

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps)
 $\Delta E^*_{CIELAB} = 6.0$

Mean lightness difference (5 steps)
 $\Delta L^*_{CIELAB} = 4.6$

Mean colour reproduction index: $R^*_{ab,m} = 74$

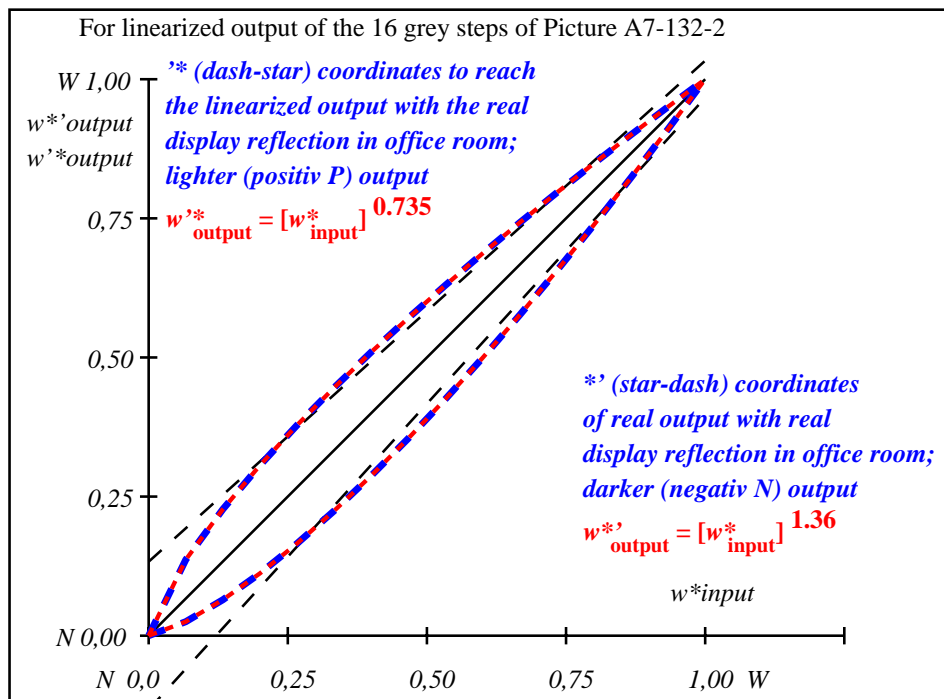

fei00-3n-132-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

fei01-3n-132-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

| $L^*/Y^*_{intended}$ (absolute) | 10.9/1.2 | 16.6/2.2 | 22.2/3.5 | 27.8/5.4 | 33.5/7.7 | 39.1/10.7 | 44.7/14.3 | 50.3/18.7 | 56.0/23.9 | 61.6/29.9 | 67.2/36.9 | 72.8/45.0 | 78.5/54.1 | 84.1/64.3 | 89.7/75.8 | 95.4/88.5 |
|---------------------------------|----------|----------|----------|----------|----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| w^*_{setrgb} | 00;F | 01;E | 02;D | 03;C | 04;B | 05;A | 06;9 | 07;8 | 08;7 | 09;6 | 10;5 | 11;4 | 12;3 | 13;2 | 14;1 | 15;0 |
| $w^*_{CIELAB, r}$ (relative) | 0,000 | 0,067 | 0,133 | 0,200 | 0,267 | 0,333 | 0,400 | 0,467 | 0,533 | 0,600 | 0,667 | 0,733 | 0,800 | 0,867 | 0,933 | 1,000 |
| $w^*_{intended}$ | 0,0 | 0,1 | 0,18 | 0,254 | 0,325 | 0,392 | 0,458 | 0,523 | 0,585 | 0,647 | 0,708 | 0,767 | 0,827 | 0,885 | 0,942 | 1,0 |

OE740-7n, Picture A7-132-2: 16 visual equidistant L^* -grey steps; PS operator: w^*_{setrgb}

TUB-test chart fei0; In-output relation according to ISO 9241-306; 1MR, DH
Viewing Y contrast $Y_W:Y_N=88,9:1,25$; Y_N range 0,93 to <1,87
000n/w/cmy0/rgb
->rgb*_d, 132-2:

see similar files of the whole serie: <http://farbe.li.tu-berlin.de/feis.htm>
technical information: <http://farbe.li.tu-berlin.de/A/33872E.html>
or <http://standards.iso.org/iso/9241/306/ed-2/index.html>

TUB registration: 20240301-fei0/fei010fa.txt /.ps
application for evaluation and measurement of display or print output
TUB material: code=rh4ta


| i | LAB*ref | l*out | LAB*out | LAB*out/c-ref | ΔE^* |
|----|---------|-------|---------|---------------|--------------|
| 1 | 18.01 | 0.0 | 0.0 | 18.01 | 0.0 |
| 2 | 23.17 | 0.0 | 0.17 | 31.35 | 0.0 |
| 3 | 28.33 | 0.0 | 0.27 | 38.93 | 0.0 |
| 4 | 33.49 | 0.0 | 0.35 | 45.23 | 0.0 |
| 5 | 38.65 | 0.0 | 0.42 | 50.82 | 0.0 |
| 6 | 43.81 | 0.0 | 0.49 | 55.93 | 0.0 |
| 7 | 48.97 | 0.0 | 0.55 | 60.7 | 0.0 |
| 8 | 54.13 | 0.0 | 0.61 | 65.2 | 0.0 |
| 9 | 59.29 | 0.0 | 0.66 | 69.47 | 0.0 |
| 10 | 64.45 | 0.0 | 0.72 | 73.56 | 0.0 |
| 11 | 69.61 | 0.0 | 0.77 | 77.49 | 0.0 |
| 12 | 74.77 | 0.0 | 0.82 | 81.29 | 0.0 |
| 13 | 79.93 | 0.0 | 0.87 | 84.97 | 0.0 |
| 14 | 85.09 | 0.0 | 0.91 | 88.54 | 0.0 |
| 15 | 90.25 | 0.0 | 0.96 | 92.02 | 0.0 |
| 16 | 95.41 | 0.0 | 1.0 | 95.41 | 0.0 |
| 17 | 18.01 | 0.0 | 0.0 | 18.01 | 0.0 |
| 18 | 37.36 | 0.0 | 0.41 | 49.47 | 0.0 |
| 19 | 56.71 | 0.0 | 0.64 | 67.36 | 0.0 |
| 20 | 76.06 | 0.0 | 0.83 | 82.22 | 0.0 |
| 21 | 95.41 | 0.0 | 1.0 | 95.41 | 0.0 |

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps)
 $\Delta E^*_{CIELAB} = 7.6$

Mean lightness difference (5 steps)
 $\Delta L^*_{CIELAB} = 5.8$

Mean colour reproduction index: $R^*_{ab,m} = 67$

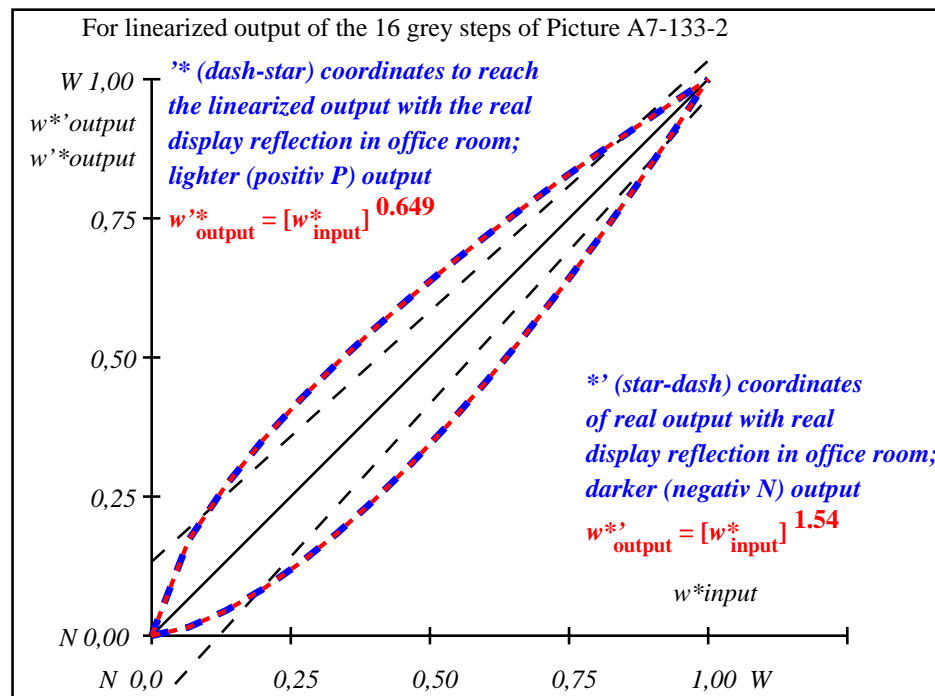

fei00-3n-133-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

fei01-3n-133-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

| $L^*/Y^*_{intended}$ (absolute) | 18.0/2.5 | 23.1/3.8 | 28.3/5.5 | 33.4/7.7 | 38.6/10.4 | 43.8/13.7 | 48.9/17.5 | 54.1/22.0 | 59.2/27.3 | 64.4/33.3 | 69.6/40.1 | 74.7/47.9 | 79.9/56.5 | 85.0/66.1 | 90.2/76.8 | 95.4/88.5 |
|------------------------------------|----------|----------|----------|----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| $w^* w^* w^*$ setrgb | | | | | | | | | | | | | | | | |
| gp=0.77 | | | | | | | | | | | | | | | | |
| No. and Hex code | 00;F | 01;E | 02;D | 03;C | 04;B | 05;A | 06;9 | 07;8 | 08;7 | 09;6 | 10;5 | 11;4 | 12;3 | 13;2 | 14;1 | 15;0 |
| $w^* = l^*_{CIELAB, r}$ (relative) | | | | | | | | | | | | | | | | |
| $w^*_{intended}$ | 0,000 | 0,067 | 0,133 | 0,200 | 0,267 | 0,333 | 0,400 | 0,467 | 0,533 | 0,600 | 0,667 | 0,733 | 0,800 | 0,867 | 0,933 | 1,000 |
| w^*_{out} | 0.0 | 0.123 | 0.209 | 0.287 | 0.359 | 0.426 | 0.491 | 0.554 | 0.614 | 0.673 | 0.73 | 0.786 | 0.841 | 0.895 | 0.947 | 1.0 |

OE740-7n, Picture A7-133-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*$ setrgbcolor

TUB-test chart fei0; In-output relation according to ISO 9241-306; 1MR, DH
Viewing Y contrast $Y_W:Y_N=88,9:2,5$; Y_N range 1,87 to <3,75

000n/w/cmy0/rgb
->rgb*d, 133-2:

see similar files of the whole serie: <http://farbe.li.tu-berlin.de/feis.htm>
technical information: <http://farbe.li.tu-berlin.de/A/33872E.htm>
or <http://standards.iso.org/iso/9241/306/ed-2/index.html>

TUB registration: 20240301-fei0/fei010fa.txt /.ps
application for evaluation and measurement of display or print output
TUB material: code=rh4ta


| i | LAB*ref | l*out | LAB*out | LAB*out/c-ref | ΔE^* |
|----|---------------|----------------|---------------|---------------|--------------|
| 1 | 26.85 0.0 0.0 | 0.0 0.0 | 26.85 0.0 0.0 | 0.0 0.0 0.0 | 0.01 |
| 2 | 31.42 0.0 0.0 | 0.21 41.05 0.0 | 0.0 0.0 9.63 | 0.0 0.0 9.63 | 9.63 |
| 3 | 35.99 0.0 0.0 | 0.31 48.1 0.0 | 0.0 0.0 12.11 | 0.0 0.0 12.11 | 12.11 |
| 4 | 40.56 0.0 0.0 | 0.39 53.75 0.0 | 0.0 0.0 13.18 | 0.0 0.0 13.18 | 13.18 |
| 5 | 45.13 0.0 0.0 | 0.46 58.64 0.0 | 0.0 0.0 13.51 | 0.0 0.0 13.51 | 13.51 |
| 6 | 49.7 0.0 0.0 | 0.53 63.05 0.0 | 0.0 0.0 13.34 | 0.0 0.0 13.34 | 13.34 |
| 7 | 54.27 0.0 0.0 | 0.59 67.09 0.0 | 0.0 0.0 12.82 | 0.0 0.0 12.82 | 12.82 |
| 8 | 58.84 0.0 0.0 | 0.64 70.87 0.0 | 0.0 0.0 12.02 | 0.0 0.0 12.02 | 12.02 |
| 9 | 63.41 0.0 0.0 | 0.69 74.42 0.0 | 0.0 0.0 11.01 | 0.0 0.0 11.01 | 11.01 |
| 10 | 67.99 0.0 0.0 | 0.74 77.79 0.0 | 0.0 0.0 9.81 | 0.0 0.0 9.81 | 9.81 |
| 11 | 72.56 0.0 0.0 | 0.79 81.01 0.0 | 0.0 0.0 8.46 | 0.0 0.0 8.46 | 8.46 |
| 12 | 77.13 0.0 0.0 | 0.84 84.1 0.0 | 0.0 0.0 6.97 | 0.0 0.0 6.97 | 6.97 |
| 13 | 81.7 0.0 0.0 | 0.88 87.07 0.0 | 0.0 0.0 5.37 | 0.0 0.0 5.37 | 5.37 |
| 14 | 86.27 0.0 0.0 | 0.92 89.94 0.0 | 0.0 0.0 3.67 | 0.0 0.0 3.67 | 3.67 |
| 15 | 90.84 0.0 0.0 | 0.96 92.71 0.0 | 0.0 0.0 1.88 | 0.0 0.0 1.88 | 1.88 |
| 16 | 95.41 0.0 0.0 | 1.0 95.41 0.0 | 0.0 0.0 0.0 | 0.0 0.0 0.0 | 0.01 |
| 17 | 26.85 0.0 0.0 | 0.0 26.85 0.0 | 0.0 0.0 0.0 | 0.0 0.0 0.0 | 0.01 |
| 18 | 43.99 0.0 0.0 | 0.45 57.47 0.0 | 0.0 0.0 13.48 | 0.0 0.0 13.48 | 13.48 |
| 19 | 61.13 0.0 0.0 | 0.67 72.67 0.0 | 0.0 0.0 11.54 | 0.0 0.0 11.54 | 11.54 |
| 20 | 78.27 0.0 0.0 | 0.85 84.85 0.0 | 0.0 0.0 6.58 | 0.0 0.0 6.58 | 6.58 |
| 21 | 95.41 0.0 0.0 | 1.0 95.41 0.0 | 0.0 0.0 0.0 | 0.0 0.0 0.0 | 0.01 |

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps)
 $\Delta E^*_{CIELAB} = 8.4$

Mean lightness difference (5 steps)
 $\Delta L^*_{CIELAB} = 6.3$

Mean colour reproduction index: $R^*_{ab,m} = 64$

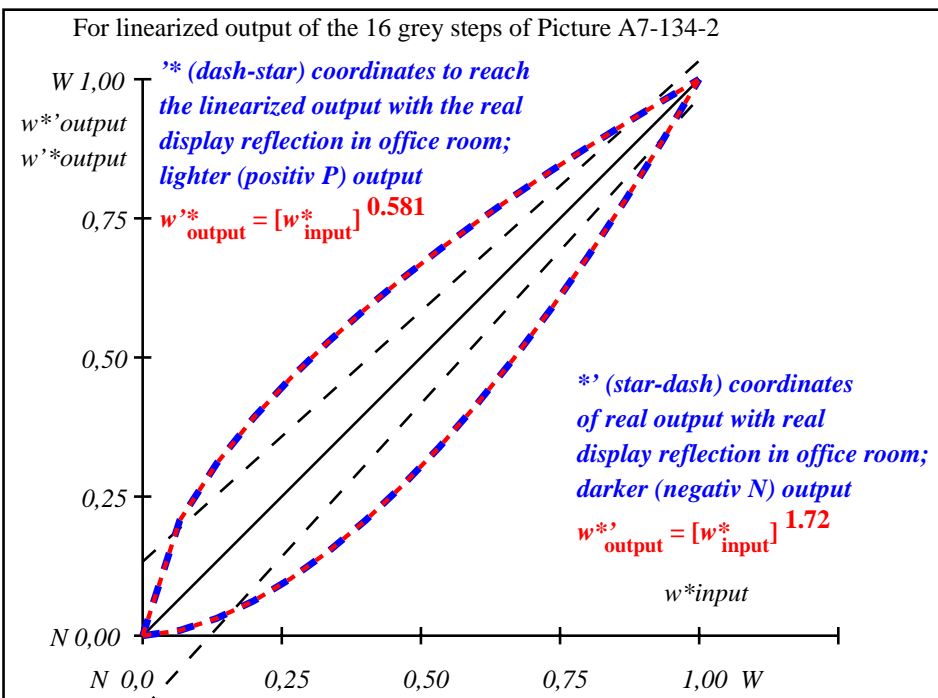

fei00-3n-134-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

fei01-3n-134-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

| $L^*/Y^*_{intended}$ (absolute) | 26.8/5.0 | 31.4/6.8 | 35.9/9.0 | 40.5/11.5 | 45.1/14.6 | 49.7/18.1 | 54.2/22.2 | 58.8/26.8 | 63.4/32.0 | 67.9/37.9 | 72.5/44.4 | 77.1/51.7 | 81.6/59.7 | 86.2/68.5 | 90.8/78.1 | 95.4/88.5 |
|------------------------------------|----------|----------|----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| $w^* w^* w^*$ setrgb | | | | | | | | | | | | | | | | |
| gp=0.7 | | | | | | | | | | | | | | | | |
| No. and Hex code | 00;F | 01;E | 02;D | 03;C | 04;B | 05;A | 06;9 | 07;8 | 08;7 | 09;6 | 10;5 | 11;4 | 12;3 | 13;2 | 14;1 | 15;0 |
| $w^* = l^*_{CIELAB, r}$ (relative) | | | | | | | | | | | | | | | | |
| $w^*_{intended}$ | 0,000 | 0,067 | 0,133 | 0,200 | 0,267 | 0,333 | 0,400 | 0,467 | 0,533 | 0,600 | 0,667 | 0,733 | 0,800 | 0,867 | 0,933 | 1,000 |
| w^*_{out} | 0.0 | 0.15 | 0.243 | 0.324 | 0.396 | 0.463 | 0.526 | 0.586 | 0.643 | 0.699 | 0.753 | 0.804 | 0.855 | 0.904 | 0.952 | 1.0 |

OE740-7n, Picture A7-134-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*$ setrgbcolor

TUB-test chart fei0; In-output relation according to ISO 9241-306; 1MR, DH
Viewing Y contrast $Y_W:Y_N=88,9:5$; Y_N range 3,75 to <7,5

000n/w/cmy0/rgb
->rgb*_d, 134-2:

see similar files of the whole serie: <http://farbe.li.tu-berlin.de/feis.htm>
technical information: <http://farbe.li.tu-berlin.de/A/33872E.htm>
or <http://standards.iso.org/iso/9241/306/ed-2/index.html>

TUB registration: 20240301-fei0/fei010fa.txt /.ps
application for evaluation and measurement of display or print output
TUB material: code=rh4ta


| i | LAB*ref | l*out | LAB*out | LAB*out/c-ref | ΔE^* |
|----|---------|-------|---------|---------------|--------------|
| 1 | 37.99 | 0.0 | 0.0 | 37.99 0.0 0.0 | 0.01 |
| 2 | 41.81 | 0.0 | 0.24 | 51.79 0.0 0.0 | 9.98 |
| 3 | 45.64 | 0.0 | 0.35 | 57.87 0.0 0.0 | 12.23 |
| 4 | 49.47 | 0.0 | 0.43 | 62.6 0.0 0.0 | 13.13 |
| 5 | 53.3 | 0.0 | 0.5 | 66.63 0.0 0.0 | 13.33 |
| 6 | 57.13 | 0.0 | 0.56 | 70.19 0.0 0.0 | 13.07 |
| 7 | 60.96 | 0.0 | 0.62 | 73.44 0.0 0.0 | 12.48 |
| 8 | 64.78 | 0.0 | 0.67 | 76.44 0.0 0.0 | 11.65 |
| 9 | 68.61 | 0.0 | 0.72 | 79.23 0.0 0.0 | 10.62 |
| 10 | 72.44 | 0.0 | 0.76 | 81.87 0.0 0.0 | 9.43 |
| 11 | 76.27 | 0.0 | 0.81 | 84.37 0.0 0.0 | 8.11 |
| 12 | 80.1 | 0.0 | 0.85 | 86.76 0.0 0.0 | 6.66 |
| 13 | 83.93 | 0.0 | 0.89 | 89.05 0.0 0.0 | 5.12 |
| 14 | 87.75 | 0.0 | 0.93 | 91.24 0.0 0.0 | 3.49 |
| 15 | 91.58 | 0.0 | 0.96 | 93.36 0.0 0.0 | 1.78 |
| 16 | 95.41 | 0.0 | 1.0 | 95.41 0.0 0.0 | 0.01 |
| 17 | 37.99 | 0.0 | 0.0 | 37.99 0.0 0.0 | 0.01 |
| 18 | 52.34 | 0.0 | 0.48 | 65.67 0.0 0.0 | 13.33 |
| 19 | 66.7 | 0.0 | 0.69 | 77.86 0.0 0.0 | 11.16 |
| 20 | 81.05 | 0.0 | 0.86 | 87.34 0.0 0.0 | 6.29 |
| 21 | 95.41 | 0.0 | 1.0 | 95.41 0.0 0.0 | 0.01 |

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps)
 $\Delta E^*_{CIELAB} = 8.2$

Mean lightness difference (5 steps)
 $\Delta L^*_{CIELAB} = 6.2$

Mean colour reproduction index: $R^*_{ab,m} = 65$

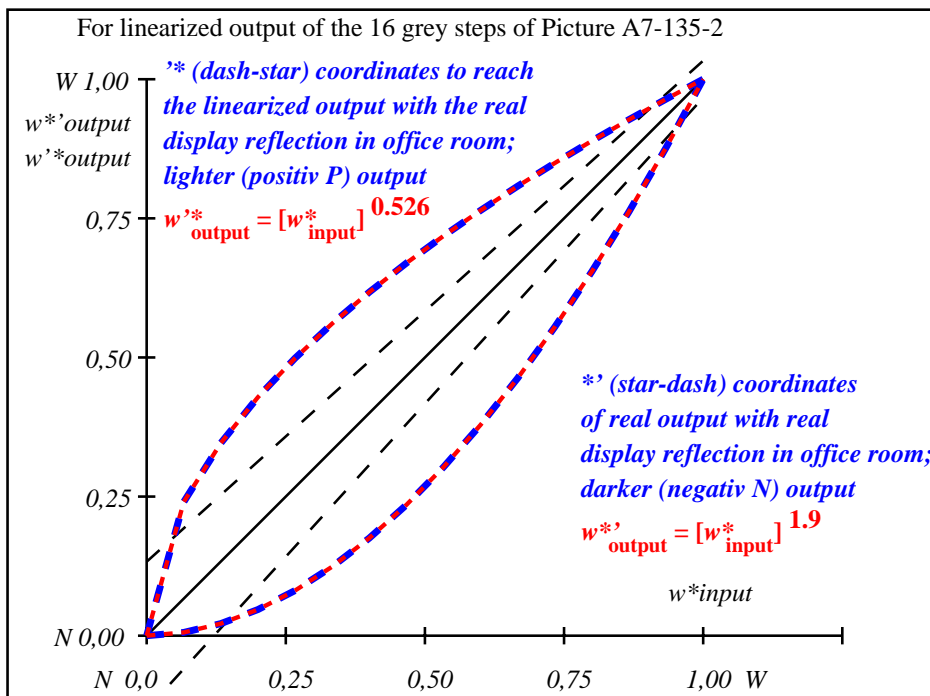

fei00-3n-135-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

fei01-3n-135-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

| $L^*/Y^*_{intended}$ (absolute) | 37.9/10.0 | 41.8/12.3 | 45.6/15.0 | 49.4/17.9 | 53.2/21.3 | 57.1/25.0 | 60.9/29.1 | 64.7/33.7 | 68.6/38.8 | 72.4/44.3 | 76.2/50.3 | 80.0/56.8 | 83.9/63.9 | 87.7/71.5 | 91.5/79.7 | 95.4/88.5 |
|---------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| w^*_{setrgb} | 00;F | 01;E | 02;D | 03;C | 04;B | 05;A | 06;9 | 07;8 | 08;7 | 09;6 | 10;5 | 11;4 | 12;3 | 13;2 | 14;1 | 15;0 |
| $w^*_{CIELAB, r}$ (relative) | 0,000 | 0,067 | 0,133 | 0,200 | 0,267 | 0,333 | 0,400 | 0,467 | 0,533 | 0,600 | 0,667 | 0,733 | 0,800 | 0,867 | 0,933 | 1,000 |
| $w^*_{intended}$ | 0,000 | 0,067 | 0,133 | 0,200 | 0,267 | 0,333 | 0,400 | 0,467 | 0,533 | 0,600 | 0,667 | 0,733 | 0,800 | 0,867 | 0,933 | 1,000 |
| w^*_{out} | 0,0 | 0,184 | 0,283 | 0,365 | 0,438 | 0,502 | 0,564 | 0,621 | 0,674 | 0,726 | 0,776 | 0,823 | 0,869 | 0,914 | 0,957 | 1,0 |

OE740-7n, Picture A7-135-2: 16 visual equidistant L^* -grey steps; PS operator: w^*_{setrgb}

TUB-test chart fei0; In-output relation according to ISO 9241-306; 1MR, DH
Viewing Y contrast $Y_W:Y_N=88,9:10$; Y_N range 7,5 to <15

000n/w/cmy0/rgb
->rgb*_d, 135-2:

see similar files of the whole serie: <http://farbe.li.tu-berlin.de/feis.htm>
 technical information: <http://farbe.li.tu-berlin.de/A/33872E.htm>
 or <http://standards.iso.org/iso/9241/306/ed-2/index.html>

TUB registration: 20240301-fei0/fei010fa.txt /.ps
 application for evaluation and measurement of display or print output
 TUB material: code=rh4ta


| i | LAB*ref | l*out | LAB*out | LAB*out/c-ref | ΔE^* |
|----|---------|-------|---------|---------------|--------------|
| 1 | 52.02 | 0.0 | 0.0 | 52.02 | 0.0 |
| 2 | 54.91 | 0.0 | 0.27 | 63.82 | 0.0 |
| 3 | 57.8 | 0.0 | 0.38 | 68.49 | 0.0 |
| 4 | 60.7 | 0.0 | 0.46 | 72.03 | 0.0 |
| 5 | 63.59 | 0.0 | 0.53 | 75.0 | 0.0 |
| 6 | 66.48 | 0.0 | 0.59 | 77.61 | 0.0 |
| 7 | 69.37 | 0.0 | 0.64 | 79.95 | 0.0 |
| 8 | 72.27 | 0.0 | 0.69 | 82.1 | 0.0 |
| 9 | 75.16 | 0.0 | 0.74 | 84.09 | 0.0 |
| 10 | 78.05 | 0.0 | 0.78 | 85.96 | 0.0 |
| 11 | 80.95 | 0.0 | 0.82 | 87.72 | 0.0 |
| 12 | 83.84 | 0.0 | 0.86 | 89.4 | 0.0 |
| 13 | 86.73 | 0.0 | 0.9 | 91.0 | 0.0 |
| 14 | 89.62 | 0.0 | 0.93 | 92.53 | 0.0 |
| 15 | 92.52 | 0.0 | 0.97 | 93.99 | 0.0 |
| 16 | 95.41 | 0.0 | 1.0 | 95.41 | 0.0 |
| 17 | 52.02 | 0.0 | 0.0 | 52.02 | 0.0 |
| 18 | 62.87 | 0.0 | 0.51 | 74.3 | 0.0 |
| 19 | 73.71 | 0.0 | 0.72 | 83.11 | 0.0 |
| 20 | 84.56 | 0.0 | 0.87 | 89.81 | 0.0 |
| 21 | 95.41 | 0.0 | 1.0 | 95.41 | 0.0 |

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps)
 $\Delta E^*_{CIELAB} = 7.0$

Mean lightness difference (5 steps)
 $\Delta L^*_{CIELAB} = 5.2$

Mean colour reproduction index: $R^*_{ab,m} = 70$

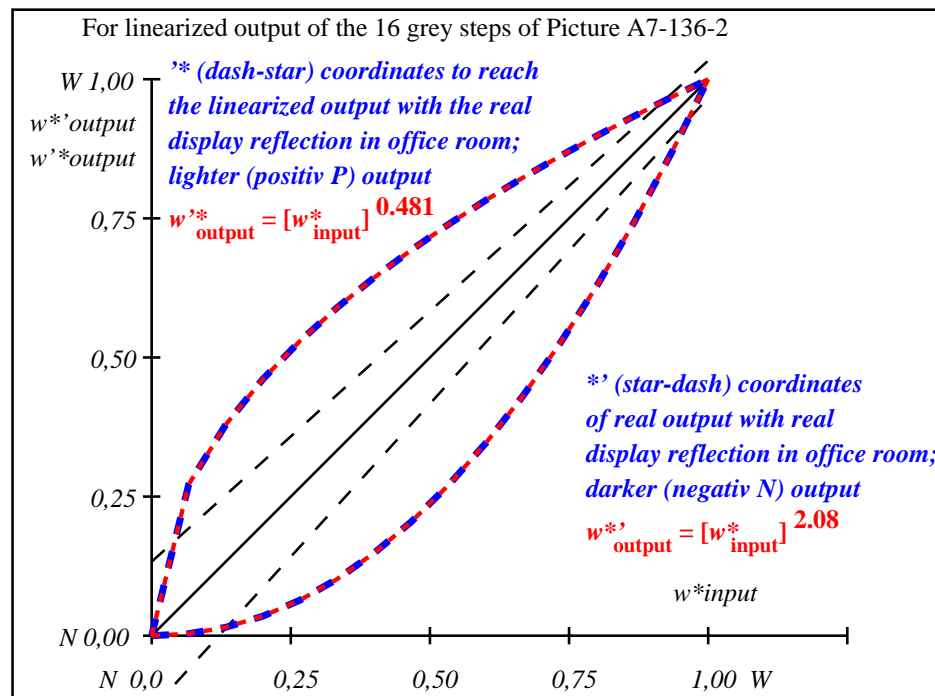

fei00-3n-136-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

fei01-3n-136-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

| $L^*/Y^*_{intended}$ (absolute) | 52.0/20.1 | 54.9/22.8 | 57.8/25.7 | 60.6/28.9 | 63.5/32.2 | 66.4/35.9 | 69.3/39.8 | 72.2/44.0 | 75.1/48.5 | 78.0/53.3 | 80.9/58.3 | 83.8/63.7 | 86.7/69.4 | 89.6/75.4 | 92.5/81.8 | 95.4/88.5 |
|------------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| $w^* w^* w^*$ setrgb | | | | | | | | | | | | | | | | |
| gp=0.55 | | | | | | | | | | | | | | | | |
| No. and Hex code | 00;F | 01;E | 02;D | 03;C | 04;B | 05;A | 06;9 | 07;8 | 08;7 | 09;6 | 10;5 | 11;4 | 12;3 | 13;2 | 14;1 | 15;0 |
| $w^* = l^*_{CIELAB, r}$ (relative) | | | | | | | | | | | | | | | | |
| $w^*_{intended}$ | 0,000 | 0,067 | 0,133 | 0,200 | 0,267 | 0,333 | 0,400 | 0,467 | 0,533 | 0,600 | 0,667 | 0,733 | 0,800 | 0,867 | 0,933 | 1,000 |
| w^*_{out} | 0.0 | 0.226 | 0.329 | 0.412 | 0.483 | 0.546 | 0.604 | 0.657 | 0.707 | 0.755 | 0.8 | 0.842 | 0.884 | 0.924 | 0.962 | 1.0 |

OE740-7n, Picture A7-136-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*$ setrgbcolor

TUB-test chart fei0; In-output relation according to ISO 9241-306; 1MR, DH
 Viewing Y contrast $Y_W:Y_N=88,9:20$; Y_N range 15 to <30

000n/w/cmy0/rgb
 ->rgb*_d, 136-2:

see similar files of the whole serie: <http://farbe.li.tu-berlin.de/feis.htm>
technical information: <http://farbe.li.tu-berlin.de/A/33872E.htm>
or <http://standards.iso.org/iso/9241/306/ed-2/index.html>

TUB registration: 20240301-fei0/fei010fa.txt /.ps
application for evaluation and measurement of display or print output
TUB material: code=rh4ta


| i | LAB*ref | l*out | LAB*out | LAB*out/c-ref | ΔE^* |
|----|---------|-------|---------|---------------|--------------|
| 1 | 69.7 | 0.0 | 69.7 | 0.0 | 0.01 |
| 2 | 71.41 | 0.0 | 77.46 | 6.04 | 6.04 |
| 3 | 73.13 | 0.0 | 80.24 | 7.11 | 7.11 |
| 4 | 74.84 | 0.0 | 82.31 | 7.47 | 7.47 |
| 5 | 76.55 | 0.0 | 84.02 | 7.47 | 7.47 |
| 6 | 78.27 | 0.0 | 85.51 | 7.24 | 7.24 |
| 7 | 79.98 | 0.0 | 86.84 | 6.86 | 6.86 |
| 8 | 81.7 | 0.0 | 88.05 | 6.35 | 6.35 |
| 9 | 83.41 | 0.0 | 89.17 | 5.76 | 5.76 |
| 10 | 85.12 | 0.0 | 90.21 | 5.08 | 5.08 |
| 11 | 86.84 | 0.0 | 91.19 | 4.35 | 4.35 |
| 12 | 88.55 | 0.0 | 92.11 | 3.56 | 3.56 |
| 13 | 90.27 | 0.0 | 92.99 | 2.73 | 2.73 |
| 14 | 91.98 | 0.0 | 93.83 | 1.85 | 1.85 |
| 15 | 93.7 | 0.0 | 94.64 | 0.94 | 0.94 |
| 16 | 95.41 | 0.0 | 95.41 | 0.0 | 0.01 |
| 17 | 69.7 | 0.0 | 69.7 | 0.0 | 0.01 |
| 18 | 76.13 | 0.0 | 83.62 | 7.5 | 7.5 |
| 19 | 82.55 | 0.0 | 88.62 | 6.06 | 6.06 |
| 20 | 88.98 | 0.0 | 92.34 | 3.35 | 3.35 |
| 21 | 95.41 | 0.0 | 95.41 | 0.0 | 0.01 |

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps)
 $\Delta E^*_{CIELAB} = 4.6$

Mean lightness difference (5 steps)
 $\Delta L^*_{CIELAB} = 3.4$

Mean colour reproduction index: $R^*_{ab,m} = 80$

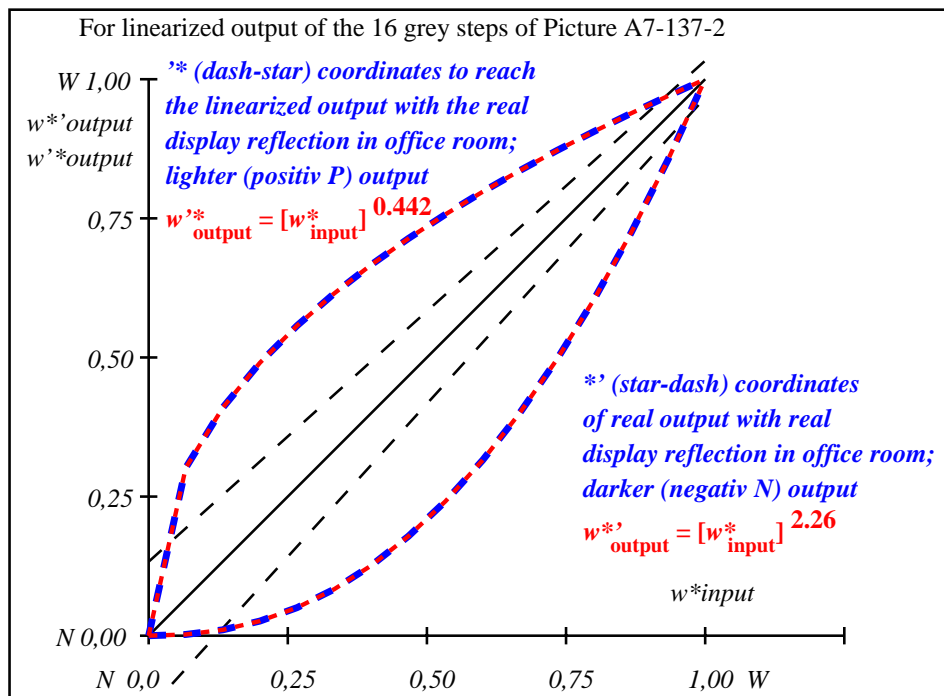

fei00-3n-137-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

fei01-3n-137-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

| $L^*/Y^*_{intended}$ (absolute) | 69.6/40.3 | 71.4/42.7 | 73.1/45.3 | 74.8/48.0 | 76.5/50.7 | 78.2/53.6 | 79.9/56.6 | 81.6/59.7 | 83.4/62.9 | 85.1/66.2 | 86.8/69.6 | 88.5/73.2 | 90.2/76.8 | 91.9/80.6 | 93.6/84.5 | 95.4/88.5 |
|---------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| w^*_{setrgb} | 00;F | 01;E | 02;D | 03;C | 04;B | 05;A | 06;9 | 07;8 | 08;7 | 09;6 | 10;5 | 11;4 | 12;3 | 13;2 | 14;1 | 15;0 |
| $w^*_{CIELAB, r}$ (relative) | 0.000 | 0.067 | 0.133 | 0.200 | 0.267 | 0.333 | 0.400 | 0.467 | 0.533 | 0.600 | 0.667 | 0.733 | 0.800 | 0.867 | 0.933 | 1.000 |
| $w^*_{intended}$ | 0.0 | 0.276 | 0.383 | 0.465 | 0.534 | 0.593 | 0.647 | 0.696 | 0.741 | 0.784 | 0.825 | 0.862 | 0.899 | 0.934 | 0.967 | 1.0 |
| w^*_{out} | 0.0 | 0.276 | 0.383 | 0.465 | 0.534 | 0.593 | 0.647 | 0.696 | 0.741 | 0.784 | 0.825 | 0.862 | 0.899 | 0.934 | 0.967 | 1.0 |

OE740-7n, Picture A7-137-2: 16 visual equidistant L^* -grey steps; PS operator: w^*_{setrgb}

OE740-7n, Picture A7-137-2: 16 visual equidistant L^* -grey steps; PS operator: w^*_{setrgb}