



Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: `www*setrgbcolor`

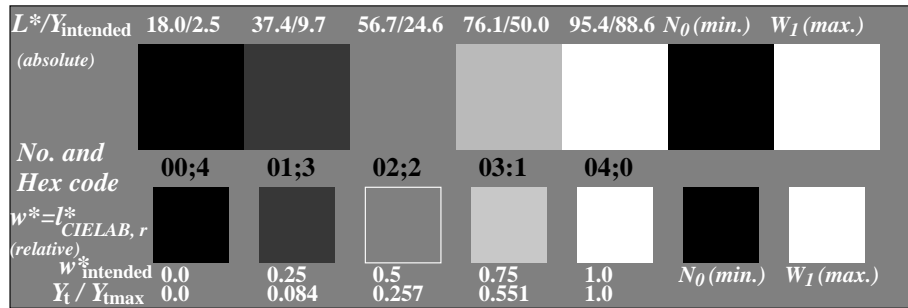


Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: `www*setrgbcolor`

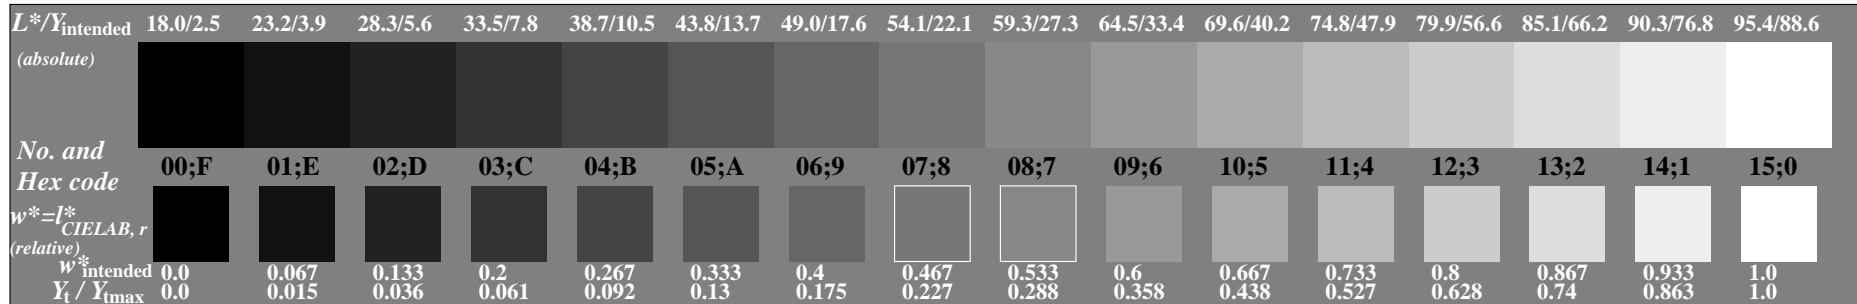


Picture C3: 16 visual equidistant L^* -grey steps; PS operator: `www*setrgbcolor`


ISO 9241-test chart for contrast range $Y_w:Y_n = 88.6 : 2.5$
 Ergonomics – Visual Displays – Field Assessment Methods

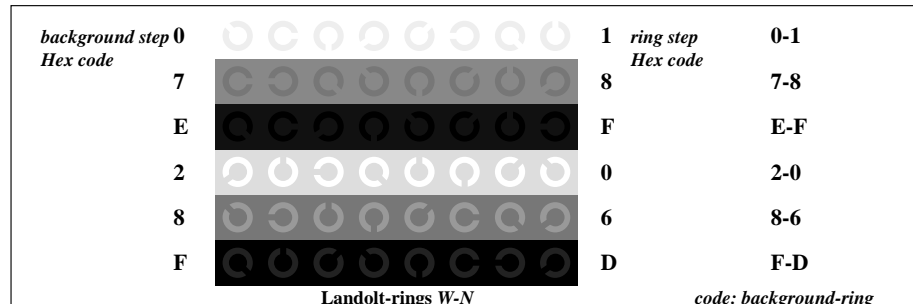

Picture C4: Landolt-rings W-N; PS operator: `www*setrgbcolor`

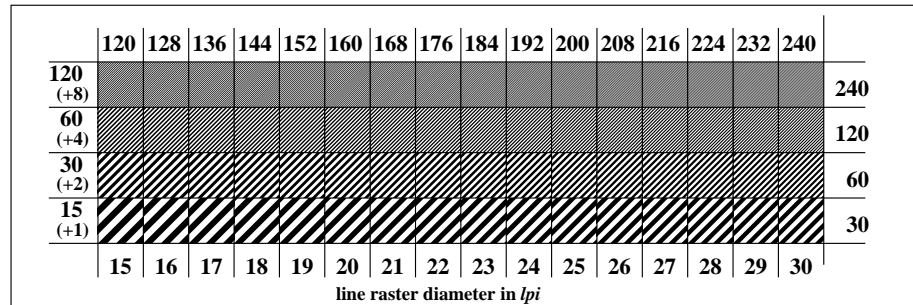

Picture C5: Line raster under 45° (or 135°); PS operator: `www*setrgbcolor`

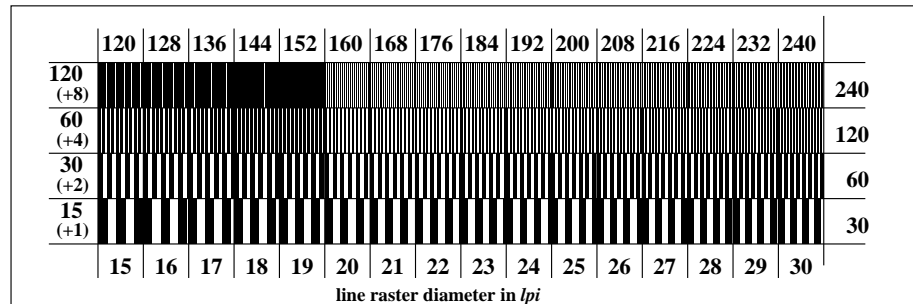

Picture C6: Line raster under 90° (or 0°); Use of the PS operator `www*setrgbcolor`

input: `www*setrgbcolor`
 output: no change compared to input

See for similar files: <http://www.ps.bam.de/CE73/Technical information>; <http://www.ps.bam.de/9241>

Version 2.0, io=3.3, CIEXYZ, 2.0 exp

BAM registration: 20040101-CE73/10Q/Q73E00NP.PS/.PDF BAM material: code=rh4ta
 Application for achromatic display output with CIE LAB contrast range $L^*_w:L^*_n = 95.4 : 18.0$