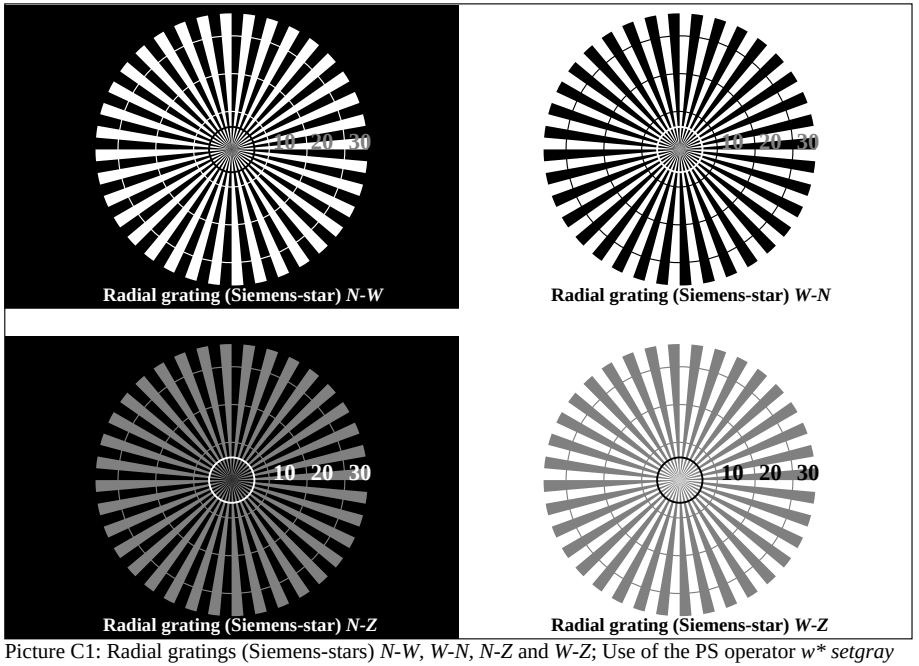

Picture C1: Radial gratings (Siemens-stars) *N-W*, *W-N*, *N-Z* and *W-Z*; Use of the PS operator *w* setgray*

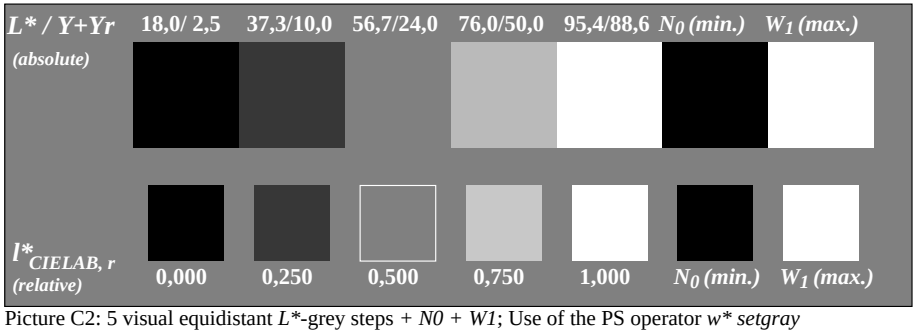

Picture C2: 5 visual equidistant *L**-grey steps + *N0* + *W1*; Use of the PS operator *w* setgray*

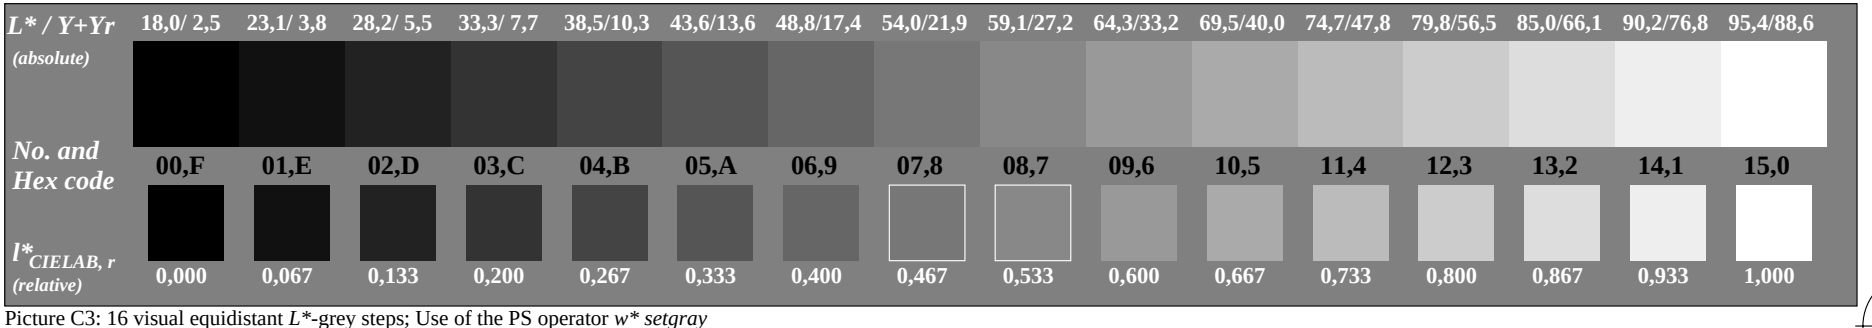

Picture C3: 16 visual equidistant *L**-grey steps; Use of the PS operator *w* setgray*

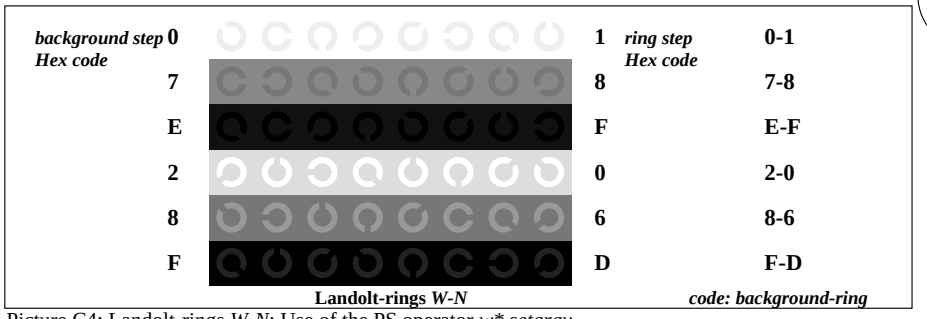

Picture C4: Landolt-rings *W-N*; Use of the PS operator *w* setgray*

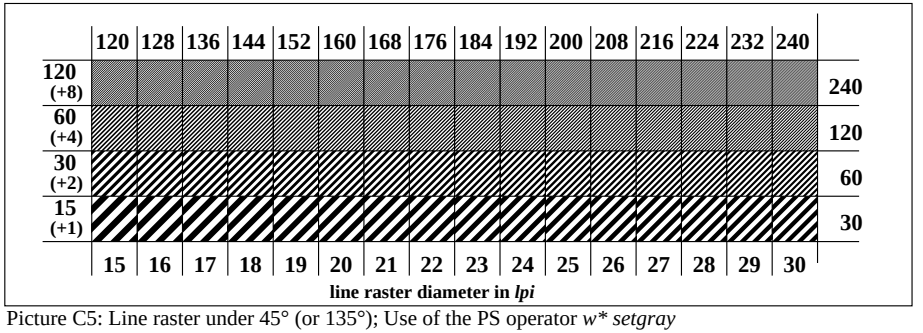

Picture C5: Line raster under 45° (or 135°); Use of the PS operator *w* setgray*

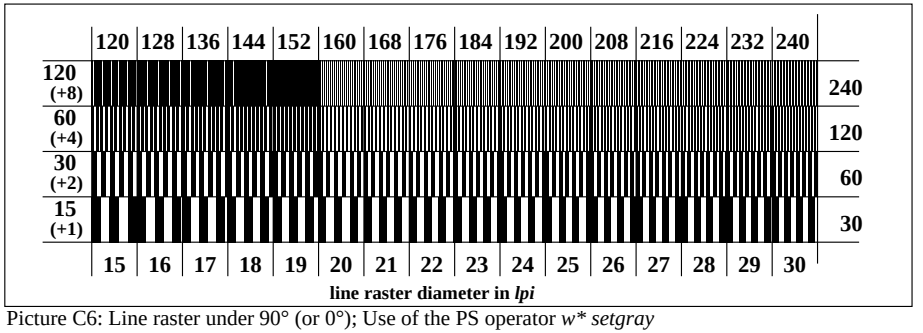

Picture C6: Line raster under 90° (or 0°); Use of the PS operator *w* setgray*

Information and Order: http://www.ps.bam.de Image file version 1.9, 20020101-DE77

BAM registration: 20020101-DE77/10L/L77E20FA.PS/.TXT Full part: printers, Yr=0.0, XYZ BAM material: code=rha4ta

Fig. C1 to C6 of ISO/IEC-test chart 3; ISO/IEC 15775 and DIS ISO/IEC 19839-X; input: *w* setgray* output: *w* setgray*