



See for similar files: <http://www.ps.bam.de/DE81/DE81.HTM>
 Information and Order: <http://www.ps.bam.de> Version 2.0, io=m,m


BAM registration: 20030101-IE81/10B/B81E02NP.PS/.PDF BAM material: code=thata4ta
 application for monitors and printers, Yr=2.5, XYZ

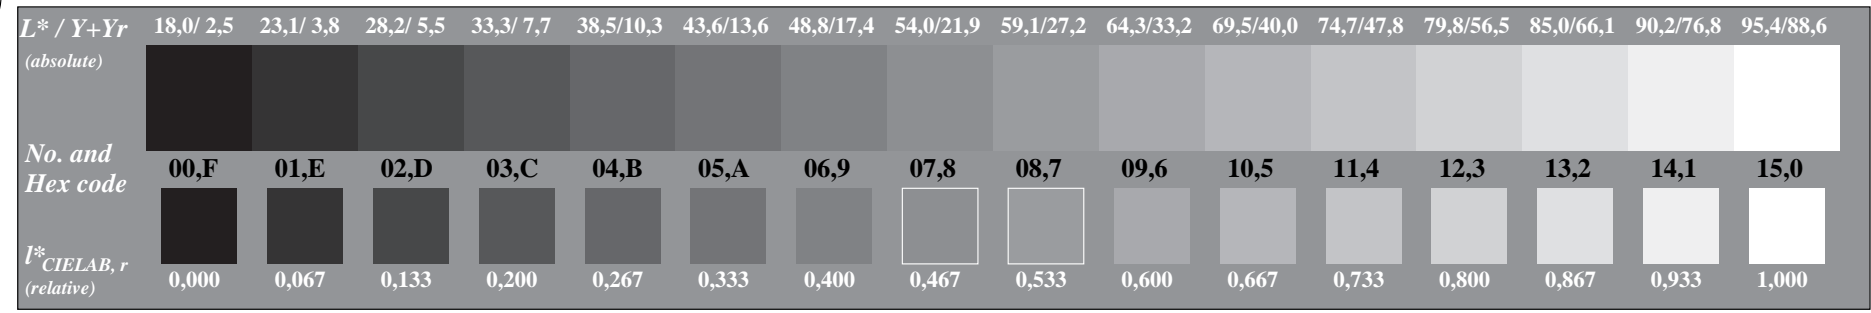


Picture C3: 16 visual equidistant L^* -grey steps; Use of the PS operator $000n^*$ setcmykcolor

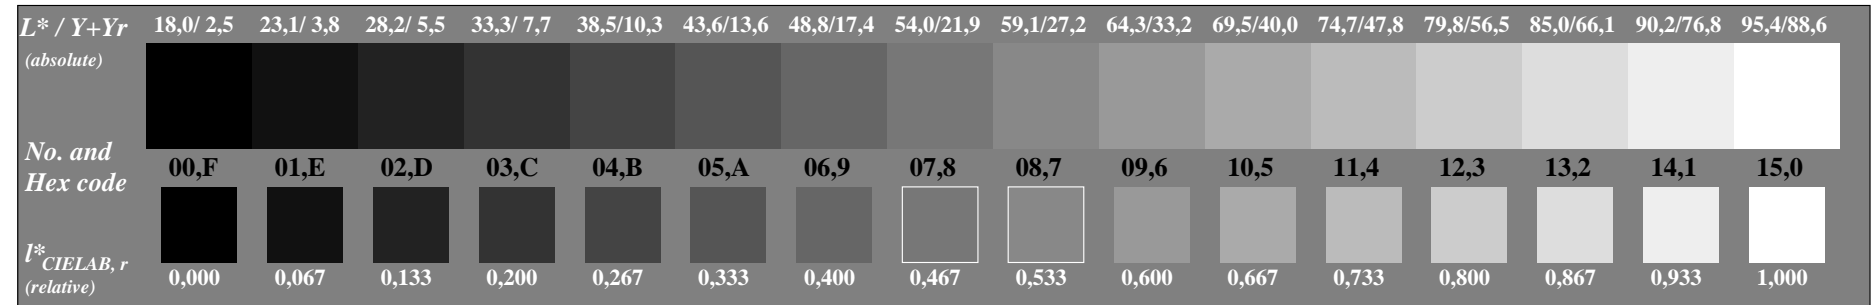

Picture C3: 16 visual equidistant L^* -grey steps; Use of the PS operator w^* setgray

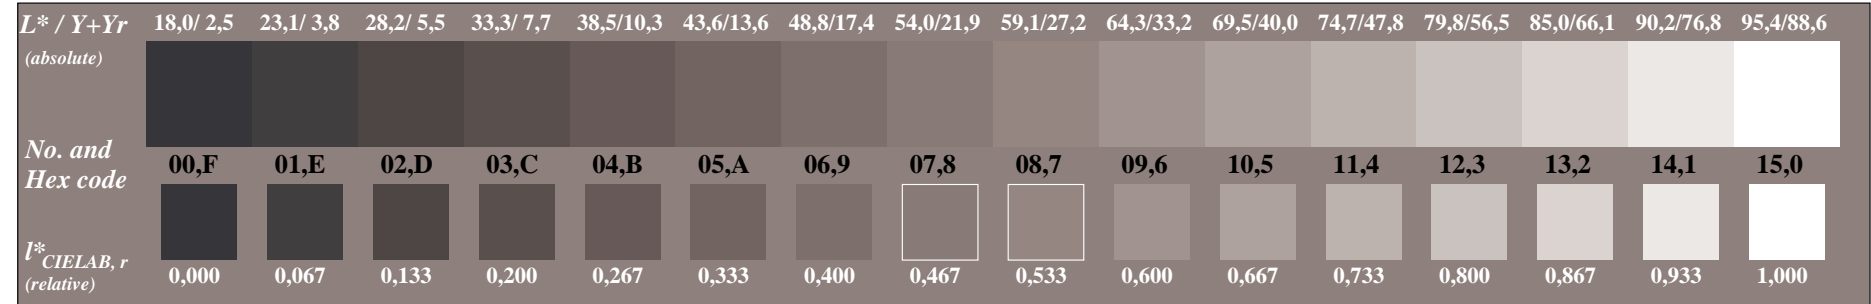

Picture C3: 16 visual equidistant L^* -grey steps; Use of the PS operator $nnn0^*$ setcmykcolor

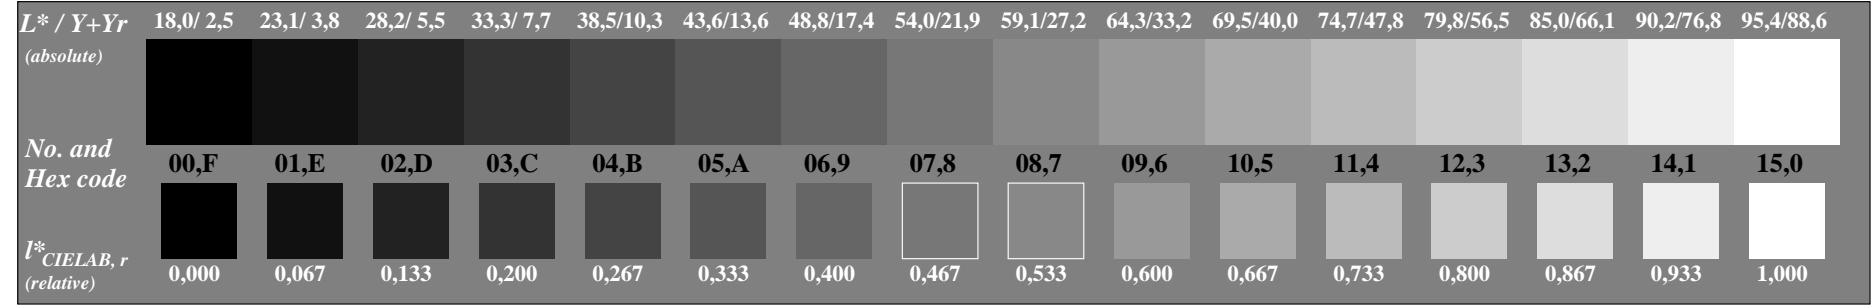

Picture C3: 16 visual equidistant L^* -grey steps; Use of the PS operator www^* setrgbcolor

Fig. C3 of ISO/IEC-test chart no. 3;

ISO/IEC 15775 and DIS ISO/IEC 19839-X; input: mixture (m) of PS operators
 output: no change compared to input

