


See for similar files: <http://www.ps.bam.de/IE86/>
 Information and Order: <http://www.ps.bam.de>


Version 2.0, io=0, IIRS, oLRS, ClEXYZ

BAM registration: 20031201-JE86/B86E00F1.PS/.TXT
 Top part of page: application for monitors, Yr=Z, XYZ


BAM material: code=thata

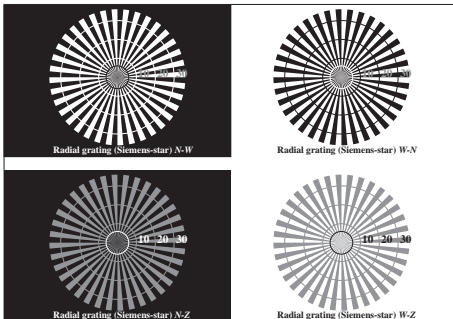


Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS oper.: 000n*lin 1.0 exp setcmykcolor

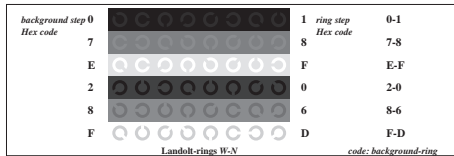


Picture C4: Landolt-rings W-N; PS operator: 000n*lin 1.0 exp setcmykcolor

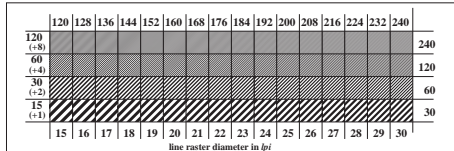

Picture C5: Line raster under 45° (or 135°); PS operator: 000n*lin 1.0 exp setcmykcolor

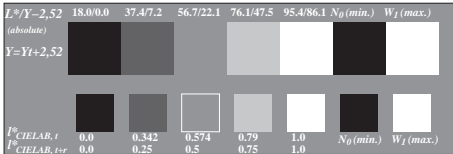

Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: 000n*lin 1.0 exp setcmykcolor

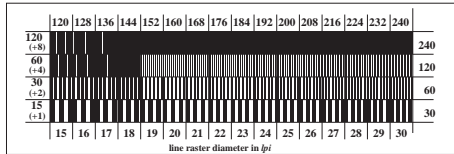

Picture C6: Line raster under 90° (or 0°); PS operator: 000n*lin 1.0 exp setcmykcolor



Picture C3: 16 visual equidistant L^* -grey steps; PS operator: 000n*lin 1.0 exp setcmykcolor; use file www.bam.de/KE86/10B/B86E00FA.PS or [/B86E00FP.PS](http://www.bam.de/KE86/10B/B86E00FP.PS) for DPS or PDF systems to complete the figure

ISO/IEC-test chart no. 3B according to ISO/IEC 15775 and DIS ISO/IEC 19839-X; input: 000n*lin 1.0 exp setcmykcolor
 output: cmy0*/000n*setcmykcolor