www.ps.bam.de/LE17/10S/S17E06FP.PS/.PDF; linearized output
F: Output Linearization (OL) data LE17/10S/S17E06FP.DAT in File (F)

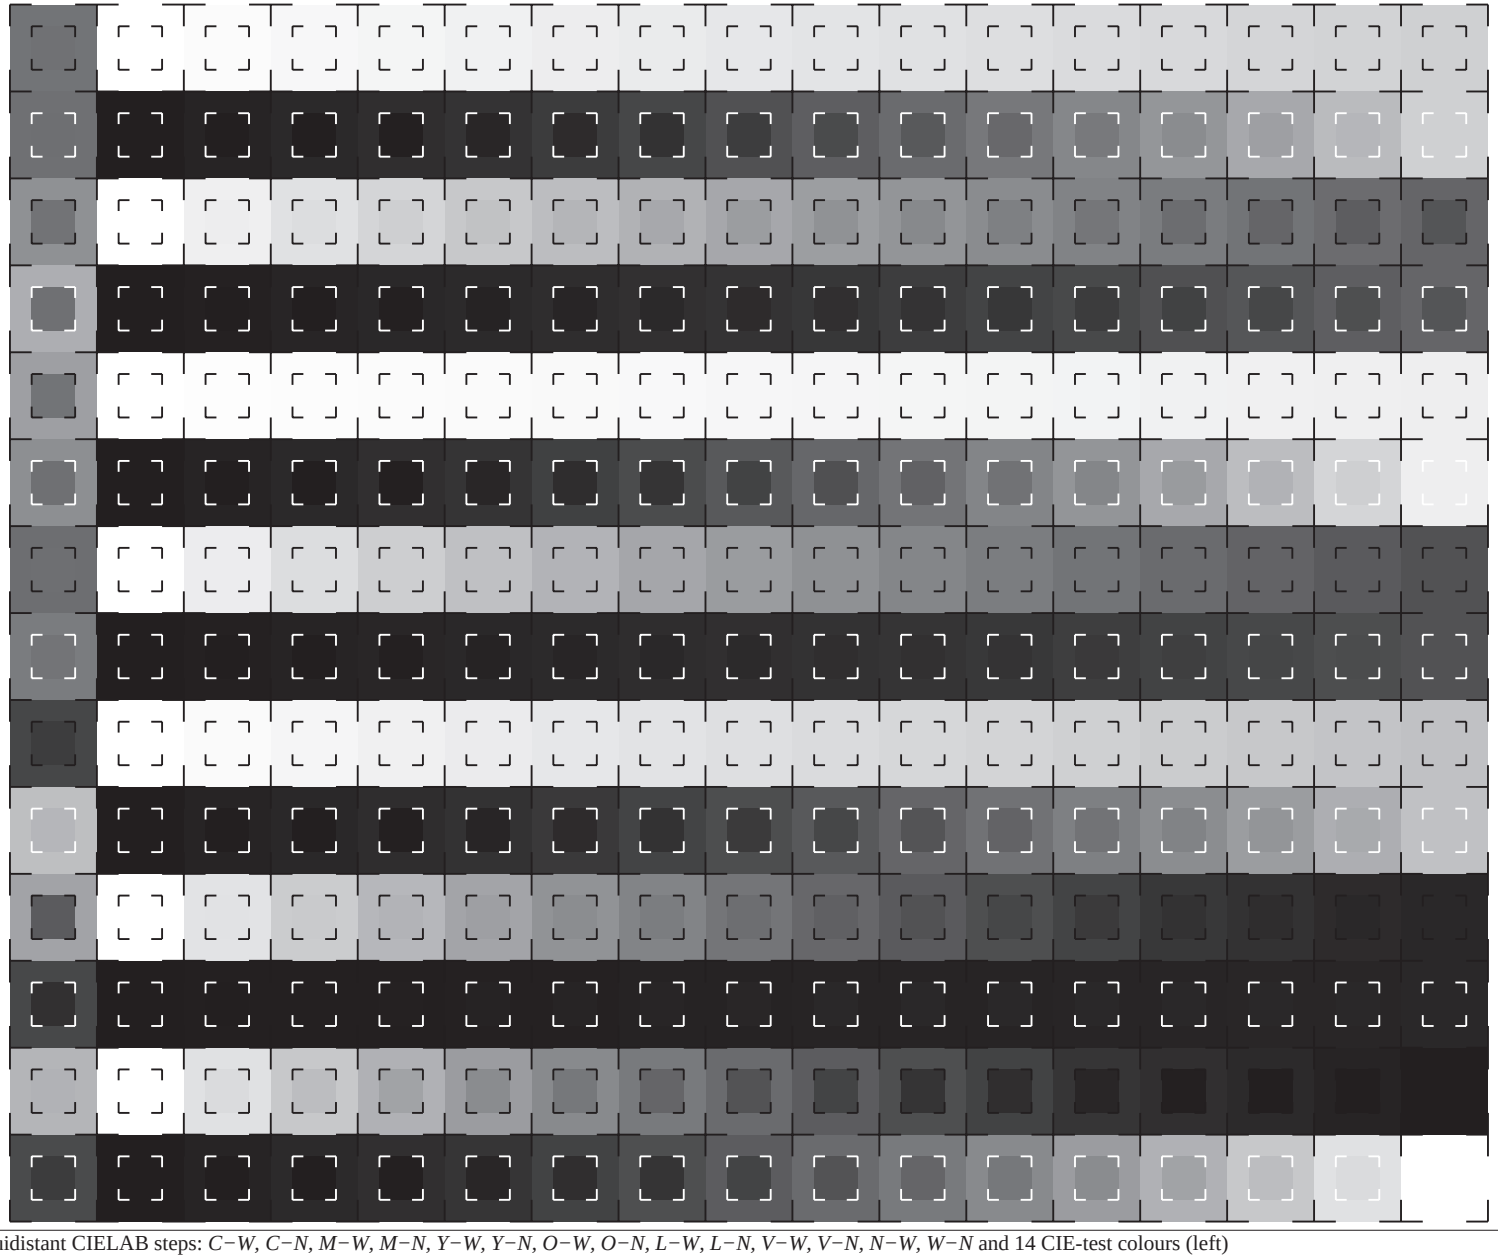

used coordinate surround	center
o11*	LAB*TLS00
C	
0lv*	LAB*TLS00
1l1*	LAB*TLS00
M	
o0v*	LAB*TLS00
11v*	LAB*TLS00
Y	
ol0*	LAB*TLS00
1lv*	LAB*TLS00
O	
o00*	LAB*TLS00
o1v*	LAB*TLS00
L	
0l0*	LAB*TLS00
ol1*	LAB*TLS00
V	
00v*	LAB*TLS00
olv*	LAB*TLS00
N/W	
w*	LAB*TLS00

16 equidistant CIELAB steps: *C−W, C−N, M−W, M−N, Y−W, Y−N, O−W, O−N, L−W, L−N, V−W, V−N, N−W, W−N* and 14 CIE-test colours (left)

Test chart LE17: 16 CIELAB steps of ISO/IEC 15775
Chromatic−White, Chromatic−Black, Black−White

input ,TLS00: *LAB* setcolor/olv* setrgbcolor*
output ,TLS00: *000n* setcmykcolor*

See for similar files: http://www.ps.bam.de/LE17/LE17.HTM
Information and Order: http://www.ps.bam.de Version 2.0, io=0,6; iTLS; oTLS, CIELAB

BAM registration: 20030101-LE17/10S/S17E06FP.PS/.PDF
application for measurement of monitor (Yr=2.5) and printer output

BAM material: code=rha4ta